



# EMC

## TEST REPORT

REPORT NO. : ADT-EC97055  
MODEL NO. : SBC-570, SBC-490, SBC-355V  
DATE OF TEST : Feb. 21 ~ March 10, 1997

MULTIPLE LISTING FOR: AAEON TECHNOLOGY INC.  
MODEL: SBC-570N, SBC-355N

PREPARED FOR: AAEON TECHNOLOGY INC.

ADDRESS : 1F, NO. 6, ALLEY 6, LANE 45, PAO-HSIN RD.,  
HSIN-TIEN CITY, TAIPEI, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

12F, NO.1, SEC.4, NAN-KING EAST RD.,  
TAIPEI, TAIWAN, R.O.C.

This test report consists of 42 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. The test result in the report only applies to the tested sample.



## TABLE OF CONTENTS

TITLE	PAGE
<b>COVER PAGE</b>	1
<b>1. CERTIFICATION</b>	3
<b>2. GENERAL INFORMATION</b>	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF SUPPORT UNITS	5
2.3 TEST SETUP	5
<b>3. TEST INSTRUMENTS</b>	6
3.1 TEST INSTRUMENTS (EMISSION)	6
3.2 TEST INSTRUMENTS (IMMUNITY)	7
<b>4. TEST RESULTS (EMISSION)</b>	8
4.1 RADIO DISTURBANCE	8
4.1.1 EUT OPERATING CONDITION	8
4.1.2 TEST DATA OF CONDUCTED EMISSION	9-11
4.1.3 TEST DATA OF RADIATED EMISSION	12-17
<b>5. TEST RESULTS (IMMUNITY)</b>	18
5.1 GENERAL DESCRIPTION	18
5.2 PERFORMANCE CRITERIA DESCRIPTION	18
5.3 EUT OPERATION CONDITION	18
5.4 TEST RESULT OF ELECTROSTATIC DISCHARGE (ESD)	19
5.5 TEST RESULT OF RADIATED RADIO FREQUENCY ELECTROMAGNETIC FIELDS (RS)	20
5.6 TEST RESULT OF ELECTRICAL FAST TRANSIENT/BURST (EFT/BURST)	21
5.7 TEST RESULT OF CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)	22
5.8 TEST RESULT OF POWER FREQUENCY MAGNETIC FIELD	23
5.9 TEST RESULT OF RADIO-FREQUENCY ELECTROMAGNETIC FIELD, PULSE MODULATED	24
<b>6. PHOTOS OF TEST CONFIGURATION</b>	25-35
<b>7. CONSTRUCTION PHOTOS OF EUT</b>	36-40
<b>8. ATTACHMENT 1 - TECHNICAL DESCRIPTION OF EUT</b>	41-42



1.

# CERTIFICATION

Issue date: March 13, 1997

Product : CPU BOARD  
Trade Name : AAEON  
Model No. : SBC-570, SBC-490, SBC-355V  
Applicant : AAEON TECHNOLOGY INC.  
Standard : EN55 022:1994, Class A    **EN50 082-2:1995**  
   EN61000-4-2:1995  
   ENV50140:1993  
   EN61000-4-4:1995  
   ENV50141:1993  
   EN61000-4-8:1993  
   ENV50204:1995

We hereby certify that one sample of the designation has been tested in our facility from Feb. 21 to March 10, 1997. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Sharon Hsiung , DATE: 3/13/97  
( Sharon Hsiung )

CHECKED BY: Andy Cheng , DATE: 3/13/97  
( Andy Cheng )

APPROVED BY: Harris W. Lai , DATE: 3/13/97  
( Harris W. Lai )

**ADVANCE DATA TECHNOLOGY CORPORATION**

**NVLAP<sup>®</sup>**

Accredited Laboratory



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Product	:	CPU BOARD
Model No.	:	SBC-570, SBC-490, SBC-355V
Power Supply	:	DC
Power Cord	:	N/A

Note: The EUT has five model names which are identical in all aspects except for some difference in function:

- \* SBC-570 (CPU: Pentium 166 MHz)
- \* SBC-490 (CPU: IBM 5X86C 100 MHz, with on-board VGA)
- \* SBC-355V (CPU: 386SX-40 MHz, with on-board VGA)
- \* SBC-570N (same as model: SBC-570)
- \* SBC-355N (same as model: SBC-355V)

As the multiple listing model: SBC-570N is identical model: SBC-570 and model: SBC-355N is identical to model: SBC-355V, no additional tests are needed for these models. The other models were tested individually.

During the test, the EUT was installed in a metal enclosure with a slot board to form an industrial PC. The other parts of industrial PC includes the following:

- \* Case: AAEON, model: AIPC-110
- \* Switching power supply: SEASONIC, model: SSG-250G
- \* VGA Card: CARDEX, model: PCI-S3-765-B2 (for model: SBC-570 only)

For more detailed features, please refer to ATTACHMENT 1 - TECHNICAL DESCRIPTION OF EUT and User's Manual.





## 2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

### FOR EMISSION TEST

No	Product	Brand	Model No.	Serial No.	I/O Cable
1	COLOR MONITOR	ACER	7134T	M5400233562	Shielded signal Nonshielded Power
2	KEYBOARD	FORWARD	FDA-102D	3005142	Shielded signal
3	PRINTER	HP	2225C+	3123S97230	Shielded signal Nonshielded Power
4	MODEM X 2	DATATRONICS	1200CK	07-503068 07-503003	Shielded signal Nonshielded Power

Note: There is no ferrite core on the interface cable of all support units.

### FOR IMMUNITY TEST

No	Product	Manufacturer	Model No.	Serial No.	I/O Cable
1	MONITOR	ACTION	CV-0951	N/A	Shielded Signal Nonshielded Power
2	KEYBOARD	ACER	6311	K6357050921	Shielded Signal
3	PRINTER	HP	C2145A	SG5BN160GY	Shielded Signal Nonshielded Power
4	MOUSE	LOGITECH	M-M35	LZA63601664	Shielded Signal
5	MODEM	GVC	F-1114V/R6	8503E100	Shielded signal Nonshielded Power
6	MODEM	HAYES	5300AP	A1425300K045	Shielded signal Nonshielded Power

Note: There is a ferrite core on the interface cable of support unit 1.

## 2.3 Test setup

Please refer to the photos of test configuration in Item 6.



### 3. TEST INSTRUMENTS

#### 3.1 TEST INSTRUMENTS (EMISSION)

##### RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
HP Spectrum Analyzer	8594A	3144A00308	Aug. 27, 1996
HP Preamplifier	8447D	2944A08119	Jan. 17, 1997
ROHDE & SCHWARZ TEST RECEIVER	ESVP	893496/030	July 17, 1996
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 30, 1996
CHASE Bilog Antenna	CBL6112	2086	Dec. 28, 1996
EMCO Turn Table	1060	1195	N/A
EMCO Tower	1051	1263	N/A
Open Field Test Site	Site-2	ADT-R02	Oct. 1, 1996

##### CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ Test Receiver	ESH3	893495/006	July 17, 1996
ROHDE & SCHWARZ Spectrum	EZM	893787/013	July 17, 1996
ROHDE & SCHWARZ Artificial Mains Network	ESH2-Z5	892107/003	July 25, 1996
EMCO-L.I.S.N.	3825/2	9204-1964	July 25, 1996
Shielding Room	Site 2	ADT-C02	N/A

Note: The calibration interval of the above test instruments is 12 months.

And the calibrations are traceable to NML/ROC and NIST/USA.



### 3.2 TEST INSTRUMENTS (IMMUNITY)

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
KeyTek, ESD Test System	2000	9105240/41	Aug. 5, 1996
KeyTek, ESD Simulator	MZ-15/EC	92022232	June 7, 1996
KeyTek, EFT Generator	CE-40	9508257	Sept. 12, 1996
KeyTek, Capacitive Clamp	CE-40-CCL	9508259	Sept. 12, 1996
KeyTek, Control Center	E103	9508347	N/A
KeyTek, Surge Combination Wave	E501A	9508349	Sept. 20, 1996
KeyTek, Surge Coupler/Decoupler	E551	9508350	Sept. 20, 1996
ROHDE & SCHWARZ Signal Generator	SMY01	840490/009	Oct. 1, 1996
KALMUS Power Amplifier	LA1000V	091995-1	N/A
KALMUS Power Amplifier	757LC	091995-2	N/A
HOLADAY Field Probe	HI-4422	89915	Sept. 12, 1996
EMCO BiconiLog Antenna	3141	1001	N/A
FCC Coupling Decoupling Network	FCC-801-M3-25	48	N/A
FCC Coupling Decoupling Network	FCC-801-M2-25	20	N/A
FCC Coupling Decoupling Network	FCC-801-M1-25	17	N/A
BOONTON RF Voltage Meter	9200B	331801AE	Oct. 1, 1996
COMTEST Compact Full Anechoic Chamber (7x3x3 m)	CFAC	ADT-S01	Aug. 2, 1996
HAEFELY Mains Interference Simulator	PLINE 1610	083690-17	Jan. 31, 1996
HAFEELY Magnetic Field Tester	MAG 100.1	083794-06	Jan. 31, 1996

Note: The calibration interval of the above test instruments is 12 months.

And the calibrations are traceable to NML/ROC and NIST/USA.



## 4. TEST RESULTS (EMISSION)

### 4.1 Radio Disturbance

Product Family Standard	:	EN 55 022, Class A
Frequency Range	:	0.15 - 30 MHz (Conducted Emission) 30 - 1000 MHz (Radiated Emission)
Input Voltage	:	230 Vac, 50 Hz (to power of Industrial PC)
Temperature	:	20 °C
Humidity	:	60 %
Atmospheric Pressure	:	1060 mbar

TEST RESULT	Remarks
PASS	Minimum passing margin of conducted emission: 28.5 dB at 11.702 MHz
	Minimum passing margin of radiated emission: 3.4 dB at 166.76 MHz

#### 4.1.1 EUT OPERATION CONDITION

1. Turn on the power of all equipments.
2. Confirm the CPU board installed in Industrial PC is model: SBC-570.
3. Industrial PC reads a test program to enable all functions.
5. The Industrial PC reads and writes messages from HDD.
6. The Industrial PC sends "H" messages to monitor and monitor display "H" patterns on screen.
7. The Industrial PC sends "H" messages to each modem.
8. The Industrial PC sends "H" messages to printer, and the printer prints them on paper.
9. Repeat steps 3-9.
10. Change the CPU board with model: SBC-490 and repeat steps 3-9.
11. Change the CPU board with model: SBC-355V and repeat steps 3-9.



#### 4.1.2 TEST DATA OF CONDUCTED EMISSION (A)

EUT: CPU BOARD

MODEL: SBC-570

CPU: Pentium 166 MHz

6 dB Band Width: 10 kHz

TEST PERSONNEL: Henry Lai


Freq. [MHz]	L1 Level		N Level		Limit		Margin [dB (μV)]			
	[dB (μV)]		[dB (μV)]		[dB (μV)]		L1		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.155	39.10	-	41.30	-	79.00	66.00	39.9	-	37.7	-
0.204	43.80	-	44.60	-	79.00	66.00	35.2	-	34.4	-
0.249	41.10	-	42.10	-	79.00	66.00	37.9	-	36.9	-
0.532	38.60	-	37.60	-	73.00	60.00	34.4	-	35.4	-
0.782	36.80	-	35.90	-	73.00	60.00	36.2	-	37.1	-
6.113	35.90	-	36.80	-	73.00	60.00	37.1	-	36.2	-

- Remarks:
1. "\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  4. The emission level of other frequencies were very low against the limit.

File No. ADT-EC9705Y

Page 9-1

Tested by *Huang Lai*

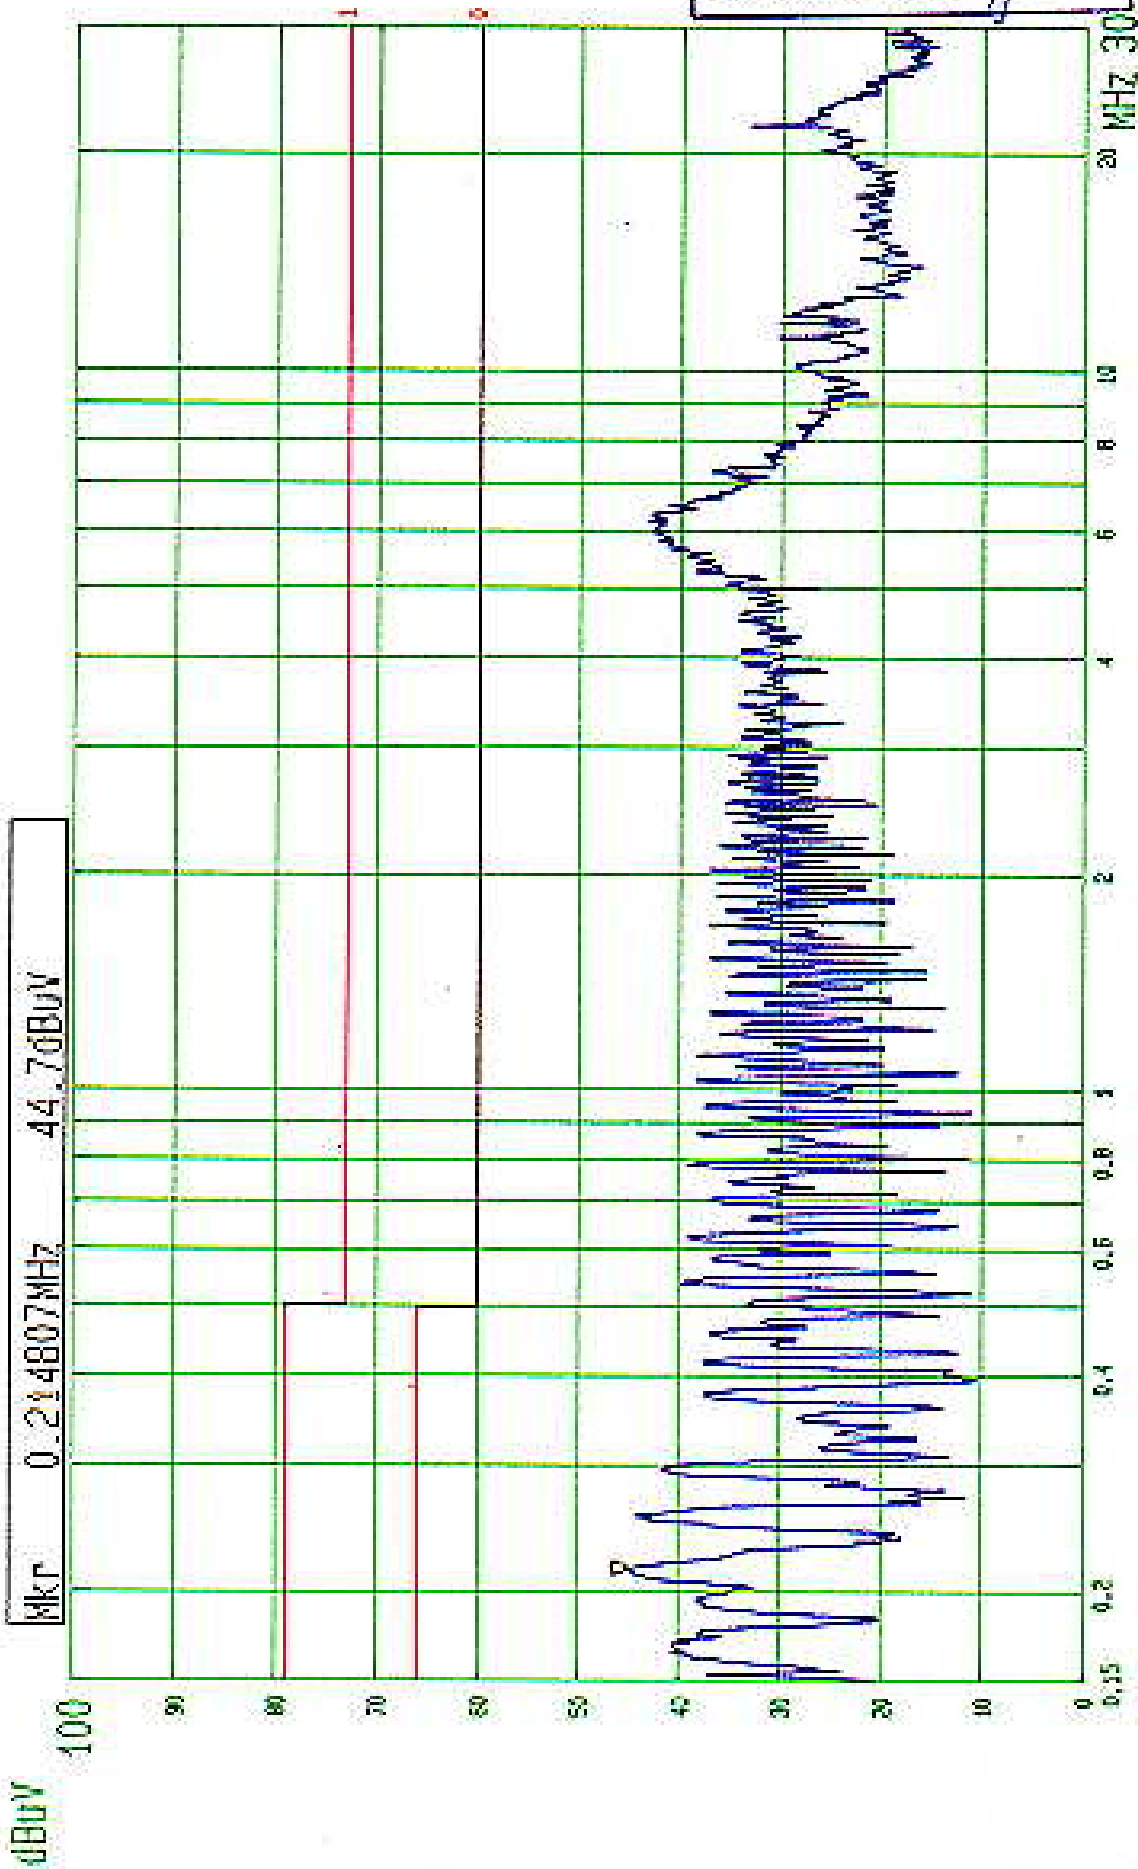


--- Date 28.FEB '97 Time 09:21:54  
EN55022 CLASS A CONDUCTION TEST (PEAK VALUE)  
MODEL: SBC-570 CPU: PENTIUM 165MHz

ADT CO.  
LISN: L1

File No. ADT-EC97055

Page 9-2

Tested by *Song Li*

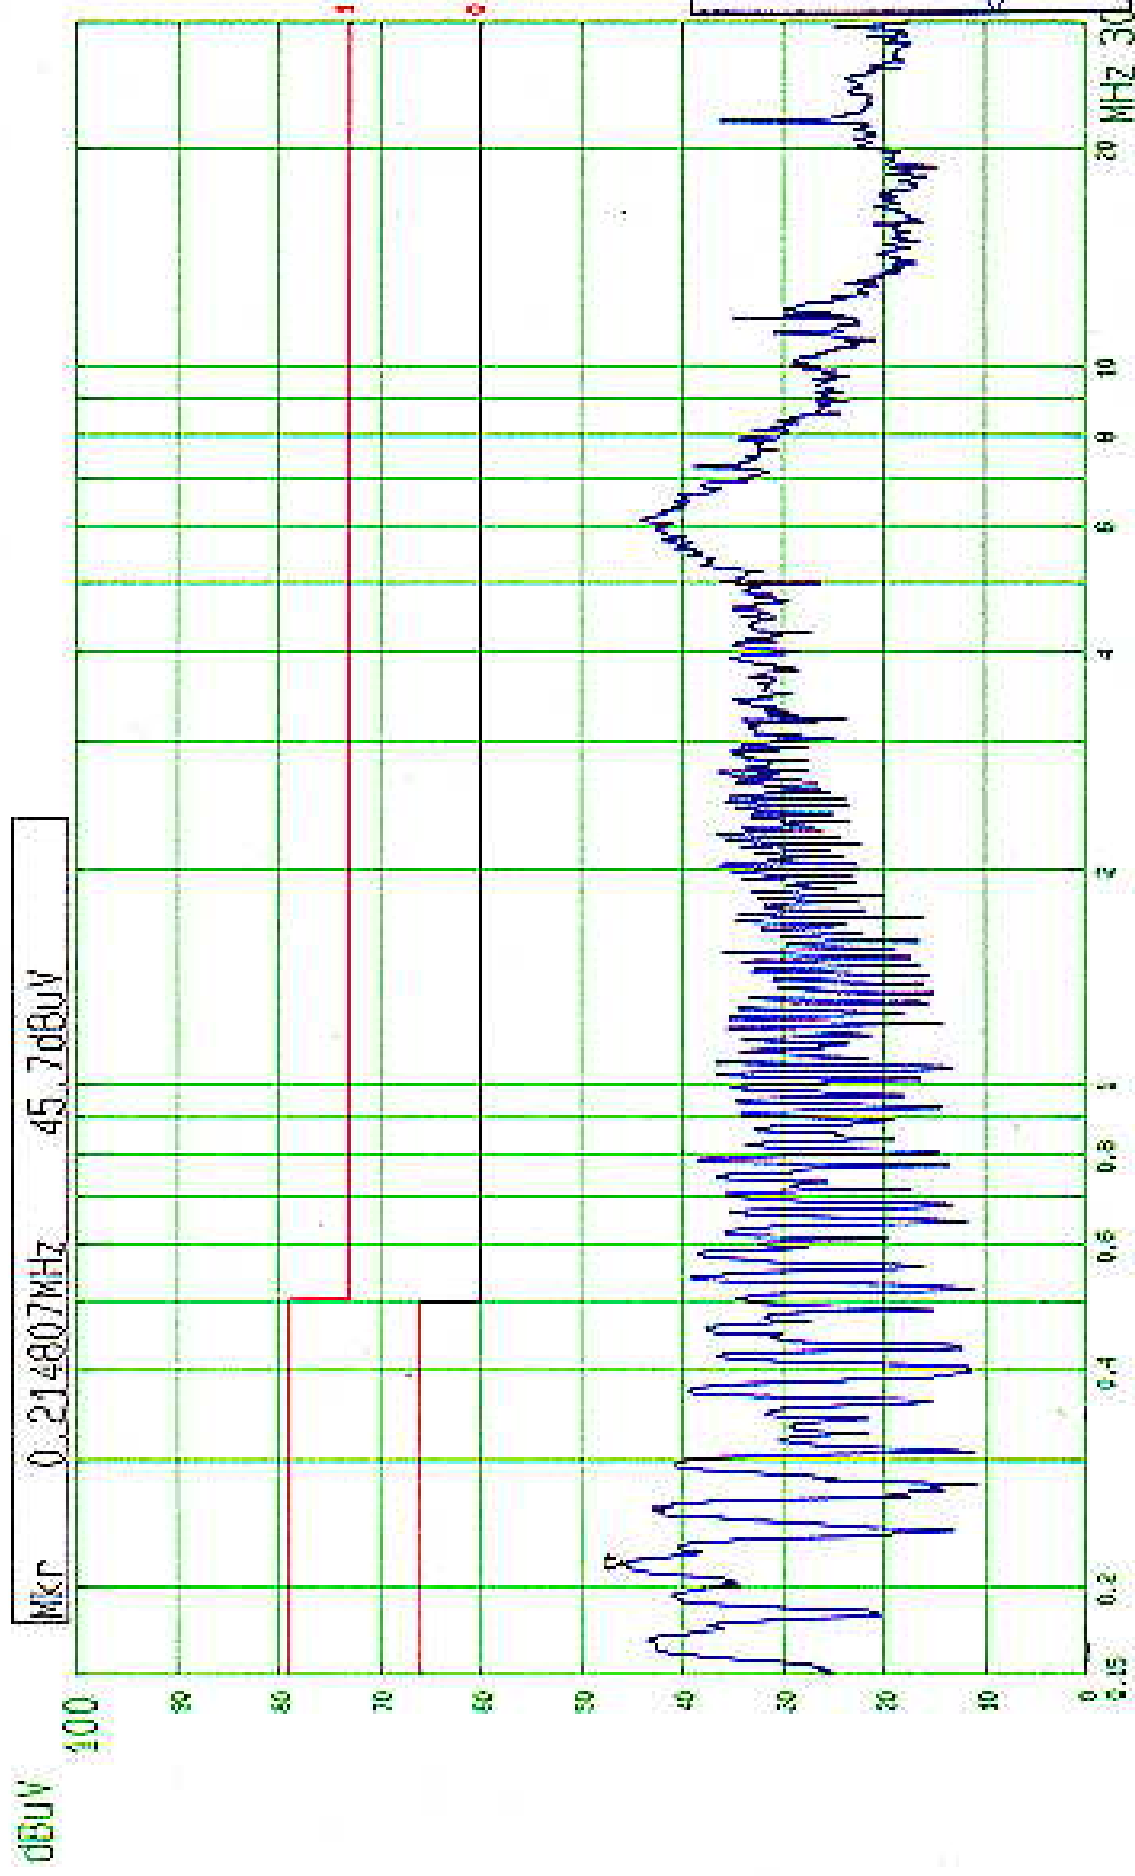

--- Date 28.FEB '97 Time 09:13:13  
EN55022 CLASS A CONDUCTION TEST (PEAK VALUE)  
MODEL: SBC-570 CPU: PENTIUM 166MHz

ADT CO.  
LISN: N



#### 4.1.2 TEST DATA OF CONDUCTED EMISSION (B)

EUT: CPU BOARD

MODEL: SBC-490

CPU: IBM 5X86C 100 MHz

6 dB Band Width: 10 kHz


TEST PERSONNEL: Henny Lai

Freq. [MHz]	L1 Level [dB (μV)]		N Level [dB (μV)]		Limit [dB (μV)]		Margin [dB (μV)]			
	QP	AV	QP	AV	QP	AV	L1		N	
0.204	43.10	-	44.10	-	79.00	66.00	35.9	-	34.9	-
0.248	41.40	-	42.10	-	79.00	66.00	37.6	-	36.9	-
0.287	44.50	-	44.10	-	79.00	66.00	34.5	-	34.9	-
0.533	37.90	-	37.40	-	73.00	60.00	35.1	-	35.6	-
0.781	36.60	-	34.60	-	73.00	60.00	36.4	-	38.4	-
6.128	35.70	-	35.60	-	73.00	60.00	37.3	-	37.4	-

- Remarks:
1. "\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  4. The emission level of other frequencies were very low against the limit.




Mkr 6.120818MHz 43.7dBuV

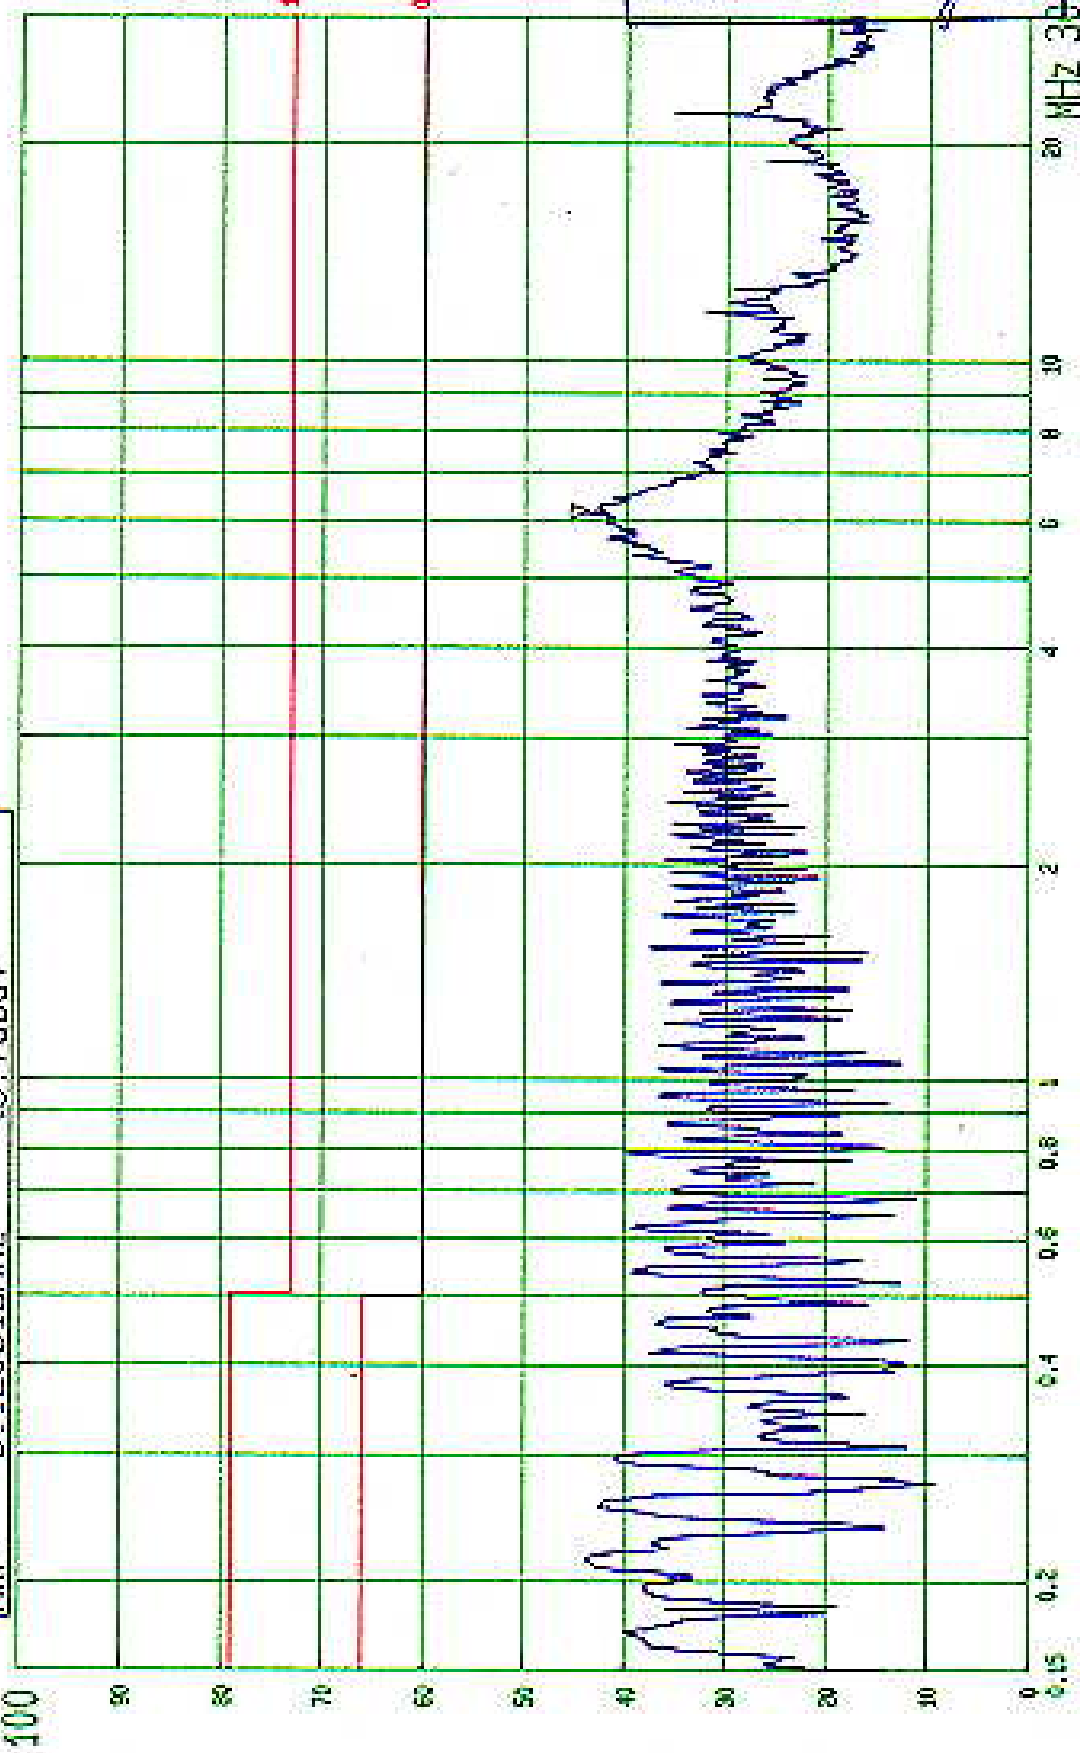

File No. ADT-EC97035  
Page 10-1  
Tested by Henry Lai

--- Date 28.FEB '97 Time 10:22:21  
EN55022 CLASS A CONDUCTION TEST (PEAK VALUE)  
MODEL: SBC-490 CPU: IBM 5X85C 100MHZ

ADT CO.  
LISN: L1

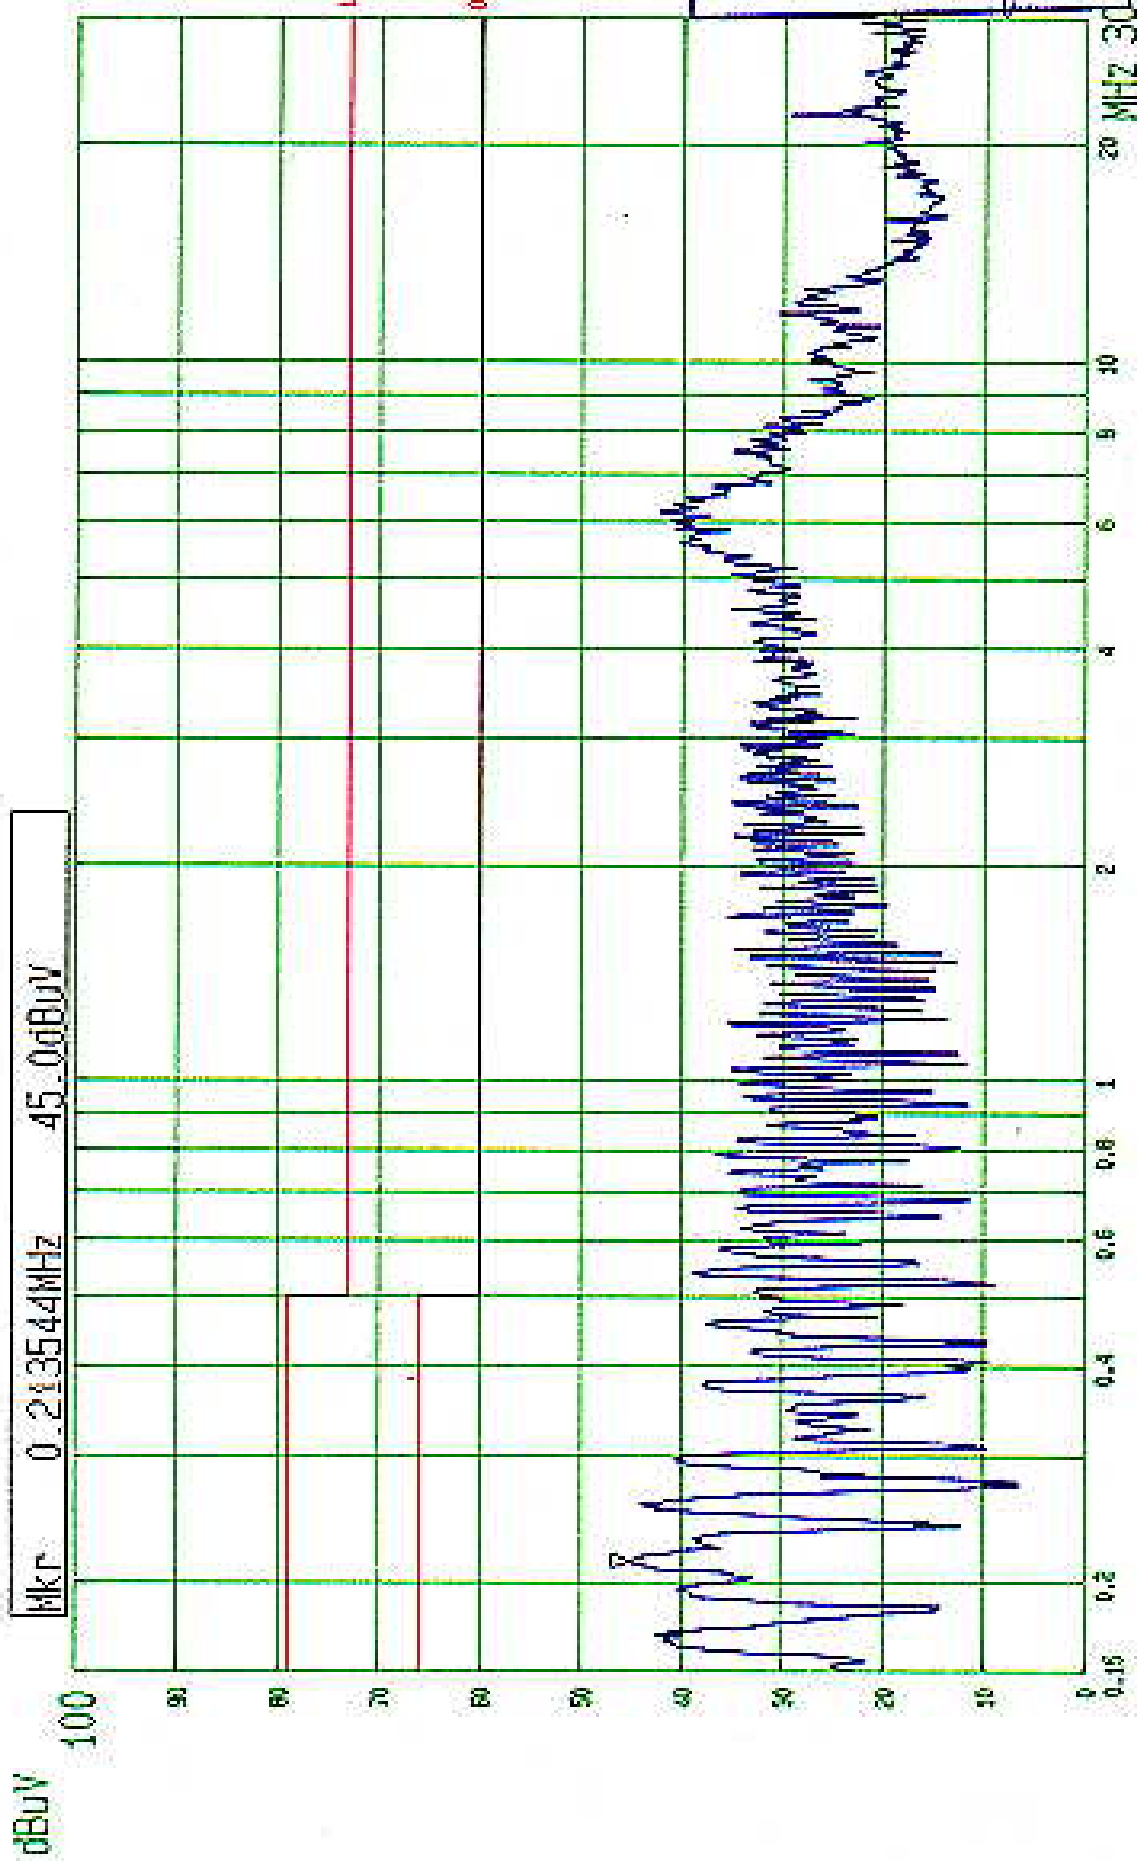



#### 4.1.2 TEST DATA OF CONDUCTED EMISSION (C)

EUT: CPU BOARD      MODEL: SBC-355V    CPU: 386SX-40 MHz

6 dB Band Width: 10 kHz


TEST PERSONNEL: *Denny Lai*

Freq. [MHz]	L1 Level		N Level		Limit		Margin [dB (μV)]			
	[dB (μV)]		[dB (μV)]		[dB (μV)]		L1		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.203	43.80	-	42.60	-	79.00	66.00	35.2	-	36.4	-
0.249	40.40	-	40.80	-	79.00	66.00	38.6	-	38.2	-
0.284	40.50	-	40.80	-	79.00	66.00	38.5	-	38.2	-
1.351	30.50	-	35.50	-	73.00	60.00	42.5	-	37.5	-
6.086	43.40	-	43.40	-	73.00	60.00	29.6	-	29.6	-
11.702	35.50	-	44.50	-	73.00	60.00	37.5	-	28.5	-
18.879	33.30	-	38.50	-	73.00	60.00	39.7	-	34.5	-

- Remarks:
1. "\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  4. The emission level of other frequencies were very low against the limit.

dBUV

MkP 6.120818MHZ 44.7dBUV

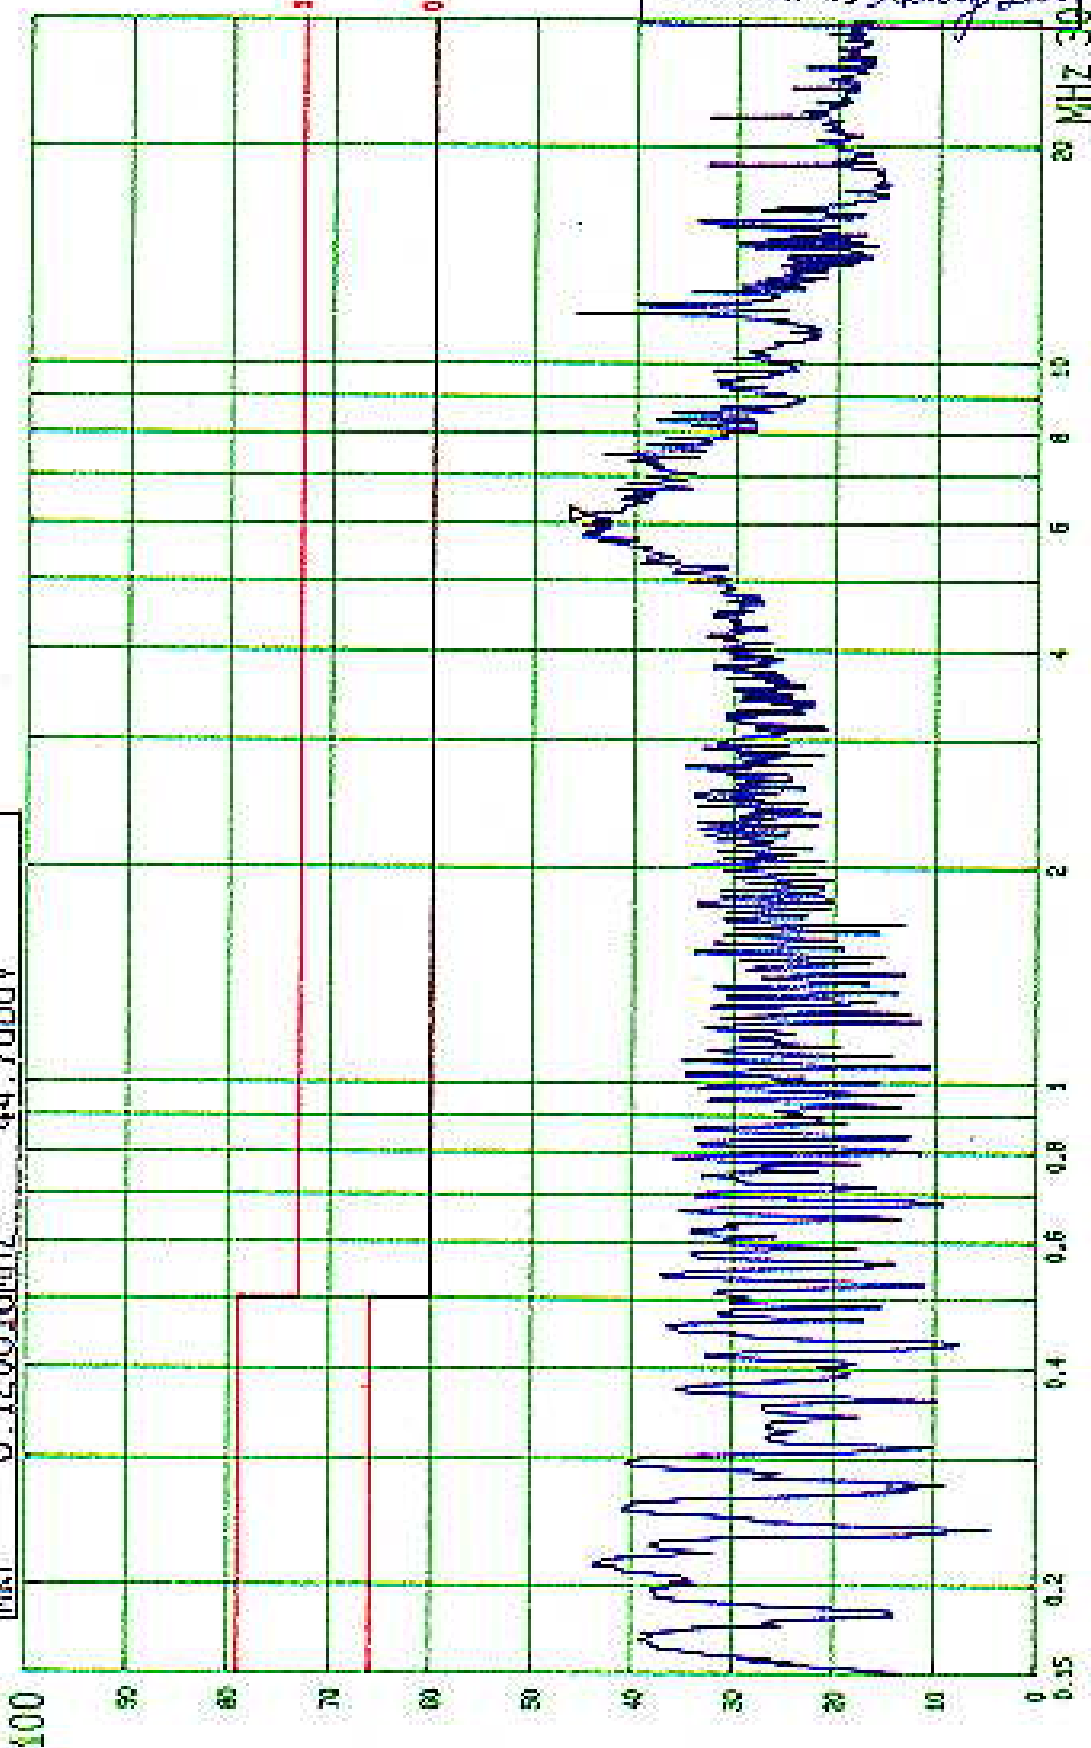

File No. ADT-E097055

Page (1-1)

Tested by *Mengy Lin*

---- Date 21.FEB '97 Time 19:24:47

EN55022 CLASS A CONDUCTION TEST

MODEL: SBC-355V CPU: 386SX-40MHZ


(PEAK VALUE)

ADT CO.,

LISN: L1

dBuV

Mkr 6.084939MHz 47.50dBuV

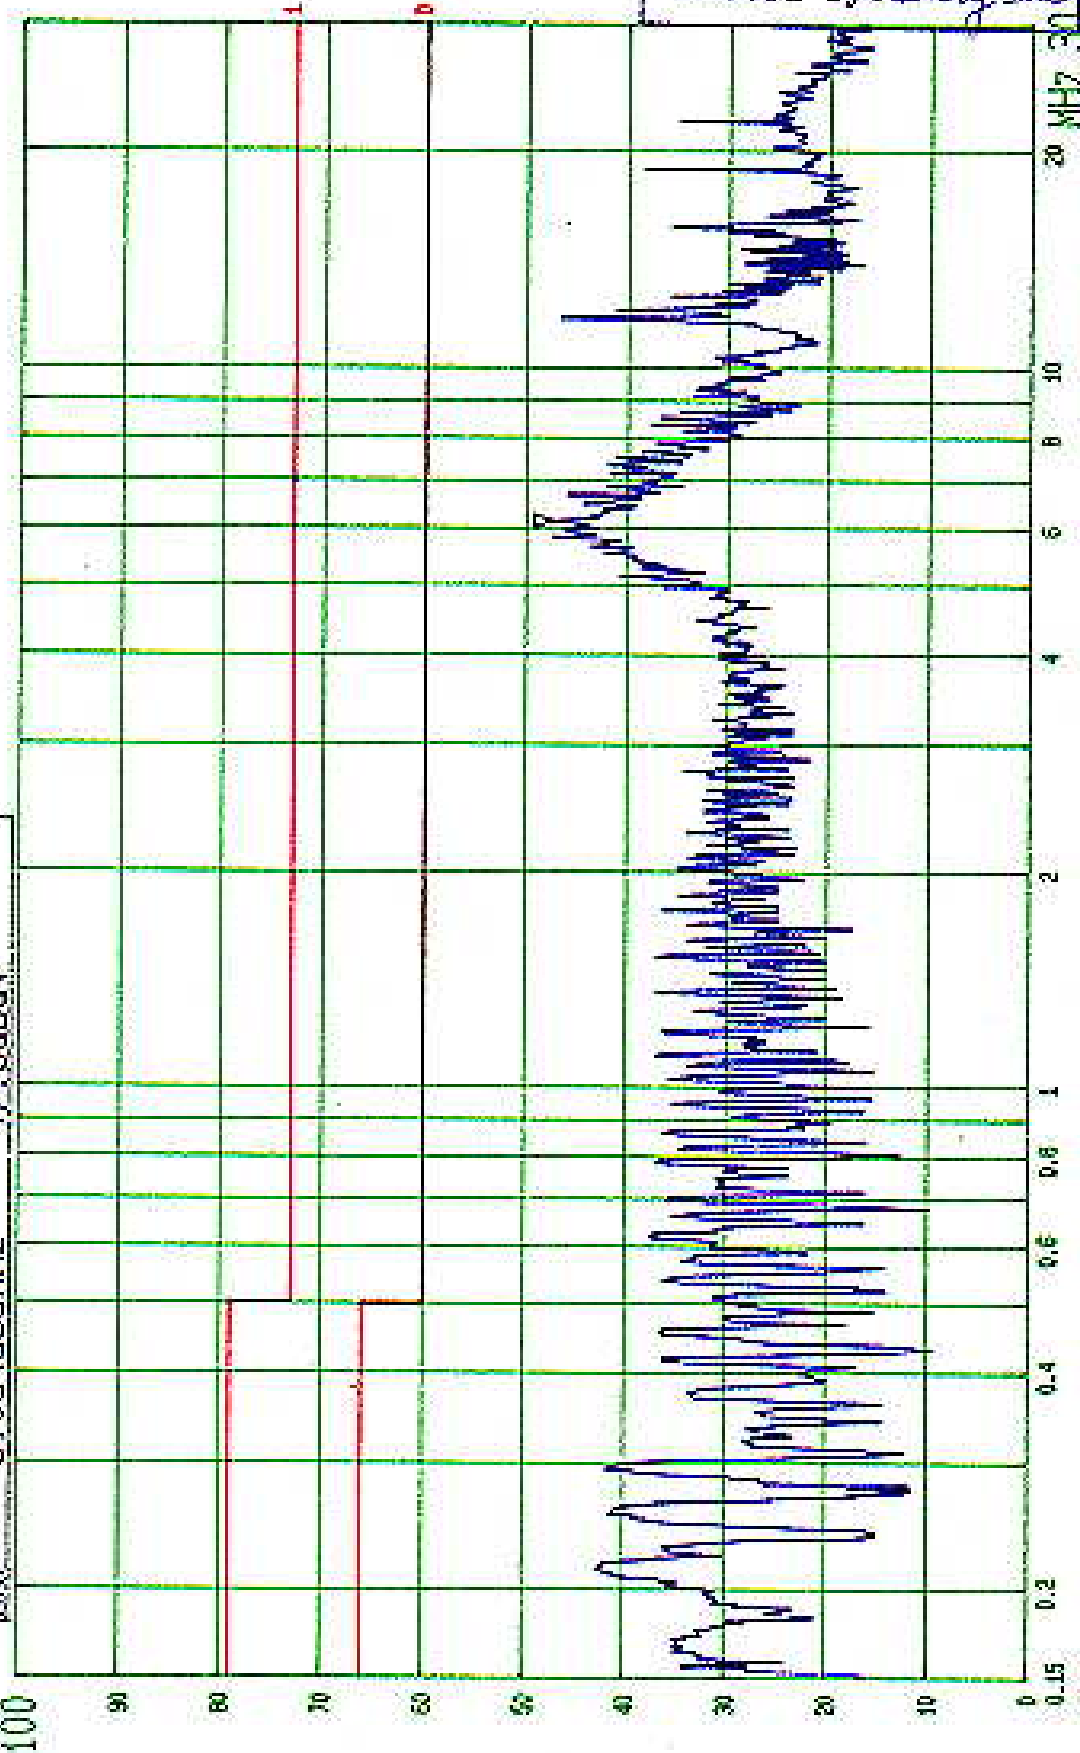

File No. ADT-91055  
Page 11-2  
Tested by Henry Lai

---- Date 21.FEB '97 Time 19:05:18  
EN55022 CLASS A CONDUCTION TEST (PEAK VALUE)  
MODEL: SBC-355V CPU: 386SX-40MHZ

ADT CO.,  
LISN: N



### 4.1.3 TEST DATA OF RADIATED EMISSION (A1)

EUT: CPU BOARD                      MODEL: SBC-570                      CPU: Pentium 166 MHz  
ANTENNA: CHASE BILOG CBL6112                      POLARITY: HORIZONTAL  
DETECTOR FUNCTION: CISPR, Quasi-peak                      6 dB BAND WIDTH: 120 kHz  
FREQUENCY RANGE: 30-1000 MHz                      MEASURED DISTANCE: 10 M  
TEST PERSONNEL: *Jerry Lai*

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)
109.17	13.4	11.7	25.1	40.0	-14.9
130.55	14.3	14.4	28.7	40.0	-11.3
137.66	14.7	15.7	30.4	40.0	-9.6
149.50	13.9	14.4	28.3	40.0	-11.7
215.95	15.1	12.1	27.2	40.0	-12.8
225.45	15.6	18.3	33.9	40.0	-6.1
230.19	15.9	17.7	33.6	47.0	-13.4
265.79	18.5	14.2	32.7	47.0	-14.3
398.68	21.1	16.6	37.7	47.0	-9.3
431.90	22.7	12.5	35.2	47.0	-11.8
498.34	24.3	9.1	33.4	47.0	-13.6

REMARKS :    1. Emission level (dBuV/m) = Correction Factor(dB/m) + Meter Reading (dBuV).  
                  2. Correction Factor(dB/m) = Ant. Factor(dB/m)+Cable loss(dB)  
                  3. The other emission levels were very low against the limit.

Graph of Test Result

=====

Model: SBC-570  
 Mode: PENTIUM 166MHz  
 SMI Type: BN55022 Class A  
 Freq. Range: 30-1000 MHz  
 Antenna: CHASE Bi\_Log


Test Date: 21 Feb 1997  
 Remark: Full system  
 Distance: 10 M  
 Detector: CISPR, QUASI\_Peak  
 Ant. Polarization: Horizontal

Tested By : Henry Lin

Report No. : EC97055

No.	Freq. (MHz)	Emission (dBuV)
1	109.3	25.1
3	137.7	30.4
5	216.0	27.2
7	230.2	33.6
9	398.7	37.7
11	498.3	33.4

No.	Freq. (MHz)	Emission (dBuV)
2	130.6	28.7
4	149.5	28.3
6	225.5	33.9
8	265.8	32.7
10	431.9	35.2

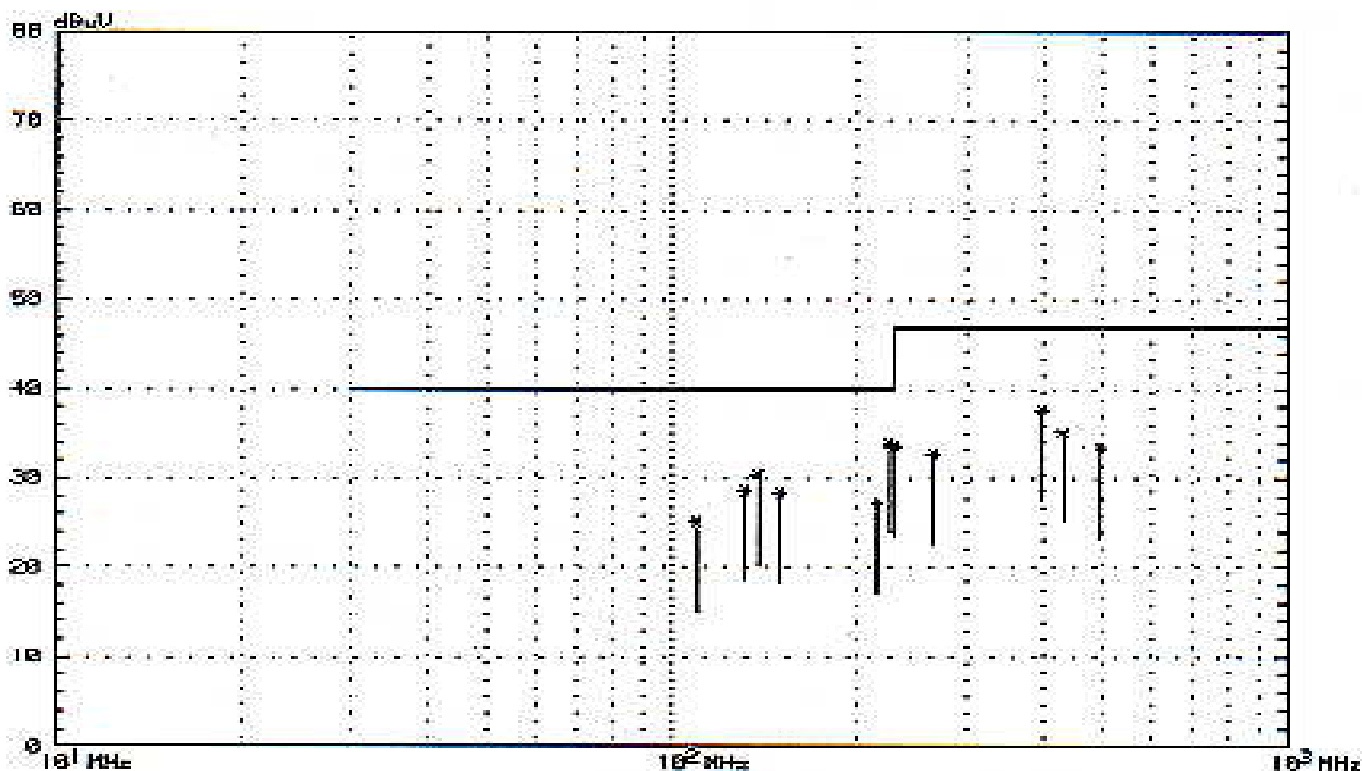



## TEST DATA OF RADIATED EMISSION (A2)

EUT: CPU BOARD                      MODEL: SBC-570                      CPU: Pentium 166 MHz

ANTENNA: CHASE BILOG CBL6112                      POLARITY: VERTICAL

DETECTOR FUNCTION: CISPR, Quasi-peak                      6 dB BAND WIDTH: 120 kHz

FREQUENCY RANGE: 30-1000 MHz                      MEASURED DISTANCE: 10 M

TEST PERSONNEL: Henry Lai

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)
66.85	8.2	17.2	25.4	40.0	-14.6
90.53	10.4	22.6	33.0	40.0	-7.0
118.65	13.1	21.0	34.1	40.0	-5.9
121.02	13.2	23.1	36.3	40.0	-3.7
137.68	14.5	19.6	34.1	40.0	-5.9
149.49	15.0	20.0	35.0	40.0	-5.0
182.74	13.8	13.1	26.9	40.0	-13.1
218.35	14.0	9.9	23.9	40.0	-16.1
398.68	22.6	14.0	36.6	47.0	-10.4
498.36	25.1	8.6	33.7	47.0	-13.3

- REMARKS :
1. Emission level (dBuV/m) = Correction Factor(dB/m) + Meter Reading (dBuV).
  2. Correction Factor(dB/m) = Ant. Factor(dB/m)+Cable loss(dB)
  3. The other emission levels were very low against the limit.



Graph of Test Result

=====

Model: SBC-570  
 Mode: PENTIUM 166MHz  
 EMI Type: EN55022 Class A  
 Freq. Range: 30-1000 MHz  
 Antenna: CHASE Bi\_Log


Test Date: 21 Feb 1997  
 Remark: Full system  
 Distance: 10 M  
 Detector: CISPR, QUASI\_Peak  
 Ant. Polarization: Vertical

Tested By : Henry Fan

Report No. : EC97055

No.	Freq. (MHz)	Emission (dBuV)
1	66.8	25.4
3	118.7	34.1
5	137.7	34.1
7	182.7	26.9
9	398.7	36.6

No.	Freq. (MHz)	Emission (dBuV)
2	90.5	33.0
4	121.0	36.3
6	149.5	35.0
8	218.4	23.9
10	498.6	33.7

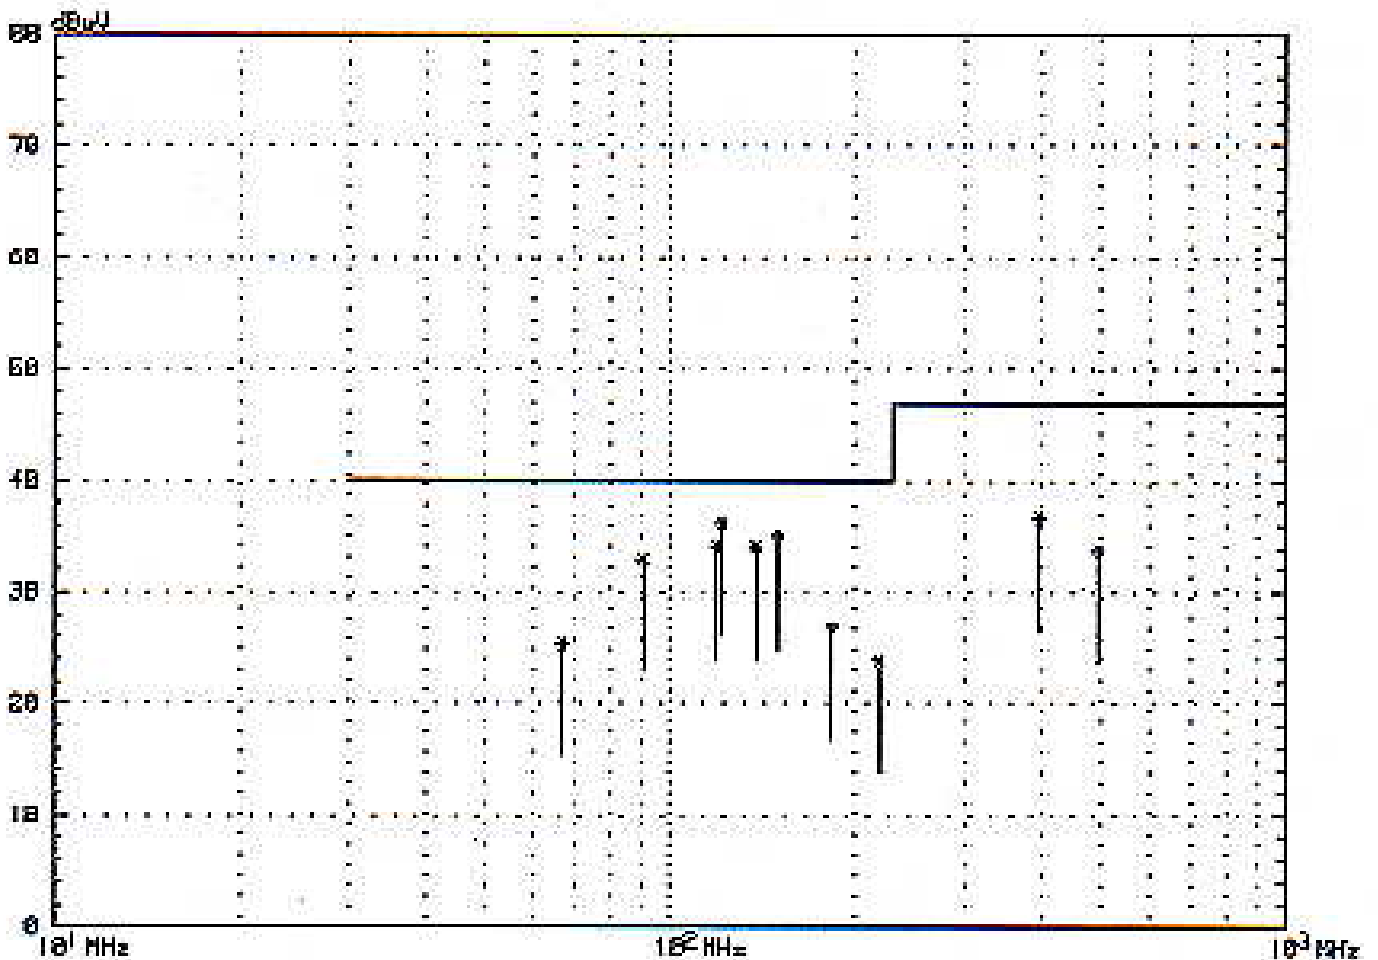



### 4.1.3 TEST DATA OF RADIATED EMISSION (B1)

EUT: CPU BOARD                      MODEL: SBC-490                      CPU: IBM 5x86C-100 MHz  
ANTENNA: CHASE BILOG CBL6112                      POLARITY: HORIZONTAL  
DETECTOR FUNCTION: CISPR, Quasi-peak                      6 dB BAND WIDTH: 120 kHz  
FREQUENCY RANGE: 30-1000 MHz                      MEASURED DISTANCE: 10 M  
TEST PERSONNEL: Henry Lai

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)
113.16	13.6	9.2	22.8	40.0	-17.2
119.42	13.8	9.8	23.6	40.0	-16.4
135.13	14.6	9.6	24.2	40.0	-15.8
165.85	12.7	6.4	19.1	40.0	-20.9
178.85	12.2	10.5	22.7	40.0	-17.3
198.00	14.0	6.1	20.1	40.0	-19.9
219.99	15.3	7.9	23.2	40.0	-16.8
232.35	16.0	13.9	29.9	47.0	-17.1
240.02	16.4	12.9	29.3	47.0	-17.7
497.65	24.3	5.3	29.6	47.0	-17.4
465.20	23.8	6.4	30.2	47.0	-16.8

REMARKS :    1. Emission level (dBuV/m) = Correction Factor(dB/m) + Meter Reading (dBuV).  
                  2. Correction Factor(dB/m) = Ant. Factor(dB/m)+Cable loss(dB)  
                  3. The other emission levels were very low against the limit.

### Graph of Test Result

Model: SBC-490  
 Mode: IBM 5X86C-100MHz  
 SMI Type: EN55022 Class A  
 Freq. Range: 30-1000 MHz  
 Antenna: CHASE Bi\_Log


Test Date: 21 Feb 1997  
 Remark: Full system  
 Distance: 10 M  
 Detector: CISPR, QUASI\_Peak  
 Ant. Polarization: Horizontal

Tested By : Henry Lai

Report No. : EC97055

No.	Freq. (MHz)	Emission (dBuV)
1	113.2	22.8
3	135.1	24.2
5	178.9	22.7
7	220.0	23.2
9	240.0	29.3
11	497.7	29.6

No.	Freq. (MHz)	Emission (dBuV)
2	119.4	23.6
4	165.9	19.1
6	198.0	20.1
8	232.4	29.9
10	465.2	30.2

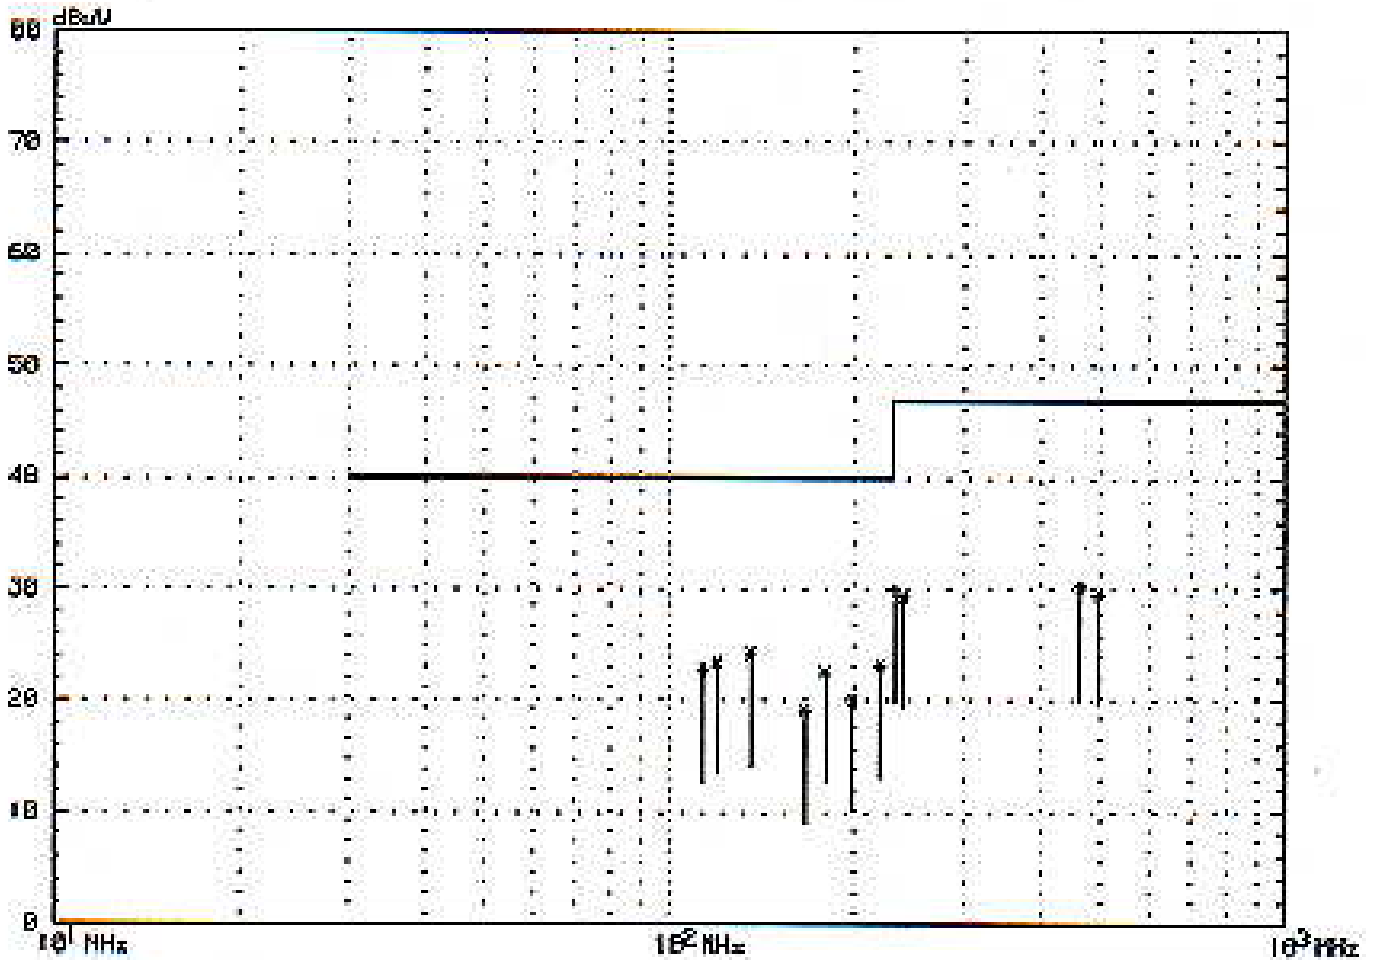



## TEST DATA OF RADIATED EMISSION (B2)

EUT: CPU BOARD                      MODEL: SBC-490                      CPU: IBM 5x86C-100 MHz

ANTENNA: CHASE BILOG CBL6112                      POLARITY: VERTICAL

DETECTOR FUNCTION: CISPR, Quasi-peak                      6 dB BAND WIDTH: 120 kHz

FREQUENCY RANGE: 30-1000 MHz                      MEASURED DISTANCE: 10 M

TEST PERSONNEL: Henry Lai

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)
83.87	9.9	22.6	32.5	40.0	-7.5
135.14	14.3	17.4	31.7	40.0	-8.3
163.41	15.1	11.4	26.5	40.0	-13.5
165.91	14.9	10.5	25.4	40.0	-14.6
169.70	14.6	12.7	27.3	40.0	-12.7
182.20	13.8	7.5	21.3	40.0	-18.7
198.00	13.0	9.4	22.4	40.0	-17.6
219.98	14.1	12.8	26.9	40.0	-13.1
226.26	14.5	13.9	28.4	40.0	-11.6
432.00	22.4	5.4	27.8	47.0	-19.2
497.43	25.1	2.5	27.6	47.0	-19.4

- REMARKS :
1. Emission level (dBuV/m) = Correction Factor(dB/m) + Meter Reading (dBuV).
  2. Correction Factor(dB/m) = Ant. Factor(dB/m) + Cable loss(dB)
  3. The other emission levels were very low against the limit.

### Graph of Test Result

=====

Model: SBC-490  
 Mode: IBM 5XB6C-100MHz  
 EMI Type: EN55022 Class A  
 Freq. Range: 30-1000 MHz  
 Antenna: CHASE Bi\_Log


Test Date: 21 Feb 1997  
 Remark: Full system  
 Distance: 10 M  
 Detector: CISPR, QUASI\_Peak  
 Ant. Polarization: Vertical

Tested By : Henry Lai

Report No. : EC97055

No.	Freq. (MHz)	Emission (dBuV)
1	83.9	32.5
3	163.4	26.5
5	169.7	27.3
7	198.0	22.4
9	226.3	28.4
11	497.4	27.6

No.	Freq. (MHz)	Emission (dBuV)
2	135.1	31.7
4	165.9	25.6
6	182.2	21.3
8	220.0	26.9
10	432.0	27.8

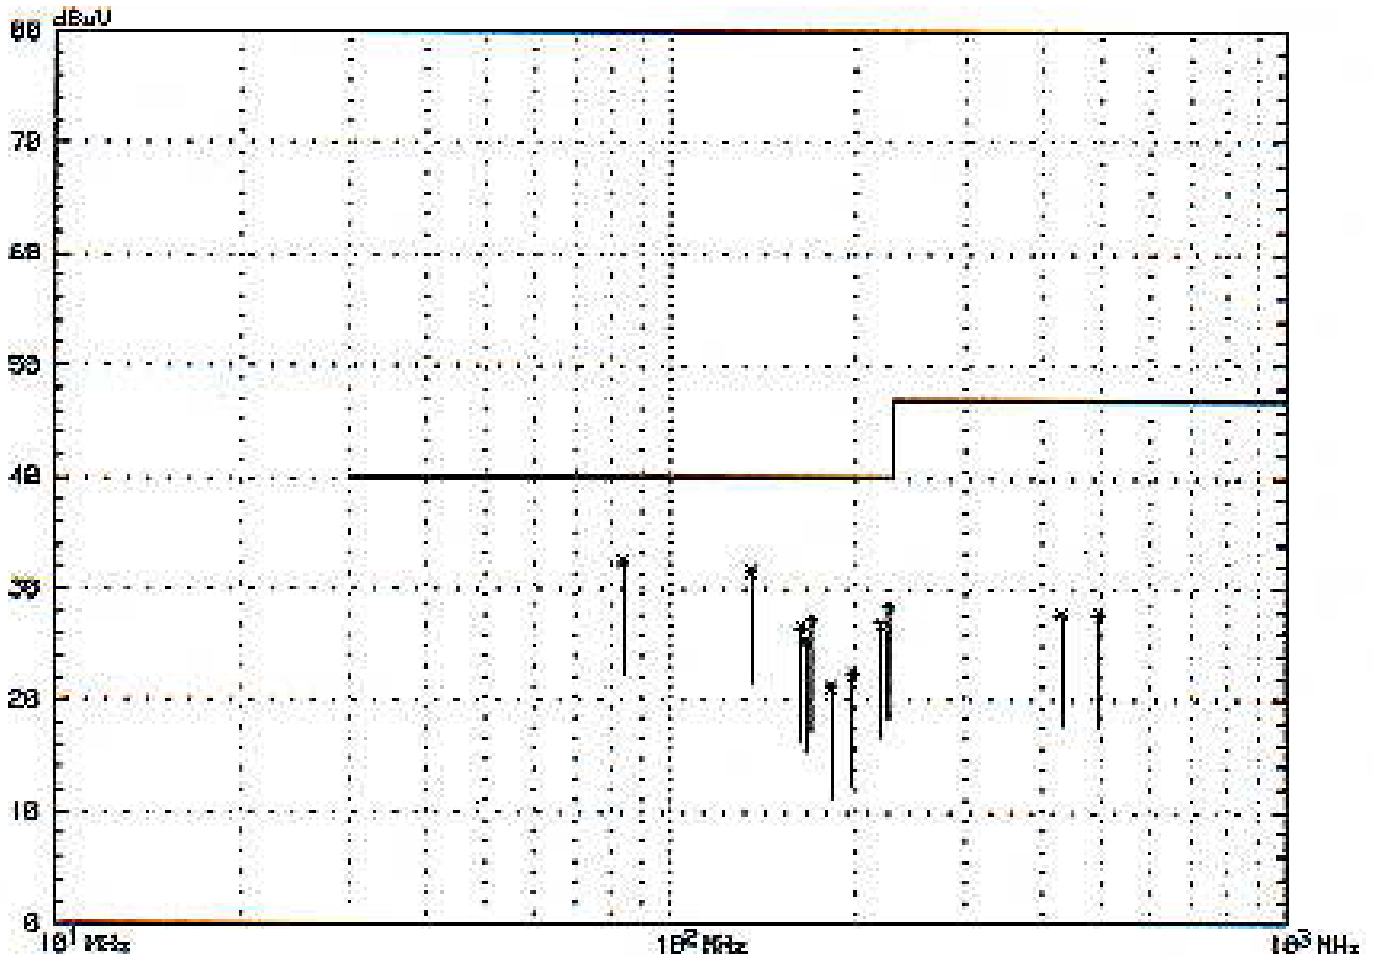



### 4.1.3 TEST DATA OF RADIATED EMISSION (C1)

EUT: CPU BOARD                      MODEL: SBC-355V    CPU: 386SX-40 MHz  
ANTENNA: CHASE BILOG CBL6112                      POLARITY: HORIZONTAL  
DETECTOR FUNCTION: CISPR, Quasi-peak                      6 dB BAND WIDTH: 120 kHz  
FREQUENCY RANGE: 30-1000 MHz                      MEASURED DISTANCE: 10 M  
TEST PERSONNEL: Henry Lai

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)
80.21	9.9	17.1	27.0	40.0	-13.0
119.58	13.8	10.9	24.7	40.0	-15.3
132.16	14.4	9.8	24.2	40.0	-15.8
157.33	13.2	15.0	28.2	40.0	-11.8
166.75	12.7	14.7	27.4	40.0	-12.6
176.22	12.3	8.9	21.2	40.0	-18.8
226.57	15.7	14.4	30.1	40.0	-9.9
240.56	16.5	15.6	32.1	47.0	-14.9
276.96	18.4	14.1	32.5	47.0	-14.5
393.32	20.9	7.4	28.3	47.0	-18.7
456.41	23.7	11.0	34.7	47.0	-12.3
504.41	24.4	8.6	33.0	47.0	-14.0

REMARKS :    1. Emission level (dBuV/m) = Correction Factor(dB/m) + Meter Reading (dBuV).  
                  2. Correction Factor(dB/m) = Ant. Factor(dB/m)+Cable loss(dB)  
                  3. The other emission levels were very low against the limit.

### Graph of Test Result

=====

Model: SPC-355V  
 Mode: 386SX-40MHz  
 EMI Type: EN55022 Class A  
 Freq. Range: 30-1000 MHz  
 Antenna: CHASE Bi\_Log


Test Date: 21 Feb 1997  
 Remark: Full system  
 Distance: 10 M  
 Detector: CISPR, QUASI\_Peak  
 Ant. Polarization: Horizontal

Tested By : Henry Lin

Report No. : EC97055

No.	Freq. (MHz)	Emission (dBuV)
1	80.2	27.0
3	132.2	24.2
5	166.8	27.4
7	226.6	30.1
9	277.0	32.5
11	456.6	34.7

No.	Freq. (MHz)	Emission (dBuV)
2	119.6	24.7
4	157.3	28.2
6	176.2	21.2
8	240.6	32.1
10	393.3	28.3
12	504.4	33.0

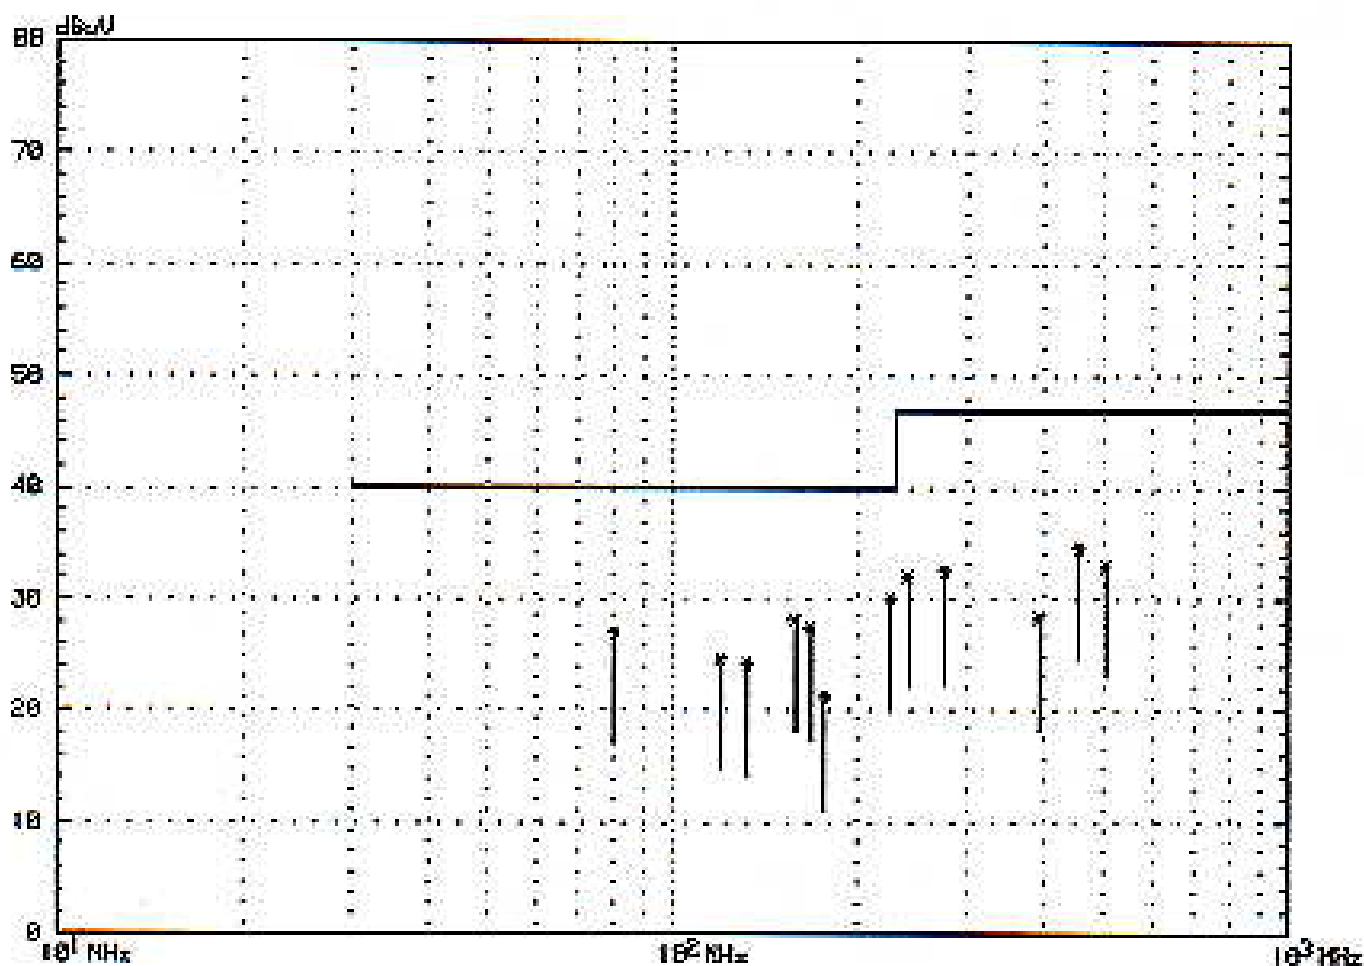



## TEST DATA OF RADIATED EMISSION (C2)

EUT: CPU BOARD

MODEL: SBC-355V

CPU: 386SX-40 MHz

ANTENNA: CHASE BILOG CBL6112

POLARITY: VERTICAL

DETECTOR FUNCTION: CISPR, Quasi-peak

6 dB BAND WIDTH: 120 kHz

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

TEST PERSONNEL: Henry Lai

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)
40.90	15.0	14.5	29.5	40.0	-10.5
80.19	9.7	25.2	34.9	40.0	-5.1
125.87	13.6	16.4	30.0	40.0	-10.0
132.19	14.1	17.7	31.8	40.0	-8.2
160.52	15.3	17.8	33.1	40.0	-6.9
166.76	14.8	21.8	36.6	40.0	-3.4
176.23	14.2	12.1	26.3	40.0	-13.7
217.13	14.0	12.2	26.2	40.0	-13.8
240.57	15.4	12.5	27.9	47.0	-19.1
302.08	18.8	10.9	29.7	47.0	-17.3
393.54	22.4	6.9	29.3	47.0	-17.7
504.35	25.2	7.7	32.9	47.0	-14.1

- REMARKS :
1. Emission level (dBuV/m) = Correction Factor(dB/m) + Meter Reading (dBuV).
  2. Correction Factor(dB/m) = Ant. Factor(dB/m) + Cable loss(dB)
  3. The other emission levels were very low against the limit.



Graph of Test Result


Model: SBC-355V  
Mode: 386SX-40MHz  
EMI Type: EN55022 Class A  
Freq. Range: 30-1000 MHz  
Antenna: CHASE Bi\_Log

Test Date: 21 Feb 1997  
Remark: Full system  
Distance: 10 M  
Detector: CISPR, QUASI\_Peak  
Ant. Polarization: Vertical

Tested By : *Delany Lee*

Report No. : EC97055

No.	Freq. (MHz)	Emission (dBuV)	No.	Freq. (MHz)	Emission (dBuV)
1	40.9	29.5	2	80.2	34.9
3	125.9	30.0	4	132.2	31.8
5	160.5	33.1	6	166.8	36.6
7	176.2	26.3	8	217.1	26.2
9	240.6	27.9	10	302.1	29.7
11	393.5	29.3	12	504.4	32.9

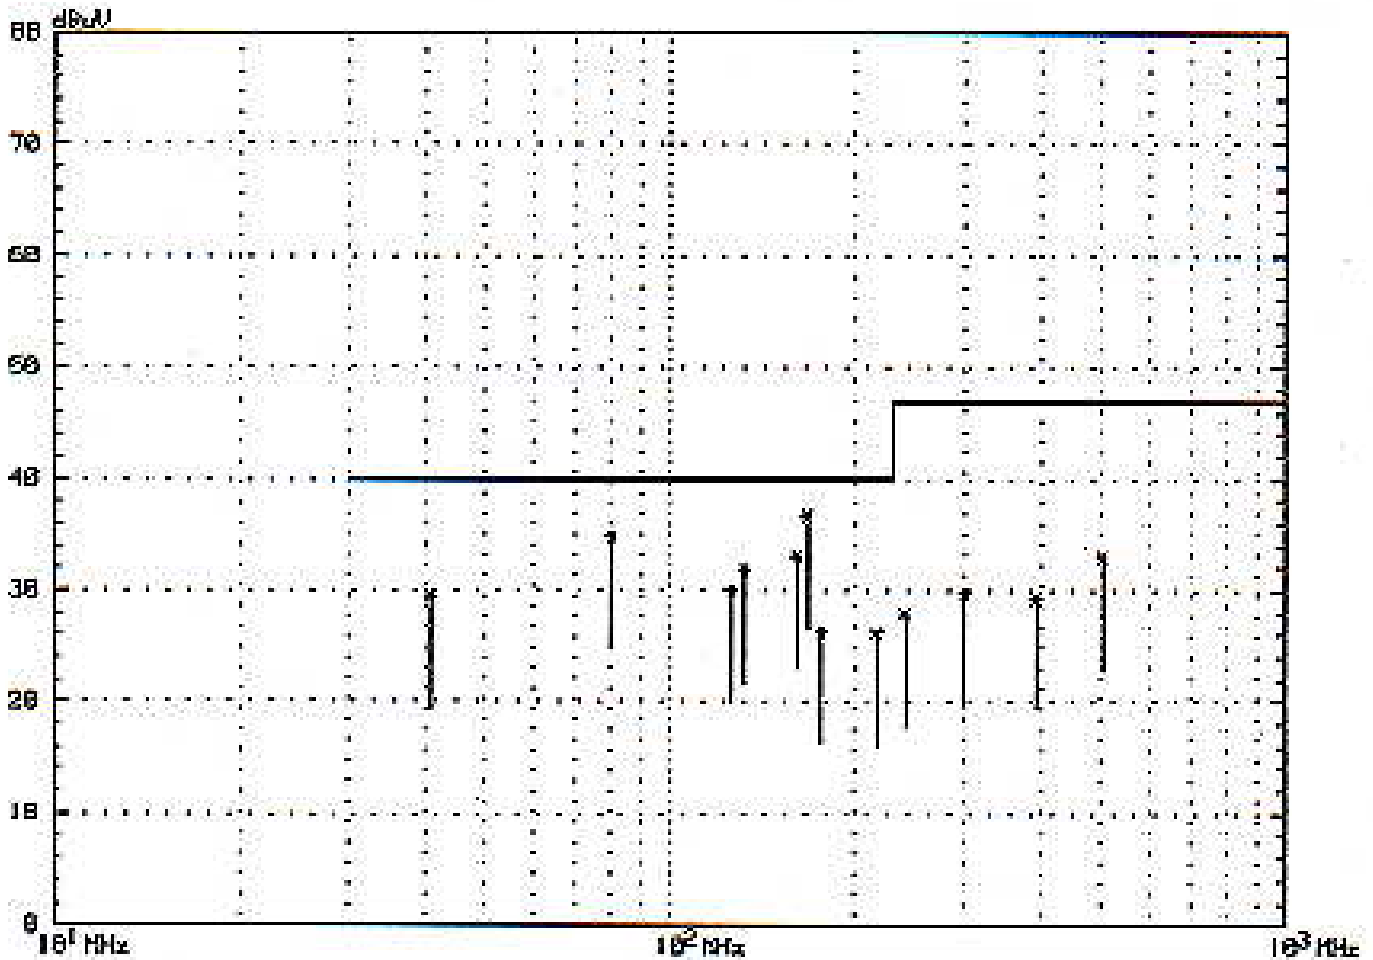



## 5. TEST RESULTS (IMMUNITY)

### 5.1 GENERAL DESCRIPTION

Basic Standard	:	EN61000-4-2	(Electrostatic Discharge Test, ESD)
		ENV50140	(Radiated Radio-Frequency Disturbance Test, RS)
		EN61000-4-4	(Electrical Fast Transient/Burst Test, EFT)
		ENV50141	(Conducted Radio Frequency Disturbances Test, CS)
		EN61000-4-8	(Power Frequency Magnetic Field Test)
		ENV50204	(Radio-Frequency Electromagnetic Field, Pulse modulated)
Generic Standard	:	EN 50 082-2	
Input Voltage	:	230 Vac, 50 Hz	(to power of Industrial PC)
Temperature	:	25 °C	
Humidity	:	55 %	
Atmospheric Pressure	:	1060 mbar	

### 5.2 PERFORMANCE CRITERIA DESCRIPTION

Criterion A - The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.

Criterion B - The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.

Criterion C - Temporary loss of function is allowed, provided the function is self recoverable or can be restored by the operation of the controls.

### 5.3 EUT OPERATION CONDITION

Industrial PC runs a test program to access FDD/HDD/MODEM/PRINTER sequentially and show the result on monitor screen.



## 5.4 TEST RESULT OF ELECTROSTATIC DISCHARGE (ESD)

Basic Standard : EN61000-4-2  
 Generic Standard : EN 50 082-2  
 Discharge Impedance : 330 ohm / 150 pF  
 Discharge Voltage : Air Discharge - 8 kV (Direct/Indirect)  
 (Direct/Indirect) Contact Discharge - 4 kV  
 Polarity : Positive/Negative  
 Number of Discharge : Minimum 10 times at each test point  
 Discharge Mode : Single Discharge  
 Discharge Period : 1 second minimum

Test Personnel : TM Yung

Test Result		Remarks
Criterion A	PASS	Model: SBC-570, SBC-490, SBC-355V

### OBSERVATION DESCRIPTION

Direct Application			Test Result	
Discharge Level (kV)	Polarity (+/-)	Test Point	Contact Discharge	Air Discharge
4	+	4,5	Note 1	N/A
8	+	1 ~ 3	N/A	Note 1

#### Description of test point:

- |                 |               |
|-----------------|---------------|
| 1. LED          | 2. FDD        |
| 3. Power Switch | 4. Metal case |
| 5. Slot bracket |               |

Indirect Application			Test Result	
Discharge Level (kV)	Polarity (+/-)	Test Point	Horizontal Coupling	Vertical Coupling
4	+/-	1 ~ 4	Note 1	Note 1

#### Description of test point:

- |               |               |
|---------------|---------------|
| 1. Front side | 2. Right side |
| 3. Left side  | 4. Rear side  |

#### Description of test result:

Note 1: There was no change compared with initial operation during the test.



## 5.5 TEST RESULT OF RADIATED RADIO FREQUENCY DISTURBANCES (RS)

Basic Standard : ENV50140  
Generic Standard : EN 50 082-2  
Frequency range : 80 MHz - 1000 MHz  
Field strength : 10 V/m  
Modulation : 1kHz Sine Wave, 80%, AM Modulation  
Frequency step : 1 % of fundamental  
Polarity of Antenna : Horizontal and Vertical  
Test distance : 3 m

Test Personnel : Tim Young

Test Result		Remarks
Criterion A	PASS	Model: SBC-570, SBC-490, SBC-355V

Note: Four sides of EUT are verified separately.

### OBSERVATION DESCRIPTION

There is no change compared with initial operation during the test.



## 5.6 TEST RESULT OF ELECTRICAL FAST TRANSIENT/BURST (EFT/BURST)

Basic Standard : EN61000-4-4  
Generic Standard : EN 50 082-2  
Test Voltage : Power Line - 2 kV (to power of Industrial PC)  
Signal/Control Line - N/A  
Polarity : Positive/Negative  
Impulse Frequency : 5 kHz  
Tr / Tn : 5/50 ns  
Burst Duration : 15 ms  
Burst Period : 300 ms  
Test Duration : Not less than 1 min.

Test Personnel :

Test Result		Remarks
Criterion A	PASS	Model: SBC-570, SBC-490, SBC-355V

### OBSERVATION DESCRIPTION

Test Point	Polarity	Test Level (kV)	Result
L1	+/-	2	Note 1
L2	+/-	2	Note 1
GND	+/-	2	Note 1

#### Description of test result:

Note1: There is no change compared with initial operation during the test.



## 5.7 TEST RESULT OF CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)

Basic Standard : ENV50141  
Generic Standard : EN 50 082-2  
Frequency range : 0.15 MHz - 80 MHz  
Field strength : 10 V/m  
Modulation : 1kHz Sine Wave, 80%, AM Modulation  
Frequency step : 1 % of fundamental  
Coupled cable : Power Mains, Unshielded  
Coupling device : CDN-M3 (3 wires)  
Test Personnel : Tim Young

Test Result		Remarks
Criterion A	PASS	Model: SBC-570, SBC-490, SBC-355V

### OBSERVATION DESCRIPTION

There is no change compared with initial operation during the test.



## 5.8 TEST RESULT OF POWER FREQUENCY MAGNETIC FIELD

Basic Standard : EN61000-4-8  
Generic Standard : EN 50 082-2  
Frequency range : 50Hz  
Field strength : 30 A/m  
Observation Time : 1 minute  
Inductance coil : Rectangular type, 1mx1m  
Test Personnel : *TM Yung*

Test Result		Remarks
Criterion A	PASS	Model: SBC-570, SBC-490, SBC-355V

### OBSERVATION DESCRIPTION

There was no change compared with initial operation during the test.



## 5.9 TEST RESULT OF RADIO-FREQUENCY ELECTROMAGNETIC FIELD, PULSE MODULATED

Basic Standard : ENV50204  
Generic Standard : EN 50 082-2  
Frequency range : 900 +/- 5 MHz  
Field strength : 10 V/m  
Modulation : 200Hz, Square Wave, 50% Duty Cycle  
Dewell Time : 30 second  
Polarity of Antenna : Horizontal and Vertical  
Test distance : 3 m

Test Personnel : Tom Yellony

Test Result		Remarks
Criterion A	PASS	Model: SBC-570, SBC-490, SBC-355V

Note: Four sides of EUT are verified separately.

### OBSERVATION DESCRIPTION


There is no change compared with initial operation during the test.





## 6. PHOTOGRAPHS OF THE TEST CONFIGURATION

### RADIATED EMISSION TEST (MODEL: SBC-570)

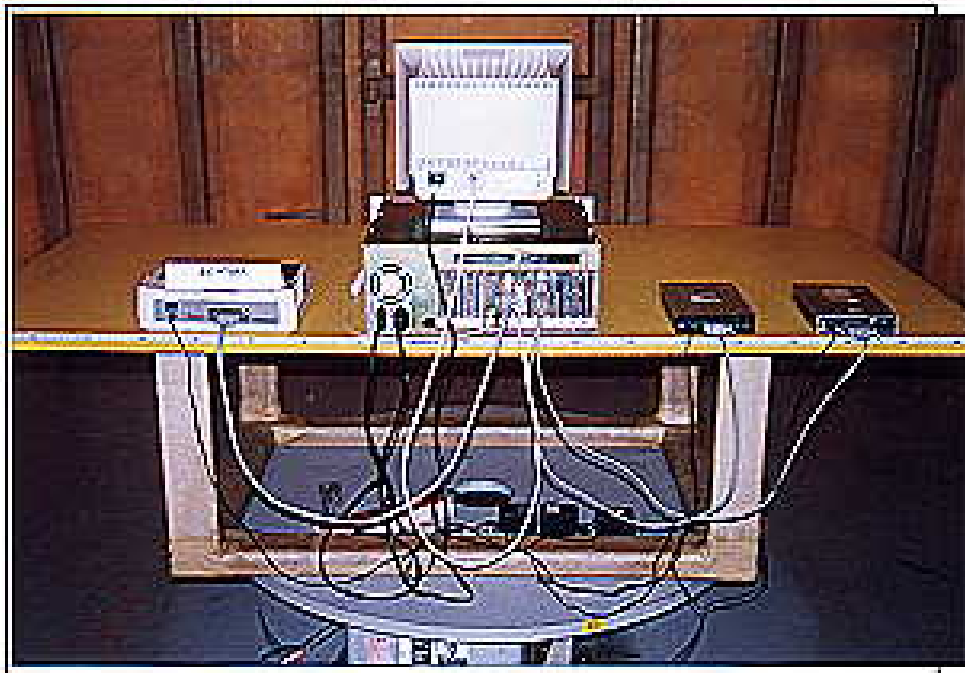




## CONDUCTED EMISSION TEST (MODEL: SBC-570)





## RADIATED EMISSION TEST (MODEL: SBC-490)

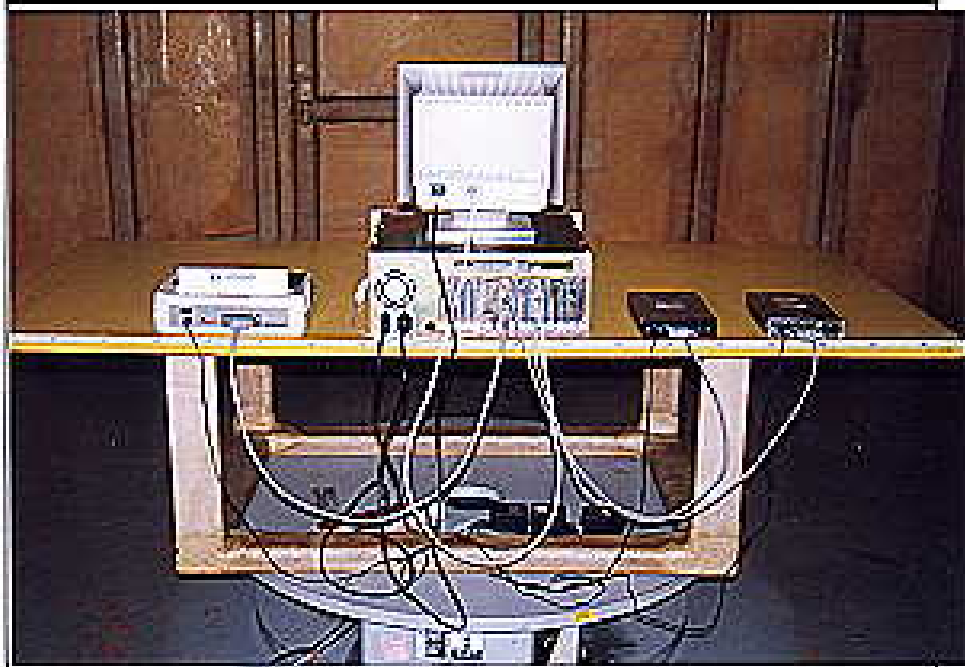




## CONDUCTED EMISSION TEST (MODEL: SBC-490)





## RADIATED EMISSION TEST (MODEL: SBC-355V)

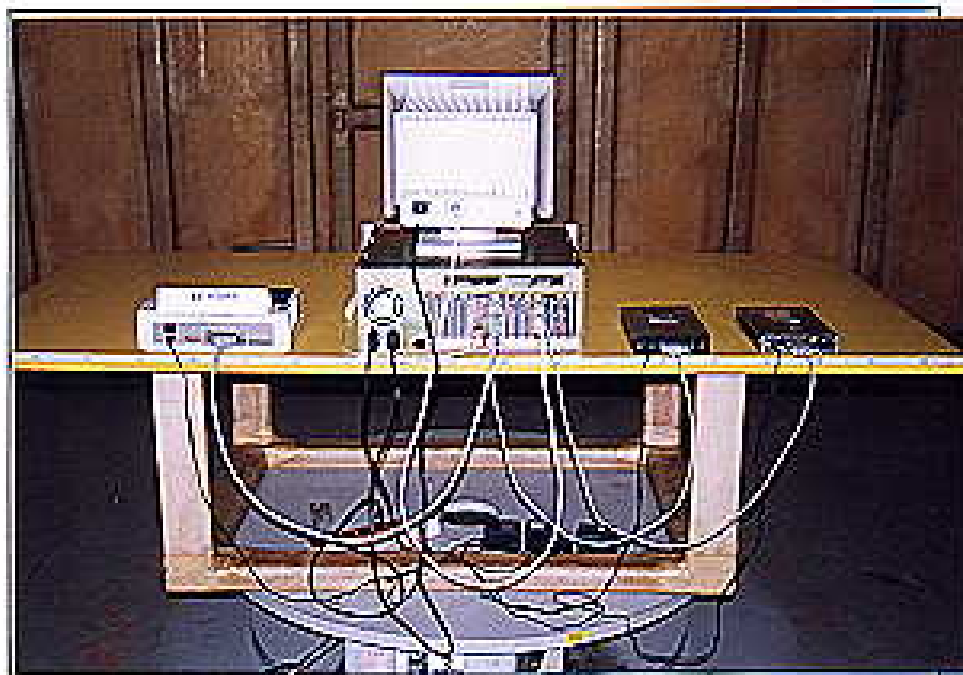




## CONDUCTED EMISSION TEST (MODEL: SBC-355V)






## ESD TEST

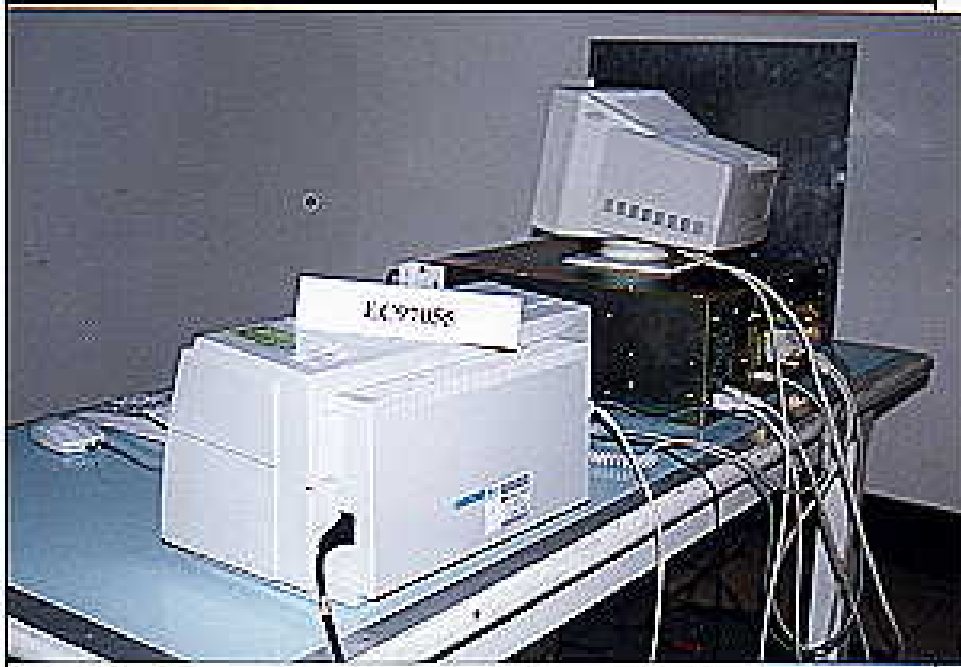



## RS TEST (AM MODULATION AND PULSE MODULATION)

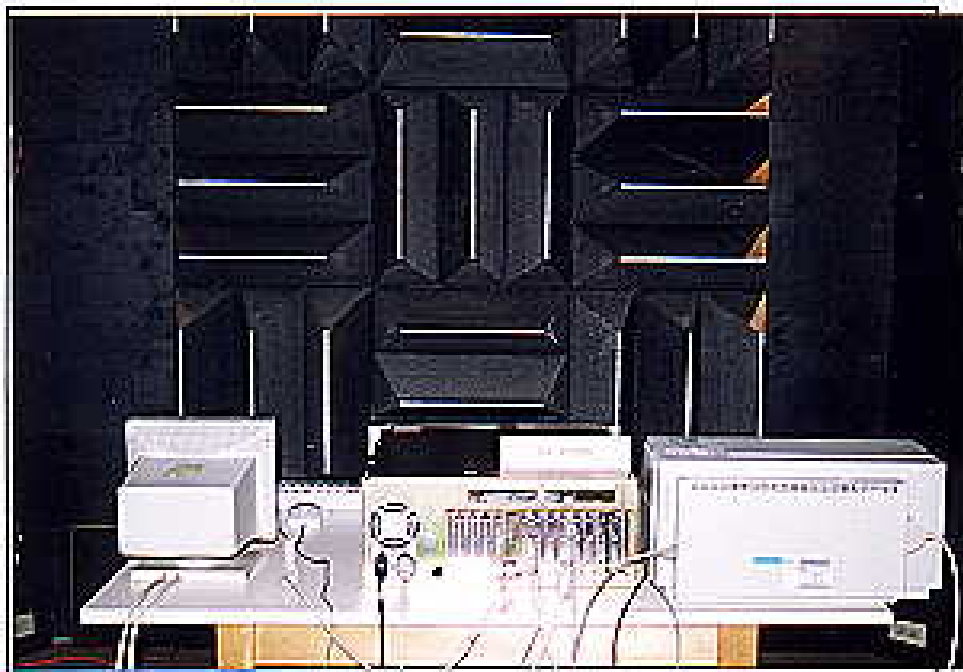






## EFT TEST



## CONDUCTED SUSCEPTIBILITY TEST

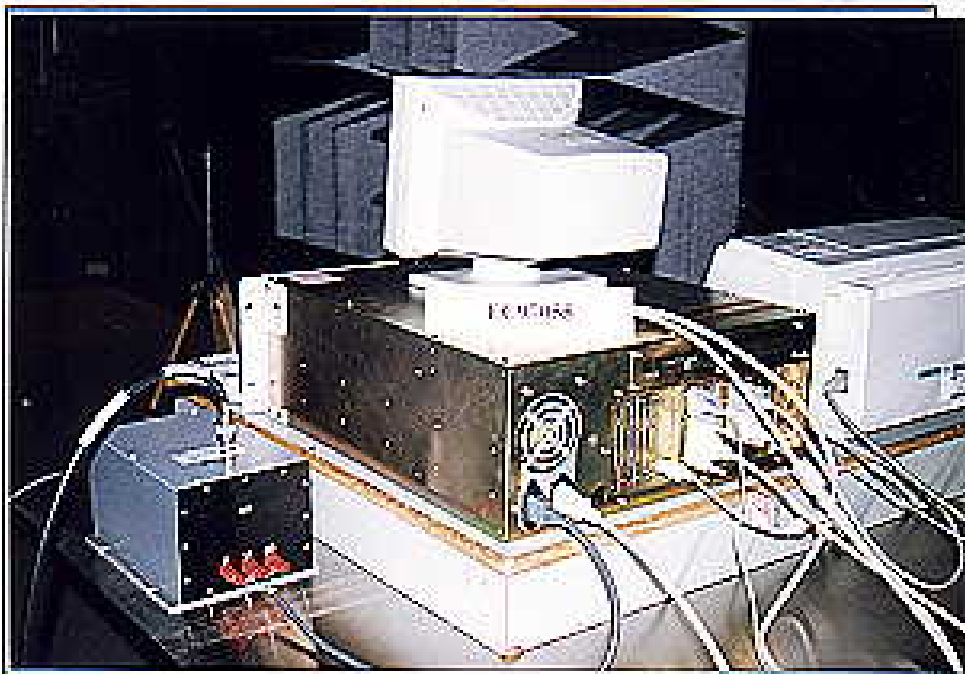



## MAGNETIC TEST





## 7. CONSTRUCTION PHOTOS OF EUT





(MODEL: SBC-570)







(MODEL: SBC-490)





(MODEL: SBC-355V)

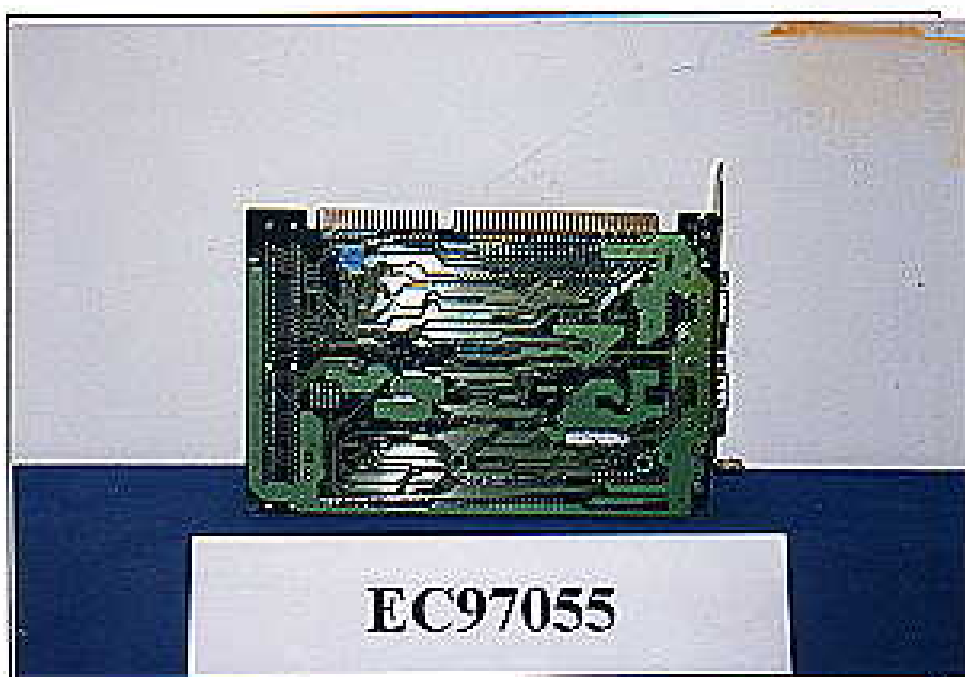

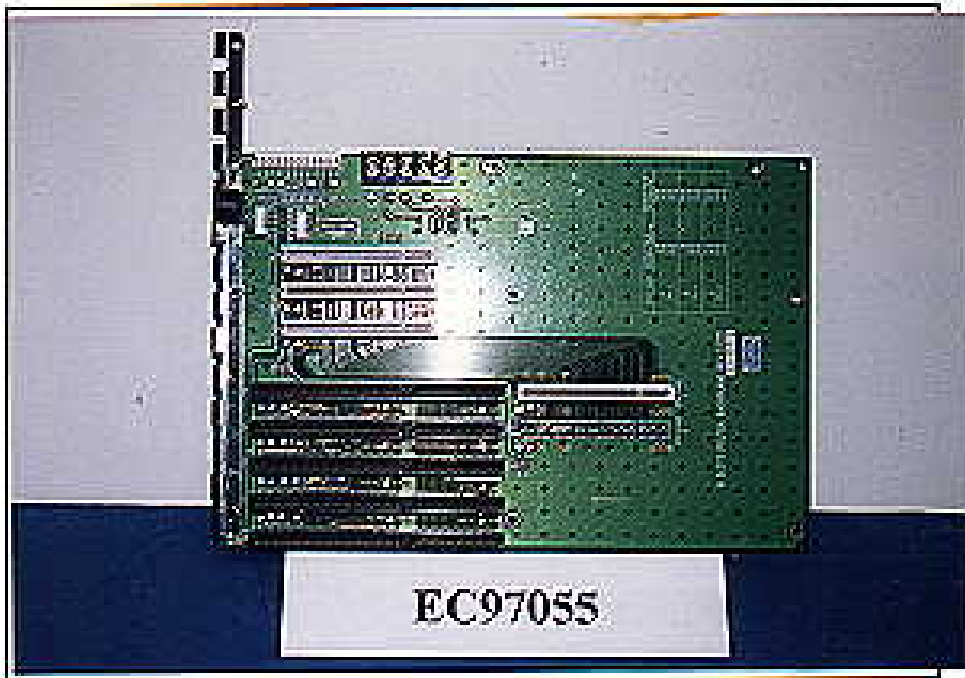





## 8. ATTACHMENT I - TECHNICAL DESCRIPTION OF EUT

### SPECIFICATIONS:

* CPU	Pentium 166 MHz (Model: SBC-570) IBM 5X86C 100 MHz (Model: SBC-490) 386SX-40 MHz (Model: SBC-355V)
* BIOS	Cyrix 6x86 (Model: SBC-570) AMI Flash Win (Model: SBC-490) AMI Flash (Model: SBC-355V)
* 2nd Level Cache	256k-512k (Model: SBC-570) 128k-512k (Model: SBC-490) N/A (Model: SBC-355V)
* Max. DRAM (MB)	128 (Model: SBC-570) 128 (Model: SBC-490) 16 (Model: SBC-355V)
* SCSI Interface	Ultra-wide SCSI (Model: SBC-570) N/A (Model: SBC-490) N/A (Model: SBC-355V)
* IDE	Enhanced x 2 (Model: SBC-570) Enhanced x 2 (Model: SBC-490) Enhanced (Model: SBC-355V)
* FDD Interface	Yes
* Parallel Port	SPP/EPP/ECP
* RS-232 Port	2 (Model: SBC-570) 2 (Model: SBC-490) 1 (Model: SBC-355V)
* PS-232/422/485 Port	N/A (Model: SBC-570) N/A (Model: SBC-490) 1 (Model: SBC-355V)
* Watch Dog Timer	1 sec-60 min (Model: SBC-570) 2-32 sec. (Model: SBC-490) 2-32 sec. (Model: SBC-355V)
* SVGA CRT Interface	N/A (Model: SBC-570) Trident 9440 (PCI) (Model: SBC-490) C&T 65545 (ISA) (Model: SBC-355V)
* Flat Panel Interface	N/A (Model: SBC-570) N/A (Model: SBC-490) C&T 65545 (ISA) (Model: SBC-355V)
* Video Memory Size	N/A (Model: SBC-570) 1M/2M (Model: SBC-490) 512K/1M (Model: SBC-355V)



* PCI Bus	Yes (Model: SBC-570)
* ISA Bus	Yes
* PC-104 Connector	Yes
* Power Saving	Yes
* Size (LxW inches)	13.3x4.8 (Model: SBC-570) 13.3x4.8 (Model: SBC-490) 7.3x4.8 (Model: SBC-355V)