

Certificate of Compliance

We, **ADVANCE DATA TECHNOLOGY CORP.**, hereby certify that:

The product : CPU BOARD

Trade Name : AAEON

Model No. : SBC-557

Applicant : AAEON TECHNOLOGY INC.

one sample of the designation has been tested in our facility from Nov. 9 ~ 22, 1999. The test record, data evaluation and Equipment Under Test (EUT) configuration represented in our report No. **CE88110603**, are in compliance with the following standards:

EN 55022: 1994+A1: 1995+A2: 1997, Class A

EN 50082-2: 1995

EN 61000-4-2: 1995

EN 61000-4-3: 1996

EN 61000-4-4: 1995

EN 61000-4-6: 1996

EN 61000-4-8: 1993

ENV 50204: 1995



Mike Su / Project Manager

Issue Date: Nov. 24, 1999



ADVANCE DATA TECHNOLOGY CORP.

Head office: 11F, NO. 1, SEC. 4, NAN-KING EAST RD., TAIPEI, TAIWAN, R.O.C.

TEL: (02) 2603-2180 FAX: (02) 2602-2943 <http://www.adt.com.tw> e-mail: service@mail.adt.com.tw



EMC

TEST REPORT

REPORT NO. : CE88110603
MODEL NO. : SBC-557
DATE OF TEST : Nov. 9 ~ 22, 1999

PREPARED FOR: AAEON TECHNOLOGY INC.

ADDRESS : 1F, NO. 6, ALLEY 6, LANE 45, PAO-HSIN RD.,
HSIN-TIEN CITY, TAIPEI, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

11F, NO.1, SEC.4, NAN-KING EAST RD.,
TAIPEI, TAIWAN, R.O.C.

This test report consists of 30 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



TABLE OF CONTENTS

1. CERTIFICATION	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 GENERAL DESCRIPTION OF APPLIED STANDARD	4
2.3 DESCRIPTION OF SUPPORT UNITS	5
2.4 TEST SETUP	6
3. TEST INSTRUMENTS	7
3.1 TEST INSTRUMENTS (EMISSION)	7
3.2 TEST INSTRUMENTS (IMMUNITY)	8
3.3 LIMITS OF CONDUCTED AND RADIATED EMISSION	9
4. TEST RESULTS (EMISSION)	10
4.1 RADIO DISTURBANCE	10
4.2 EUT OPERATION CONDITION	10
4.3 TEST DATA OF CONDUCTED EMISSION	11
4.4 TEST DATA OF RADIATED EMISSION	13
5. TEST RESULTS (IMMUNITY)	15
5.1 GENERAL DESCRIPTION	15
5.2 PERFORMANCE CRITERIA DESCRIPTION	15
5.3 EUT OPERATION CONDITION	15
5.4 TEST RESULT OF ELECTROSTATIC DISCHARGE (ESD)	16
5.5 TEST RESULT OF RADIATED RADIO FREQUENCY	17
5.6 TEST RESULT OF ELECTRICAL FAST TRANSIENT/BURST (EFT/BURST)	18
5.7 TEST RESULT OF CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)	19
5.8 TEST RESULT OF POWER FREQUENCY MAGNETIC FIELD	20
5.9 TEST RESULT OF RADIO-FREQUENCY ELECTROMAGNETIC	21
6. PHOTOGRAPHS OF THE TEST CONFIGURATION	22
7. APPENDIX - INFORMATION OF THE TESTING LABORATORY	30



1.

CERTIFICATION

Issue date: Nov. 24, 1999

Product : CPU BOARD
Trade Name : AAEON
Model No. : SBC-557
Applicant : AAEON TECHNOLOGY INC.
Standard : EN 55022: 1994+A1: 1995+A2: 1997, EN 50082-2: 1995
Class A EN 61000-4-2: 1995
EN 61000-4-3: 1996
EN 61000-4-4: 1995
EN 61000-4-6: 1996
EN 61000-4-8: 1993
ENV 50204: 1995

We hereby certify that one sample of the designation has been tested in our facility from Nov. 9 to 22, 1999. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

TESTED BY : Jone Lin , DATE: 11/24/99
(Emission) (Jone Lin)

TESTED BY : Dennis Chuang , DATE: 11/24/99
(Immunity) (Dennis Chuang)

CHECKED BY : Yemmy Soong , DATE: 11/24/99
(Yemmy Soong)

APPROVED BY : Mike Su , DATE: 11/24/99
(Mike Su)

ADVANCE DATA TECHNOLOGY CORPORATION

NVLAQ

Accredited Laboratory



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product : CPU BOARD
Model No. : SBC-557
Power Supply : Switching (from PC)

Note: During the test, the EUT was installed in a metal enclosure with a slot board to form an industrial PC.

The EUT was tested under the following configurations:

CPU	AMD K6II 300MHz (100MHz x 3)
HDD	SEAGATE, ST34520A, 4.5GB
BACKPLANE	AAEON, PCA-6114P3
CHASSIS	AAEON, ACPI-110
MEMORY	64MB SDRAM
SPS	SEASONIC, SSG-250G

The EUT has a resolution up to 1024x768, 256 color.

For more detailed features description, please refer to Manufacturer's Specification or User's Manual.

2.2 GENERAL DESCRIPTION OF APPLIED STANDARD

The EUT is a kind of Information Technology Equipment which could be used in industrial area and according to the manufacturer's specifications, it was tested according to the following standards:

EN 55022: 1994-A1: 1995+A2: 1997, Class A

EN 50082-2: 1995

EN 61000-4-2: 1995

EN 61000-4-3: 1996

EN 61000-4-4: 1995

EN 61000-4-6: 1996

EN 61000-4-8: 1993

ENV 50204: 1995

All tests are performed and recorded as per above standards.



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been installed into a PC system and tested together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

FOR EMISSION TEST

No	Product	Brand	Model No.	Serial No.	I/O Cable
1	COLOR MONITOR	HP	D2846	JP90512179	Nonshielded Signal (1.2m) Shielded Power (1.8m)
2	PRINTER	HP	2255C+	3123S97230	Nonshielded Signal (1.2m) Shielded Power (1.2m)
3	MODEM X2	ACEEX	1414	980020504 980020531	Shielded signal (1.2m) Nonshielded Power (1.2m)
4	KEYBOARD	BTC	5140	765020076	Shielded Signal (1.4m)
5	MOUSE	DEXIN	A2P800A	80102120	Shielded signal (1.5m)
6	USB KEYBOARD	BTC	7932	178190004	Shielded Signal (1.4m)
7	USB MOUSE	DEXIN	A2U800A	71001820	Shielded Signal (1.4m)
8	PERSONAL COMPUTER	IBM	2156-D1N	BNA2561	Nonshielded power (1.8m)
9	MONITOR	ADT	SM-5714A	S218030301A	Nonshielded Signal (1.2m) Shielded Power (1.8m)
10	KEYBOARD	FORWARD	FDA-104GA	FDKB8110129	Shielded Signal (1.4m)
11	MOUSE	DEXIN	A2P800A	80102047	Shielded signal (1.5m)
12	LAN CARD	D-LINK	DE-230P	S749200795	NA

Note: 1. Support unit 1-7 acted as SERVER PC and communicated with support unit 8-12 which acted as HOST PC and systems of communication partner via a UTP cable (10m).

2. Support unit 6 & 7 were connected to the USB ports of EUT.



FOR IMMUNITY TEST

No	Product	Brand	Model No.	Serial No.	I/O Cable
1	COLOR MONITOR	ACER	7234e	9174302003	Shielded signal (1.5m) Nonshielded Power (1.8m)
2	PRINTER	HP	C2145A	SG59N16035	Shielded signal (1.5m) Nonshielded Power (1.8m)
3	MODEM 2X	OVC	F-1128V1R6	96-191-113003 853E100	Shielded signal (1.25m) Nonshielded Power (1.5m)
4	KEYBOARD	BTC	5140	75B110606	Shielded Signal (1.5m)
5	MOUSE	HP	M-834	LZA72556273	Shielded signal (1.8m)
6	USB KEYBOARD	ACER	6512-BU	NA	Shielded Signal (2.9m)
7	USB MOUSE	FORWARD	FDM-F50	90801059	Shielded Signal (1.8m)
8	NOTEBOOK	USI	UNI-812	97207-0112-02- 9850	Nonshielded Power (1.8m)
9	LAN CARD	3COM	3CCFB575BT	6TW1505530	NA

Note: 1. Support unit 1-7 acted as SERVER PC and communicated with support unit 8-9 which acted as HOST PC and systems of communication partner via a UTP cable (10m).

2. Support unit 6 & 7 were connected to the USB ports of EUT.

2.4 TEST SETUP

Please refer to the photos of test configuration in Item 6.



3. TEST INSTRUMENTS

3.1 TEST INSTRUMENTS (EMISSION)

CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESHS30	828765/002	Aug. 2, 2000
ROHDE & SCHWARZ Artificial Mains Network	ESH2-Z5	828075/003	July 21, 2000
EMCO-L.I.S.N.	3825/2	90031627	July 21, 2000
Shielded Room	Site 5	ADT-C05	NA

- Note: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	8590L	3544A01176	April 22, 2000
HP Preamplifier	8447D	2944A08485	April 21, 2000
HP Preamplifier	8347A	3307A01088	Aug. 30, 2000
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Aug. 30, 2000
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 25, 1999
CHASE BILOG Antenna	CBL6112A	2221	Aug. 4, 2000
EMCO Turn Table	1060	1115	NA
SHOSHIN Tower	AP-4701	A6Y005	NA
Open Field Test Site	Site 5	ADT-R05	July 30, 2000

- Note: 1. The measurement uncertainty is less than +/- 3dB, which is calculated as per NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.



3.2 TEST INSTRUMENTS (IMMUNITY)

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
KeyTek, ESD Test System	2000	9105240/41	Aug. 10, 2000
KeyTek, ESD Simulator	MZ-15/EC	92022232	April 14, 2000
KeyTek, EFT Generator	CE-40	9508257	Sept. 5, 2000
KeyTek, Capacitive Clamp	CE-40-OCL	9508259	Sept. 5, 2000
KeyTek, Control Center	E103	9508347	NA
KeyTek, Surge Combination Wave	E501A	9508349	Aug. 30, 2000
KeyTek, Surge Coupler/Decoupler	E551	9508350	Aug. 30, 2000
ROHDE & SCHWARZ Signal Generator	SMY01	840490/009	Aug. 19, 2000
KALMUS Power Amplifier	LA1000V	091995-1	NA
KALMUS Power Amplifier	757LC	091995-2	NA
HOLADAY Field Probe	HI-4422	89915	Oct. 28, 2000
EMCO BiconiLog Antenna	3141	1001	NA
FCC Coupling Decoupling Network	FCC-801-M3-25	48	NA
FCC Coupling Decoupling Network	FCC-801-M2-25	20	NA
FISCHER CUSTOM COMMUNICATIONS EM Injection Clamp	FCC-2031	50	NA
FCC Coupling Decoupling Network	FCC-801-M1-25	17	NA
BOONTON RF Voltage Meter	9200B	331801AB	Dec. 17, 1999
COMTEST Compact Full Anechoic Chamber (7x3x3 m)	CFAC	ADT-S01	Aug. 24, 2000
HAEFELY Magnetic Field Tester	MAG 100.1	083794-06	NA
COMBINOVA Magnetic Field Meter	MFM10	224	Oct. 28, 1999
HAEFELY Mains Interference Simulator	PLINE 1610	083690-17	June 7, 2000

Note: The calibration interval of the above test instruments is 12 months.
 And the calibrations are traceable to NML/ROC and NIST/USA.



3.3 LIMITS OF CONDUCTED AND RADIATED EMISSION

LIMIT OF RADIATED EMISSION OF EN 55022

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

- Note: (1) The lower limit shall apply at the transition frequencies.
(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

LIMIT OF CONDUCTED EMISSION OF EN 55022

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- Note: (1) The lower limit shall apply at the transition frequencies.
(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz
(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4. TEST RESULTS (EMISSION)

4.1 RADIO DISTURBANCE

Product Family Standard : EN 55022: 1994+A1: 1995+A2: 1997, Class A
Frequency Range : 0.15 - 30 MHz (Conducted Emission)
30 - 1000 MHz (Radiated Emission)
Input Voltage : 230 Vac, 50 Hz (to PC)
Temperature : 24 °C
Humidity : 60 %
Atmospheric Pressure : 997 mbar

TEST RESULT	Remarks
PASS	Minimum passing margin of conducted emission: -28.6 dB at 4.710 MHz Minimum passing margin of radiated emission: -2.1 dB at 601.36 MHz, 601.50 MHz & 701.40 MHz

4.2 EUT OPERATION CONDITION

1. Turn on the power of all equipment.
2. Industrial PC reads a test program to enable all functions.
3. Industrial PC reads and writes messages from HDD.
4. Industrial PC sends and receives messages to and from HOST PC via a UTP cable.
5. Industrial PC sends "H" messages to monitor and monitor display "H" patterns on screen.
6. Industrial PC sends "H" messages to modems.
7. Industrial PC sends "H" messages to printer, and the printer prints them on paper.
8. Repeat steps 2-8.



4.3 TEST DATA OF CONDUCTED EMISSION

EUT: CPU BOARD

MODEL: SBC-557

6 dB Bandwidth: 10 kHz

PHASE: LINE (L)

Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.201	0.2	41.8	-	42.0	-	79.0	69.0	-37.0	-
0.282	0.2	42.6	-	42.8	-	79.0	69.0	-36.2	-
0.931	0.3	35.7	-	36.0	-	73.0	63.0	-37.0	-
4.710	0.8	43.6	-	44.4	-	73.0	63.0	-28.6	-
7.610	0.8	37.6	-	38.4	-	73.0	63.0	-34.6	-
21.470	1.6	36.7	-	38.3	-	73.0	63.0	-34.7	-

- Remarks:
1. "": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Emission Level reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT: SBC-557
Manuf: FULL SYSTEM
Test Spec: LISN : L
File name: CISPR22A.SPC

Report No. ce 88110603


Page

11-1

Tested by June Lin

Overview Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	
150k	1M	3.9k	9k	PK	10ms	10dB LN	OFF	
1M	10M	3.9k	9k	PK	0.05ms	10dB LN	OFF	
10M	30M	3.9k	9k	PK	0.05ms	10dB LN	OFF	

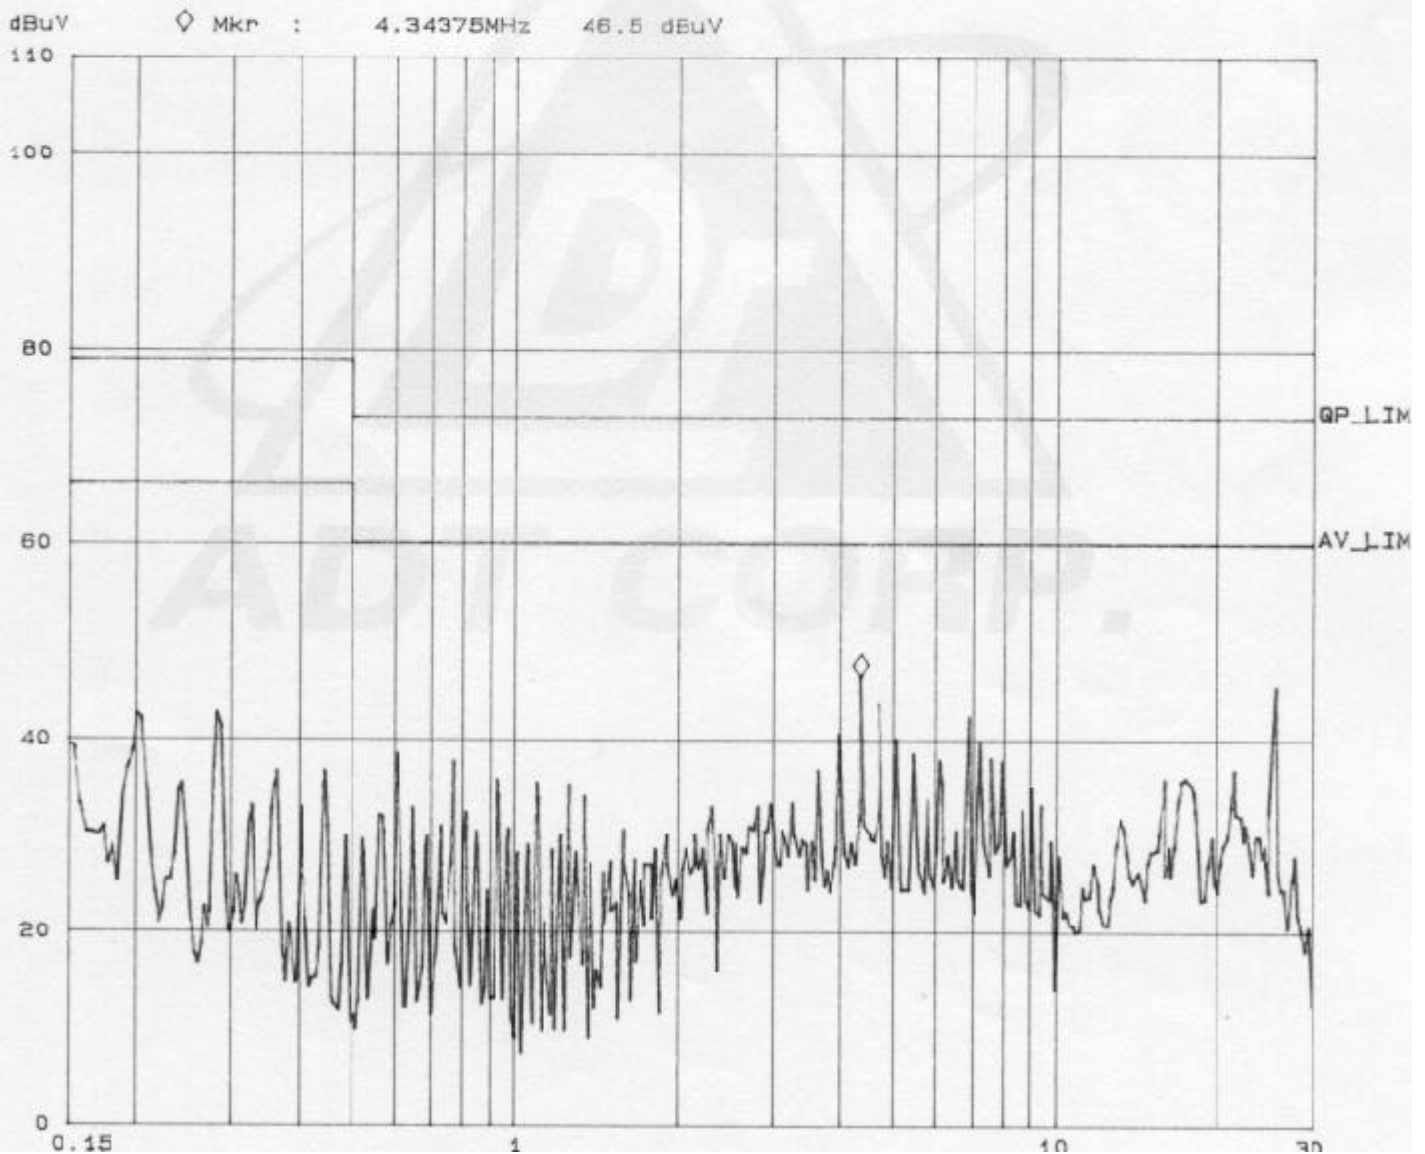



TEST DATA OF CONDUCTED EMISSION

EUT: CPU BOARD

MODEL: SBC-557

6 dB Bandwidth: 10 kHz

PHASE: NEUTRAL (N)

Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
		[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.201	0.2	43.7	-	43.9	-	79.0	69.0	-35.1	-
0.282	0.2	42.9	-	43.1	-	79.0	69.0	-35.9	-
0.931	0.3	37.8	-	38.1	-	73.0	63.0	-34.9	-
4.710	0.7	42.8	-	43.5	-	73.0	63.0	-29.5	-
7.610	0.7	39.7	-	40.4	-	73.0	63.0	-32.6	-
21.470	1.2	36.3	-	37.5	-	73.0	63.0	-35.5	-


- Remarks:
1. "*": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Emission Level reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT: SBC-557
Manuf: FULL SYSTEM
Test Spec: LISN : N
File name: CISPR22A.SPC

Report No. CE 88110603
Page 12-1
Tested by Jonelin

Overview Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	
150k	1M	3.9k	9k	PK	10ms	10dB LN	OFF	
1M	10M	3.9k	9k	PK	0.05ms	10dB LN	OFF	
10M	30M	3.9k	9k	PK	0.05ms	10dB LN	OFF	

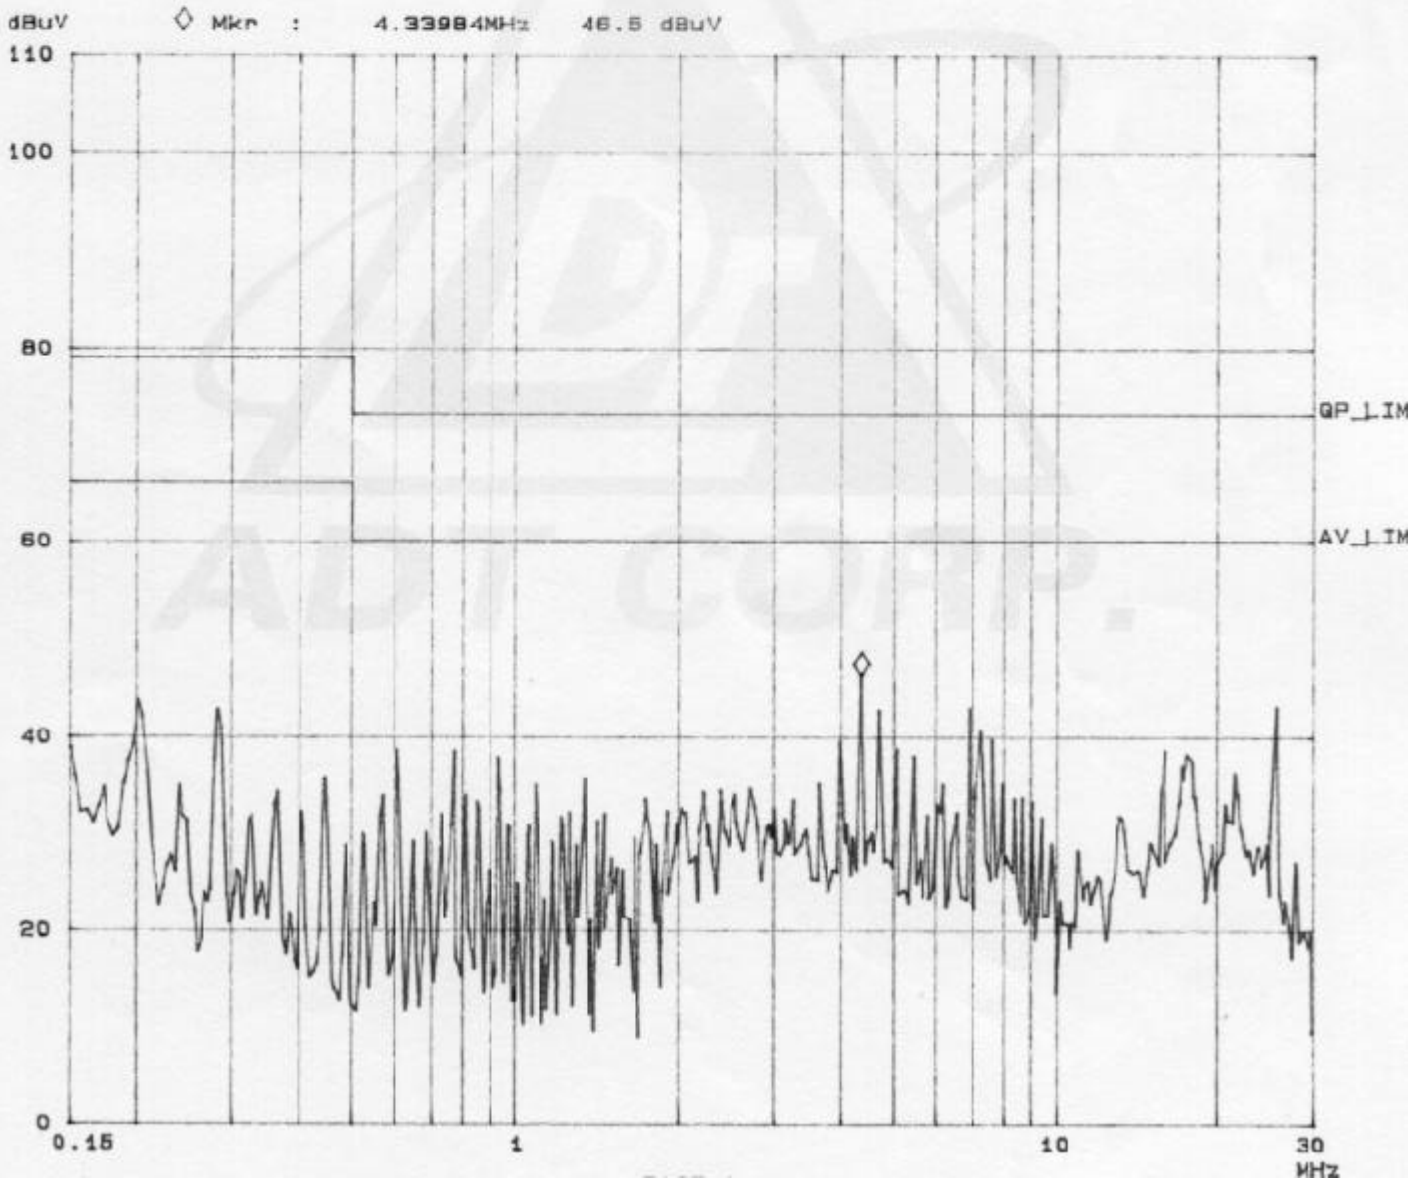



4.4 TEST DATA OF RADIATED EMISSION

EUT: CPU BOARD

MODEL: SBC-557

ANT. POLARITY: Horizontal

DETECTOR FUNCTION: Quasi-peak

6 dB BANDWIDTH: 120 kHz

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
116.97	12.7	18.6	31.3	40.0	-8.7	400	56
149.47	12.2	14.3	26.5	40.0	-13.5	400	130
175.47	10.9	21.5	32.4	40.0	-7.6	400	208
181.97	10.7	19.5	30.2	40.0	-9.8	400	277
192.71	10.4	22.3	32.7	40.0	-7.3	400	340
200.01	10.2	23.5	33.7	40.0	-6.3	400	12
206.03	10.6	19.9	30.5	40.0	-9.5	400	224
207.96	10.7	24.4	35.1	40.0	-4.9	400	81
214.46	11.2	22.9	34.1	40.0	-5.9	400	5
300.67	14.9	20.2	35.1	47.0	-11.9	400	74
601.36	20.9	24.0	44.9	47.0	-2.1	142	245
701.59	21.7	22.8	44.5	47.0	-2.5	190	74

- REMARKS:**
1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
 2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION

EUT: CPU BOARD

MODEL: SBC-557

ANT. POLARITY: Vertical

DETECTOR FUNCTION: Quasi-peak

6 dB BANDWIDTH: 120 kHz

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
36.33	13.9	20.3	34.2	40.0	-5.8	100	178
45.51	10.4	27.0	37.4	40.0	-2.6	100	201
110.48	12.3	25.0	37.3	40.0	-2.7	100	259
116.98	12.7	23.5	36.2	40.0	-3.8	100	180
142.98	12.5	23.3	35.8	40.0	-4.2	100	101
149.47	12.2	24.5	36.7	40.0	-3.3	100	29
168.97	11.2	22.4	33.6	40.0	-6.4	100	358
181.96	10.7	26.8	37.5	40.0	-2.5	100	45
200.03	10.2	21.8	32.0	40.0	-8.0	100	171
207.95	10.7	24.5	35.2	40.0	-4.8	100	134
214.45	11.2	25.0	36.2	40.0	-3.8	100	118
229.10	12.2	21.9	34.1	40.0	-5.9	100	86
601.50	20.9	24.0	44.9	47.0	-2.1	400	50
701.40	21.7	23.2	44.9	47.0	-2.1	323	50

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
 2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



5. TEST RESULTS (IMMUNITY)

5.1 GENERAL DESCRIPTION

Generic Standard	:	EN 50082-2: 1995
Basic Standard and Performance Criteria	:	EN 61000-4-2 (Electrostatic Discharge, ESD, 8kV air discharge, 4kV Contact discharge, Performance Criterion B)
		EN 61000-4-3 (Radio-Frequency Electromagnetic Field Susceptibility Test, RS, 80-1000 MHz, 10V/m, 80% AM (1kHz), Performance Criterion A)
		EN 61000-4-4 (Electrical Fast Transient/Burst, EFT, Power line: 2kV, Signal line: 1kV, Performance Criterion B)
		EN 61000-4-6 (Conducted Radio Frequency Disturbances Test, CS, 0.15-80 MHz, 10V/m, 80% AM, 1kHz, Performance Criterion A)
		EN 61000-4-8 (Power Frequency Magnetic Field Test, 50 Hz, 30A/m, Performance Criterion A)
		ENV 50204 (Radio-Frequency Electromagnetic Field, Pulse modulated, 900+/-5 MHz, 10V/m, 50 % duty cycle, Rep. Frequency 200 Hz, Performance Criterion A)
Input Voltage	:	230 Vac, 50 Hz (to power of Industrial PC)
Temperature	:	20 °C
Humidity	:	54 %
Atmospheric Pressure	:	1000 mbar

5.2 PERFORMANCE CRITERIA DESCRIPTION

- Criterion A - The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.
- Criterion B - The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.
- Criterion C - Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

5.3 EUT OPERATION CONDITION

Industrial PC runs a test program to access FDD/HDD/MODEM/PRINTER sequentially and show the result on monitor screen.



5.4 TEST RESULT OF ELECTROSTATIC DISCHARGE (ESD)

Basic Standard	:	EN 61000-4-2
Generic Standard	:	EN 50082-2
Discharge Impedance	:	330 ohm / 150 pF
Discharge Voltage	:	Air Discharge - 8 kV (Direct) Contact Discharge - 4 kV (Direct/ Indirect)
Polarity	:	Positive/Negative
Number of Discharge	:	Minimum 20 times at each test point
Discharge Mode	:	Single Discharge
Discharge Period	:	1-second minimum

Test Result	Remarks
Criterion A PASS	MODEL: SBC-557

OBSERVATION DESCRIPTION

Direct Application			Test Result	
Discharge Level (kV)	Polarity (+/-)	Test Point	Contact Discharge	Air Discharge
8	+/-	1 ~ 4	NA	Note 1
4	+/-	1 ~ 3	Note 1	NA

Description of test point: (Please refer to ESD photo)

- | | |
|-------------------|-----------------|
| 1. All I/O port | 2. All screws |
| 3. All Metal case | 4. All openings |

Indirect Application			Test Result	
Discharge Level (kV)	Polarity (+/-)	Test Point	Horizontal Coupling Plane	Vertical Coupling Plane
4	+/-	1 ~ 4	Note 1	Note 1

Description of test point:

- | | |
|---------------|---------------|
| 1. Front side | 2. Right side |
| 3. Left side | 4. Rear side |

Description of test result:

Note 1: There was no change compared with initial operation during the test.



5.5 TEST RESULT OF RADIATED RADIO FREQUENCY

DISTURBANCES (RS)

Basic Standard : EN 61000-4-3
Generic Standard : EN 50082-2
Frequency range : 80 MHz - 1000 MHz
Field strength : 10 V/m
Modulation : 1kHz Sine Wave, 80%, AM Modulation
Dwell Time : 3 seconds
Frequency step : 1 % of fundamental
Polarity of Antenna : Horizontal and Vertical
Test distance : 3 m

Test Result		Remarks
Criterion A	PAS	MODEL: SBC-557

Note: Four sides of EUT are verified separately.

OBSERVATION DESCRIPTION

There was no change compared with initial operation during the test.



5.6 TEST RESULT OF ELECTRICAL FAST TRANSIENT/BURST (EFT/BURST)

Basic Standard : EN 61000-4-4
Generic Standard : EN 50082-2
Test Voltage : Power Line - 2 kV (to power of Industrial PC)
Signal/Control Line - 1kV
Polarity : Positive/Negative
Impulse Frequency : 5 kHz
Tr / Tn : 5/50 ns
Burst Duration : 15 ms
Burst Period : 300 ms
Test Duration : Not less than 1 min.

Test Result	Remarks
Criterion A PA	MODEL: SBC-557

OBSERVATION DESCRIPTION

Test Point	Polarity	Test Level (kV)	Result
L1	+/-	2	Note 1
L2	+/-	2	Note 1
GND	+/-	2	Note 1
Signal / Control Line	+/-	1	Note 1

Description of test result:

Note 1: There was no change compared with initial operation during the test.



5.7 TEST RESULT OF CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)

Basic Standard : EN 61000-4-6
Generic Standard : EN 50082-2
Frequency range : 0.15 MHz - 80 MHz
Field strength : 10 V/m
Modulation : 1kHz Sine Wave, 80%, AM Modulation
Frequency step : 1 % of fundamental
Coupled cable : Power Mains, Unshielded LAN cable
Coupling device : CDN M3 (3 wires), Clamp

Test Result		Remarks
Criterion A	PASS	MODEL: SBC-557

OBSERVATION DESCRIPTION

There is no change compared with initial operation during the test.



5.8 TEST RESULT OF POWER FREQUENCY MAGNETIC FIELD

Basic Standard : EN 61000-4-8
Generic Standard : EN 50082-2
Frequency range : 50 Hz
Field strength : 30 A/m
Observation Time : 1 minute
Inductance coil : Rectangular type, 1mx1m

Test Result		Remarks
Criterion A	PASS	MODEL: SBC-557

OBSERVATION DESCRIPTION

There was no change compared with initial operation during the test.



5.9 TEST RESULT OF RADIO-FREQUENCY ELECTROMAGNETIC FIELD, PULSE MODULATED

Basic Standard : ENV 50204
Generic Standard : EN 50082-2
Frequency range : 900 +/- 5 MHz
Field strength : 10 V/m
Modulation : 200Hz, Square Wave, 50% Duty Cycle
Dwell Time : 30 second
Polarity of Antenna : Horizontal and Vertical
Test distance : 3 m

Test Result	Remarks
Criterion A : PASS	MODEL: SBC-557

Note: Four sides of EUT are verified separately.


OBSERVATION DESCRIPTION

There is no change compared with initial operation during the test.





6. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST

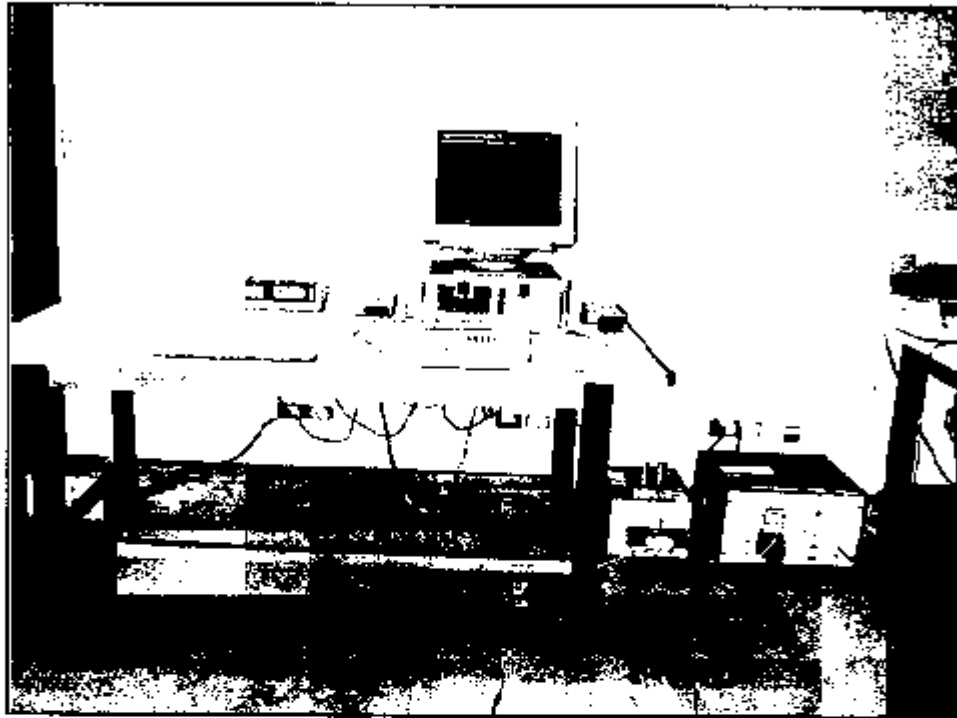



RADIATED EMISSION TEST

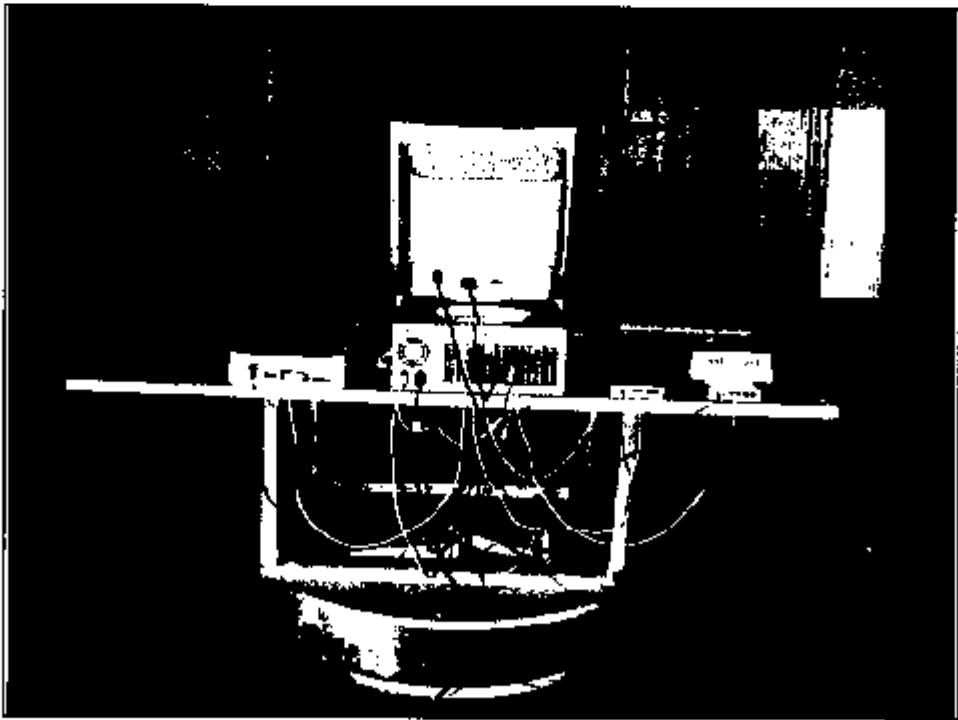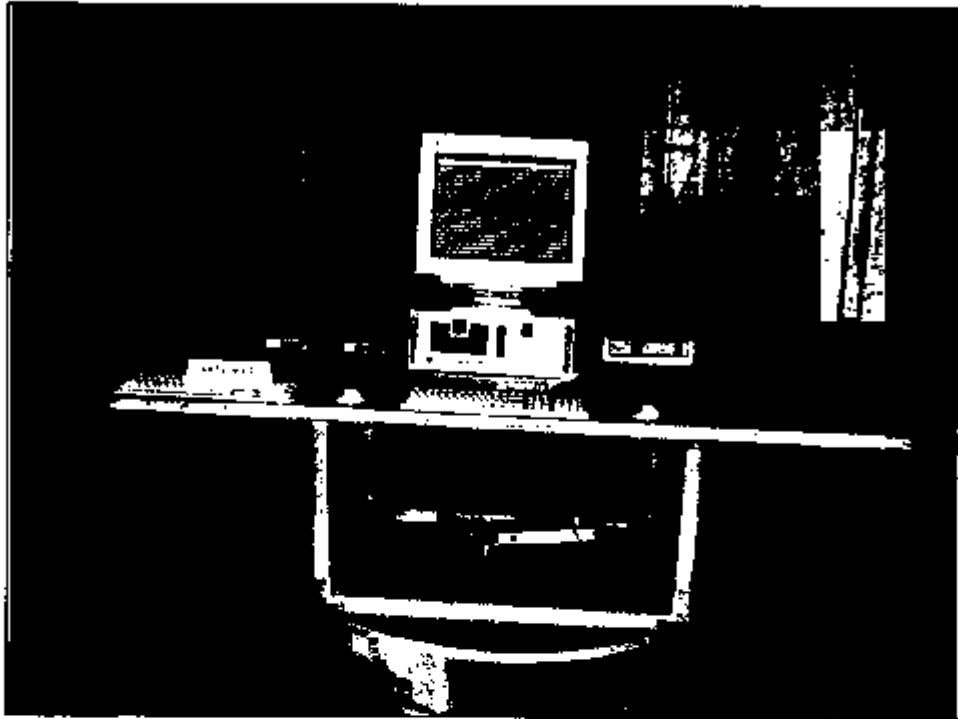



ESD TEST



STC



2

3

4



1



RS & PULSE MODULATION TEST

