

# COM-QM77

## Temperature/Humidity Test Report

Report NO: 12CO020005

Summary	<p><input checked="" type="checkbox"/> <b>Pass</b></p> <p><input type="checkbox"/> <b>Fail</b></p> <p>Note : There is/are ____ defect(s) not list in the report, please check it in the DTS Website.</p> <p><input type="checkbox"/> <b>Pass with Deviation</b></p>
---------	---

**Issue date**

2012-08-13

**Approval**

Tom Lin

**Test Engineer**

Matthew Chi

# Test item list

- 
1. *Test item list* ----- 2
  2. *Configuration of EUT* ----- 3
  3. *Temp./humidity power on/off test* ----- 4
  4. *Temperature variation operation test* ----- 5
  5. *Cold start and hot start test* ----- 6

## Testing Result


Num	Test item list	Result	Remark
1	Temp./humidity power on/off test	Pass	
2	Temperature variation operation test	Pass	
3	Cold start and hot start test	Pass	

# Configuration of EUT

## Test Product: COM-QM77 B1.0

### Sample Configuration & Quantity Under Test:

1. CPU: Intel i7 3555LE 2.50GHz
2. BIOS: COM-QM77 M1.4(CM77BM14)(07/25/2012)
3. Chipset: INTEL QM77 PCH
4. Memory: Transcend 4G DDR3-1333 (SEC K4B2G0846C) x2
5. HDD: Seagate 2"5 SATA ST9160412AS 160GB
6. Test Software: Windows 7 / Run PassMark Burn In Test 7.0 Pro
7. AT Power Supply: ZIPPY HG2-6400P
8. CPU Fan:

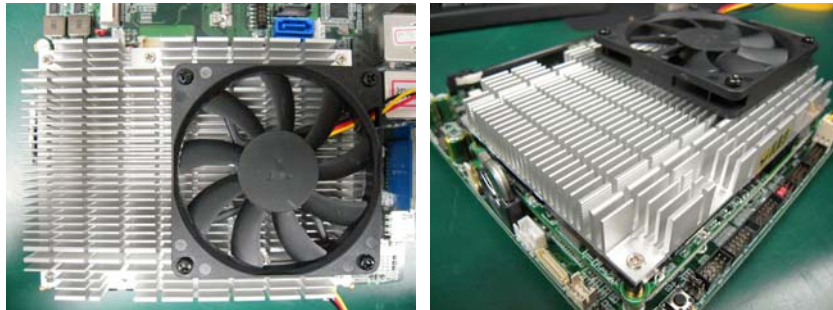

# Temp./humidity power on/off test

**Test Date:** 08-07 ~ 08-2012

**Test Site:** AAEON QE Dept.

**Test Standard:** Refer to IEC 68-2-30 Testing procedures  
Test Db: Damp Heat Test

**Test Equipment:**


Programmable Temperature & Humidity Chamber  
K.SON. INS. TECH. CORP.  
Model: THS-B6T-150+LN2  
Date of Calibration: 10/13/11  
Serial Number: 6487KT

**Temperature & Humidity Power On/Off Test:**

**Testing Specification:**

Step	Temperature (°C)	Humidity (%RH)	Duration (HH:MM)
1	25	50	00:30
2	25	50	00:30
3	25	90	01:00
4	25	90	00:30
5	60	90	03:30
6	60	90	03:00
7	0	0	04:50
8	0	0	05:23
9	25	50	01:47
10	25	50	03:00

**Test Curve:**

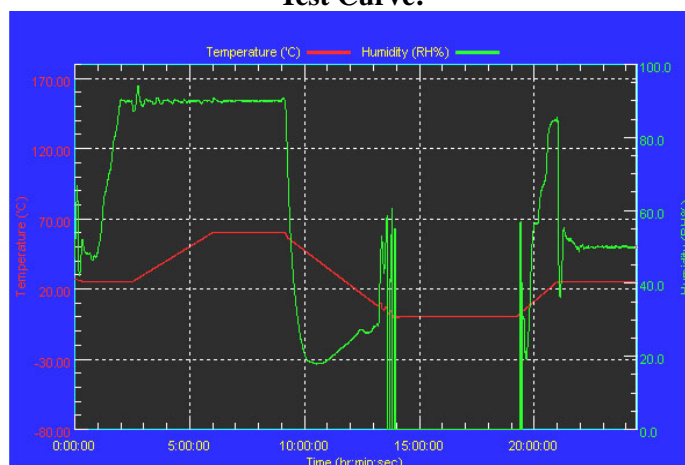

**Test Result:**

Test Method	Actual	Successful	Failure rate
Power On/Off	1266/times	1266/times	0.0 %

Note: Failure rate must be under 0.2%.

# Temperature variation operation test

**Test Date:** 08-09~10 -2012

**Test Site:** AAEON QE Dept.


**Test Standard:** Refer to IEC 68-2-14 Testing procedures  
Test N: Change of temperature Test

**Test Equipment:**

Programmable Temperature & Humidity Chamber  
K.SON. INS. TECH. CORP.  
Model: THS-B6T-150+LN2  
Date of Calibration: 10/13/11  
Serial Number: 6487KT

**Temperature & Humidity Cycle Test:**

1. Test Low Temperature: 0°C (1~2 cycles)  
-5°C (3<sup>rd</sup> cycle)
2. Test High Temperature: 60°C (1~2 cycles)  
65°C (3<sup>rd</sup> cycle)
3. Test dwell time: 4Hrs (1~2 cycles)  
2Hrs (3<sup>rd</sup> cycle)
4. Temperature slope: 2°C/min
5. Test cycle: 3 cycles
6. Test Environment Curve:

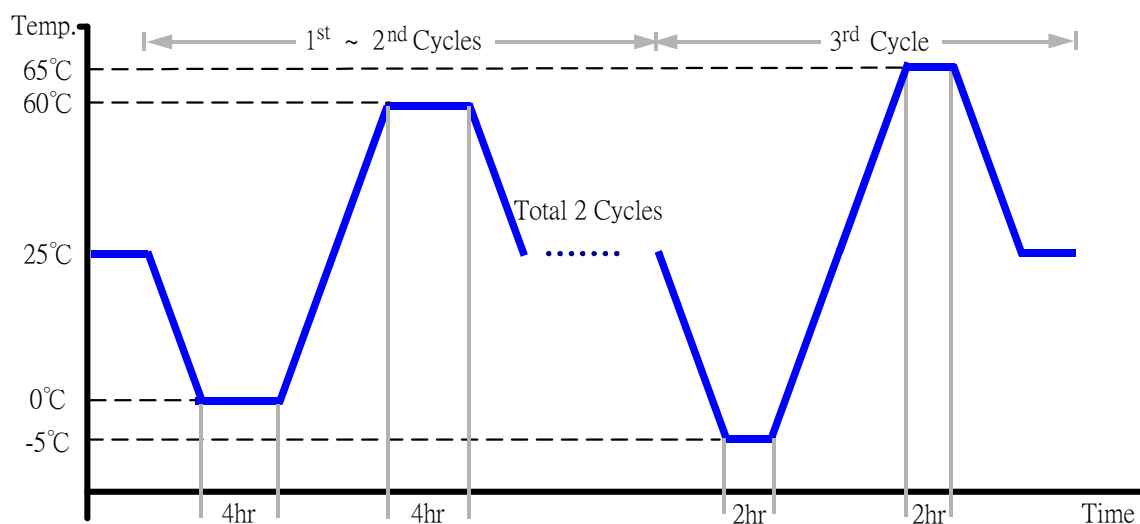

**Test Result:**

No issue was found during the temperature variation operation test.

# Cold start and hot start test


**Test Date:** 08-08 ~09-2012

**Test Site:** AAEON QE Dept.

**Test Standard:** Refer to IEC 68-2-14 Testing procedures  
Test N: Change of temperature Test

**Test Equipment:**  
Programmable Temperature & Humidity Chamber  
K.SON. INS. TECH. CORP.  
Model: THS-B6T-150+LN2  
Date of Calibration: 10/13/11  
Serial Number: 6487KT

**Test Condition:**

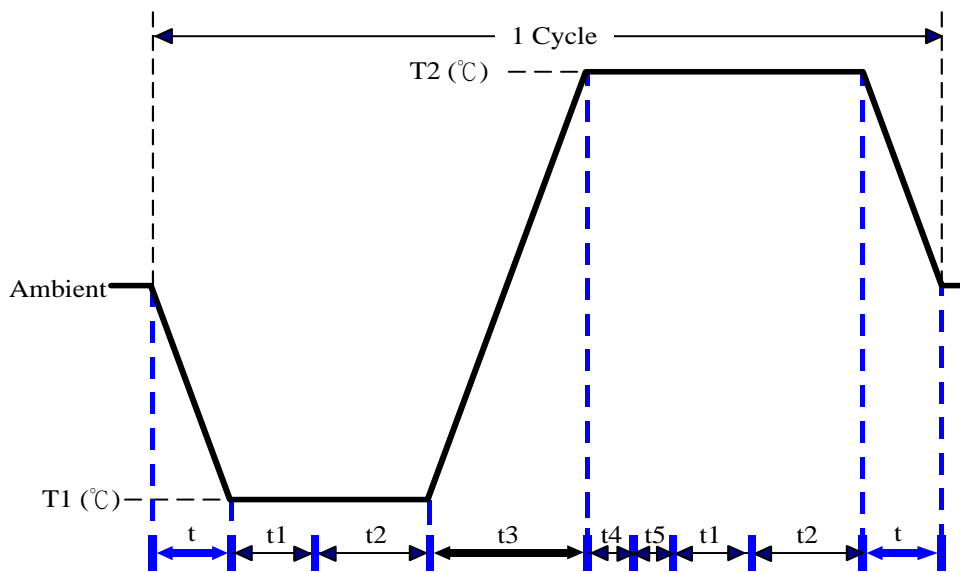

Parameters	Description
T1	-5°C
T2	65°C
t1	1 hrs
t2	2 hrs
t4, t5	30 min
t, t3	2°C/min
n (Cycle)	1

t,t3 = temprature slope  
t, t1: Power Off  
t2: Power on/off test 10 times (on 2 min / off 5min)  
t3,t4: Run PassMark Burn In Test  
t5: Windows 7 Software restart test 2 times  
Test Software:Windows 7

**Test Result:**

- No issue was found during the cold start test.
- No issue was found during the hot start test.