

EMB-CV2

Temperature/Humidity Test Report

Report NO: 13I020018

Summary	<p><input checked="" type="checkbox"/> Pass</p> <p><input type="checkbox"/> Fail</p> <p>Note : There is/are ____ defect(s) not list in the report, please check it in the DTS Website.</p> <p><input type="checkbox"/> Pass with Deviation</p> <p>Comment: _____</p>
---------	--

Issue date

2013-07-25

Approval

Tom Lin

Test Engineer

Jerry Chen

Test item list

-
1. *Test item list* ----- 2
 2. *Configuration of EUT* ----- 3
 3. *Temp./humidity power on/off test* ----- 4
 4. *Temperature variation operation test* ----- 5
 5. *Cold start and hot start test* ----- 6

Testing Result


Num	Test item list	Result	Remark
1	Temp./humidity power on/off test	Pass	
2	Temperature variation operation test	Pass	
3	Cold start and hot start test	Pass	

Configuration of EUT

Test Product: EMB-CV2 A0.4

Sample Configuration & Quantity Under Test:

1. CPU: Intel D2550 1.86GHz
2. BIOS Ver. ECV2AT09
3. Chipset: Intel ICH10R
4. Memory: Transcend 2GB * 2 / DDR3 1066 / SEC BCH0-K4B1G0846G
5. USB Flash: Transcend 4GB (For DOS Mode Power On/Off Test)
6. 3.5" SATA HDD: HITACHI HDS721050CLA362 / 500GB
7. Test Software: Windows 7 / Run PassMark Burn In Test 7.0 Pro
8. AT Power Supply: Zippy HG2-6400P (AT to ATX Mode)
9. Heat Sink:

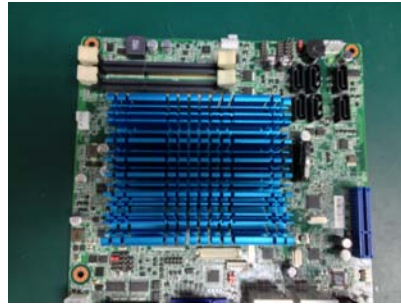

Temp./humidity power on/off test

Test Date: 07-24 ~ 25-2013

Test Site: AAEON QE Dept.

Test Standard: Refer to IEC 68-2-30 Testing procedures
Test Db: Damp Heat Test

Test Equipment:


Programmable Temperature & Humidity Chamber (K.SON. INS. TECH. CORP.)
Model: THS-D4H+-100
Date of Calibration: 10/10/12
Serial Number: 2582

Temperature & Humidity Power On/Off Test:

Testing Specification:

Step	Temperature (°C)	Humidity (%RH)	Duration (HH:MM)
1	25	50	00:30
2	25	50	00:30
3	25	90	01:00
4	25	90	00:30
5	60	90	03:30
6	60	90	03:00
7	0	0	04:50
8	0	0	05:23
9	25	50	01:47
10	25	50	03:00

Test Curve:

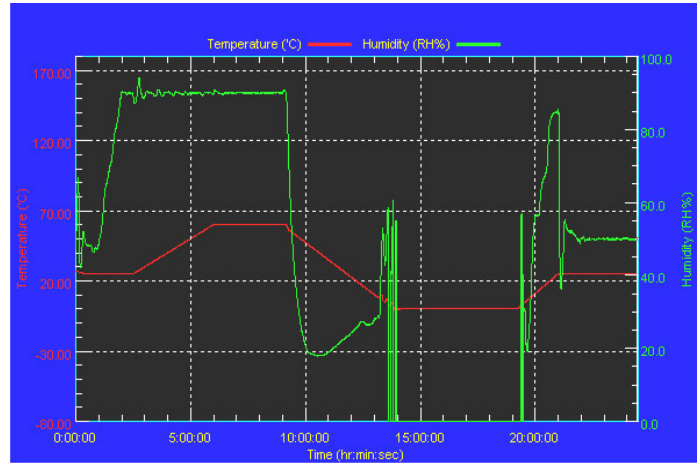

Test Result:

Test Method	Actual	Successful	Failure rate
Power On/Off	1149/times	1149/times	0 %

Note: Failure rate need to under 0.2%.

Temperature variation operation test

Test Date: 07-23~ 24-2013

Test Site: AAEON QE Dept.


Test Standard: Refer to IEC 68-2-14 Testing procedures
Test N: Change of temperature Test

Test Equipment:

Programmable Temperature & Humidity Chamber (K.SON. INS. TECH. CORP.)
Model: THS-D4H+-100
Date of Calibration: 10/10/12
Serial Number: 2582

Temperature & Humidity Cycle Test:

1. Test Low Temperature: 0°C (1~2 cycles)
-5°C (3rd cycle)
2. Test High Temperature: 60°C (1~2 cycles)
65°C (3rd cycle)
3. Test dwell time: 4Hrs (1~2 cycles)
2Hrs (3rd cycle)
4. Temperature slope: 2°C/min
5. Test cycle: 3 cycles
6. Test Environment Curve:

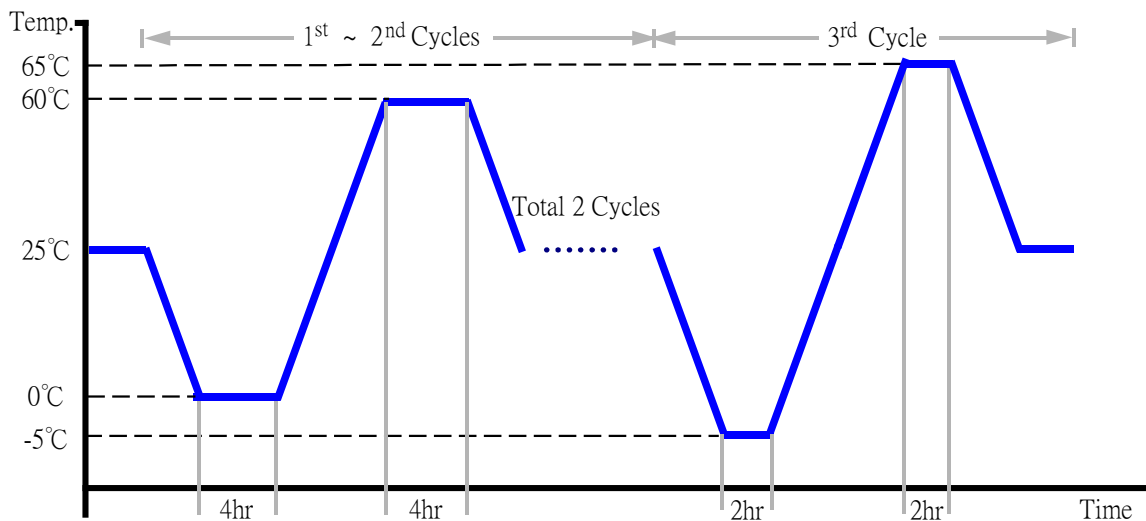

Test Result:

No issues were found during the temperature variation operation test.

