

FSB-H81H

PCB Rev. A0.2_0_0

Temperature/Humidity Test Report

Report NO:

Summary	<p><input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail</p> <p>Note : There is/are ___ defect(s) not list in the report, please check it in the DTS Website.</p> <p><input type="checkbox"/> Pass with Deviation</p>
----------------	--

Issue date

2014-06-23

Approval

Richard Wu

Test Engineer

Ronald Lin

Test item list

1. *Test item list* ----- 2
2. *Configuration of EUT* ----- 3
3. *Temp./humidity power on/off test* ----- 4
4. *Temperature variation operation test* ----- 5
5. *Cold start and hot start test* ----- 6

Testing Result

Num	Test item list	Result	Remark
1	Temp./humidity power on/off test	Pass	N/A
2	Temperature variation operation test	Pass	N/A
3	Cold start and hot start test	Pass	N/A

Configuration of EUT

Test Product: FSB-H81H A0.2 + BP-260VH-PE2E

Sample Configuration & Quantity Under Test:

1. **CPU:** Intel Haswell i7-4770S CPU @3.9GHz
2. **Chipset:** PCH/Lynx Point
3. **VGA:** Intel HD Graphics 4600
4. **Memory:** DSL 8GB DDR3L 1600 * 2
5. **BIOS Reversion:** FSB-H81H R0.6 (F81HAM06) (06/11/2014)
6. **SATA HDD:** ST3500413AS ATA Device
7. Test Software: Windows 7 64-bit/ Run PassMark BurnInTest Pro v7.1
8. Power Supply: HG2-6300P
9. CPU Cooler



Temp./humidity power on/off test

Test Date: 2014-06-17~06-18

Test Site: AAEON Taichung Internal Lab

Test Standard: Reference IEC 68-2-30 Testing procedures
Test Db: Damp Heat Test

Test Equipment:

Programmable Temperature & Humidity Chamber


TERCHY. TECH. CORP.

Model: MHK-225NK

Date of Calibration: 2014/03/17

Serial Number: 1000122

Temperature & Humidity Power On/Off Test:

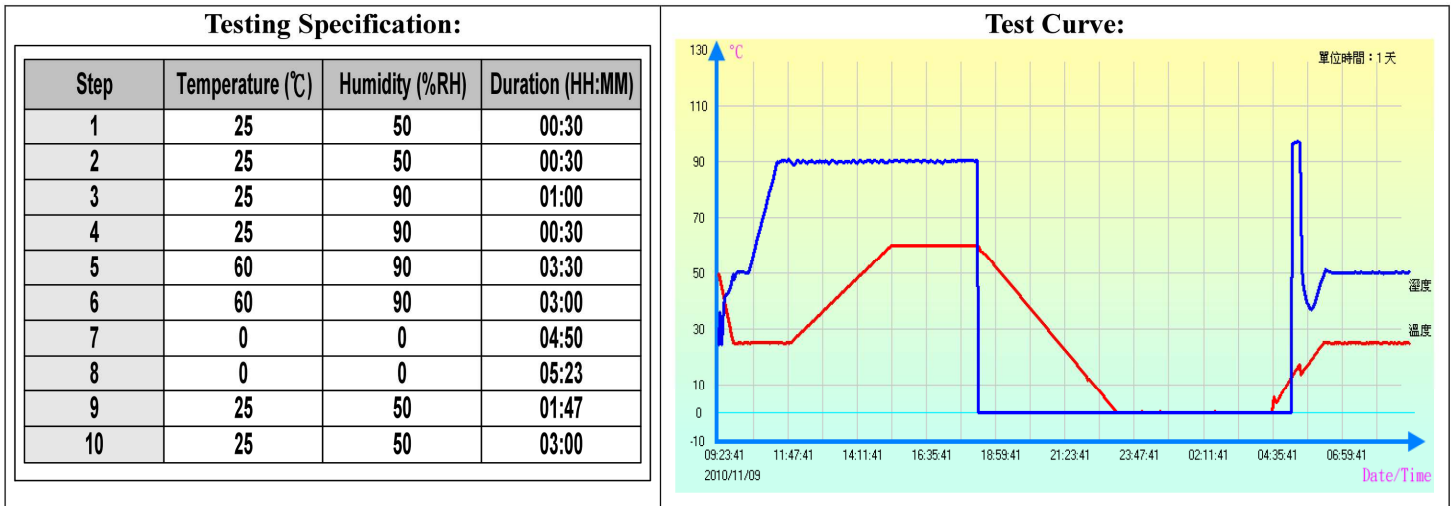

Test Result:

No problem was found during the temperature & humidity power on/off test.

Test Method	Actual	Successful	Failure rate
Power On/Off	1393/ times	1393/ times	0 %
Note: Failure rate need to under 0.2%.			

Temperature variation operation test

Test Date: 2014-06-18~06-19

Test Site: AAEON Taichung Internal Lab

Test Standard: Reference IEC 68-2-14 Testing procedures
Test N: Change of temperature Test

Test Equipment:

Programmable Temperature & Humidity Chamber

TERCHY. TECH. CORP.


Model: MHK-225NK

Date of Calibration: 2014/03/17

Serial Number: 1000122

Temperature & Humidity Cycle Test:

1. Test Low Temperature: **0°C** (1st~2nd cycles)
-5°C (3rd cycle)
2. Test High Temperature: **60°C** (1st~2nd cycles)
65°C (3rd cycle)
3. Test dwell time: **4Hrs** (1st~2nd cycles)
2Hrs (3rd cycle)
4. Temperature slope: **2°C/min**
5. Test cycle: **3 cycles**
6. Test Environment Curve:

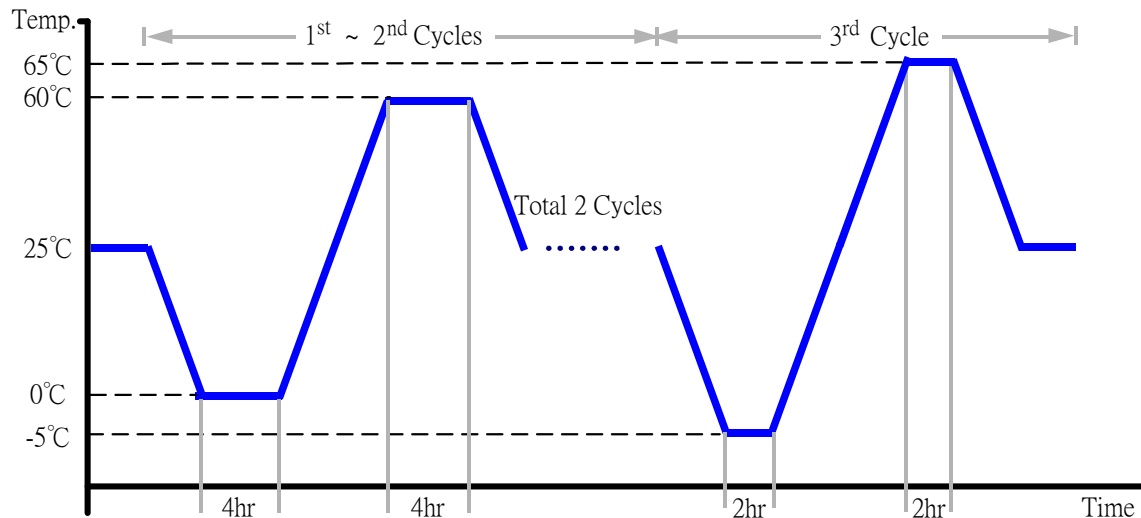

Test Result:

No problem was found during the temperature variation operation test.

Cold start and hot start test

Test Date: 2014-06-23~06-23

Test Site: AAEON Taichung Internal Lab

Test Standard: Reference IEC 68-2-14 Testing procedures
Test N: Change of temperature Test

Test Equipment:

Programmable Temperature & Humidity Chamber


TERCHY. TECH. CORP.

Model: MHK-225NK

Date of Calibration: 2014/03/17

Serial Number: 1000122

Test Condition:

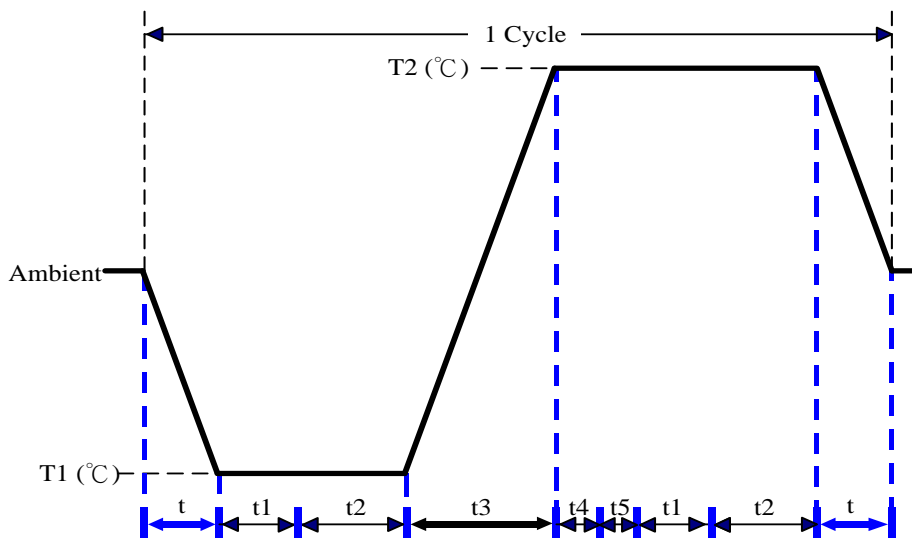

Parameters	Description
T1	-5°C
T2	65°C
t1	1 hr
t2	2 hrs
t4, t5	30 mins
t, t3	2°C/min
n (Cycle)	1

t, t3: Temperature Slope

t, t1: Power Off

t2: Power On/Off test 10 times (On 2 mins / Off 5 mins)

t5: Windows soft restart test 2 times

Test software: Windows 7 Ultimate x32 Edition

Test Result:

- a. No problem was found during the cold start test.
- b. No problem was found during the hot start test.