

AAEON

AAEON Technology INC.
ISO-9001/ISO-14001 Certified
Industrial Automation PCs

PCM-4896

Environment Test Report

Release Date : May/10/1999

Issue Stamp

Chen an Lee

QA Manager

Wenyan Yang

QE Manager

Rex Chang

Test Engineer

Environment

Model Name : PCM-4896

Test Date : 99-05-01

Test Site : AAEON QE Dept.

Performed by : Rex Chang

Test Standard :

Select	NO.	Description
√	IEC 68-2-30	Test DB : Damp Heat Test
√	IEC 68-2-61	Test Z/ABD : Climatic Sequence Test

Testing Item :

Temperature & Humidity Cycle
Test Temperature & Humidity Power On/Off Test

Additional Test Peripheral :

Configuration	Model
Test Software	QAPlus 5.29
Test Fixture	Power on/off(110V) Fixture

Testing Equipment :

Programmable Temperature & Humidity Chamber
Model : Ths-D4L+-100
S/N : 1241
Date of Calibration : 07-10-1998

Sample Configuration & Quantity Under Test :


Use All-in-One Cyrix GXm Single Board with the following options installed .
1.CPU : Cyrix MediaGX MMX 233MHz
2.DRAM : 32MB(HY57V168010D TC-10S)
3.Chipset : Cyrix Cx5530
4.VGA Chipset : C&T B69000
5.I/O Chipset : ITE IT8661F/Winbond W83977F. Full 16-bit I/O ` decoded

Test Result :

Standard	Description	Result
IEC 68-2-30	Temperature & Humidity Power On/Off Test	Pass
IEC 68-2-61	Temperature & Humidity Cycle Test(Run QAPlus 5.29)	Pass


Environment

Temperature & Humidity Power On/Off Test

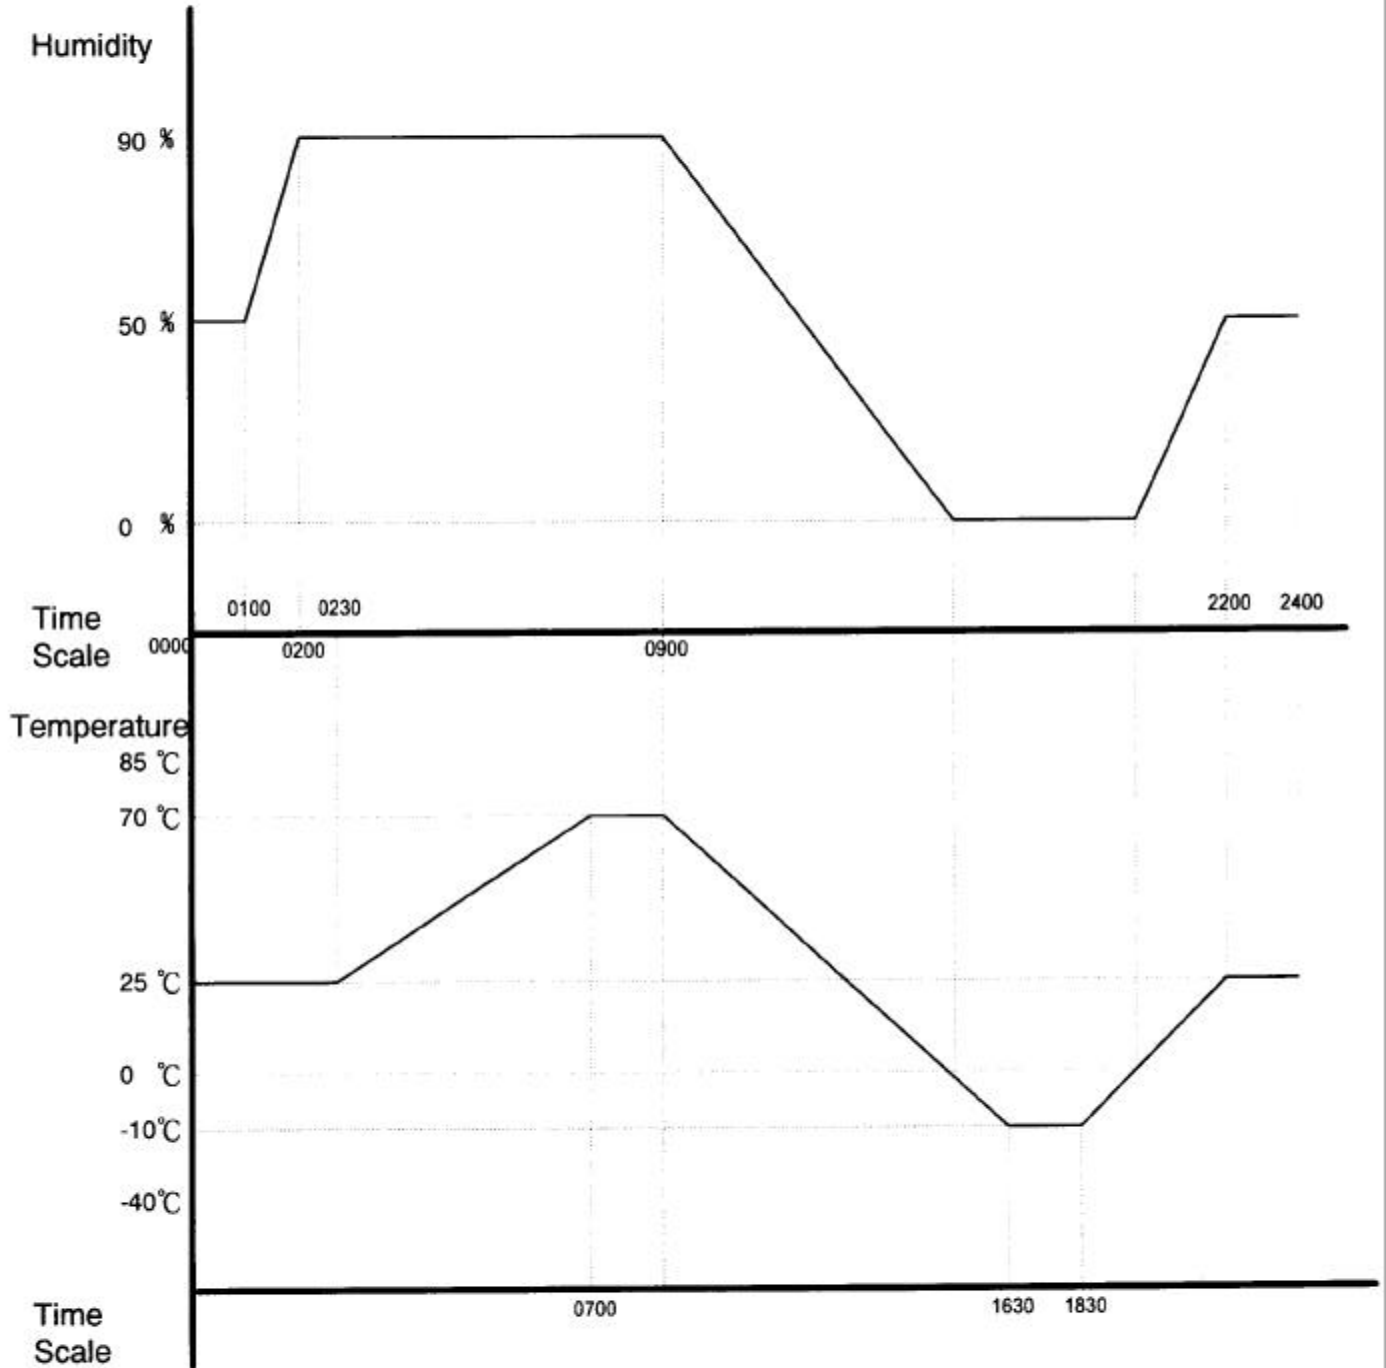


Environment

Temperature & Humidity Power On/Off Test

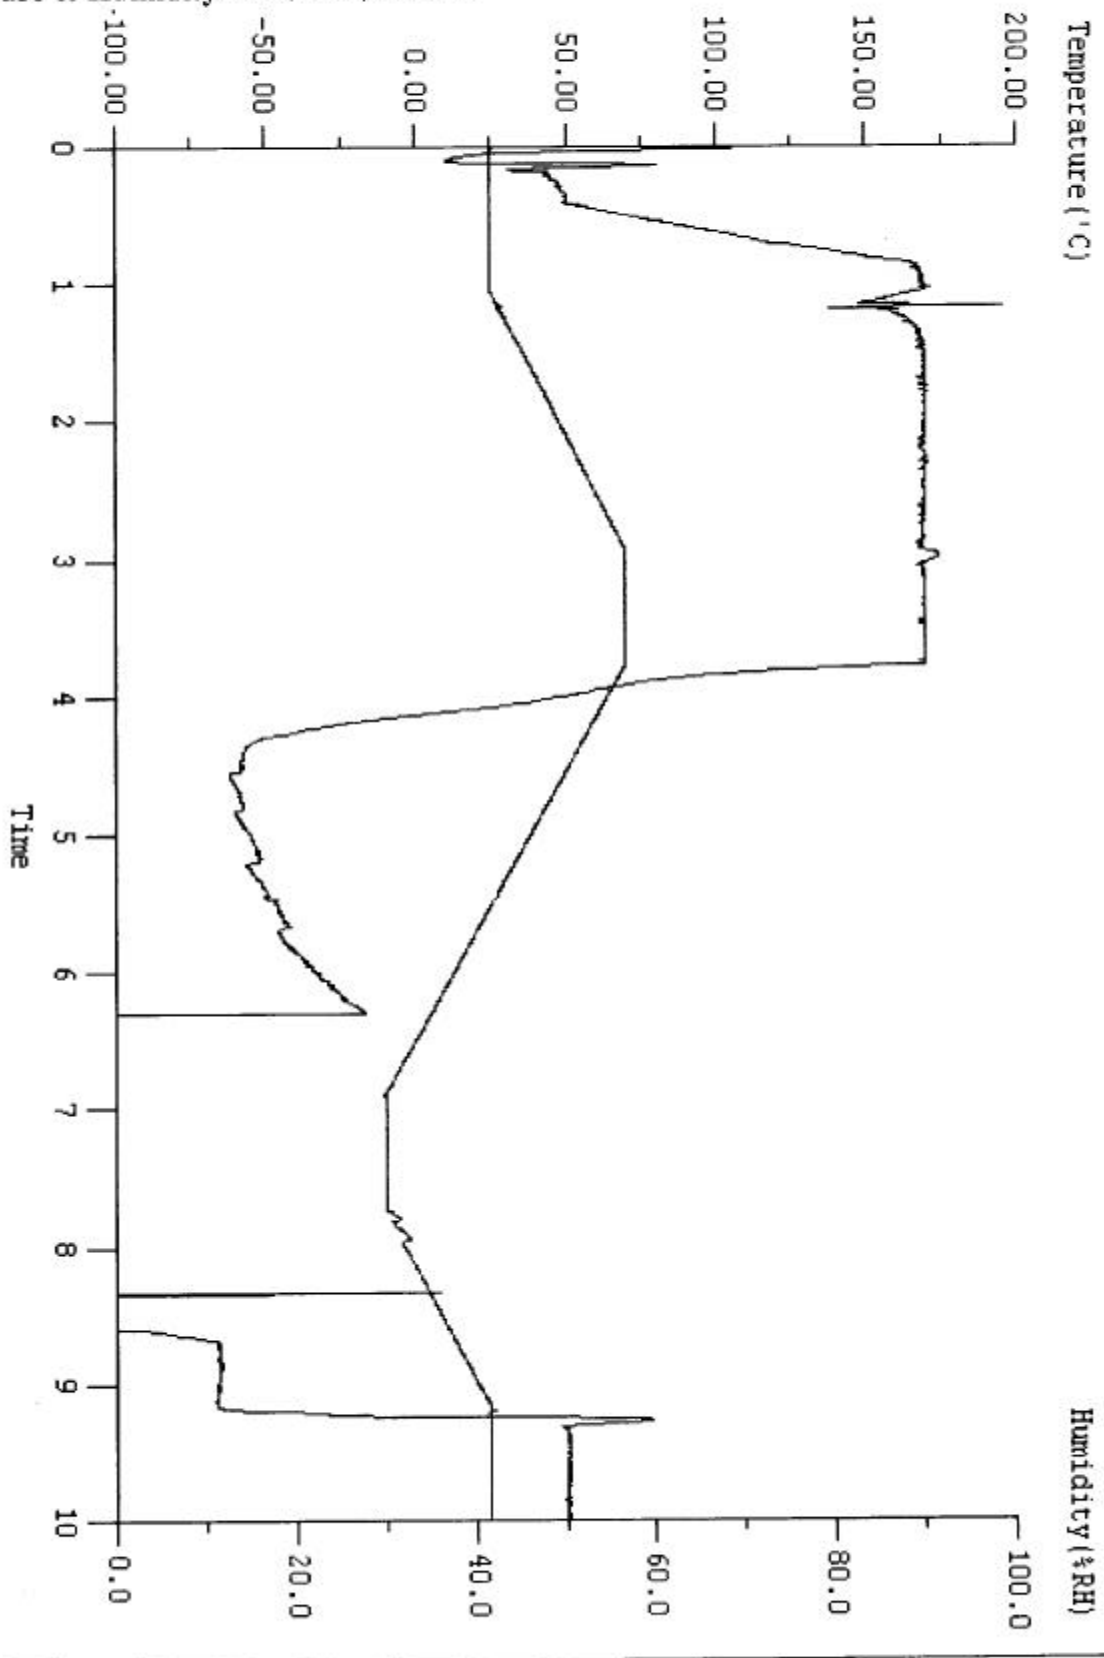

Environment

Temperature & Humidity Cycle Test (Run QAPlus 5.29)

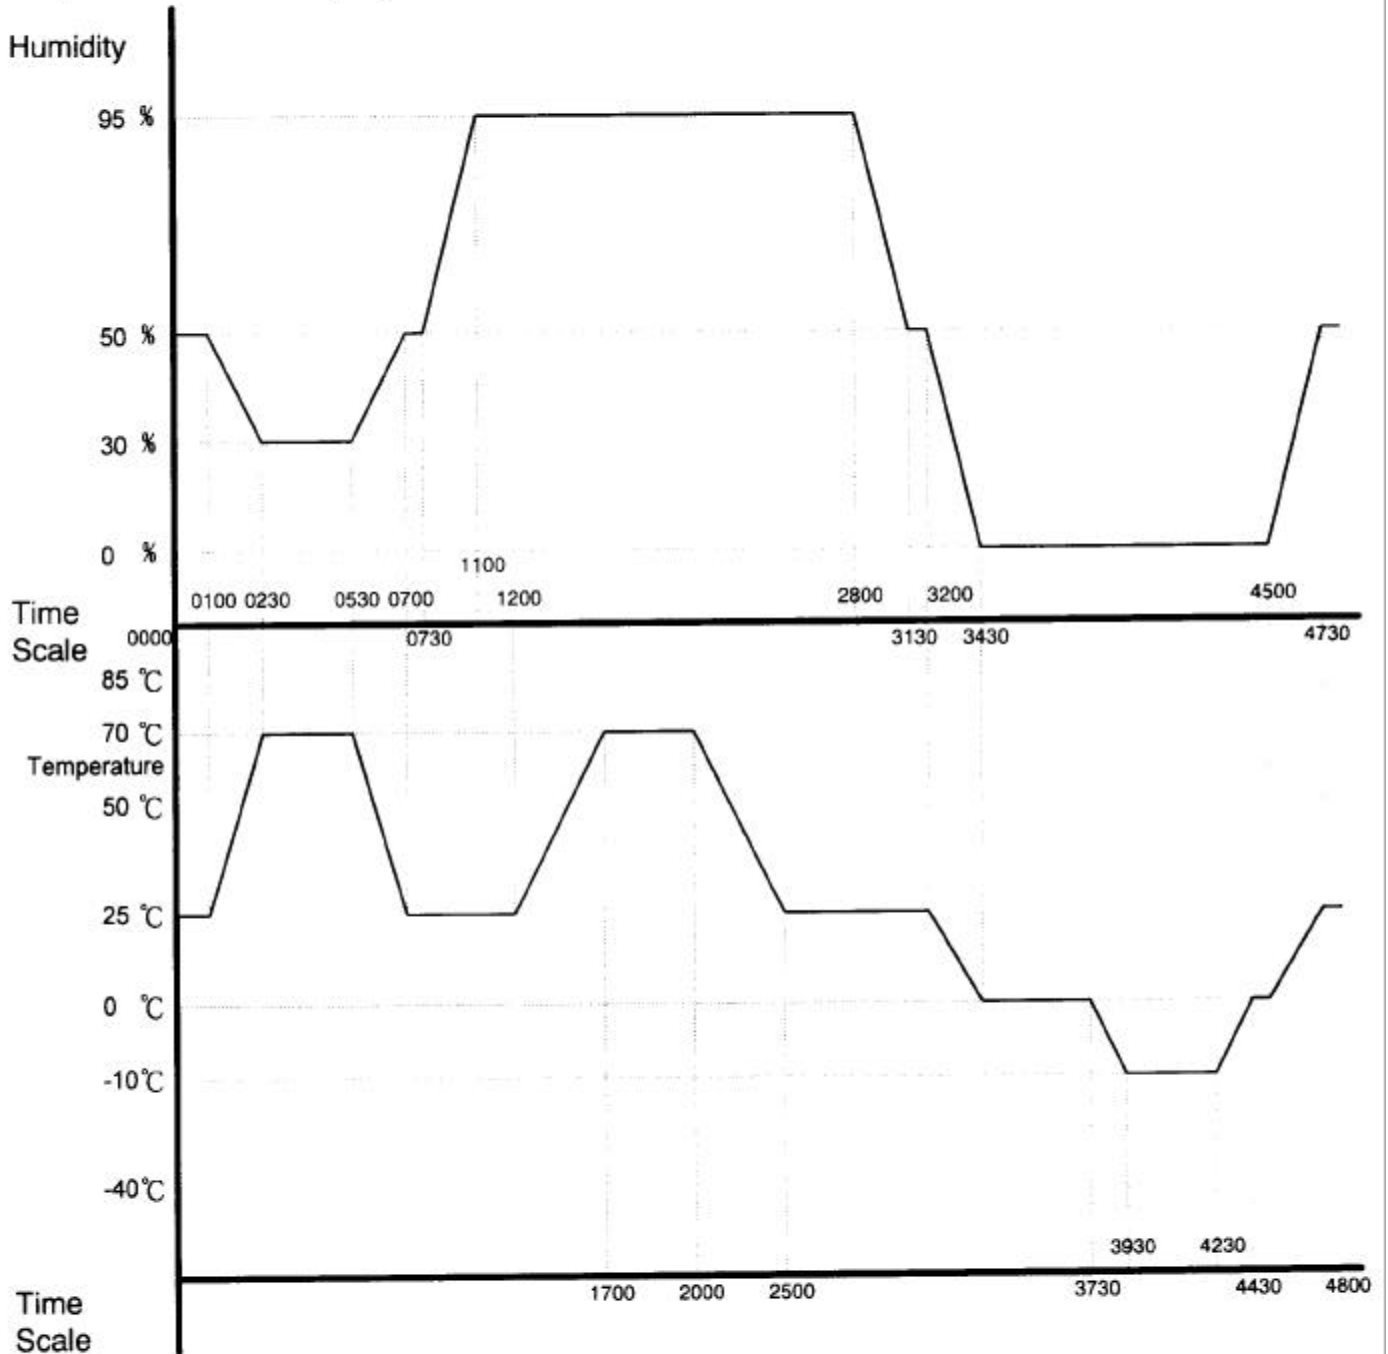

Environment

Temperature & Humidity Cycle Test(Run QAPLus 5.29)

