



PCM-6894 (ATX Power) Temperature cycle Test Report

Report NO : 02E020047

Issued by:

/

12/02/2002

Rex Chang
DV Engineer

Date

Reviewed by:

/

12/02/2002

Wayne-Chen
DV Manager

Date

PCM-6894 (ATX Power)

Test Date: 11-28~12-02-2002

Test Product: PCM-6894 (ATX Power) Rev : A0.3


Test Site: AAEON QA Internal Lab.

Performed By : Rex Chang


Test Standard : Reference IEC 68-2-30 Testing procedures
 Test DB : Damp Heat Test
 Reference IEC 68-2-61 Testing procedures
 Test Z/ABD : Climatic Sequence Test

Test Equipment:
 Programmable Temperature & Humidity Chamber
 K.SON. INS. TECH. CORP.
 Model : THS-D4H+-100
 Date of Calibration : 06/10/02
 Serial Number: 1241

Temperature & Humidity Cycle Test:

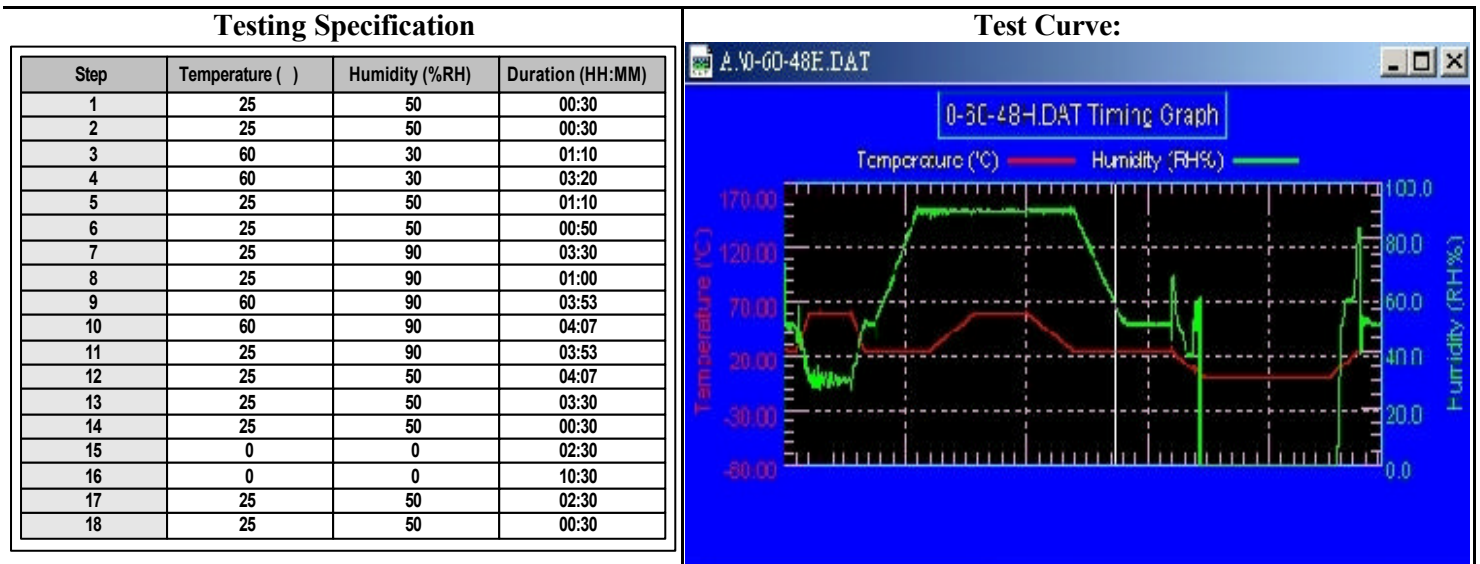

Temperature & Humidity Power On/Off Test

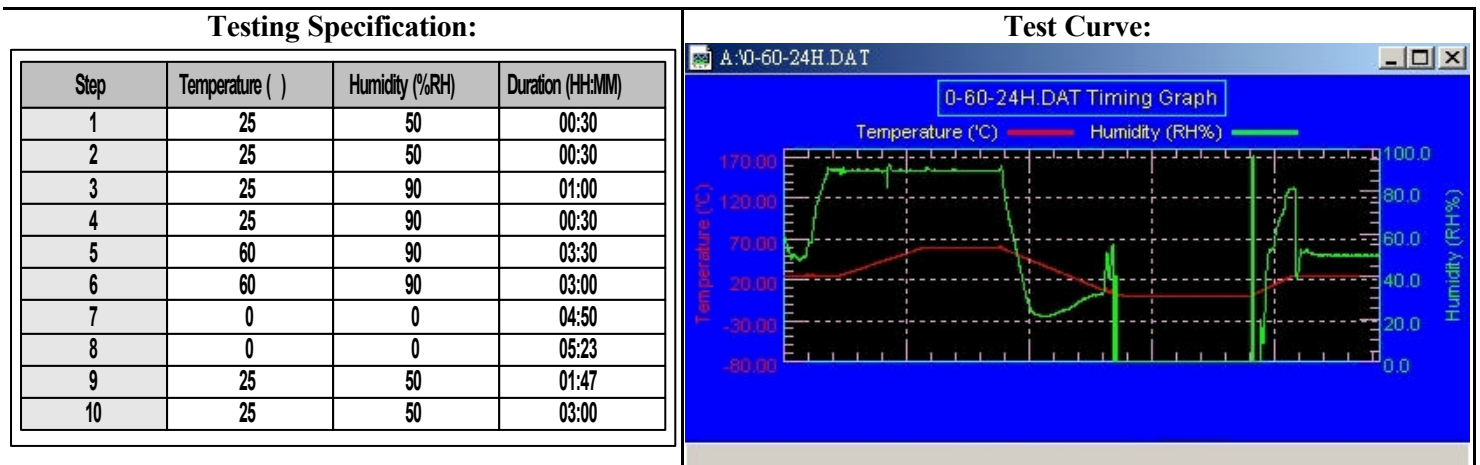

Sample Configuration & Quantity Under Test:**Sample 1 :**

1. CPU : Celeron 1.3GHz (Bios Ver.1.0)
2. SDRAM : SETTEC PM72V56841CT-6 512MB (PC133)
3. VGA : SMI Lynx3DM SM 722
4. Chipset : VIA Apollo Pro 133A / VT82C694T
5. CPU Cooler :

**Sample 2 :**

1. CPU : Pentium 1.4GHz (Bios Ver.1.0)
2. SDRAM : Winbond W982508BH-75 512MB (PC133)
3. VGA : SMI Lynx3DM SM 722
4. Chipset : VIA Apollo Pro 133A / VT82C694T
5. CPU Cooler :

**Test Result :****Passed.**

The PCM-6894 (ATX Power) compact board meets temperature cycle test.