

Temperature cycle test

Test Date: 06-07~12-2006

Test Product: PCM-8150 Rev: A2.0

Test Site: AAEON QA Internal Lab.

Performed By: Rex Chang


Test Standard: Reference IEC 68-2-30 Testing procedures
Test Db: Damp Heat Test
Reference IEC 68-2-61 Testing procedures
Test Z/ABD: Climatic Sequence Test

Test Equipment:
Programmable Temperature & Humidity Chamber
K.SON. INS. TECH. CORP.
Model: THS-D4H+-100
Date of Calibration: 05/19/06
Serial Number: 1241

**Temperature & Humidity Power On/Off Test:
Testing Specification:**

Step	Temperature (°C)	Humidity (%RH)	Duration (HH:MM)
1	25	50	00:30
2	25	50	00:30
3	25	90	01:00
4	25	90	00:30
5	60	90	03:30
6	60	90	03:00
7	0	0	04:50
8	0	0	05:23
9	25	50	01:47
10	25	50	03:00


Test Curve:

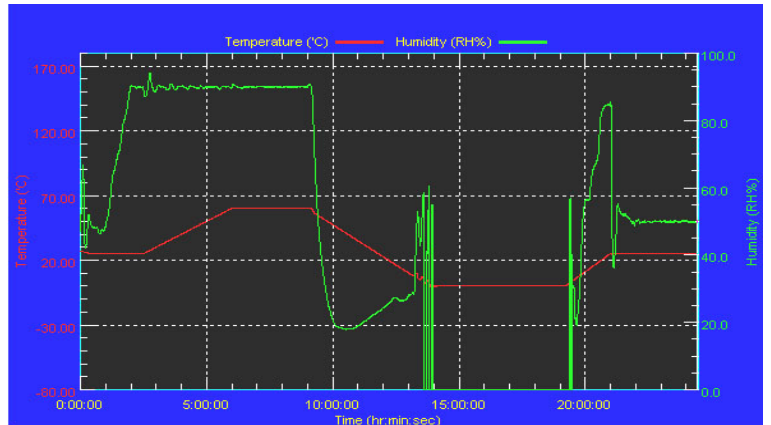

**Temperature & Humidity Cycle Test:
Testing Specification**

Step	Temperature (°C)	Humidity (%RH)	Duration (HH:MM)
1	25	50	00:30
2	25	50	00:30
3	60	30	01:10
4	60	30	03:20
5	25	50	01:10
6	25	50	00:50
7	25	90	03:30
8	25	90	01:00
9	60	90	03:53
10	60	90	04:07
11	25	90	03:53
12	25	50	04:07
13	25	50	03:30
14	25	50	00:30
15	0	0	02:30
16	0	0	10:30
17	25	50	02:30
18	25	50	00:30


Test Curve:

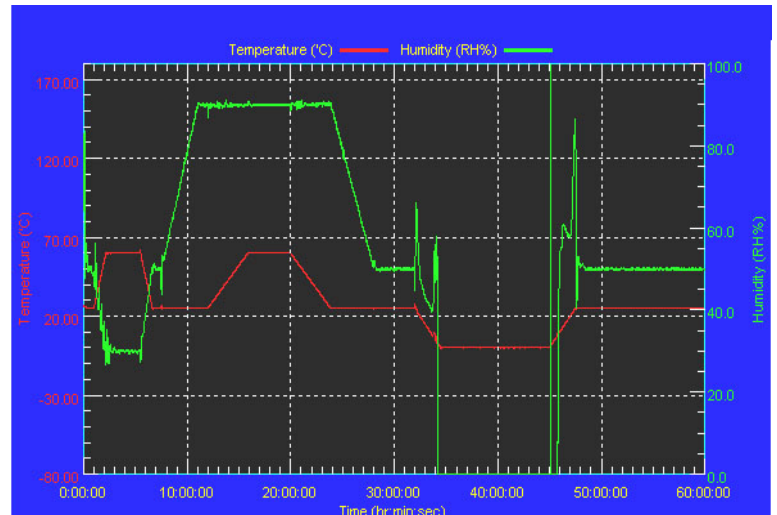

Temperature cycle test

Sample Configuration & Quantity Under Test:

1. CPU: Intel(R) Pentium-M 1.73GHz (Bios Ver. A1.4)
2. SDRAM: Hynix HY5DU56822BT-D43 256MB (DDR400)
3. Chipset: Intel 82855GM
4. VGA: Intel 82855GM
5. LAN: Intel 82551ER
6. Audio: Realtek ALC655 6CH AC97 CODEC
7. CFD: PQI 32MB
8. HDD: Maxtor Fireball ATA/133 30GB
9. Power Supply: UMEC.UPF300-AF
10. Test Software: Windows 2000 / Run PassMark BurnIn Test Pro 4.0
11. CPU Cooler:

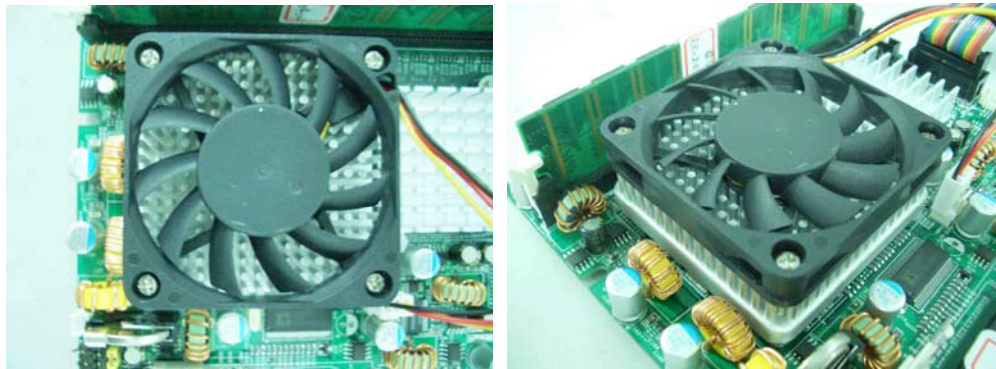

Test Result:

1. **Temperature & Humidity Power On/Off Test:**
No problem was found during the Temperature & Humidity Power On/Off Test.
2. **Temperature & Humidity Cycle Test:**
No problem was found during the Temperature & Humidity Cycle Test.