



AAEON Technology INC.
ISO-9001/ISO-14001 Certified
Industrial Automation PCs

PCM-5897

Environment Test Report

Release Date : Nov. 10, 1999

Issue Stamp

QA Manager

QE Manager

Test Engineer

Environment

Model Name : PCM-5897

Test Date : 99-11-10

Test Site : AAEON QE Dept.

Performed by : George Hsin

Test Standard :

Select	NO.	Description
√	IEC 68-2-30	Test DB : Damp Heat Test
√	IEC 68-2-61	Test Z/ABD : Climatic Sequence Test

Testing Item :

Temperature & Humidity Cycle
Test Temperature & Humidity Power On/Off Test

Additional Test Peripheral :

Configuration	Model
Test Software	QAPluse/FE V5.29
Test Fixture	Power on/off(110V) Fixture

Testing Equipment :

Programmable Temperature & Humidity Chamber
Model : Ths-D4L+-100
S/N : 1241
Date of Calibration : 07-10-1998

Sample Configuration & Quantity Under Test :


Use PCM-5897 Little Board Socket 7 Single Board with the following options installed .
1.CPU : K6 300MHz
2.DRAM : 32MB(D4516821AG5-A10-9NF 32M)
3.Chipset : VIA VT8501
4.VGA Chipset : VIA VT8501
5.I/O Chipset : ITE IT8661F

Test Result :

Standard	Description	Result
IEC 68-2-30	Temperature & Humidity Power On/Off Test	Pass
IEC 68-2-61	Temperature&HumidityCycle Test(Run QAPluse/FE V5.29)	Pass


Environment

Temperature & Humidity Power On/Off Test

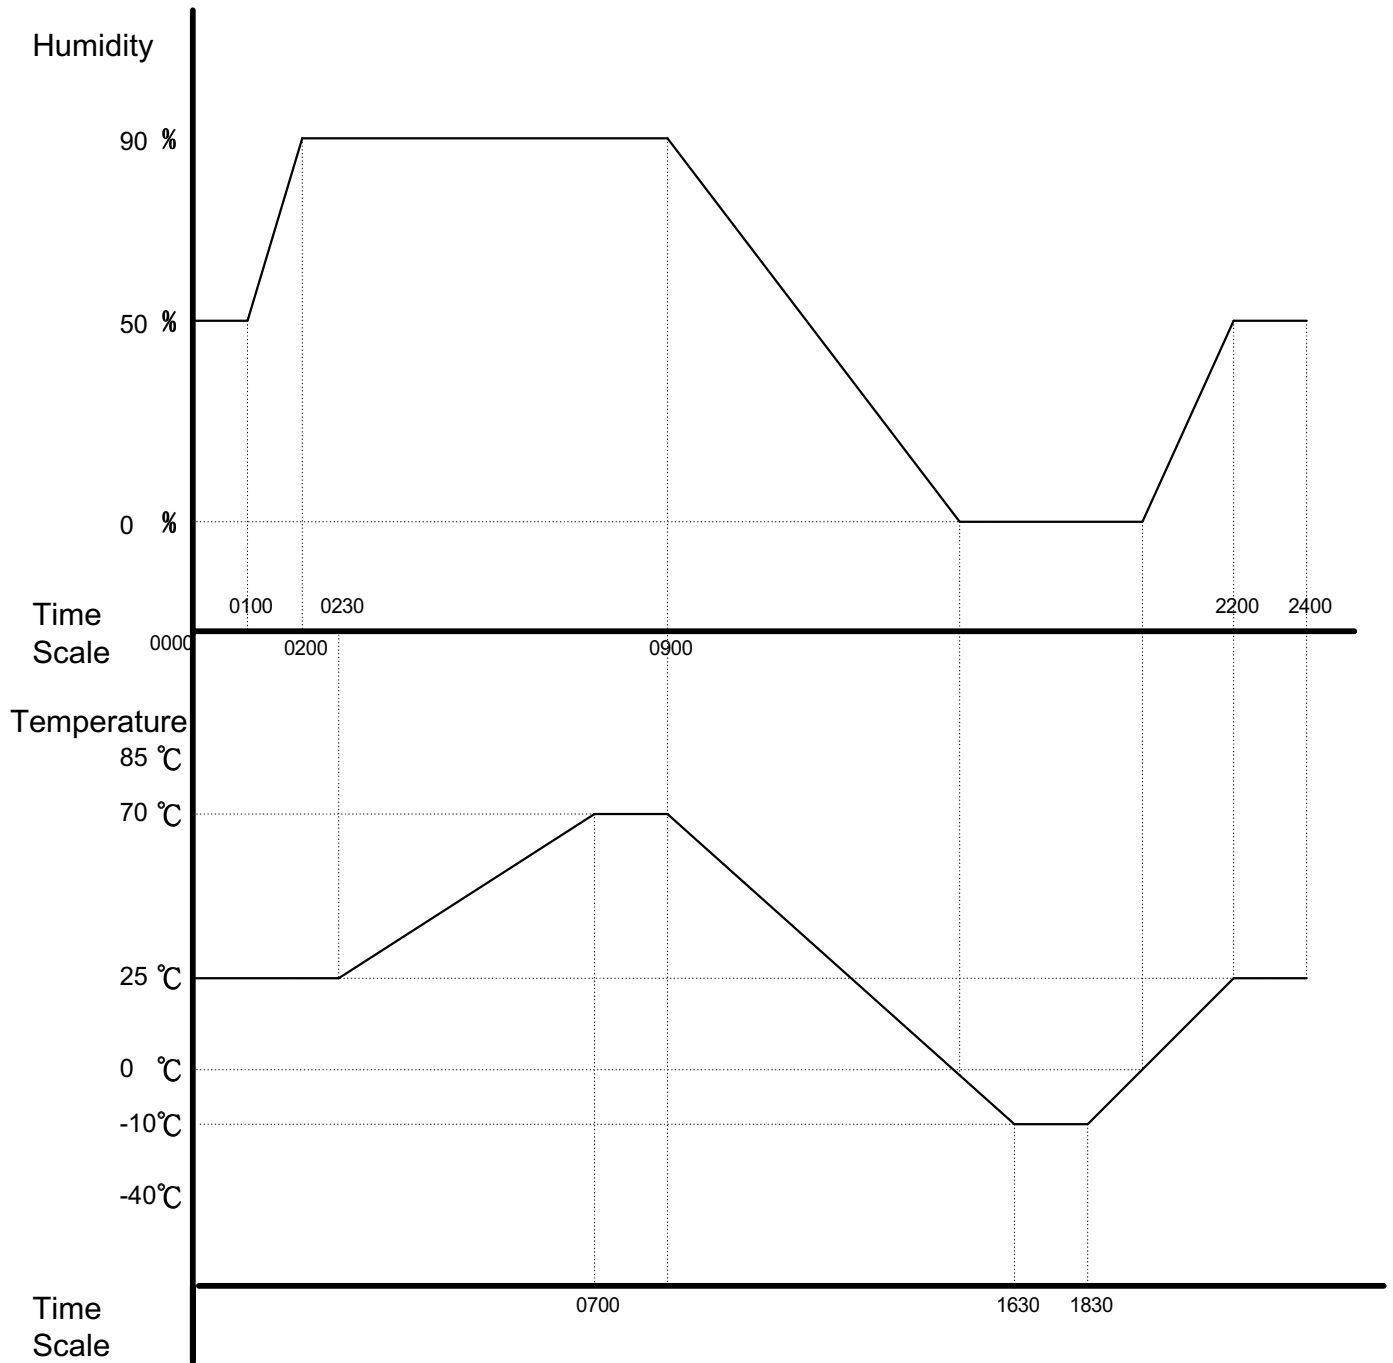


Environment

Temperature & Humidity Power On/Off Test

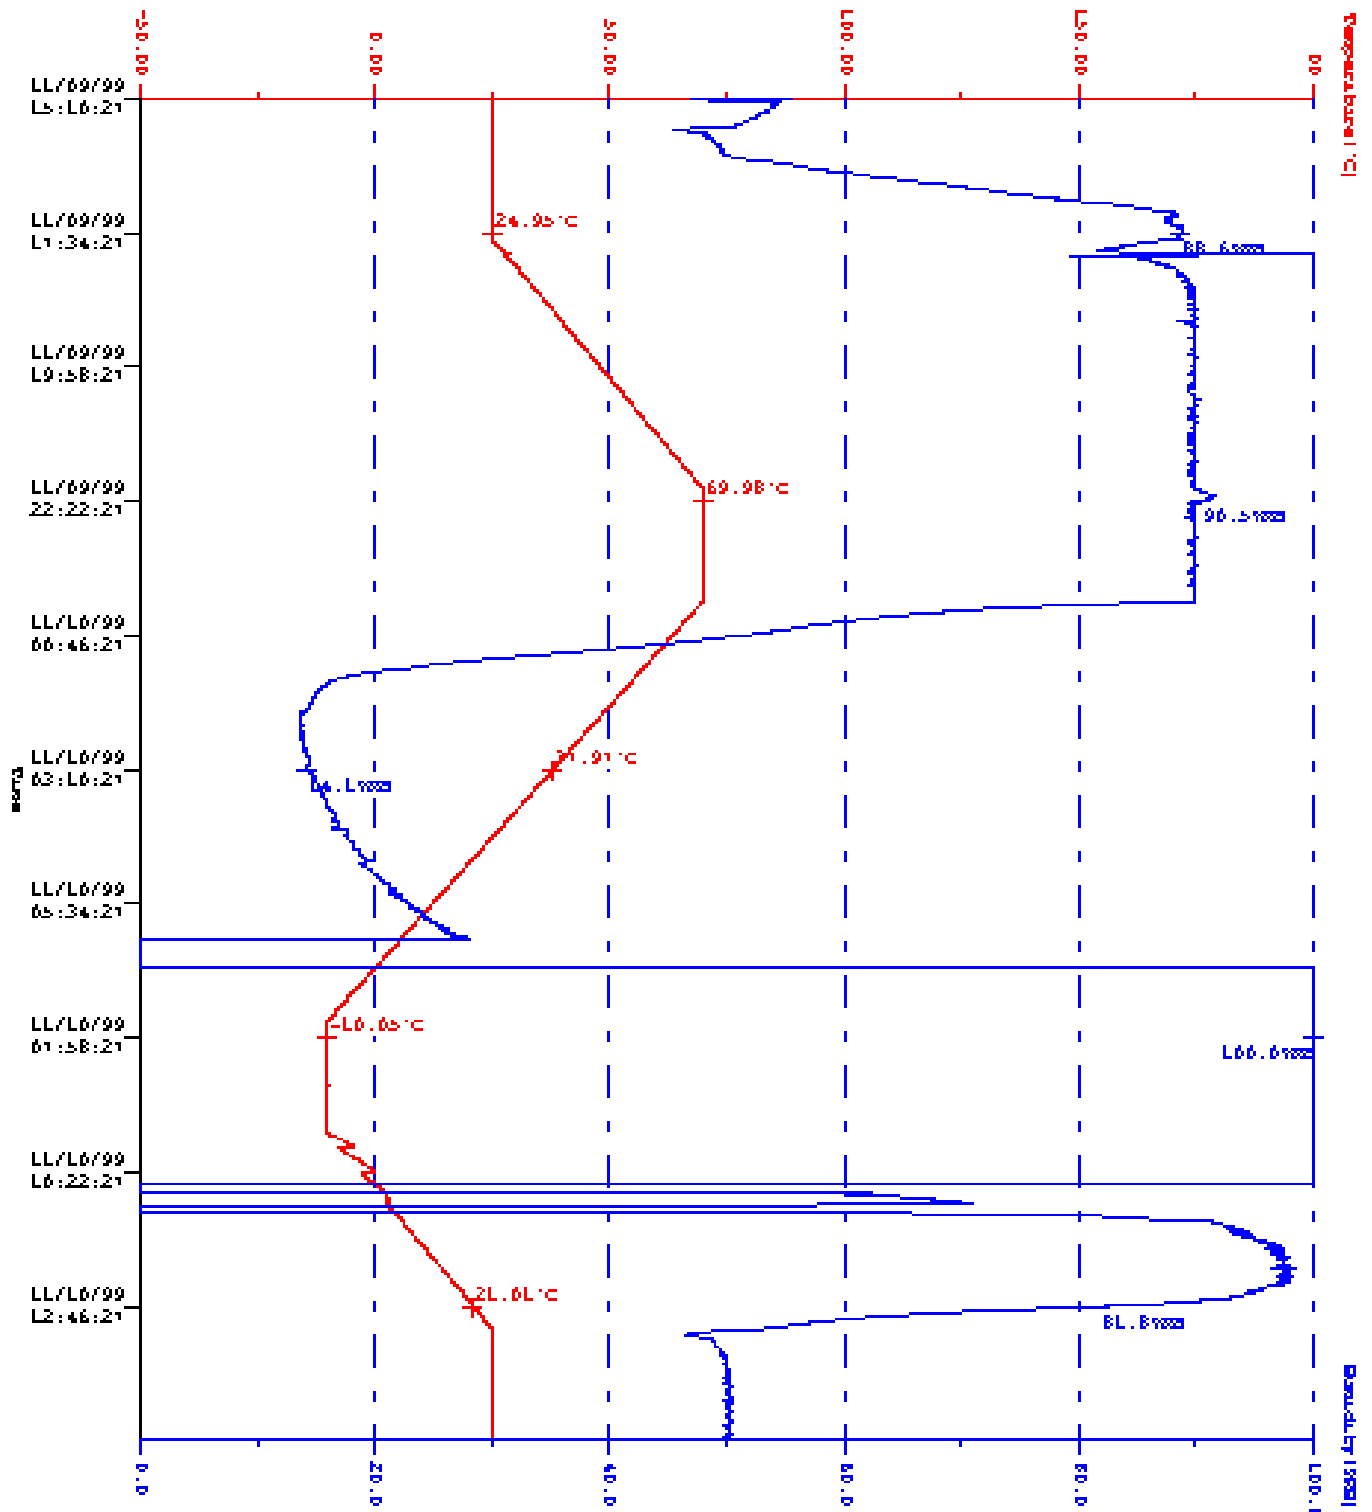

Environment

Temperature & Humidity Cycle Test (QAPLuse/FE V5.29)

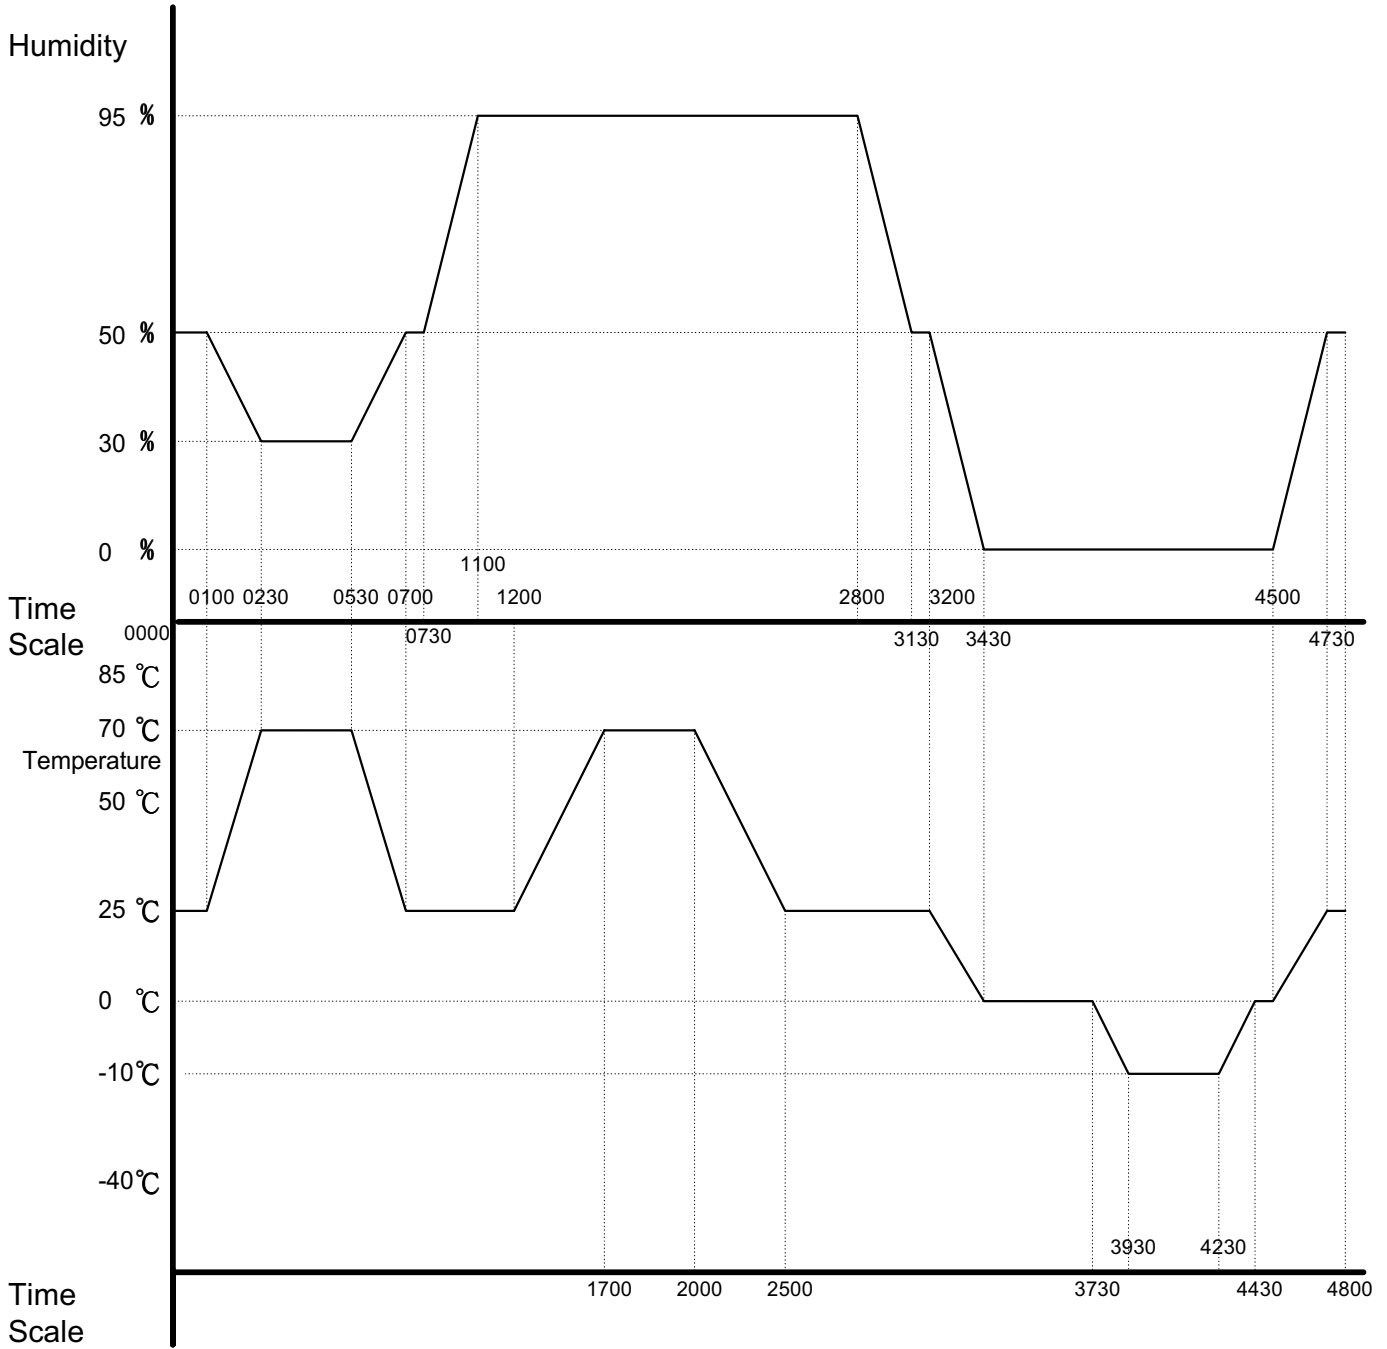

Environment

Temperature & Humidity Cycle Test (QAPLuse/FE V5.29)

