



EMC COMPLIANCE TEST REPORT

for

IPC

Trade Name : N/A
Model Number : SBC-658 (N)
Serial Number : N/A
Report Number : 000323-E
Date : June 19, 2000
Regulations : See below

Standards	Results (Pass/Fail)
EN 55022: 1994 + A1: 1995 + A2: 1997 (Class A)	PASS
EN 60555-2: 1987	PASS
EN 60555-3 : 1987 +A1: 1991	PASS
EN 50082-2: 1995	PASS
- EN 61000-4-2: 1995	PASS
- ENV 50140: 1994	PASS
- ENV 50204: 1996	PASS
- EN 61000-4-4:1995	PASS
- ENV 50141: 1994	PASS

Prepared for :

AAEON Technology Inc.
5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C.

Prepared by :



C & C Laboratory Co., Ltd.
1st Fl., No. 344, Fu Ching Street
Taipei, Taiwan, R.O.C.
TEL: (02)27468584
FAX: (02)27632154

**This report shall not be reproduced, except in full, without the written approval of
C&C Laboratory Co., Ltd.**



EC-Declaration of Conformity

For the following equipment:

IPC

(Product Name)

SBC-658 (N)

(Model Designation / Trade name)

AAEON Technology Inc.

(Manufacturer Name)

5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R.O.C.

(Manufacturer Address)

is herewith confirmed to comply with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility Directive (89/336/EEC, Amended by 92/31/EEC & 93/68/EEC), For the evaluation regarding the Electromagnetic Compatibility (89/336/EEC, Amended by 92/31/EEC & 93/68/EEC), the following standards are applied:

EN 55022: 1994+A1: 1995+A2: 1997 (Class A)

EN 60555-2: 1987 ; EN 60555-3: 1987 + A1:1991

EN50082-2: 1995

EN 61000-4-2: 1995 ; ENV 50140: 1994 ; ENV 50204: 1996 ; EN 61000-4-4: 1995
ENV 50141: 1994

The following manufacturer / importer or authorized representative established within the EUT is responsible for this declaration:

(Company Name)

(Company Address)

Person responsible for making this declaration:

(Name, Surname)

(Position / Title)

(Place)

(Date)

(Legal Signature)

TABLE OF CONTENTS

DESCRIPTION	PAGE
VERIFICATION OF COMPLIANCE	5
GENERAL INFORMATION	6
SYSTEM DESCRIPTION	7
PRODUCT INFORMATION	8
SUPPORT EQUIPMENT	9
TEST FACILITY	11
TEST EQUIPMENT LIST	12
SECTION 1 EN 55022 (LINE CONDUCTED & RADIATED EMISSION)	15
MEASUREMENT PROCEDURE & LIMIT (LINE CONDUCTED EMISSION TEST)	15
MEASUREMENT PROCEDURE & LIMIT (RADIATED EMISSION TEST)	17
BLOCK DIAGRAM OF TEST SETUP	20
SUMMARY DATA	21
SECTION 2 EN 60555-2 & EN 60555-3 (POWER HARMONICS & VOLTAGE FLUCTUATION/FLICKER)	24
BLOCK DIAGRAM OF TEST SETUP	25
RESULT	25
SECTION 3 EN 61000-4-2 (ELECTROSTATIC DISCHARGE)	26
BLOCK DIAGRAM OF TEST SETUP	27
TEST PROCEDURE	28
PERFORMANCE & RESULT	28
ESD TESTED POINT TO EUT	29
SECTION 4 ENV 50140 (RADIATED ELECTROMAGNETIC FIELD)	30
BLOCK DIAGRAM OF TEST SETUP	30
TEST PROCEDURE	31
PERFORMANCE & RESULT	31

DESCRIPTION	PAGE
SECTION 5 ENV 50204 (RADIATED ELECTROMAGNETIC FIELD FROM DIGITAL TELEPHONES)	32
BLOCK DIAGRAM OF TEST SETUP	32
TEST PROCEDURE	33
PERFORMANCE & RESULT	33
SECTION 6 EN 61000-4 –4 (FAST TRANSIENTS/BURST)	34
BLOCK DIAGRAM OF TEST SETUP	34
TEST PROCEDURE	35
PERFORMANCE & RESULT	35
SECTION 7 ENV 50141 (CONDUCTED DISTURBANCE, INDUCED BY RADIO-FREQUENCY FIELDS)	36
BLOCK DIAGRAM OF TEST SETUP	36
TEST PROCEDURE	37
PERFORMANCE & RESULT	37
SECTION 8 EN 61000-4-8 (POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST)	38
BLOCK DIAGRAM OF TEST SETUP	38
TEST PROCEDURE	39
PERFORMANCE & RESULT	39
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP EN 55022 TEST EN 60555-2 TEST EN 60555-3 TEST EN 61000-4-2 TEST ENV 50140 & ENV 50204 TEST EN 61000-4-4 TEST ENV 50141 TEST	40
APPENDIX 2 PHOTOGRAPHS OF EUT	48

VERIFICATION OF COMPLIANCE

Equipment Under Test: IPC
Trade Name: N/A
Model Number: SBC-658 (N)
Serial Number: N/A
EUT Powered during test: 230VAC/50Hz
Applicant: **AAEON Technology Inc.**
5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C.
Manufacturer: **AAEON Technology Inc.**
5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C.
Type of Test: EMC Directive 89/336/EEC for CE Marking
Technical Standards: EN 55022: 1994 + A1: 1995 + A2: 1997 (Class A)
EN 60555-2: 1987, EN 60555-3: 1987 + A1: 1991
EN 50082-2: 1995 (EN 61000-4-2: 1995 ; ENV 50140: 1994 ;
ENV 50204: 1996 ; EN 61000-4-4: 1995 ;
ENV 50141: 1994)
File Number: 000323-E
Date of test: June 1/2 , 2000
Deviation: According to applicant's declaration this EUT is a class A product, and to be
market in industrial environment only.
Condition of Test Sample: Normal

The above equipment was tested by C&C Laboratory Co., Ltd. for compliance with the requirements set forth in EMC Directive 89/336/EEC and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Approved by Authorized Signatory: _____
Kurt Chen / Q.A. Manager

GENERAL INFORMATION

Applicant: **AAEON Technology Inc.**
5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C.

Contact Person: Milo Wang

Manufacturer: **AAEON Technology Inc.**
5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C.

File Number: 000323-E

Date of Test: June 1/2, 2000

Equipment Under Test: IPC

Model Number: SBC-658 (N)

Serial Number: Prototype

Technical Standards: EN 55022: 1994 + A1: 1995 + A2: 1997 (Class A)
EN 60555-2: 1987, EN 60555-3: 1987 + A1: 1991
EN 50082-2: 1995 (EN 61000-4-2: 1995 ; ENV 50140: 1994 ;
ENV 50204: 1996 ; EN 61000-4-4: 1995 ;
ENV 50141: 1994)

**Frequency Range
(EN 55022):** 150kHz to 30MHz for Line Conducted Test
30MHz to 1000MHz for Radiated Emission Test

Test Site **C & C LABORATORY CO., LTD.**
No. 15, 14 Lin, Chi Twu Chi, Lu-Chu Hsiang
Taoyuan, Taiwan, R. O. C.

SYSTEM DESCRIPTION

EUT Test Program:

1. EMI test program was loaded and executed in Windows mode.
2. Data was sent to Monitor filling the screen with upper case of "H" patterns.
3. Test program sequentially exercised all related I/O's of EUT and sent "H" patterns to all out ports EUT.
4. Communication test program was loaded and executed to communicate with remote side.
5. EUT sent data to Notebook PC on remote side via telephone cable.
6. Repeat 2 to 5. Test program is self-repeating throughout the test.

PRODUCT INFORMATION

Housing Type:	Metal case		
EUT Power Rating:	115/230VAC, 50/60Hz, 6/3A		
AC Power during Test	230VAC/50Hz		
Power Supply Manufacturer:	EMACS		
Power Supply Model Number:	MR2-4250F		
AC Power Cord Type:	Unshielded, 1.8m (Detachable)		
DC Power Cable Type:	N/A		
CPU Manufacture:	Intel	Type:	Pentium III 550MHz
OSC/Clock Frequencies:	100MHz		
Memory Capacity:		Install:	32MB
HDD Manufacturer:	MAXTOR	Model:	91080D5
Chassis Manufacturer:	AAEON	Model:	SBC-658 (N)
CPU Card Type:	SBC-658		
Video Chipset Type:	C&T	Model:	69000

I/O Port of EUT

I/O PORT TYPES	Q'TY	TESTED WITH
1) Parallel Port	1	1
2) Serial Port	2	2
3) Video Port	1	1
4) PS/2 Keyboard Port	1	1
5) AT Keyboard Port	1	1
6) LAN Port	1	1
7) USB Port	2	2

SUPPORT EQUIPMENT (for EN 55022 only)

No.	Equipment	Model #	Serial #	FCC ID	Trade Name	Data Cable	Power Cord
1.	Monitor	CM753ET	T9A000038	FCC DoC	HITACHI	Shielded, 1.8m with two cores	Unshielded, 1.8m
2.	Modem	2400	94-364-176272	DK467GSM24	Computer Peripherals	Shielded, 1.8m	Unshielded, 1.5m
3.	Printer	231AA	A26631083558	BFJ9D93108US	Hayes	Shielded, 1.8m	Unshielded, 1.5m
4.	PS/2 Keyboard	E03633YLTW 3-C	3722	CIGE03633	HP	Shielded, 1.8m with a core	N/A
5.	Mouse	M-MM43	LZE93353074	DoC	LOGITECH	Shielded, 1.9m	N/A
6.	USB Mouse	M-BB48	LZE93050165	FCC DoC	Logitech	Shielded, 1.8m	N/A
7.	USB Mouse	M-BB48	LZE93050187	FCC DoC	Logitech	Shielded, 1.8m	N/A
8.	AT Keyboard	KB-9000	KA5-2	LFCACEKEY1	ACEKEY	Shielded, 1.5m	N/A
9.	HUB (Remote)	J2600A	SG43801953	N/A	HP	Unshielded, 20 m	N/A
10.	Notebook PC (Remote)	365	EXTENSA367T	FCC DoC	Acer	Shielded, 10m	N/A

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

Grounding: Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.

SUPPORT EQUIPMENT (for all test except EN 55022)

No.	Equipment	Model #	Serial #	FCC ID	Trade Name	Data Cable	Power Cord
1.	Monitor	CM753ET	T9A000038	FCC DoC	HITACHI	Shielded, 1.8m	Unshielded, 1.8m
2.	Modem	FM-144VR/1	93-503-27955	DK4FM144VR1	GVC	Shielded, 1.8m	Unshielded, 1.5m
3.	Printer	2225C+	2909S40149	DIS6XU2225	HP	Shielded, 1.8m	Unshielded, 1.5m
4.	PS/2 Keyboard	SK-2502C	M99043551	FCC DoC	HP	Shielded, 1.5m	N/A
5.	Mouse	M-MM43	LZE93353074	DoC	LOGITECH	Shielded, 1.9m	N/A
6.	USB Mouse	SL-A 799111	U4-1	E6QMOUSE X31	JOW DAIN	Shielded, 1.4m	N/A
7.	USB Mouse	PH-A 799108	U4-2	E6QMOUSE PS2	JOW DAIN	Shielded, 1.4m	N/A
8.	AT Keyboard	KB-9000	KA5-2	LFCACEKEY1	ACEKEY	Shielded, 1.5m	N/A
9.	HUB (Remote)	J2600A	SG43801953	N/A	HP	Unshielded, 20 m	N/A
10.	Notebook PC (Remote)	365	EXTENSA367T	FCC DoC	Acer	Shielded, 10m	N/A

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

Grounding: Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.

TEST FACILITY

- Location:** No. 15, 14 Line, Chin Twu Chi, Lu Chu Hsiang, Taoyuan, Taiwan, R.O.C.
- Description:** There are three 3/10m open area test sites and three line conducted labs for final test, and one 3/10m open area test site for engineering lab. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 1992 and CISPR 22/EN 55022 requirements.
- Site Filing:** A site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.
- Registration also was made with Voluntary Control Council for Interference (VCCI).
- Site Accreditation:** Accredited by NEMKO (Authorization #: ELA 124) for EMC & A2LA (Certificate #: 824.01) for Emission
- Also accredited by BSMI for the product category of Information Technology Equipment.
- Instrument Tolerance:** All measuring equipment is in accord with ANSI C63.4 and CISPR 22 requirements that meet industry regulatory agency and accreditation agency requirement.
- Ground Plane:** Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. It has no holes or gaps having longitudinal dimensions larger than one-tenth of a wavelength at the highest frequency of measurement up to 1GHz.
- Site # 1 & # 3 Line Conducted Test Site:** Vertical ground plane (2.2m x 2.2m)
Horizontal ground plane (2.5m x 2.5m)
- Site # 4 Line Conducted Test Site:** At Shielding Room

TEST EQUIPMENT LIST

Instrumentation: The following list contains equipment used at C & C Laboratory, Co., Ltd. for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2-1988 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10kHz to 1.0 / 2.0 GHz.

Equipment used during the tests:

Open Area Test Site: # 1 ; # 3 ; # 4

Open Area Test Site # 1					
EQUIPMENT TYPE	* MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
Spectrum Analyzer	ADVANTEST	R3261A	N/A	03/08/2000	03/07/2001
EMI Test Receiver	R&S	ESCS30	847793/012	11/06/1999	11/05/2000
PRE-AMP.	HP	8447F	2944A03748	10/22/1999	10/21/2000
Precision Dipole	R&S	HZ-12	846932/0004	07/13/1999	07/12/2000
Precision Dipole	R&S	HZ-13	846556/0008	07/13/1999	07/12/2000
Bilog Antenna	CHASE	CBL6112A	2309	02/13/2000	02/12/2001
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R
Antenna Tower	EMCO	2075-2	9707-2604	N.C.R	N.C.R
Controller	EMCO	2090	N/A	N.C.R	N.C.R
RF Switch	ANRITSU	MP59B	N/A	N.C.R	N.C.R
Site NSA	C&C	N/A	N/A	11/10/1999	11/09/2000

Open Area Test Site # 3					
EQUIPMENT TYPE	* MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
Spectrum Analyzer	ADVANTEST	R3261C	71720533	10/25/1999	10/24/2000
Pre-Amplifier	HP	8447D	2944A09173	02/01/2000	01/31/2001
EMI Test Receiver	R&S	ESVS20	838804/004	12/24/1999	12/23/2000
Precision Dipole	R&S	HZ-12	846932/0004	07/13/1999	07/12/2000
Precision Dipole	R&S	HZ-13	846556/0008	07/13/1999	07/12/2000
Bilog Antenna	CHASE	CBL6112A	2179	11/27/1999	11/26/2000
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R	N.C.R
RF Switch	ANRITSU	MP59B	N/A	N.C.R	N.C.R
Site NSA	C&C	N/A	N/A	01/30/2000	01/30/2001

Open Area Test Site # 4					
EQUIPMENT TYPE	* MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
Spectrum Analyzer	ADVANTEST	R3132	91700456	02/15/2000	02/14/2001
Pre-Amplifier	HP	8447F	2944A03748	10/22/1999	10/21/2000
EMI Test Receiver	R&S	ESVS10	846285/016	12/17/1999	12/16/2000
Precision Dipole	R&S	HZ-12	846932/0004	07/13/1999	07/12/2000
Precision Dipole	R&S	HZ-13	846556/0008	07/13/1999	07/12/2000
Bilog Antenna	CHASE	CBL 6112B	2462	01/13/2000	01/12/2001
Turn Table	Chance most	N/A	N/A	N.C.R	N.C.R
Antenna Tower	Chance most	N/A	N/A	N.C.R	N.C.R
Controller	Chance most	N/A	N/A	N.C.R	N.C.R
RF Switch	ANRITSU	MP59B	N/A	N.C.R	N.C.R
Site NSA	C&C Lab.	N/A	N/A	12/26/1999	12/25/2000

Conducted Emission Test Site: # 4

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
EMI Test Receiver	R&S	ESCS30	847793/012	11/09/1999	11/05/2000
LISN	EMCO	3825/2	9003/1382	01/10/2000	01/09/2001
LISN	R&S	ESH2-Z5	843250/010	12/06/1999	12/05/2000

The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

TEST EQUIPMENT LIST

For Power Harmonic & Voltage Fluctuation/Flicker Measurement:

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
HAEFELY TRENCH Harmonic & Flicker Tester	PHF 555	080 419-25	Oct. 05, 1999	Oct.05, 2000

For ESD test:

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
EMV SYSTEME/ ESD Generator	SESD 2000	812006	Nov. 19, 1999	Nov. 18, 2000

For Radiated Electromagnetic Field immunity Measurement:

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
Maconi /Signal Generator	2022D	119246/003	Aug. 17, 1999	Aug. 16, 2000
M2S / Power Amplifier	A00181/1000	9801-112	N/A	N/A
M2S / Power Amplifier	AC8113/800-250A	9801-179	N/A	N/A
Wandel & Goltormann/ EM-Radiation Meter	EMR-30	L-0013	Jan. 13, 2000	Jan. 12, 2001
EMCO Power Antenna	3141	9712-1083	N/A	N/A

For Fast Transients/Burst test:

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
HAEFELY TRENCH/ Fast Transients/Burst Generator	PEFT-JUNIOR	583 333-117	Aug. 18, 1999	Aug. 18, 2000

For CS test:

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
Maconi /Signal Generator	2022D	119246/003	Aug. 17, 1999	Aug. 16, 2000

SECTION 1 EN 55022 (LINE CONDUCTED & RADIATED EMISSION)

MEASUREMENT PROCEDURE (PRELIMINARY LINE CONDUCTED EMISSION TEST)

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per EN 55022: 1994 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per EN 55022: 1994.
- 3) All I/O cables were positioned to simulate typical actual usage as per EN 55022: 1994.
- 4) The EUT received AC power through a Line Impedance Stabilization Network (LISN) which supplied power source of 230VAC/50Hz and was grounded to the ground plane.
- 5) All support equipment received power from a second LISN supplying power of 110VAC/60Hz.
- 6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:

Mode(s):

1. **640 x 480 Resolution**
2. **800 x 600 Resolution**
3. **1020 x 768 Resolution**

- 10) After the preliminary scan, we found the following test mode producing the highest emission level.

Mode: 3.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.



MEASUREMENT PROCEDURE (FINAL LINE CONDUCTED EMISSION TEST)

- 1) EUT and support equipment was set up on the test bench as per step 10 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

Data Sample:

Freq. MHz	Q.P. Raw dBuV	Average Raw dBuV	Q.P. Limit dBuV	Average Limit dBuV	Q.P. Margin dB	Average Margin dB	Note
x.xx	43.95	---	56	46	-12.05	-2.05	L 1

Freq.	= Emission frequency in MHz
Raw dBuV	= Uncorrected Analyzer/Receiver reading
Limit dBuV	= Limit stated in standard
Margin dB	= Reading in reference to limit
Note	= Current carrying line of reading
“---“	= The emission level complied with the Average limits, with at least 2 dB margin, so no further recheck.

LINE CONDUCTED EMISSION LIMIT

Frequency	Maximum RF Line Voltage	
	Q.P.	AVERAGE
150kHz-500kHz	79dBuV	66dBuV
500kHz-5MHz	73dBuV	60dBuV
5MHz-30MHz	73dBuV	60dBuV

Note: The lower limit shall apply at the transition frequency.

MEASUREMENT PROCEDURE (PRELIMINARY RADIATED EMISSION TEST)

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per EN 55022: 1994 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per EN 55022: 1994.
- 3) All I/O cables were positioned to simulate typical actual usage as per EN 55022: 1994.
- 4) The EUT received 230VAC/50Hz power source from the outlet socket under the turntable. All support equipment received 110VAC/60Hz power from another socket under the turntable.
- 5) The antenna was placed at some given distance away from the EUT as stated in EN 55022: 1994. The antenna connected to the analyzer via a cable and at times a pre-amplifier would be used.
- 6) The Analyzer quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7) The following test mode(s) were scanned during the preliminary test:

Mode(s):

1. **640 x 480 Resolution**
2. **800 x 600 Resolution**
3. **1020 x 768 Resolution**

- 8) After the preliminary scan, we found the following test mode producing the highest emission level.

Mode: 3.

Then, the EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for final testing.



MEASUREMENT PROCEDURE (FINAL RADIATED EMISSION TEST)

- 1) EUT and support equipment were set up on the turntable as per step 8 of the preliminary test.
- 2) The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 3) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.
- 4) The test data of the worst case condition(s) was reported on the Summary Data page.

Data Sample:

Freq. (MHz)	Raw Data (dBuV/m)	Corr. Factor (dB)	Emiss. Level (dBuV/m)	Limits	Margin (dB)
xx.xx	14.0	11.2	26.2	30	-3.8

Freq.	= Emission frequency in MHz
Raw Data (dBuV/m)	= Uncorrected Analyzer / Receiver reading
Corr. Factor (dB)	= Correction factors of antenna factor and cable loss
Emiss. Level	= Raw reading converted to dBuV and CF added
Limit dBuV/m	= Limit stated in standard
Margin dB	= Reading in reference to limit

RADIATED EMISSION LIMIT

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30-230	10	40
230-1000	10	47

Note: The lower limit shall apply at the transition frequency.

BLOCK DIAGRAM OF TEST SETUP


SYSTEM DIAGRAM OF CONNECTIONS BETWEEN EUT AND SIMULATORS

EUT: IPC

Trade Name: N/A

Model Number: SBC-658 (N)

Power Cord: Unshielded, 1.8m

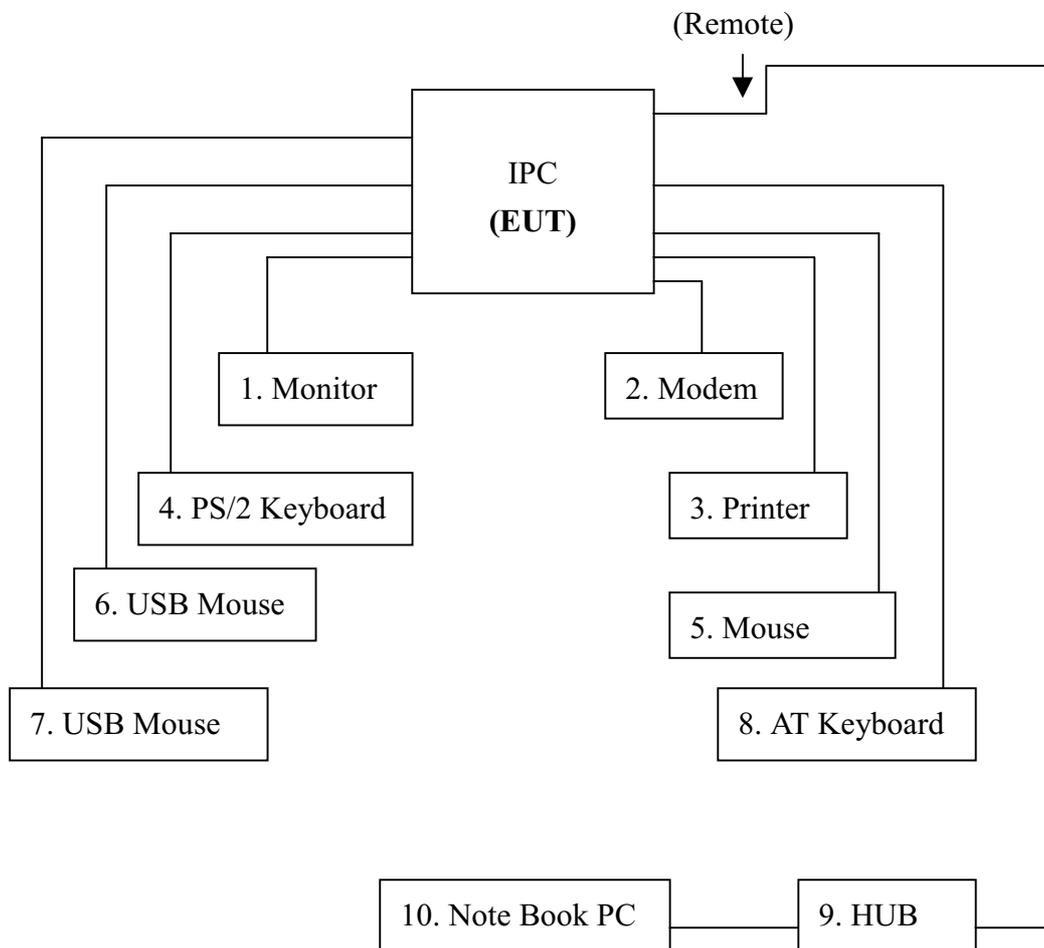

SUMMARY DATA

(LINE CONDUCTED TEST)

Model Number: SBC-658 (N)

Location: Site # 4

Tested by: Tony Tsai

Test Mode: Mode 3

Test Results: Passed

Temperature: 29°C

Humidity: 70%RH

(The chart below shows the highest readings taken from the final data)

FREQ MHz	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.155	42.1	---	79.0	66.0	-36.9	---	L1
0.220	54.3	---	79.0	66.0	-24.7	---	L1
0.345	47.9	---	79.0	66.0	-31.1	---	L1
0.410	45.6	---	79.0	66.0	-33.4	---	L1
0.535	45.3	---	73.0	60.0	-27.7	---	L1
0.665	41.7	---	73.0	60.0	-31.3	---	L1
0.220	54.7	---	79.0	66.0	-24.3	---	L2
0.345	48.3	---	79.0	66.0	-30.7	---	L2
0.410	45.6	---	79.0	66.0	-33.4	---	L2
0.535	45.3	---	73.0	60.0	-27.7	---	L2
0.665	38.5	---	73.0	60.0	-34.5	---	L2
0.850	37.4	---	73.0	60.0	-35.6	---	L2

L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

****NOTE:** “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.

SUMMARY DATA

(RADIATED EMISSION TEST)

Model Number: SBC-658 (N)

Location: Site # 3

Tested by: Gimmy Tsai

Test Mode: Mode 3

Polar: Vertical -- 10m

Detector Function: Quasi-Peak

Test Results: Passed

Temperature: 30°C

Humidity: 68%RH

(The chart below shows the highest readings taken from the final data)

Freq. (MHz)	Raw Data (dBuV/m)	Corr. Factor (dB)	Emiss. Level (dBuV/m)	Limits	Margin (dB)
117.10	13.3	14.2	27.5	40.0	-12.5
182.07	19.1	12.7	31.8	40.0	-8.2
215.40	14.0	12.8	26.8	40.0	-13.2
234.30	23.6	14.8	38.4	47.0	-8.6
302.60	20.4	18.7	39.1	47.0	-7.9
902.70	9.8	27.6	37.4	47.0	-9.6

SUMMARY DATA

(RADIATED EMISSION TEST)

Model Number: SBC-658 (N)

Location: Site # 3

Tested by: Gimmy Tsai

Test Mode: Mode 3

Polar: Horizontal -- 10m

Detector Function: Quasi-Peak

Test Results: Passed

Temperature: 30°C

Humidity: 68%RH

(The chart below shows the highest readings taken from the final data)

Freq. (MHz)	Raw Data (dBuV/m)	Corr. Factor (dB)	Emiss. Level (dBuV/m)	Limits	Margin (dB)
176.40	20.5	12.8	33.3	40.0	-6.7
180.90	14.0	12.7	26.7	40.0	-13.3
208.50	14.5	12.3	26.8	40.0	-13.2
234.40	26.2	14.8	41.0	47.0	-6.0
302.00	16.4	18.7	35.1	47.0	-11.9
801.00	8.9	27.5	36.4	47.0	-10.6
902.00	8.7	27.6	36.3	47.0	-10.7

SECTION 2 EN 65000-2 & EN 65000-3-3 (POWER HARMONICS & VOLTAGE FLUCTUATION/FLICKER)


POWER HARMONICS MEASUREMENT

Port : AC mains
Basic Standard : 60555-2: 1987
Tested by : Gimmy Tsai
Temperature : 25°C
Humidity : 47%

VOLTAGE FLUCTUATION/FLICKER MEASUREMENT

Port : AC mains
Basic Standard : EN 60555-3: 1987 + A1: 1991
Tested by : Gimmy Tsai
Temperature : 25°C
Humidity : 47%

Block Diagram of Test Setup:

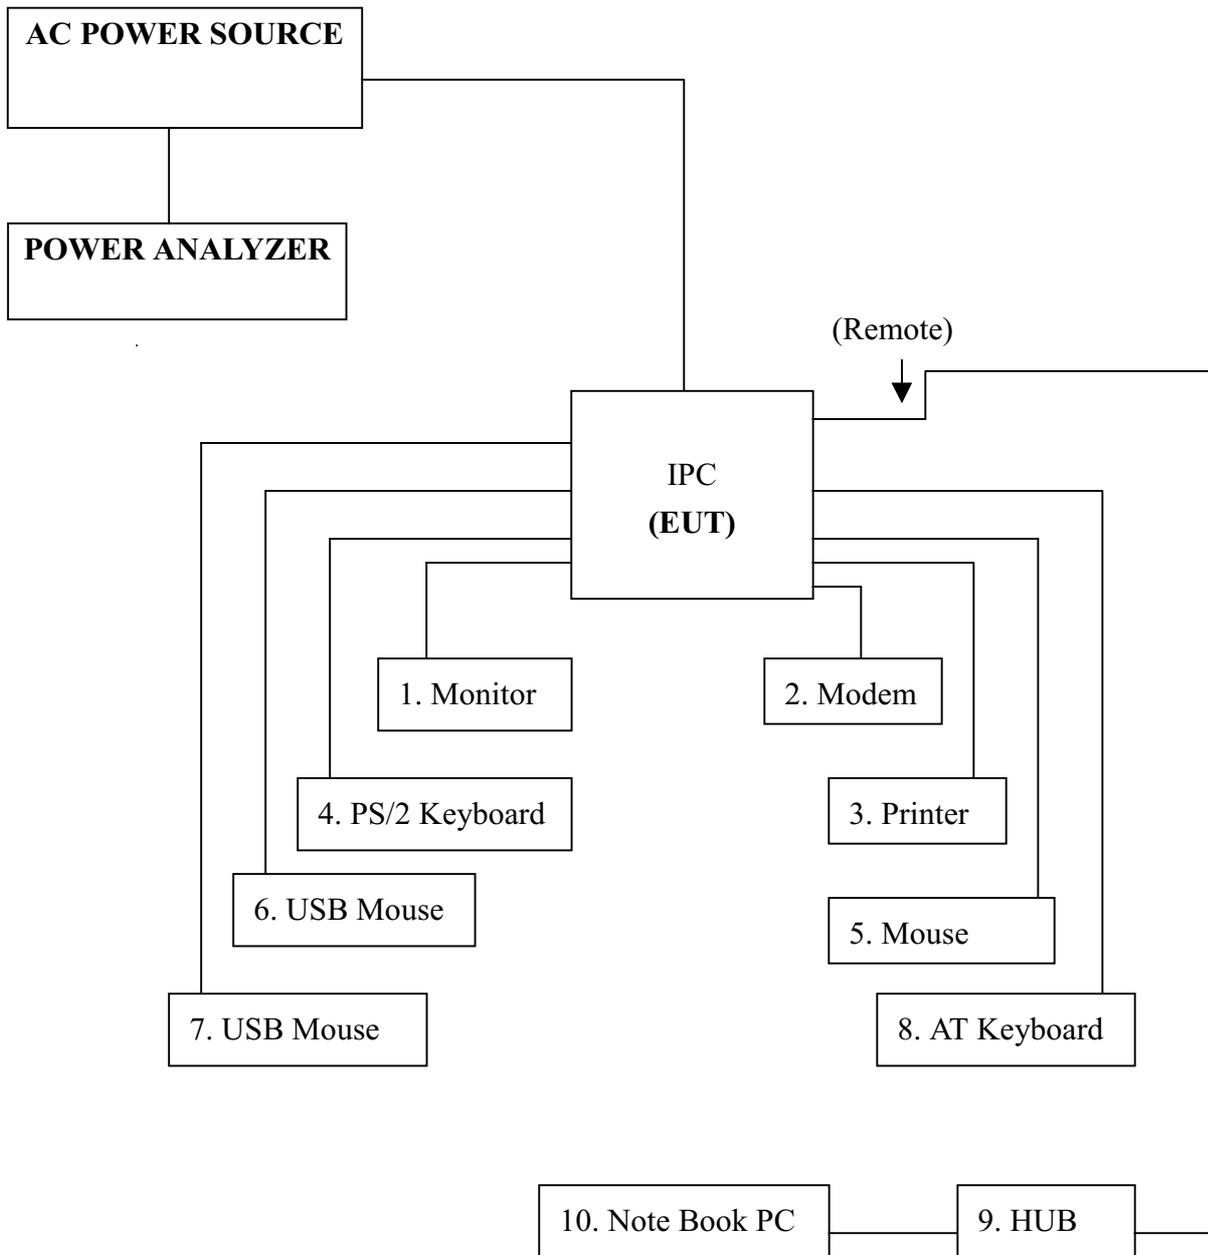

Result:


Please see the attached test data.

SECTION 3 EN 61000-4-2 (ELECTROSTATIC DISCHARGE)

ELECTROSTATIC DISCHARGE (ESD) IMMUNITY TEST

Port : Enclosure
Basic Standard : EN 61000-4-2
Requirements : ±8kV (Air Discharge)
 ±4kV (Contact Discharge)
 ±4kV (Indirect Discharge)
Performance Criteria : B (Standard Required)
Tested by : Kevin Wang
Temperature/Humidity: 25°C / 47%

Block Diagram of Test Setup:

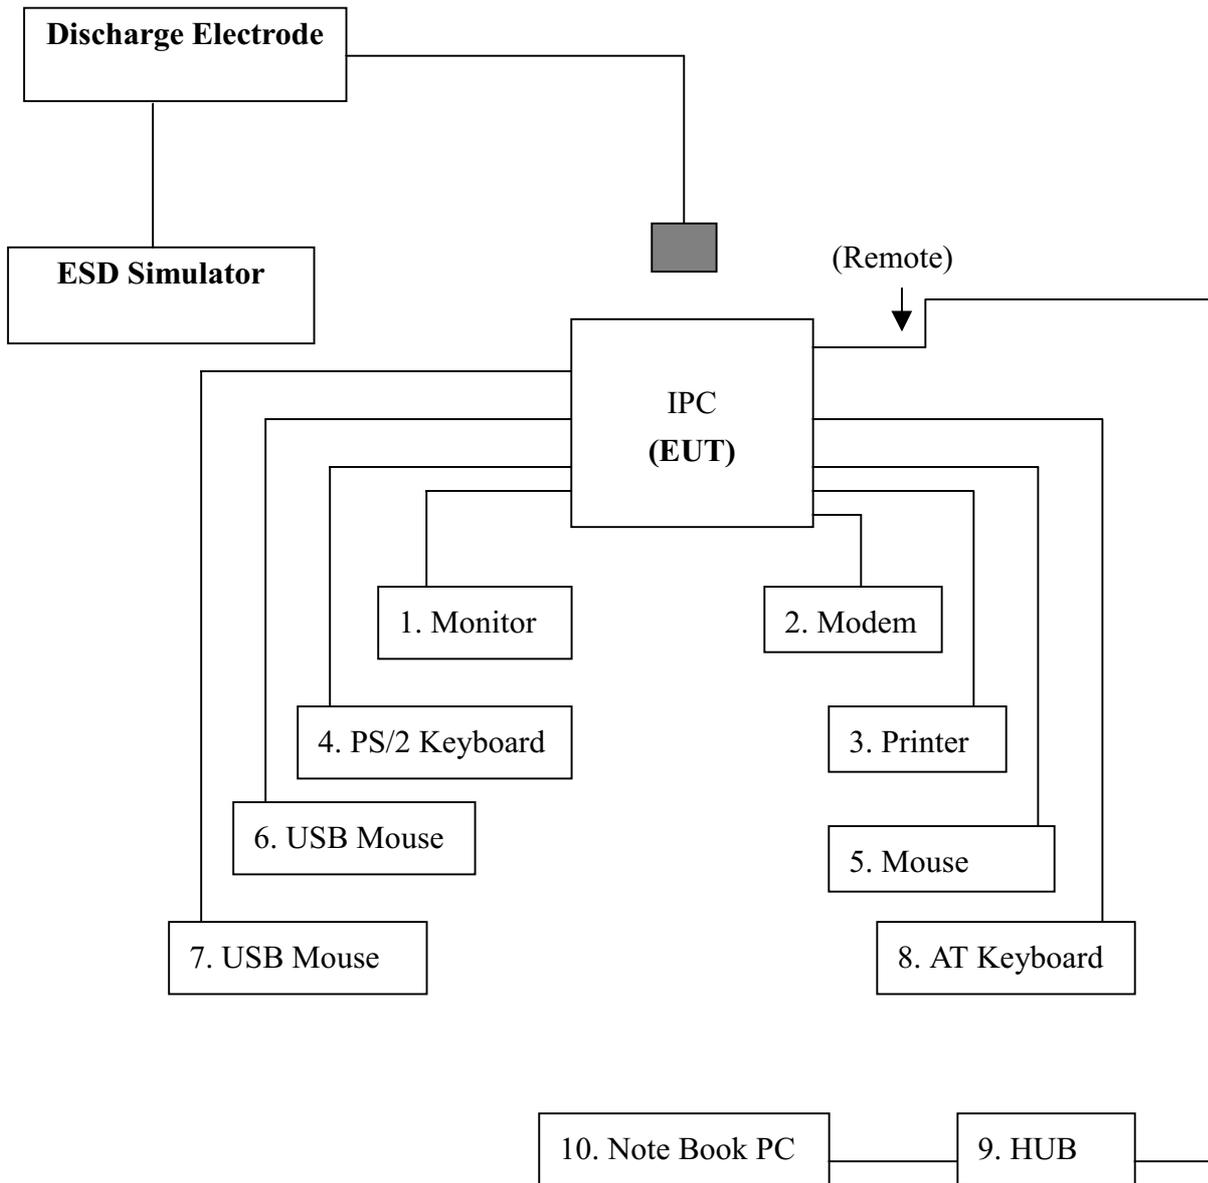

Test Procedure:

The electrostatic discharges were applied as follows:

Amount of Discharges	Voltage	Coupling	Result (Pass/Fail)
≥10Point	±8kV	Air Discharge	Pass
≥10Point	±4kV	Contact Discharge	Pass
≥10Point	±4kV	Indirect Discharge HCP (Front)	Pass
≥10Point	±4kV	Indirect Discharge HCP (Left)	Pass
≥10Point	±4kV	Indirect Discharge HCP (Back)	Pass
≥10Point	±4kV	Indirect Discharge HCP (Right)	Pass
≥10Point	±4kV	Indirect Discharge VCP (Front)	Pass
≥10Point	±4kV	Indirect Discharge VCP (Left)	Pass
≥10Point	±4kV	Indirect Discharge VCP (Back)	Pass
≥10Point	±4kV	Indirect Discharge VCP (Right)	Pass

**** The tested points to EUT, please refer to attached pages.**

Performance & Result:

- Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- Criteria C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

****Observation:** No any function degraded during the tests.

The Tested Points of EUT

(Photo 1 of 2)



(Photo 2 of 2)




SECTION 4 ENV 50140 (RADIATED ELECTROMAGNETIC FIELD)

RADIATED ELECTROMAGNETIC FIELD IMMUNITY TEST

Port : Enclosure
Basic Standard : ENV 50140
Requirements : 10 V/m, with Modulated
Performance Criteria : A (Standard Required)
Tested by : Michael Chen
Temperature : 26⁰C
Humidity : 63%

Block Diagram of Test Setup:

Same as Section 3 EN61000-4-2 Test Setup:

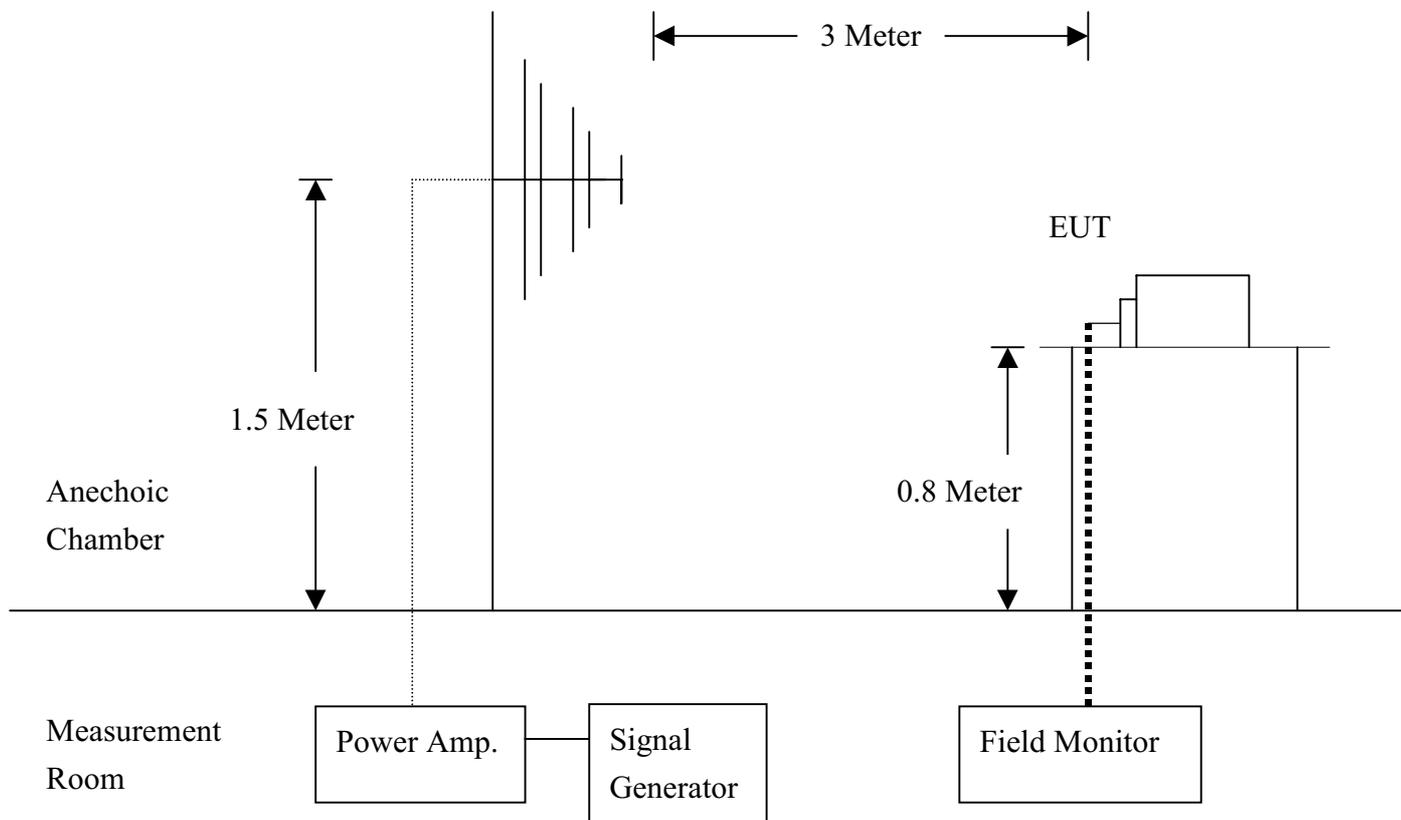

Test Procedure:

Frequency Range : 80MHz-1000MHz

Frequency Step : 1% of fundamental

Dwell Time : 3 sec

Range (MHz)	Field	Modulation	Polarity	Position (°)	Result (Pass/Fail)
80-1000	10V	Yes	H	0	Pass
80-1000	10V	Yes	V	0	Pass
80-1000	10V	Yes	H	90	Pass
80-1000	10V	Yes	V	90	Pass
80-1000	10V	Yes	H	180	Pass
80-1000	10V	Yes	V	180	Pass
80-1000	10V	Yes	H	270	Pass
80-1000	10V	Yes	V	270	Pass

Performance & Result:

- Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- Criteria C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

****Observation:** No any function degraded during the tests.


SECTION 5 ENV 50204 (RADIATED ELECTROMAGNETIC FIELD FROM DIGITAL TELEPHONES)

RADIATED ELECTROMAGNETIC FIELD IMMUNITY TEST

Port : Enclosure
Basic Standard : ENV 50204
Requirements : 10 V/m, with modulated
Performance Criteria : A (Standard Required)
Tested by : Michael Chen
Temperature : 26°C
Humidity : 63%

Block Diagram of Test Setup:

Same as Section 3 EN61000-4-2 Test Setup:

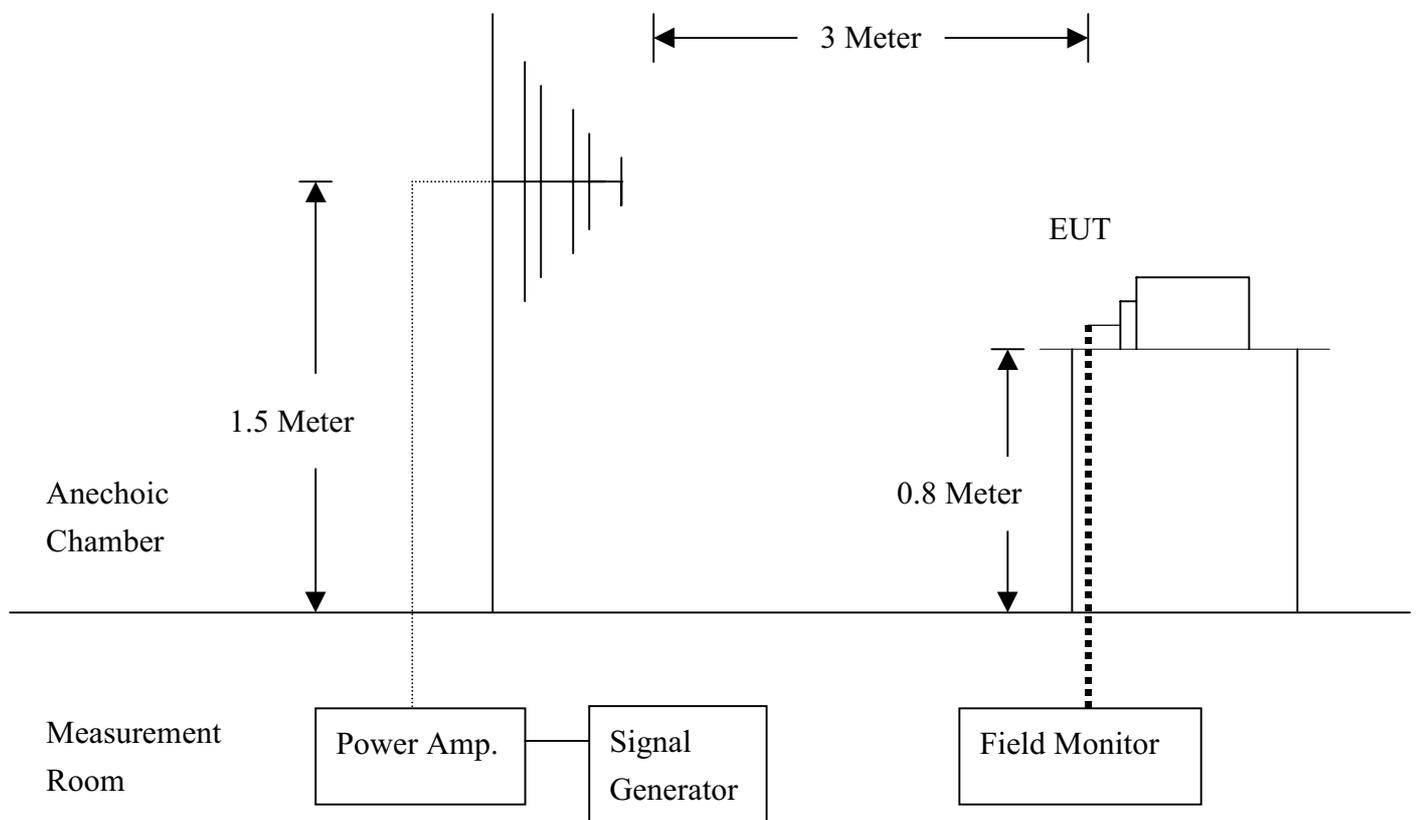

Test Procedure:

Spot Frequency : 900 MHz \pm 5MHz

Modulated Frequency : 200 Hz

Duty cycle : 50%

Range (MHz)	Field	Modulation	Polarity	Position (°)	Result (Pass/Fail)
900	10V	Yes	H	0	Pass
900	10V	Yes	V	0	Pass
900	10V	Yes	H	90	Pass
900	10V	Yes	V	90	Pass
900	10V	Yes	H	180	Pass
900	10V	Yes	V	180	Pass
900	10V	Yes	H	270	Pass
900	10V	Yes	V	270	Pass

Performance & Result:

- Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- Criteria C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

****Observation:** No any function degraded during the tests.


SECTION 6 EN 61000-4-4 (FAST TRANSIENTS/BURST)

FAST TRANSIENTS/BURST IMMUNITY TEST

Port	: On Power Supply Lines
Basic Standard	: EN 61000-4-4
Requirements	: $\pm 2\text{kV}$ for Power Supply Line $\pm 1\text{kV}$ for Data Cable
Performance Criteria	: B (Standard require)
Tested by	: Kevin Wang
Temperature	: 25°C
Humidity	: 47%

Block Diagram of Test Setup:

Same as Section 3 EN 61000-4-2 Test Setup:

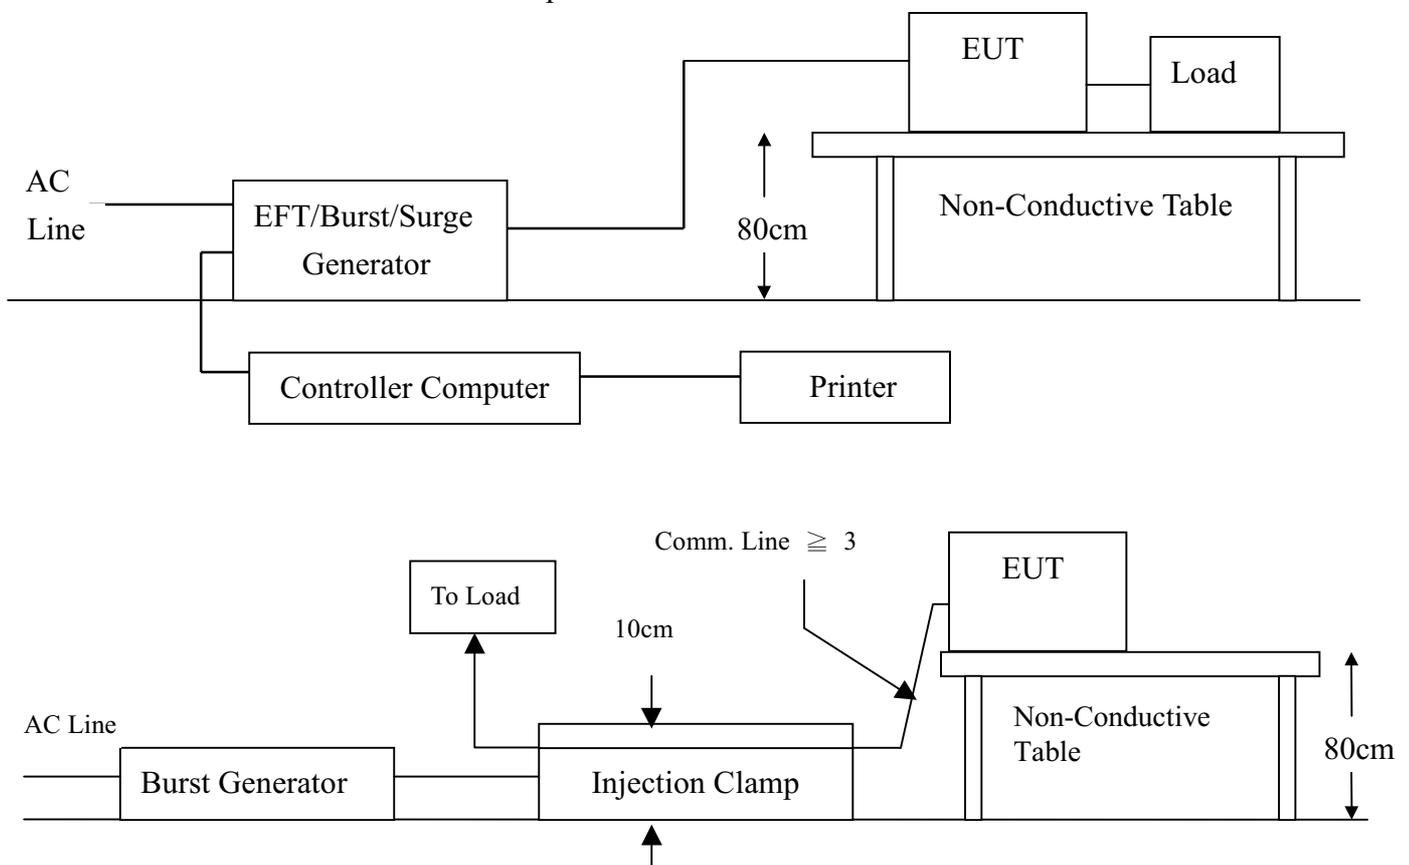

Test Procedure:

Impulse Frequency: 5kHz

Tr/Tn: 5/50ns

Burst Duration: 15ms

Burst Period: 3Hz

Inject Line	Voltage kV	Inject Method	Result (Pass/Fail)
L1	±2	Direct	Pass
N	±2	Direct	Pass
PE	±2	Direct	Pass
L1 + N	±2	Direct	Pass
L1 + PE	±2	Direct	Pass
N + PE	±2	Direct	Pass
L1 + N + PE	±2	Direct	Pass
LAN Cable	±1	Clamp	Pass

Performance & Result:

- Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- Criteria C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.


****Observation:** No any function degraded during the tests.

SECTION 7 ENV 50141 (CONDUCTED DISTURBANCE/INDUCED BY RADIO-FREQUENCY FIELD)

Port : Power cord
Basic Standard : ENV 50141
Requirements : 10 V with Modulated
Injection Method : CDN-M3
Tested by : Michael Chen
Performance Criteria : A
Temperature : 24°C
Humidity : 64%

Block Diagram of Test Setup:

Same as Section 3 EN 61000-4-2 Test Setup:

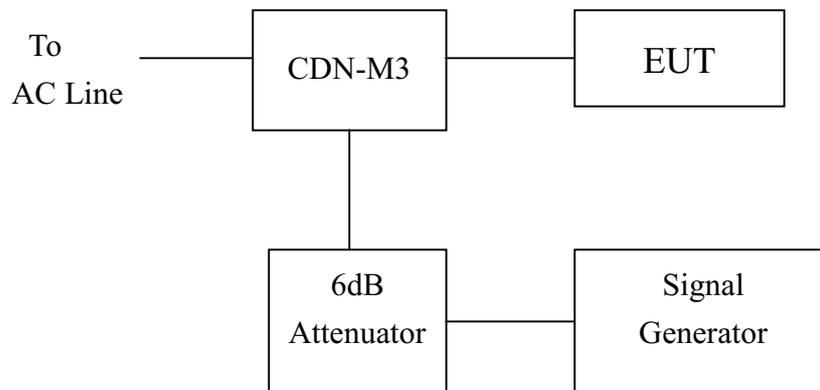

Test Procedure:

Frequency Range : 0.15MHz-80MHz
Frequency Step : 1% of fundamental
Dwell Time : 3 sec

Range (MHz)	Field	Modulation	Result (Pass/Fail)
0.15-80	10V	Yes	Pass

Performance & Result:


- Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- Criteria C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

****Observation:** No any function degraded during the tests.

SECTION 9 EN 61000-4-8 (POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST)

Port : Enclosure
Basic Standard : EN 61000-4-8
Requirements : 3 A/m
Performance Criteria : A (Standard Required)
Temperature : N/A
Humidity : N/A

Block Diagram of Test Setup:

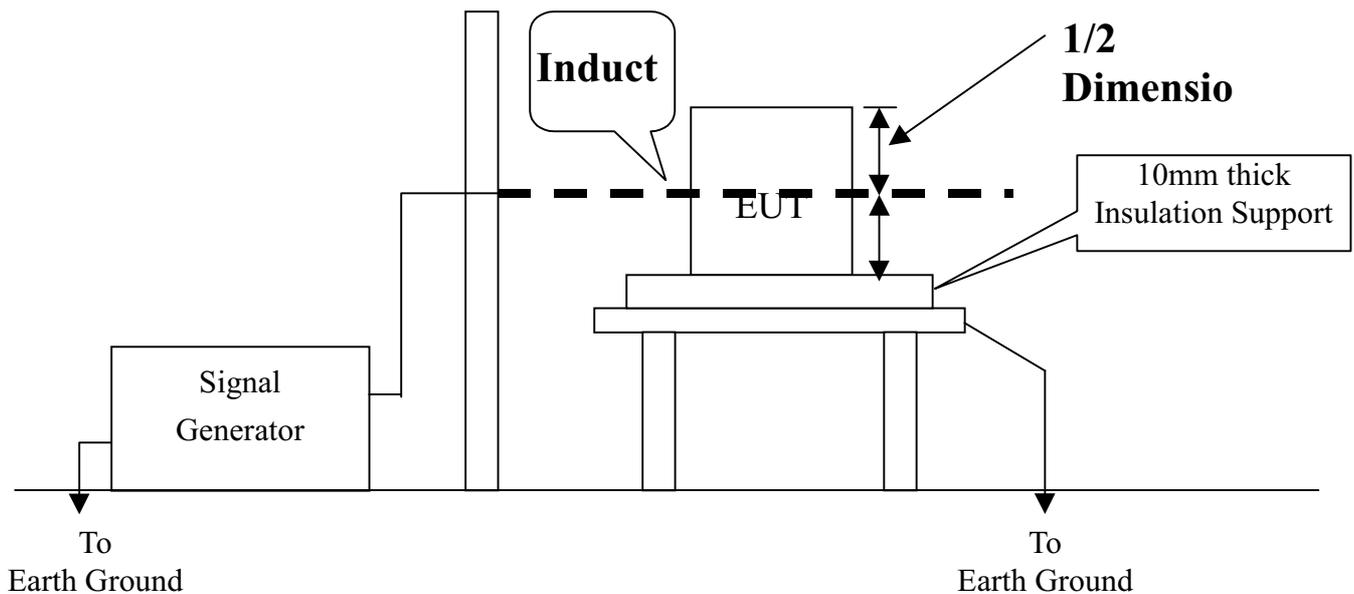

Test Procedure:

Field Strength: 3A/m
Power Freq.: 50Hz
Orientation: X, Y, Z

Orientation	Field	Result (Pass/Fail)	Remark

****Note:** Not applicable, because no any component can be influenced by power magnetic fields.

Performance & Result:

- Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- Criteria C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

****Observation:** N/A



APPENDIX 1

PHOTOGRAPHS OF TEST SETUP

LINE CONDUCTED EMISSION TEST (EN 55022)



RADIATED EMISSION TEST (EN 55022)



POWER HARMONIC & VOLTAGE FLUCTUATION / FLICKER TEST (EN 60555-2, EN 60555-3)



ELECTROSTATIC DISCHARGE TEST (EN 61000-4-2)



RADIATED ELECTROMAGNETIC FIELD (ENV 50140 & ENV 50204)



FAST TRANSIENTS/BURST TEST (EN 61000-4-4)



CONDUCTED DISTURBANCE, INDUCED BY RADIO-FREQUENCY FIELDS TEST (ENV 50141)





APPENDIX 2

PHOTOGRAPHS OF EUT



