



FCC TEST REPORT

for

47 CFR, Part 2, Part 15 and CISPR PUB. 22 Class A

Equipment : Industrial Panel PC
Model No. : AMB-2023HT, AMB-2023HTT, ACS-2303
FCC ID : N/A
Filing Type : Verification
Applicant : **AAEON Technology Inc.**
5F, No. 135, Lane 235, Pao Chiao Rd.,
Hsin-Tien City, Taipei, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468
FAX : 886-2-2696-2255

FCC ID : N/A
Page No. : 1 of 23
Issued Date : Jan. 6, 2001



CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 2, Part 15 and CISPR PUB. 22 Class A

Equipment : Industrial Panel PC
Model No. : AMB-2023HT, AMB-2023HTT, ACS-2303
FCC ID : N/A
Applicant : **AAEON Technology Inc.**
5F, No. 135, Lane 235, Pao Chiao Rd.,
Hsin-Tien City, Taipei, Taiwan, R.O.C.

HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in ANSI C63.4 - 1992 and the energy emitted by this equipment was **passed CISPR PUB. 22 and FCC Part 15** in both radiated and conducted emission class A limits. Testing was carried out on Dec. 26, 2000 at **SPORTON International Inc. LAB.** in Nei Hwu.


K. J. Lin
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.
TEL : 886-2-2696-2468
FAX : 886-2-2696-2255

FCC ID : N/A
Page No. : 3 of 23
Issued Date : Jan. 6, 2001

Table of Contents

CERTIFICATE OF COMPLIANCE 3

1. General Description of Equipment under Test 4

 1.1. Applicant..... 4

 1.2. Manufacturer..... 4

 1.3. Basic Description of Equipment under Test..... 4

 1.4. Feature of Equipment under Test..... 5

2. Test Configuration of Equipment under Test..... 6

 2.1. Test Manner..... 6

 2.2. Description of Test System..... 6

 2.3. Connection Diagram of Test System..... 8

3. Test Software..... 9

4. General Information of Test 10

 4.1. Test Facility..... 10

 4.2. Standard for Methods of Measurement..... 10

 4.3. Test in Compliance with..... 10

 4.4. Frequency Range Investigated..... 10

 4.5. Test Distance..... 10

5. Test of Conducted Powerline..... 11

 5.1. Major Measuring Instruments..... 11

 5.2. Test Procedures..... 12

 5.3. Typical Test Setup Layout of Conducted Powerline..... 13

 5.4. Test Result of AC Powerline Conducted Emission..... 14

 5.5. Photographs of Conducted Powerline Test Configuration..... 15

6. Test of Radiated Emission 17

 6.1. Major Measuring Instruments..... 17

 6.2. Test Procedures..... 18

 6.3. Typical Test Setup Layout of Radiated Emission..... 19

 6.4. Test Result of Radiated Emission..... 20

 6.5. Photographs of Radiated Emission Test Configuration..... 21

7. Antenna Factor & Cable Loss 22

8. List of Measuring Equipment Used 23

Appendix A. Photographs of EUT A1 ~ A11

1. General Description of Equipment under Test

1.1. Applicant

AAEON Technology Inc.
5F, No. 135, Lane 235, Pao Chiao Rd.,
Hsin-Tien City, Taipei, Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment : Industrial Panel PC
Model No. : AMB-2023HT, AMB-2023HTT, ACS-2303
FCC ID : N/A
Trade Name : AAEON
Data cable : Please see section 2.2 of this test report for details
STP Cable : Shielded, 10 m
Power Supply Type : Switching
Power Cord : Non-Shielded, 1.75m, 3 pin

1.4. Feature of Equipment under Test

(12.1"LCD + ACS-2303 Control Box)

- 12.1" SVGA color TFT LCD display
- Heavy-duty steel stainless chassis and NEMA 4/12 compliant plastic front panel

- All-in-one Celeron 366MHz SBC
- All-in-one Pentium or 486 SBC (optional)
- Disk Driver Space for CD-ROM, FDD and HDD
- DiskOnChip flash disk socket
- Two PCI or One ISA and One PCI

Construction: Heavy-duty steel chassis & NEMA 4/12 plastic front panel.

CPU: Celeron 366MHz (up to Pentium III 850MHz)

Memory: 32M SDRAM

Display: 12.1" SVGA (800 x 600) TFT color LCD

LCD/CRT controller: Chips 69000 VGA controller 2MB SDRAM embedded.
CRT & LCD panel support.

I/O ports: 2 serial ports: 2 RS-232,
1 parallel port (support ECP/EPP),
1 keyboard port
1 PS/2 mouse interface

Mounting: Panel mount or Wall mount (ACS-2303 control Box only, optional)

Expansion slots: 2 PCI or 1 ISA and 1PCI slot

Power supply: Universal 70W switching power supply

Dimension (W x H x D): 346 x 271 x 126 mm
(13.6 x 10.7 x 5 inches)

Net Weight: 8 Kg(17.6 lbs)

HDD: FUJITSU / MHK2060AT / 01009123

FDD: MITSUMI / D353F3 / 1.44MB

CDROM: Vintech / VIN-S24A

POWER: MPE-8071 / 100-250V

CPU: INTEL / Celeron 366MHz

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The remote workstation, SONY Monitor, DELL PS/2 Keyboard, HP Printer, ACEEX Modem, LOGITECH PS/2 Mouse and EUT were connected to the EUT for EMI test.
The remote workstation included FIC PC, SONY Monitor, DELL PS/2 Keyboard and PRIMAX PS/2 Mouse
- c. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 2000MHz.

2.2. Description of Test System

Support Unit 1. -- Personal Computer (FIC)-for remote workstation

FCC ID	: N/A
Model No.	: P2L97
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0037
Data Cable	: Shielded, 360 degree via metal backshells
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (SONY) -for local and remote workstation

FCC ID	: AK8GDM17SE2T
Model No.	: GDM-17SE2T
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0013
Data Cable	: Shielded, 360 degree via metal backshells, 1.15m

Support Unit 3. -- PS/2 Keyboard (DELL) -for local and remote workstation

FCC ID	: GYUR50SK
Model No.	: AT101W
Serial No.	: SP0019
Data Cable	: Shielded, 360 degree via metal backshells, 1.5m

FCC TEST REPORT

Report No. : F0D2208

Support Unit 4. -- Printer (HP) -for local workstation

FCC ID : DS16XU2225
Model No. : 2225C
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0014
Data Cable : Shielded, 360 degree via metal backshells, 1.2m

Support Unit 5. -- Modem (ACEEX) -for local workstation

FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0015
Data Cable : Shielded, 360 degree via metal backshells, 1.15m

Support Unit 6. -- PS/2 Mouse (LOGITECH) -for local workstation

FCC ID : DZL211029
Model No. : M-S34
Serial No. : SP0108
Data Cable : Non-Shielded, 1.8m

Support Unit 7. -- PS/2 Mouse (PRIMAX) -for remote workstation


FCC ID : EMJMUSJQ
Model No. : MUS9J
Serial No. : SP0045
Data Cable : Non-Shielded, 360 degree via metal backshells, 1.75m

SPORTON International Inc.

TEL : 886-2-2696-2468
FAX : 886-2-2696-2255

FCC ID : N/A
Page No. : 7 of 23
Issued Date : Jan. 6, 2001

2.3. Connection Diagram of Test System

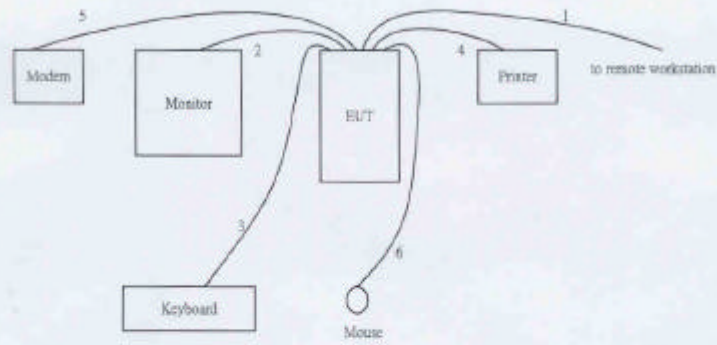

1. The STP cable is connected from EUT to the remote workstation.
2. The I/O cable is connected from PC to the support unit 2.
3. The I/O cable is connected from PC to the support unit 3.
4. The I/O cable is connected from PC to the support unit 4.
5. The I/O cable is connected from PC to the support unit 5.
6. The I/O cable is connected from PC to the support unit 6.

3. Test Software

An executive program, EMITEST.EXE &EMCTEST.EXE under WIN 98, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends "H" messages to the monitor, and the monitor displays "H" patterns on the screen.
- d. The PC sends "H" messages to the printer, then the printer prints them on the paper.
- e. The PC sends "H" messages to the modem.
- f. The PC sends "H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

At the same time, "TP TEST.exe" was executed to link with the remote workstation to receive and transmit data by STP Cable.

4. General Information of Test

4.1. Test Facility

This test was carried out by SPORTON International Inc.

Test Site Location : No. 3, Lane 238, Kang Lo Street, Nei Hwu District,
Taipei 11424, Taiwan, R.O.C.
TEL : 886-2-2631-4739
FAX : 886-2-2631-9740

4.2. Standard for Methods of Measurement

ANSI C83.4-1992

4.3. Test in Compliance with

CISPR PUB. 22 and FCC Part 15

4.4. Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation : from 30 MHz to 2,000 MHz

4.5. Test Distance

- a. The test distance of radiated emission from antenna to EUT is 10 M (from 30MHz~1000MHz).
- b. The test distance of radiated emission from antenna to EUT is 3 M (from 1GHz~2GHz).

5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


5.1. Major Measuring Instruments

Test Receiver	HP 8591EM
Attenuation	0 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 kHz

5.2. Test Procedures

- c. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- d. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- e. All the support units are connect to the other LISN.
- f. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- g. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- h. Both sides of AC line were checked for maximum conducted interference.
- i. The frequency range from 150 kHz to 30 MHz was searched.
- j. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- k. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Conducted Powerline

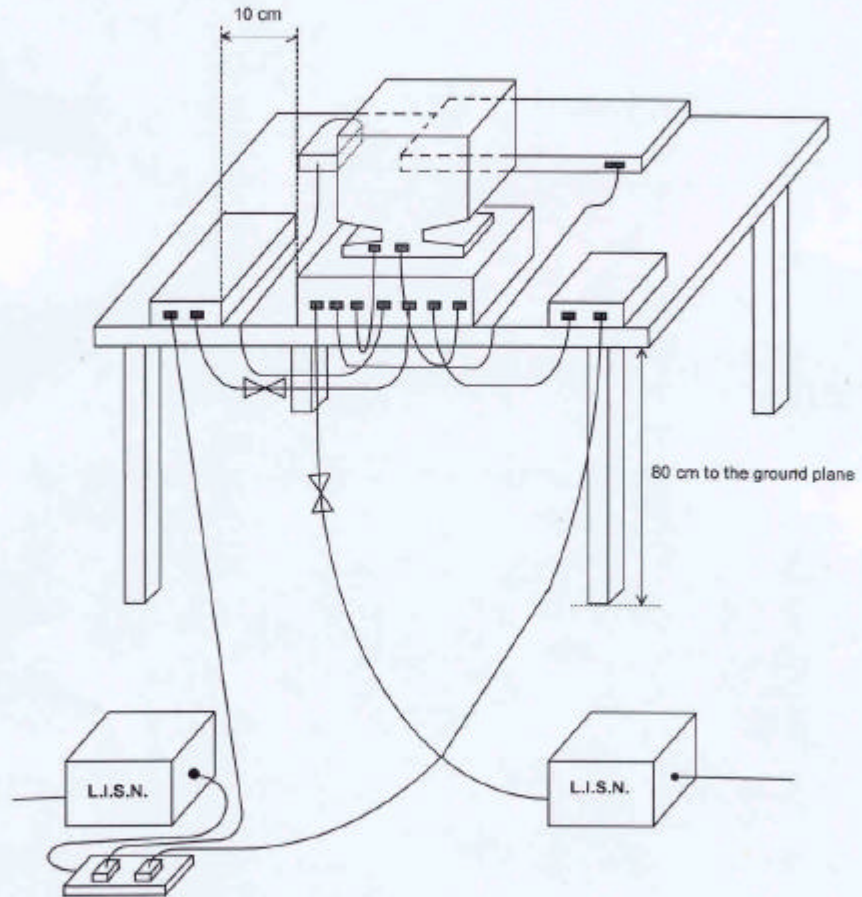

5.4. Test Result of AC Powerline Conducted Emission

- Frequency Range of Test : from 0.15 MHz to 30 MHz
- Temperature : 21°C
- Relative Humidity : 57 %
- Test Date : Dec. 26, 2000

The Conducted Emission test was passed at minimum margin

NEUTRAL 1.001 MHz / 38.30 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
1.001	L	39.00	38.00	89.13	79.43	73.00	60.00	4466.84	1000.00	-34.0	-22.0
13.937	L	37.60	32.90	75.86	44.16	73.00	60.00	4466.84	1000.00	-35.4	-27.1
0.178	N	47.20	39.20	229.09	91.20	79.00	66.00	8912.51	1995.26	-31.8	-26.8
1.001	N	39.20	38.30	91.20	82.22	73.00	60.00	4466.84	1000.00	-33.8	-21.7
13.255	N	37.80	34.30	77.62	51.88	73.00	60.00	4466.84	1000.00	-35.2	-25.7
20.015	N	41.10	34.20	113.50	51.29	73.00	60.00	4466.84	1000.00	-31.9	-25.8

Test Engineer : Benson
 BENSON TSAI

5.5. Photographs of Conducted Powerline Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW



SIDE VIEW



6. Test of Radiated Emission

Radiated emissions from 30 MHz to 2000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. Major Measuring Instruments

6.1.1. from 30MHz to 1GHz

- Amplifier (HP 8447D)
 - Attenuation 0 dB
 - RF Gain 25 dB
 - Signal Input 0.1 MHz to 1.3 GHz

- Spectrum Analyzer (ADVANTEST R3261C)
 - Attenuation 0 dB
 - Start Frequency 30 MHz
 - Stop Frequency 1000 MHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 9 KHz to 2.6 GHz


6.1.2. from 1GHz to 2GHz

- Receiver (HP 8546A)
 - Attenuation 0 dB
 - Start Frequency 1000 MHz
 - Stop Frequency 2000 MHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 9 KHz to 6.5 GHz

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3/10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. Typical Test Setup Layout of Radiated Emission

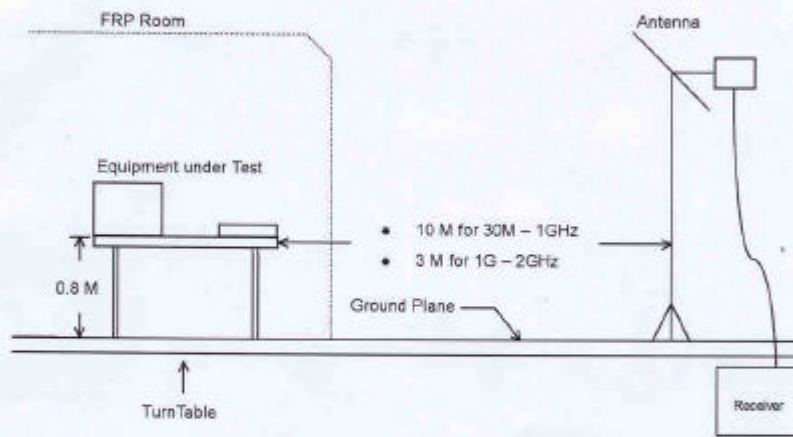

6.4. Test Result of Radiated Emission

- Temperature : 23°C
- Relative Humidity : 58 %
- Test Date : Dec. 22, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

228.176 MHz / 37.83 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 0 °

- Test Distance : 10M for 30MHz ~ 1GHz

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
164.248	H	9.63	2.42	23.96	40.00	100.00	36.01	63.17	-3.99
168.132	H	9.52	2.44	25.44	40.00	100.00	37.40	74.13	-2.60
152.114	V	10.54	2.06	24.11	40.00	100.00	36.71	68.47	-3.29
168.125	V	9.52	2.44	25.49	40.00	100.00	37.45	74.56	-2.55
228.176	V	10.82	3.15	23.86	40.00	100.00	37.83	77.89	-2.17
518.400	V	18.53	5.31	19.86	47.00	223.87	43.70	153.11	-3.30

Test Distance : 3M for 1GHz ~ 2GHz

Remark: Frequency from 1000MHz to 2000MHz, the emission emitted by the EUT is too low to be measured

Test Engineer : Benson
BENSON TSAI

6.5. Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW



7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Remark
30	19.2	0.9	10m
35	13.4	0.9	10m
40	13.4	1.0	10m
45	11.5	1.2	10m
50	9.9	1.2	10m
55	7.9	1.3	10m
60	6.0	1.3	10m
65	6.4	1.4	10m
70	6.8	1.6	10m
75	7.1	1.6	10m
80	7.3	1.6	10m
85	8.2	1.7	10m
90	9.2	1.7	10m
95	10.1	1.8	10m
100	11.0	1.9	10m
110	11.4	2.1	10m
120	11.8	2.1	10m
130	11.3	2.2	10m
140	10.8	2.3	10m
150	10.7	2.0	10m
160	9.7	2.4	10m
170	9.4	2.5	10m
180	9.5	2.6	10m
190	9.4	2.7	10m
200	9.3	2.8	10m
220	10.4	3.1	10m
240	11.4	3.3	10m
260	12.2	3.2	10m
280	12.5	3.3	10m
300	12.9	3.5	10m
320	13.3	3.7	10m
340	13.7	4.1	10m
360	14.5	4.3	10m
380	15.5	4.3	10m
400	16.5	4.4	10m
450	16.5	4.7	10m
500	18.3	5.1	10m
550	18.9	5.6	10m
600	20.1	5.7	10m
650	18.1	6.2	10m
700	17.2	6.5	10m
750	17.9	7.0	10m
800	18.0	7.4	10m
850	17.7	7.0	10m
900	21.0	7.0	10m
950	21.0	7.1	10m
1000	20.3	7.3	10m
1000	24.3	4.1	3m
2000	28.1	5.8	3m

NHOP3

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : N/A

Page No. : 22 of 23

Issued Date : Jan. 6, 2001

8. List of Measuring Equipment Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	HP	8591EM	3536A00673	9 KHz - 1.8 GHz	Sep. 04, 2000	Conduction
LISN	EMCO	3810/2	9703-1838	50uH / 50 ohm	Sep. 01, 2000	Conduction
LISN	KYORITSU	KNW-407	8-1010-15	50uH / 50 ohm	Nov. 13, 2000	Conduction
Power Filter	CORCOM	MR12030	N/A	30A*2	N/A	Conduction
Spectrum Analyzer (Site 3)	Advantest	R3261C	71720471	9KHz - 2.8GHz	Jan. 06, 2000	Radiation
Amplifier (Site 3)	HP	8447D	2944A06292	0.1MHz-1.3GHz	Feb. 19, 2000	Radiation
Bilog Antenna (Site 3)	CHASE	CBL6112A	2218	30MHz - 2GHz	Jan. 29, 2000	Radiation
Half-wave dipole antenna (Site 3)	EMCO	3121C	8912-1285	20MHz - 1GHz	Aug. 06, 2000	Radiation
Turn Table	EMCO	2080	9508-1805	0 - 360 degree	N/A	Radiation
Antenna Mast	EMCO	2075	9804-2151	1 m - 4 m	N/A	Radiation
Receiver	HP	8546A	3325A00108	9KHz-6.5GHz	Dec.15, 2000	Radiation
Horn Antenna	EMCO	3115	4976	1GHz-18GHz	Jun. 21, 2000	Radiation

※ Calibration interval of instruments listed above is one year.

APPENDIX A. Photographs of EUT



0D2208-01.jpg




0D2208-02.jpg



0D2208-03.jpg




0D2208-04.jpg

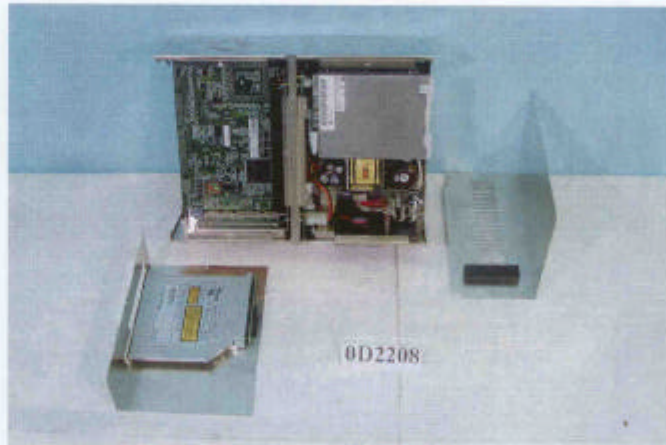

0D2208-05.jpg



0D2208-06.jpg

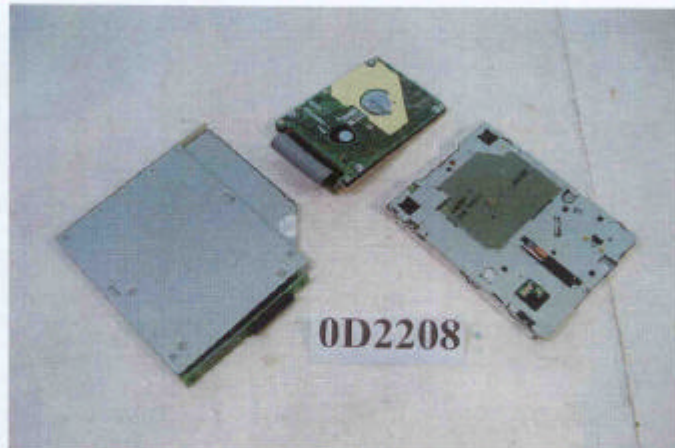


0D2208-07.jpg



0D2208-08.jpg




0D2208-09.jpg

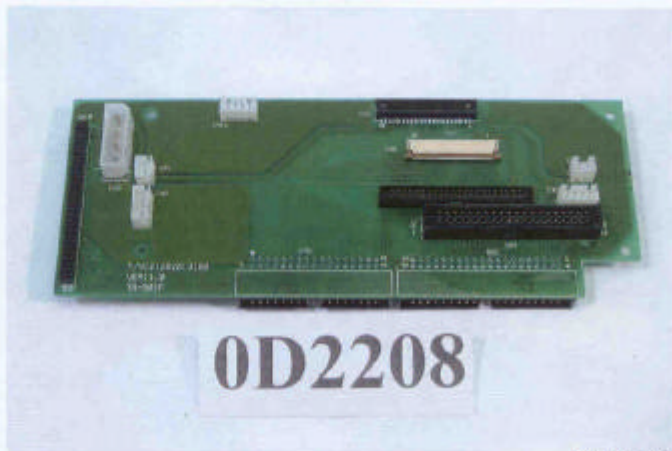

0D2208-10.jpg



0D2208-11.jpg

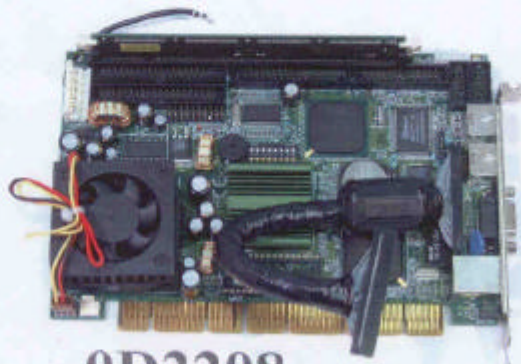

0D2208-12.jpg



0D2208-13.jpg




0D2208-14.jpg




0D2208-15.jpg



0D2208-16.jpg

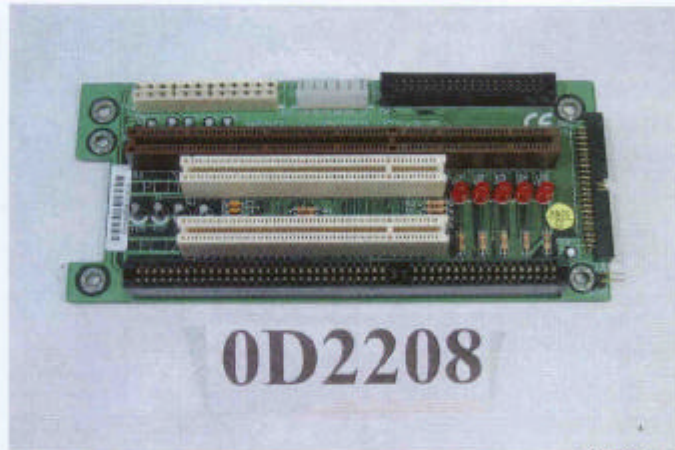


0D2208-17.jpg

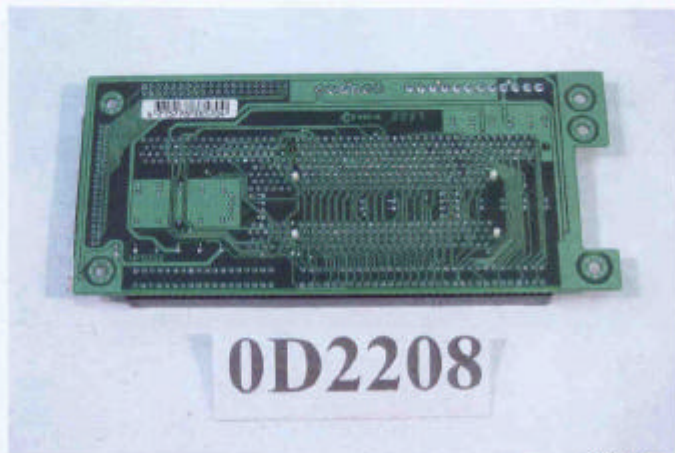


0D2208-18.jpg



0D2208-19.jpg

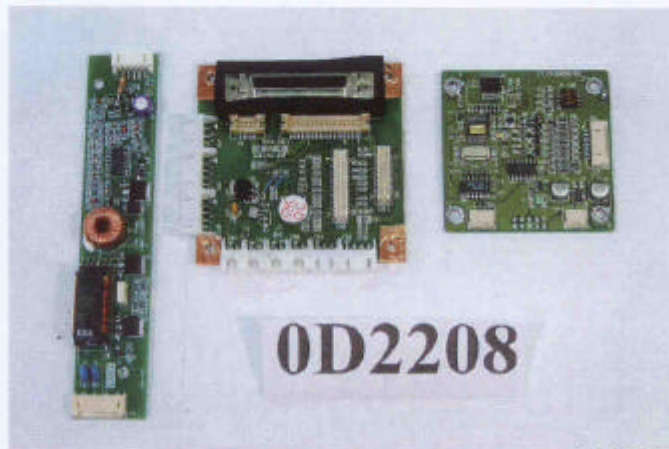

0D2208-20.jpg

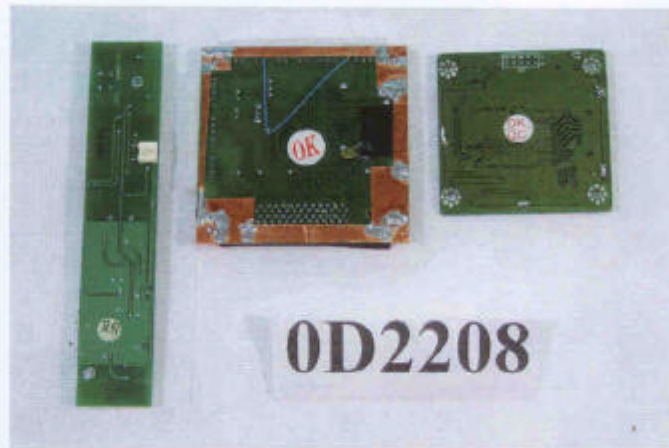

0D2208-21.jpg