



FCC 47 CFR PART 15 SUBPART B

TEST REPORT

For

5 Slot Wall Mount Chassis

Model: AMC-250

Trade Name: AAEON

Issued to

AAEON Technology Inc.

**5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C.**

Issued by



**Compliance Certification Services Inc.
Hsintien Lab.**

**No. 165, Chunghsen Road, Hsintien City
Taipei Hsien, Taiwan**

TEL: (02) 2217-0894

FAX: (02) 2217-1029



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	EUT DESCRIPTION	4
3	TEST METHODOLOGY	5
3.1	EUT SYSTEM OPERATION	5
3.2	DECISION OF FINAL TEST MODE	5
4	SETUP OF EQUIPMENT UNDER TEST	6
5	FACILITIES AND ACCREDITATIONS	7
5.1	FACILITIES	7
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	7
6	INSTRUMENT AND CALIBRATION	8
6.1	MEASURING INSTRUMENT CALIBRATION	8
6.2	TEST AND MEASUREMENT EQUIPMENT	8
7	LINE CONDUCTED & RADIATED EMISSION TEST	9
7.1	LIMIT	9
7.2	TEST PROCEDURE OF LINE CONDUCTED EMISSION	10
7.3	TEST PROCEDURE OF RADIATED EMISSION	12
7.4	TEST RESULTS	14
	APPENDIX I - PHOTOGRAPHS OF TEST SETUP	16
	APPENDIX II - TEST RESULT OF FINAL DATAS	18



1 TEST RESULT CERTIFICATION

Applicant: **AAEON Technology Inc.**
5F, No.135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C.

Manufacturer: **AAEON Technology Inc.**
5F, No.135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C.

Equipment Under Test: 5 Slot Wall Mount Chassis

Trade Name: AAEON

Model: AMC-250

Detailed EUT Description: See Item 2 of this report

Date of Test: May 20, 2005 ~ May 23, 2005

Applicable Standard	Class / Limit	Test Result
FCC Part 15 Subpart B	Class B	No non-compliance noted
Deviation from Applicable Standard		
None		

The above equipment was tested by Compliance Certification Services Inc. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, Subpart B and the measurement procedures were according to ANSI C63.4. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

Approved by:

Reviewed by:

David Wang
Manager of Hsintien Laboratory
Compliance Certification Services Inc.

Vince Chiang
Assistant Manager of Hsintien Laboratory
Compliance Certification Services Inc.



2 EUT DESCRIPTION

Product	5 Slot Wall Mount Chassis
Trade Name	AAEON
Model	AMC-250
Housing Type	Metal case
EUT Power Rating	115VAC~230VAC
AC Power During Test	120VAC / 60 Hz to Host PC Power Supply
Power Supply Manufacturer	ENHANCE
Power Supply Model Number	ENP-1815X
AC Power Cord Type	Unshielded, 1.8m (Detachable)
OSC/Clock Frequencies	12MHz; 25MHz; 14.31818MHz; 32.768KHz

I/O PORT OF EUT

I/O PORT TYPE	Q'TY	TESTED WITH
1). PIO Port	1	1
2). SIO Port	2	2
3). PS/2 one to two adaptor	1	1
4). VIDEO-OUT Port (VGA)	1	1
5). LAN Port	1	1
6). USB 2.0 Port	5	5

Note: Client consigns only one model sample (Model Number is AMC-250) to test.



3 TEST METHODOLOGY

3.1 EUT SYSTEM OPERATION

1. Windows XP boots system.
2. Run Emctest.exe To Activate All Peripherals And Display “H” Pattern On Monitor Screen.
3. Run Winemc.exe and choose “C:/ & E:/ & F:/ & G:/ & H:/ & I:/” to test EUT.
4. Press the start menu, select executive and type ping 192.168.0.2 -t(EUT), ping 192.168.0.1 -t(Server Notebook).

Note: Test program is self-repeating throughout the test.

3.2 DECISION OF FINAL TEST MODE

1. The following test mode(s) were scanned during the preliminary test:

Conduction(s):

1.	1024X768, VF=60Hz
2.	800X600, VF=60Hz

Radiation(s):

1.	1024X768, VF=60Hz
	1-5GHz
2.	800X600, VF=60Hz

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

Conduction: Mode 1

Radiation: Mode 1

Then, the EUT configuration and cable configuration of the above highest emission mode was recorded for all final test items.



4 SETUP OF EQUIPMENT UNDER TEST

Setup Diagram

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

Support Equipment

EUT Devices:

No	Equipment	Model #	Serial #	FCC/BSMI ID	Trade Name
1	CPU (600MHz)	Celeron	N/A	N/A	INTEL
2	POWER	ENP-1815X	N/A	N/A	ENHANCE
3	RAM (256MB)	HY5DU56822BT-D43	N/A	N/A	Hynix
4	FLOPPY DISK	FD1231H	N/A	N/A	NEC
5	HDD	ST34310A	N/A	N/A	Seagate
6	Mother Board	AMC-250	N/A	N/A	AAEON

Peripherals Devices:

No	Equipment	Model	Serial No.	FCC/BSMI ID	Trade Name	Data Cable	Power Cord
1	PS/2 Mouse	M071KC	443029438	DOC BSMI: R41108	DELL	Shielded, 1.8m	N/A
2	PS/2 Keyboard	SK-8110	N/A	DOC BSMI: T3A002	DELL	Shielded, 1.8m	N/A
3	Printer	C20SX	N/A	BSMI ID: 3902E004	EPSON	Shielded, 1.8m	Unshielded, 1.8m
4	Modem	5JEG4033MKO	N/A	5RJTAI-35500-M5-E	TOP- SOLUTION	Shielded, 1.8m	Unshielded, 1.8m
5	Monitor	710V	GS17H9NXA058 58E	DOC BSMI: R33475	SAMSUNG	Shielded, 1.8m with two cores	Unshielded, 1.8m
6	Modem	5JEG4033MKO	N/A	5RJTAI-35500-M5-E	TOP- SOLUTION	Shielded, 1.8m	Unshielded, 1.8m
7	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
8	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
9	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
10	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
11	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
12	Server Notebook	M285	RD49R-7YTJR- B3C4K-G2JQX- DD3CG	DoC BSMI: R31259	LEO	Unshielded, 20m	Unshielded, 1.8m with a core

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

Grounding: Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.

5 FACILITIES AND ACCREDITATIONS








5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at CCS Taiwan Hsintien Lab at No. 165, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan.

The measurement facilities are constructed in conformance with the requirements of CISPR 16-1, ANSI C63.4 and other equivalent standards.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

The test facilities used to perform Electromagnetic compatibility tests are registered or accredited by the organizations listed in the following table which includes the recognized scope specifically.

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	CFR 47, FCC Part 15/18 using ANSI 63.4; AS/NZS 3548; VCCI V3; CNS 13438; CNS 13439; CNS 13783; CNS 14115; CISPR 11/EN 55011; CISPR 14-1/EN 55014-1; CISPR 15/EN 55015; CISPR 22/EN 55022; EN 50081-1/EN 61000-6-3; EN 50082-1/EN 61000-6-4; IEC/EN 61000-4-2, IEC/EN 61000-4-3, IEC/EN 61000-4-4, IEC/EN 61000-4-5, IEC/EN 61000-4-6, IEC/EN 61000-4-8, IEC/EN 61000-4-11, IEC/EN 61000-3-2, IEC/EN 61000-3-3; CISPR 24/EN 55024; CISPR 14-2/EN 55014-2; EN 50081-2/EN 61000-6-1; EN 50082-2/EN 61000-6-2.	 824.01
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 250366
Japan	VCCI	3/10 meter Open Area Test Sites and Line Conducted Test Room to perform conducted/radiated measurements	 R-1434/1630~4 C-1511/1882
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2/3/4, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, Cisprr 16-1/2/3/4	 ELA 103
Taiwan	CNLA	47 CFR FCC Part 15 Subpart B, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 13438, AS/NZS 3548, VCCI, CNS 13022-1/2/3, EN 55022, EN 55013, EN 55014-1, EN 61000-4-2/3/4/5/6/8/11, ENV 50204, ENV 50141, ENV 50142	 1108 ILAC MRA
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439	 SL2-IN-E-0005 SL2-A1-E-0005 SL2-R1-E-0005 SL2-R2-E-0005
Canada	Industry Canada	RSS212, Issue 1	 IC 5742

Note: No part of this report may be used to claim or imply product endorsement by CNLA, A2LA or other government agency.



6 INSTRUMENT AND CALIBRATION

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 TEST AND MEASUREMENT EQUIPMENT

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and other equivalent standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective manual.

Equipment Used for Emission Measurement

Open Area Test Site # I				
EQUIPMENT	MFR	MODEL	SERIAL NUMBER	CAL. DUE
SITE NSA	CCS	I Site	N/A	09/17/2005
MEASURE RECEIVER	SCHAFFNER	SCR3501	338	07/05/2005
SPECTRUM ANALYZER	ADVANTEST	R3132	120900008	No Calibration Required
ANTENNA	SCHAFFNER	CBL 6112B	2809	09/24/2005
AMPLIFIER	SCHAFFNER	CPA9231A	3626	10/08/2005
CABLE	BELDEN	9913	N-TYPE #12	02/18/2006
ATTENUATOR	MCL	UNAT-6	AT06-3	10/08/2005
THERMO-HYGRO METER	TFA	N/A	NO.2	11/09/2005
Above 1GHz Used				
EMC ANALYZER (100Hz-22GHz)	HP	8566B	2937A06102	07/26/2005
ANTENNA (1-18GHz)	EMCO	3115	5761	01/17/2006
AMPLIFIER (1-18GHz)	HP	8449B	3008A01266	02/16/2006
CABLE (1-18GHz)	JYEBAO	LL142	SMA#RS1&2	02/16/2006
CABLE (1-18GHz)	JYEBAO	LL142	SMA#C1	04/28/2006

Note: The measurement uncertainty is less than +/- 3.36dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



Conducted Emission Test Site # A				
EQUIPMENT	MFR	MODEL	SERIAL NUMBER	CAL. DUE
TEST RECEIVER	R&S	ESHS20	840455/006	02/17/2006
LISN (EUT)	SCHWARZBECK	NSLK 8127	8127382	01/03/2006
LISN	SOLAR	8012-50-R-24-BNC	8305114	01/03/2006
BNC CABLE	MIYAZAKI	5D-FB	BNC A1	01/28/2006
THERMO-HYGRO METER	TOP	HA-202	9303-1	03/02/2006

Note: The measurement uncertainty is less than +/- 2.83dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

7 LINE CONDUCTED & RADIATED EMISSION TEST

7.1 LIMIT

Maximum permissible level of Line Conducted Emission

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: The lower limit shall apply at the transition frequency.

Maximum permissible level of Radiated Emission measured at 10 meter

FREQUENCY (MHz)	Class A (dBuV/m)	Class B (dBuV/m)
	Quasi-peak	Quasi-peak
30 - 230	40	30
230 - 1000	47	37

Note: The lower limit shall apply at the transition frequency.

Maximum permissible level of Radiated Emission measured at 3 meter

FREQUENCY (MHz)	Class A (dBuV/m)		Class B (dBuV/m)	
	Average	Peak	Average	Peak
Above 1000	59.3	79.3	53.9	73.9

Note: The lower limit shall apply at the transition frequency.



7.2 TEST PROCEDURE OF LINE CONDUCTED EMISSION

Procedure of Preliminary Test

- The EUT was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per ANSI C63.4.
- All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- The test system with EUT received AC power, 120V/60Hz, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane.
- All support equipment received power from a second LISN.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a EMI Test Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to the Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Receiver.
- The Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- During the above scans, the emissions were maximized by cable manipulation.
- The test mode(s) described in Item 3.2 were scanned during the preliminary test.
- After the preliminary scan, we found the test mode described in Item 3.2 producing the highest emission level.
- The EUT configuration and cable configuration of the above highest emission level were recorded for reference of the final test.



Procedure of Final Test

- EUT and support equipment were set up on the test bench as per step 10 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the AV. limit in Q.P. mode, then the emission signal was re-checked using an AV. detector.
- The test data of the worst-case condition(s) was recorded.

Data Sample:

Freq. MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dB	Reading Type (P/Q/A)	Line (L1/L2)
x.xx	42.95	0.55	43.50	56	-12.50	Q	L1

- Freq. = Emission frequency in MHz
 Read Level = Uncorrected Analyzer/Receiver reading
 Factor = Insertion loss of LISN + Cable Loss
 Level = Read Level + Factor
 Limit = Limit stated in standard
 Over Limit = Reading in reference to limit
 P = Peak Reading
 Q = Quasi-peak Reading
 A = Average Reading
 L1 = Hot side
 L2 = Neutral side

Calculation Formula

Over Limit (dB) = Level (dBuV) – Limit (dBuV)



7.3 TEST PROCEDURE OF RADIATED EMISSION

Procedure of Preliminary Test

- The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per ANSI C63.4.
- All I/O cables were positioned to simulate typical usage as per ANSI C63.4.
- The EUT received AC power source, 120V/60Hz, from the outlet socket under the turntable. All support equipment received power from another socket under the turntable.
- The antenna was placed at 10 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.
- The Analyzer / Receiver quickly scanned from 30MHz to 5000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- The test mode(s) described in Item 3.2 were scanned during the preliminary test:
- After the preliminary scan, we found the test mode described in Item 3.2 producing the highest emission level.
- The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

**Procedure of Final Test**

- EUT and support equipment were set up on the turntable as per step 8 of the preliminary test.
- The Analyzer / Receiver scanned from 30MHz to 5000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.
- The test data of the worst case condition(s) was recorded.

Data Sample:

Freq. MHz	Amptd dBuV/m	Margin dB	Limit dBuV/m	Reading dBuV	Factor dB/m	Reading Type (P/Q/A)	Pol. (H/V)
x.xx	26.2	-3.8	30	14	12.2	Q	H

- Freq. = Emission frequency in MHz
 Reading = Uncorrected Analyzer/Receiver reading
 Factor = Antenna Factor + Cable Loss + Attenuator (3/6/10dB) – Amplifier Gain
 Amptd = Uncorrected Analyzer/Receiver reading + Factor
 Limit = Limit stated in standard
 Margin = Reading in reference to limit
 P = Peak Reading
 Q = Quasi-peak Reading
 A = Average Reading
 H = Antenna Polarization: Horizontal
 V = Antenna Polarization: Vertical

Calculation Formula

$$\text{Margin (dB)} = \text{Amptd (dBuV/m)} - \text{Limit (dBuV/m)}$$



7.4 TEST RESULTS

Line Conducted Emission

Model: AMC-250

Test Mode: Mode 1

Temperature: 24 °C

Humidity: 50% RH

Test Results: Passed

Tested by: Elvis Zeng

(The chart below shows the highest readings taken from the final data, see **Appendix II** for details.)

Six Highest Conducted Emission Readings							
Frequency Range Investigated				150 kHz to 30 MHz			
Freq (MHz)	Read Level (dBuV)	Factor (dB)	Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Reading Type (P/Q/A)	Line (L1/L2)
0.151	54.85	0.14	54.99	65.96	-10.97	P	L1
0.191	45.09	0.14	45.23	63.98	-18.75	P	L1
12.188	40.01	0.95	40.97	60.00	-19.03	P	L1
13.408	41.01	1.03	42.04	60.00	-17.96	P	L1
0.150	55.15	0.13	55.28	66.00	-10.72	P	L2
0.185	45.43	0.13	45.56	64.24	-18.68	P	L2

NOTE: The emission level was or more than 2dB below the Average limit, so no re-check anymore.

**Radiated Emission****Model:** AMC-250**Test Mode:** Mode 1**Temperature:** 28 °C**Humidity:** 40% RH**Test Results:** Passed**Tested by:** Elvis Zeng(The chart below shows the highest readings taken from the final data, see **Appendix II** for details.)

Six Highest Radiated Emission Readings							
Frequency Range Investigated				30 MHz to 1000 MHz at 10m			
Freq (MHz)	Amptd (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Reading (dBuV)	Factor (dB/m)	Reading Type (P/Q/A)	Pol. (H/V)
166.4500	26.44	-3.56	30.00	37.80	-11.36	Q	V
249.8000	33.90	-3.10	37.00	41.80	-7.90	Q	V
299.3900	33.63	-3.37	37.00	40.36	-6.73	P	V
299.5500	33.99	-3.01	37.00	40.72	-6.73	P	H
399.5330	33.71	-3.29	37.00	37.30	-3.59	Q	H
480.0500	33.37	-3.63	37.00	34.92	-1.55	P	H

NOTE: None.




APPENDIX I - PHOTOGRAPHS OF TEST SETUP

LINE CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

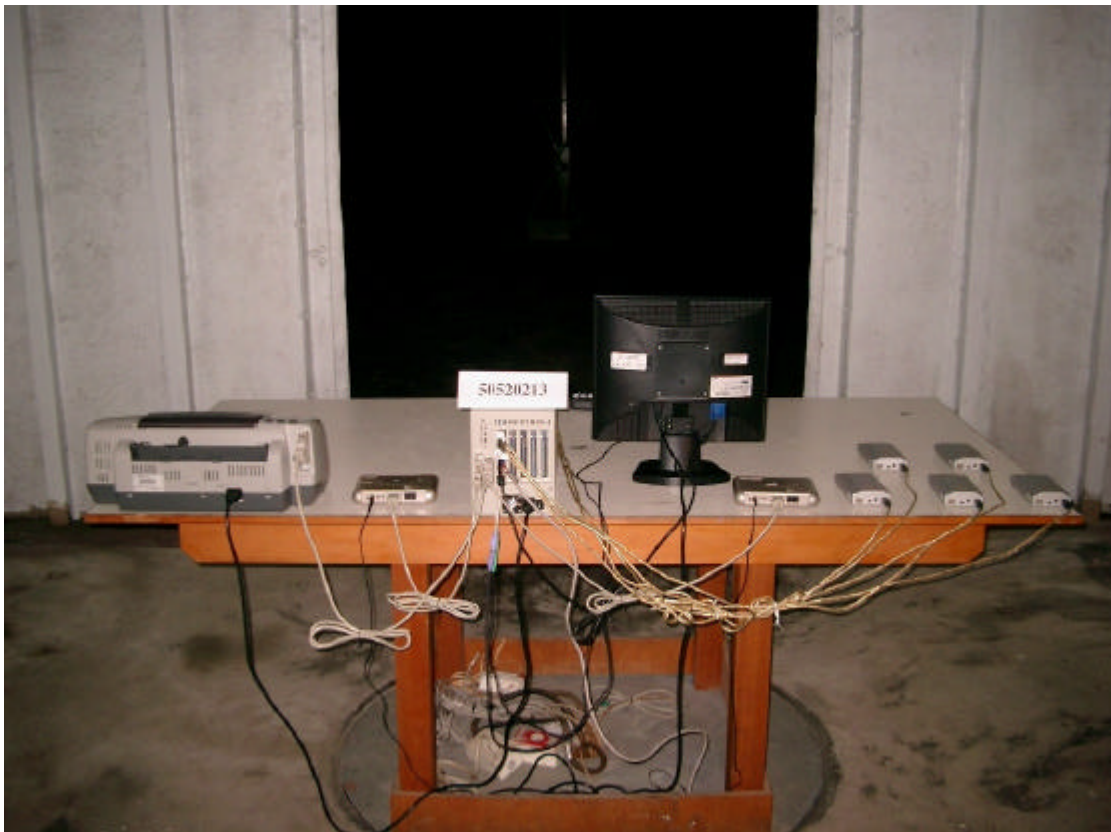




APPENDIX II - TEST RESULT OF FINAL DATAS

Conducted Emission Plot

Radiated Emission Data

Data#: 5 File#: 50520213CA.EMI

Date: 2005-05-21 Time: 15:24:30

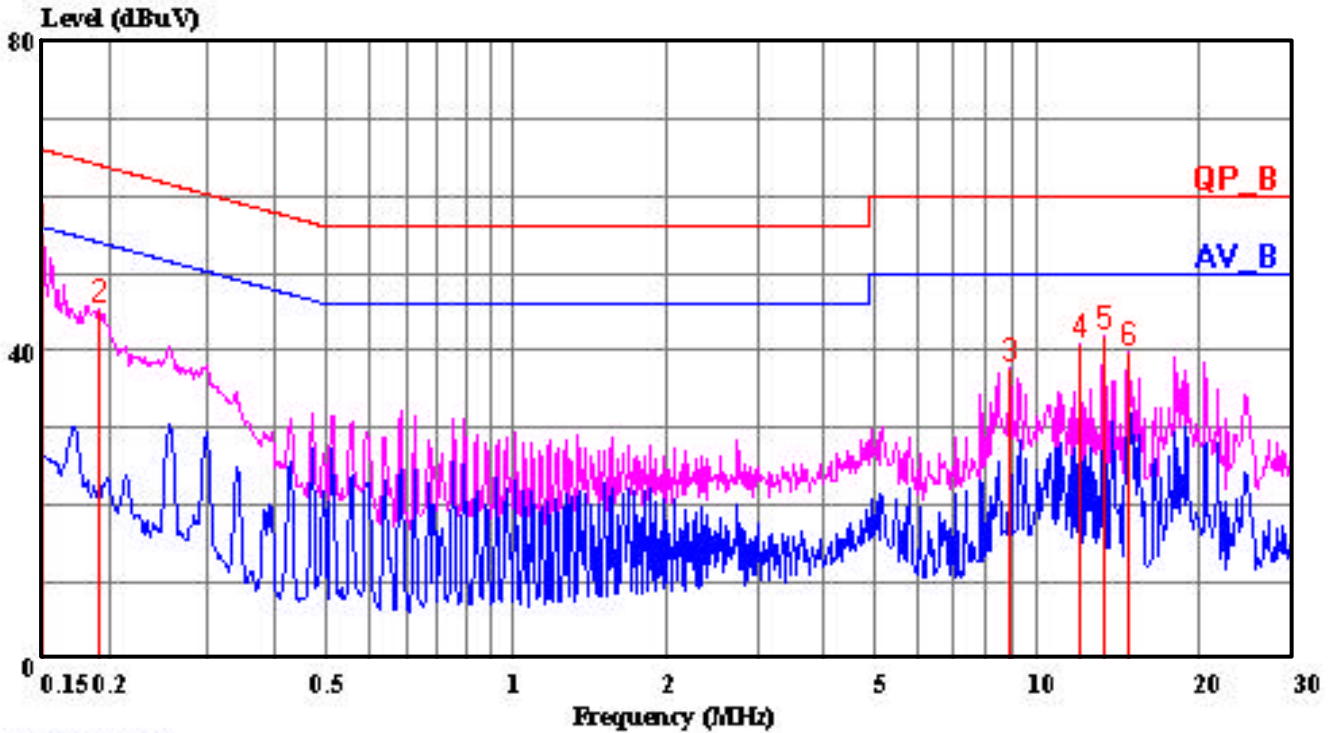

(Conduction A)

Trace: 2 1

Ref Trace:


Condition: LINE
Report No. : 50520213
Test Engr. : ELVIS ZENG
Company : AAEON Technology Inc.
EUT : AMC-250
Test Config : EUT / ALL PERIPHERALS
Type of Test: FCC CLASS B
Mode of Op. : 1024X768, VF=60Hz (Worst)

Page: 1

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.151	54.85	0.14	54.99	65.96	-10.97	Peak
2	0.191	45.09	0.14	45.23	63.98	-18.75	Peak
3	9.059	37.05	0.73	37.78	60.00	-22.22	Peak
4	12.188	40.01	0.95	40.97	60.00	-19.03	Peak
5	13.408	41.01	1.03	42.04	60.00	-17.96	Peak
6	14.986	38.79	1.13	39.92	60.00	-20.08	Peak

Data#: 8 File#: 50520213CA.EMI

Date: 2005-05-21 Time: 15:29:54

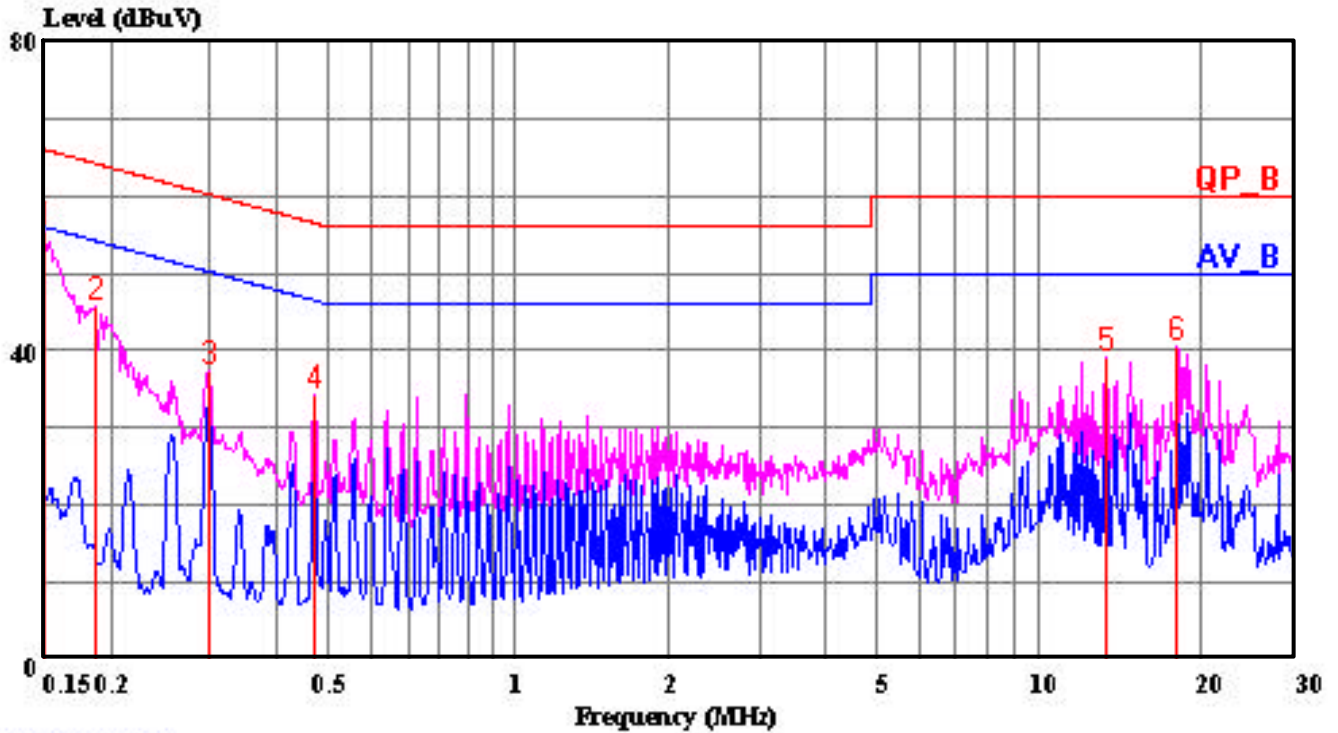

(Conduction A)

Trace: 7 6

Ref Trace:

Condition: NEUTRAL
Report No. : 50520213
Test Engr. : ELVIS ZENG
Company : AAEON Technology Inc.
EUT : AMC-250
Test Config : EUT / ALL PERIPHERALS
Type of Test: FCC CLASS B
Mode of Op. : 1024X768, VF=60Hz (Worst)



Page: 1

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	55.15	0.13	55.28	66.00	-10.72	Peak
2	0.185	45.43	0.13	45.56	64.24	-18.68	Peak
3	0.300	37.33	0.15	37.48	60.24	-22.76	Peak
4	0.471	34.15	0.20	34.35	56.49	-22.14	Peak
5	13.408	38.10	1.18	39.28	60.00	-20.72	Peak
6	18.135	38.88	1.55	40.43	60.00	-19.57	Peak

Custom Name: AAEON Technology Inc.
 Model Name: AMC-250
 Test Mode: 1024X768, VF=60Hz (Worst)

Project No.: 50520213
 Engineer Name: Elvis Zeng
 Date: 2005-05-20

Index:

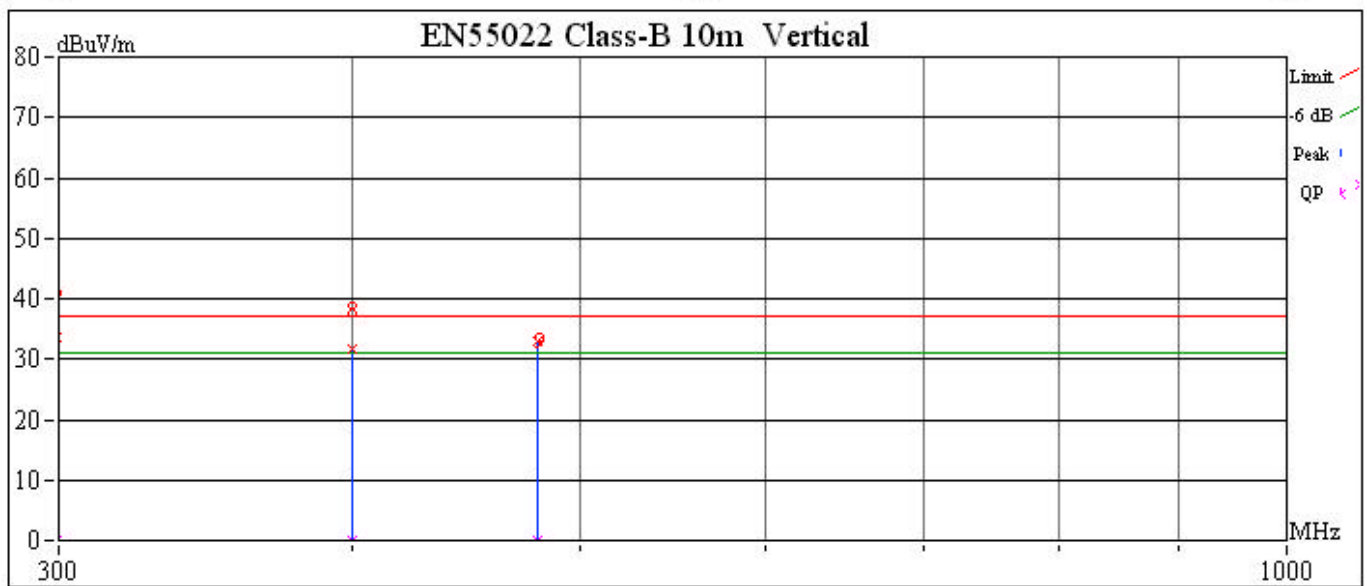
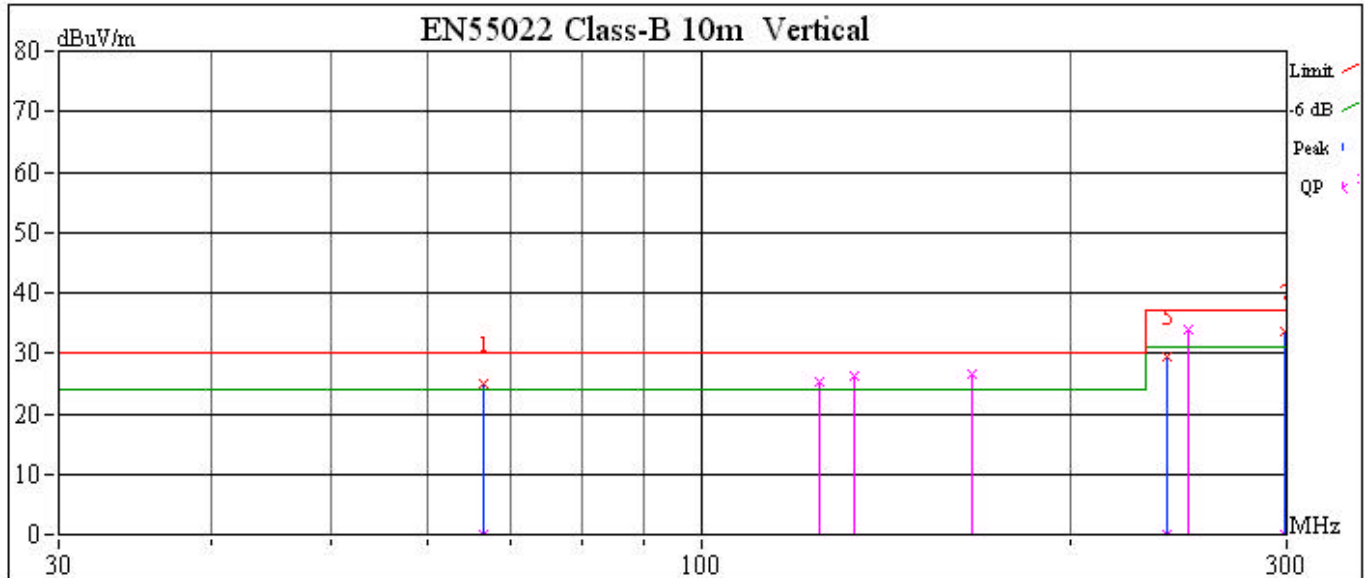


	Freq(MHz)	Peak(dBuV/m)	QP(dBuV/m)	Margin(dB)	Limit(dBuV/m)	Reading(dBuV)	Factor(dB)	Height	Degree	Comment
1	66.5500	24.86		-5.14	30.00	41.26	-16.40	100	0	
2	125.1000	-9.74	25.36	-4.64	30.00	35.10	-9.74	100	0	
3	133.1500	-9.99	26.31	-3.69	30.00	36.30	-9.99	100	0	
4	166.4500	-11.36	26.44	-3.56	30.00	37.80	-11.36	100	0	
5	239.9900	29.29		-7.71	37.00	37.94	-8.65	100	0	
6	249.8000	-7.90	33.90	-3.10	37.00	41.80	-7.90	100	0	
7	299.3900	33.63		-3.37	37.00	40.36	-6.73	100	0	
8	400.0500	31.82		-5.18	37.00	35.40	-3.58	100	0	
9	480.0500	32.93		-4.07	37.00	34.48	-1.55	100	0	

Custom Name: AAEON Technology Inc.
 Model Name: AMC-250
 Test Mode: 1024X768, VF=60Hz (Worst)

Project No.: 50520213
 Engineer Name: Elvis Zeng
 Date: 2005-05-20


Index:

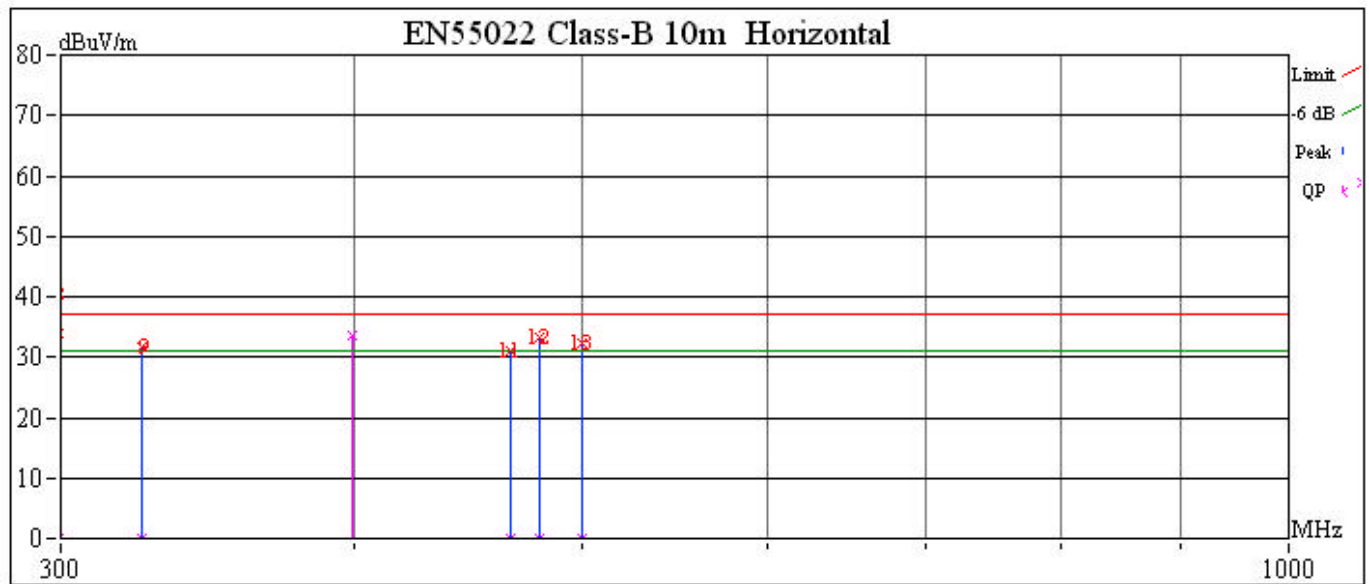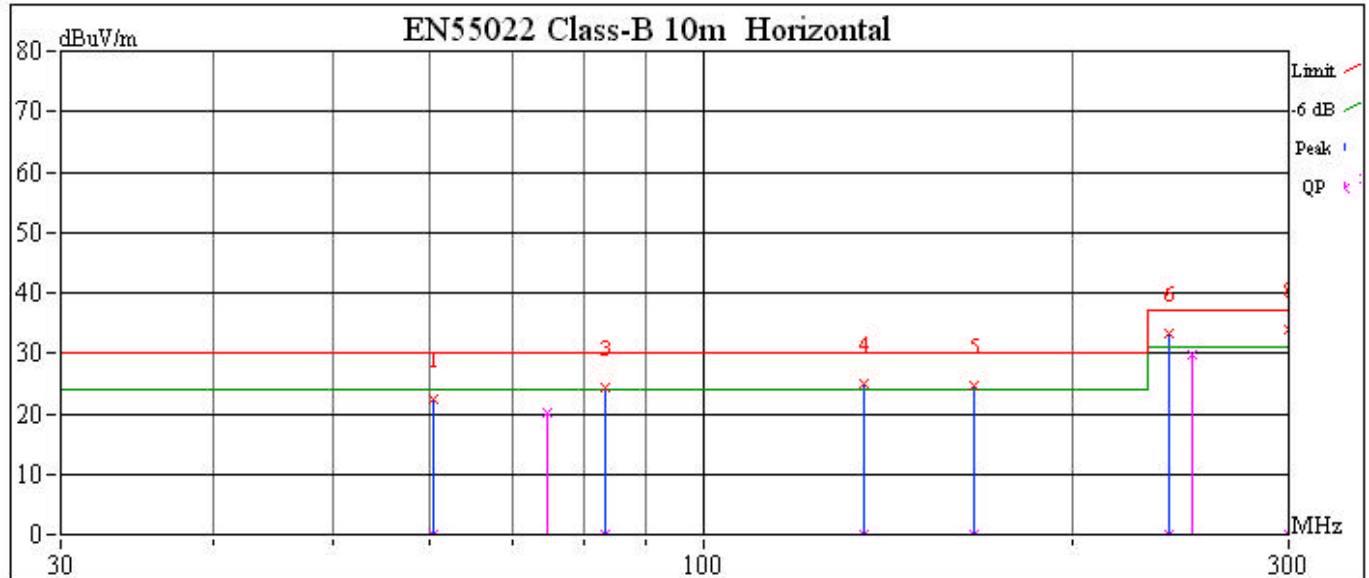

	Freq(MHz)	Peak(dBuV/m)	QP(dBuV/m)	Margin(dB)	Limit(dBuV/m)	Reading(dBuV)	Factor(dB)	Height	Degree	Comment
1	60.3500	22.36		-7.64	30.00	39.05	-16.69	100	0	
2	74.7060	-15.51	20.29	-9.71	30.00	35.80	-15.51	100	0	
3	83.3000	24.48		-5.52	30.00	38.48	-14.00	100	0	
4	135.1900	25.00		-5.00	30.00	35.05	-10.05	100	0	
5	166.4800	24.54		-5.46	30.00	35.91	-11.37	100	0	
6	240.0020	33.14		-3.86	37.00	41.79	-8.65	100	0	
7	250.0020	-7.88	29.72	-7.28	37.00	37.60	-7.88	100	0	
8	299.5500	33.99		-3.01	37.00	40.72	-6.73	100	0	
9	325.0500	31.77		-5.23	37.00	37.66	-5.89	100	0	
10	399.5330	-3.59	33.71	-3.29	37.00	37.30	-3.59	100	0	
11	466.1500	31.03		-5.97	37.00	32.88	-1.85	100	0	
12	480.0500	33.37		-3.63	37.00	34.92	-1.55	100	0	
13	500.0500	32.27		-4.73	37.00	33.40	-1.13	100	0	

Data#: 11 File#: 50520213BC.EMI

Date: 2005-05-23 Time: 16:52:43

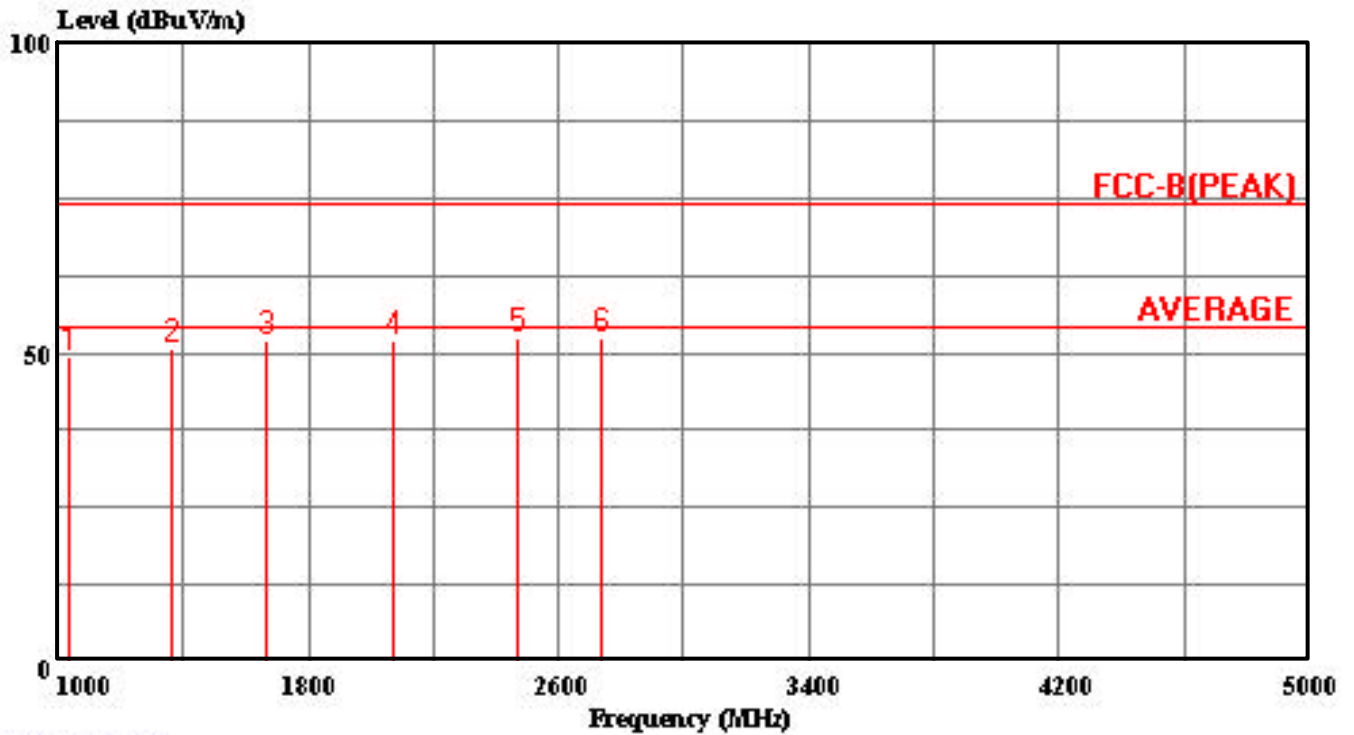

(Chamber C)

Trace:

Ref Trace:


Condition: VERTICAL / 3m
 Report No. : 50520213
 Test Engr. : ELVIS ZENG
 Company : AAEON Technology Inc.
 EUT : AMC-250
 Test Config : EUT / ALL PERIPHERALS
 Type of Test: FCC CLASS B
 Mode of Op. : 1024X768, VF=60Hz / 1-5GHz
 : All test data under the average limit

Page: 1

	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	1034.256	61.33	-11.80	49.53	74.00	-24.47 Peak
2	1366.514	60.88	-10.18	50.70	74.00	-23.30 Peak
3	1668.035	60.78	-8.71	52.07	74.00	-21.93 Peak
4	2067.336	58.98	-6.90	52.08	74.00	-21.92 Peak
5	2468.021	57.99	-5.76	52.23	74.00	-21.77 Peak
6	2735.868	57.22	-4.68	52.54	74.00	-21.46 Peak

Data#: 14 File#: 50520213BC.EMI

Date: 2005-05-23 Time: 16:55:59

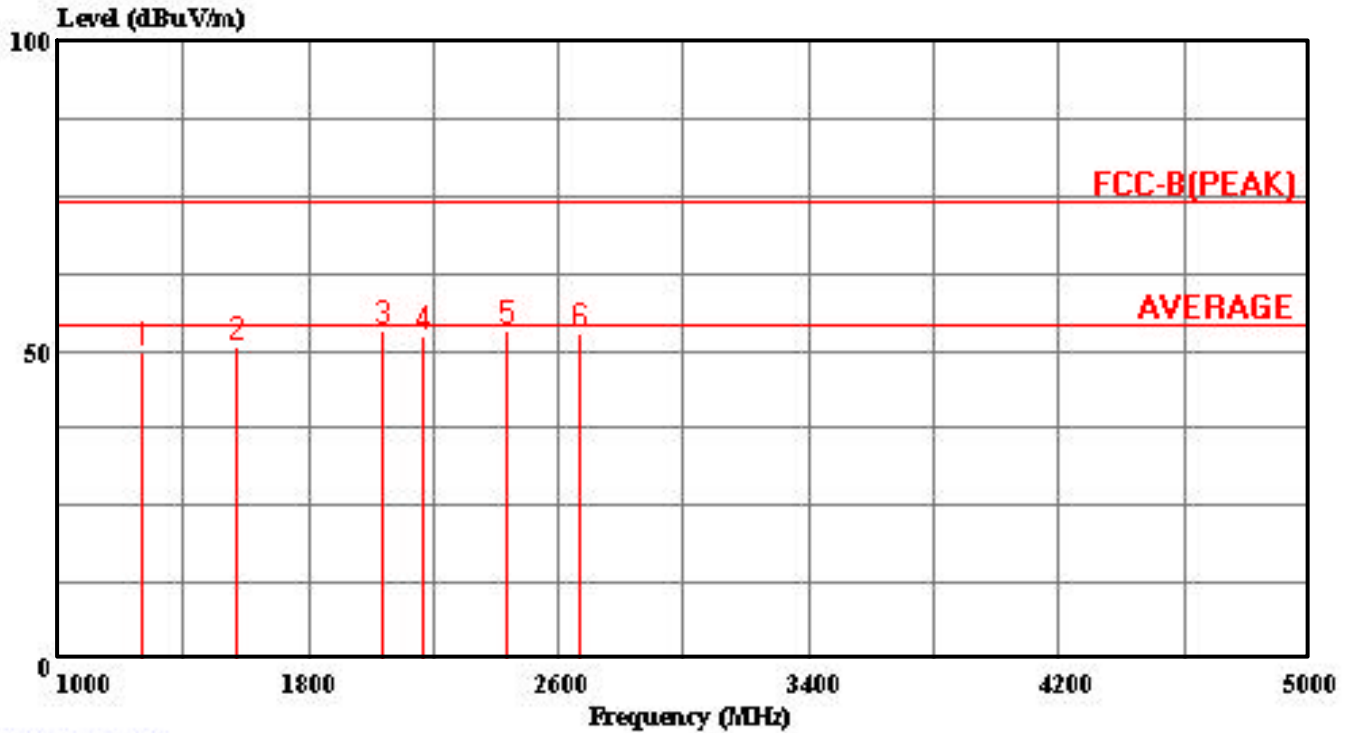

(Chamber C)

Trace:

Ref Trace:

Condition: HORIZONTAL / 3m
 Report No. : 50520213
 Test Engr. : ELVIS ZENG
 Company : AAEON Technology Inc.
 EUT : AMC-250
 Test Config : EUT / ALL PERIPHERALS
 Type of Test: FCC CLASS B
 Mode of Op. : 1024X768, VF=60Hz / 1-5GHz
 : All test data under the average limit

Page: 1

	Read	Limit	Over			
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	1268.347	60.39	-10.66	49.73	74.00	-24.27 Peak
2	1566.841	59.99	-9.21	50.78	74.00	-23.22 Peak
3	2036.574	60.33	-6.98	53.35	74.00	-20.65 Peak
4	2167.474	59.11	-6.61	52.50	74.00	-21.50 Peak
5	2435.332	59.01	-5.85	53.16	74.00	-20.84 Peak
6	2667.632	57.88	-4.96	52.92	74.00	-21.08 Peak