



FCC 47 CFR PART 15 SUBPART B

TEST REPORT

For

Micro ATX Board

Model: EMB-900M

Trade Name: AAEON

Issued to

AAEON Technology Inc.
5F, No.135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C.

Issued by

Compliance Certification Services Inc.
Hsintien Lab.

No. 165, Chungsen Road, Hsintien City
Taipei Hsien, Taiwan

TEL: (02) 2217-0894

FAX: (02) 2217-1029



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION.....	3
2 EUT DESCRIPTION.....	4
3 TEST METHODOLOGY	5
3.1 EUT SYSTEM OPERATION	5
3.2 DECISION OF FINAL TEST MODE.....	5
4 SETUP OF EQUIPMENT UNDER TEST	6
5 FACILITIES AND ACCREDITATIONS.....	8
5.1 FACILITIES.....	8
5.2 LABORATORY ACCREDITATIONS AND LISTINGS	8
6 INSTRUMENT AND CALIBRATION	9
6.1 MEASURING INSTRUMENT CALIBRATION	9
6.2 TEST AND MEASUREMENT EQUIPMENT	9
7 LINE CONDUCTED & RADIATED EMISSION TEST	10
7.1 LIMIT.....	10
7.2 TEST PROCEDURE OF LINE CONDUCTED EMISSION.....	11
7.3 TEST PROCEDURE OF RADIATED EMISSION.....	13
7.4 TEST RESULTS.....	15
APPENDIX I - PHOTOGRAPHS OF TEST SETUP.....	17
APPENDIX II - TEST RESULT OF FINAL DATAS.....	19



1 TEST RESULT CERTIFICATION

Applicant: **AAEON Technology Inc.**
5F, No.135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C.

Manufacturer: **AAEON Technology Inc.**
5F, No.135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C.

Equipment Under Test: Micro ATX Board

Trade Name: AAEON

Model: EMB-900M

Detailed EUT Description: See Item 2 of this report


Date of Test: August 17, 2005 & September 05

Applicable Standard	Class / Limit	Test Result
FCC Part 15 Subpart B, IC ICES-003	Class A	No non-compliance noted
Deviation from Applicable Standard		
None		

The above equipment was tested by Compliance Certification Services Inc. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, Subpart B and the measurement procedures were according to ANSI C63.4. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

Approved by:

Reviewed by:



David Wang
Manager of Hsintien Laboratory
Compliance Certification Services Inc.



Vince Chiang
Assistant Manager of Hsintien Laboratory
Compliance Certification Services Inc.



2 EUT DESCRIPTION

Product	Micro ATX Board
Trade Name	AAEON
Model	EMB-900M
Housing Type	N/A
Power Adaptor Power Rating	3.3VDC/ 5VDC/ \pm 12VDC from Host PC
AC Power During Test	120VAC / 60Hz to Host PC Power Supply
Power Supply Manufacturer	Seventeam
Power Supply Model Number	ST-300BLV
AC Power Cord Type	Unshielded, 1.8m (Detachable) to Host PC Power Supply
OSC/Clock Frequencies	32.768kHz; 14.31818MHz; 25MHz

I/O PORT OF EUT

I/O PORT TYPE	Q'TY	TESTED WITH
1). PIO Port	1	1
2). PS/2 Keyboard Port	1	1
3). PS/2 Mouse Port	1	1
4). Video-Out Port (DVI)	1	1
5). Audio In Port	1	1
6). Microphone Port	1	1
7). Earphone Port	4	4
8). LAN Port	2	2
9). USB Port	4	4
10). OPTICAL FIBER Port	2	2

Note: Client consigns only one model sample (Model Number is EMB-900M) to test.



3 TEST METHODOLOGY

3.1 EUT SYSTEM OPERATION

1. Windows XP boots system.
2. Run Emctest.exe to activate all peripherals and display “H” pattern on monitor screen.
3. Run Winemc.exe and choose media player to play music.
4. Run Winemc.exe and choose “F:/ & G:/ & H:/ & I:/ & J:/ & K:/ & L:/ & I:/” to test USB 2.0 Port.
5. Press the start menu, select executive and type ping 192.168.0.2 -t (EUT), ping 192.168.0.1 -t (Server Notebook).

Note: Test program is self-repeating throughout the test.

3.2 DECISION OF FINAL TEST MODE

1. The following test mode were scanned during the preliminary test:

Conduction Mode:

1.	DVI TO D-SUB MODE
----	--------------------------

Radiation Mode(s):

1.	DVI TO D-SUB MODE
	1-16GHz

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

Conduction: Mode 1

Radiation: Mode 1

Then, the EUT configuration and cable configuration of the above highest emission mode was recorded for all final test items.



4 SETUP OF EQUIPMENT UNDER TEST

Setup Diagram

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

Support Equipment

Host PC Devices:

No	Equipment	Model #	Trade Name
1.	CPU (3.20GHz)	Pentium4	Intel
2.	Memory (512MBX2)	DDR2-533	ELPIDA
3.	Power Supply	ST-300BLV	Seventeam
4.	HDD	2F040L0	Maxtor
5.	CD-ROM	CDU5211	SONY

**Peripherals Devices:**

No	Equipment	Model	Serial No.	FCC ID / BSMI ID	Trade Name	Data Cable	Power Cord
1.	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 2.0m	N/A
2.	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 2.0m	N/A
3.	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 2.0m	N/A
4.	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 2.0m	N/A
5.	PS/2 Mouse	M071KC	443029438	DoC BSMI: R41108	DELL	Shielded, 1.8m	N/A
6.	PS/2 Keyboard	SK-8110	N/A	DoC BSMI: T3A002	DELL	Shielded, 1.8m	N/A
7.	Ear. / Mic.	MSB301	N/A	N/A	e-Sense	Unshielded, 1.8m	N/A
8.	Player	RQ-L11LT	N/A	BSMI ID: 3912A162	Panasonic	Unshielded, 1.0m	N/A
9.	Earphone	MSB301	N/A	N/A	e-Sense	Unshielded, 1.8m	N/A
10.	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 2.0m	N/A
11.	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 2.0m	N/A
12.	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 2.0m	N/A
13.	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 2.0m	N/A
14.	Earphone	MSB301	N/A	N/A	e-Sense	Unshielded, 1.8m	N/A
15.	Earphone	MSB301	N/A	N/A	e-Sense	Unshielded, 1.8m	N/A
16.	Modem	5JEG4033MKO	N/A	5RJTAI-35500-M5-E	TOP-SOLUTION	Shielded, 1.8m	Unshielded, 1.8m
17.	Modem	5JEG4033MKO	N/A	5RJTAI-35500-M5-E	TOP-SOLUTION	Shielded, 1.8m	Unshielded, 1.8m
18.	Modem	1414	N/A	IFAXDM1414	ACEEX	Shielded, 1.8m	Unshielded, 1.8m
19.	Modem	5JEG4033MKO	N/A	5RJTAI-35500-M5-E	TOP-SOLUTION	Shielded, 1.8m	Unshielded, 1.8m
20.	Monitor	GH17PS	GH17H4LT604715L	DoC BSMI ID: 3902B332	SAMSUNG	Shielded, 1.8m with two cores	Unshielded, 1.8m
21.	Printer	C20SX	N/A	BSMI ID: 3902E004	EPSON	Shielded, 1.8m	Unshielded, 1.8m
22.	Server Notebook	PP05L	2464936188	DoC BSMI: R33002	DELL	Unshielded, 20m	Unshielded, 1.8m with a core

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

Grounding: Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.








5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at CCS Taiwan Hsintien Lab at No. 165, Chungshen Road, Hsintien City, Taipei Hsien, Taiwan. The measurement facilities are constructed in conformance with the requirements of CISPR 16-1, ANSI C63.4 and other equivalent standards.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

The test facilities used to perform Electromagnetic compatibility tests are registered or accredited by the organizations listed in the following table which includes the recognized scope specifically.

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	CFR 47, FCC Part 15/18 using ANSI 63.4; AS/NZS 3548; VCCI V3; CNS 13438; CNS 13439; CNS 13783; CNS 14115; CISPR 11/EN 55011; CISPR 14-1/EN 55014-1; CISPR 15/EN 55015; CISPR 22/EN 55022; EN 50081-1/EN 61000-6-3; EN 50082-1/EN 61000-6-4; IEC/EN 61000-4-2, IEC/EN 61000-4-3, IEC/EN 61000-4-4, IEC/EN 61000-4-5, IEC/EN 61000-4-6, IEC/EN 61000-4-8, IEC/EN 61000-4-11, IEC/EN 61000-3-2, IEC/EN 61000-3-3; CISPR 24/EN 55024; CISPR 14-2/EN 55014-2; EN 50081-2/EN 61000-6-1; EN 50082-2/EN 61000-6-2.	 824.01
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 250366
Japan	VCCI	3/10 meter Open Area Test Sites and Line Conducted Test Room to perform conducted/radiated measurements	 R-1434/1630~4 C-1511/1882
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2/3/4, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, Cispr 16-1/2/3/4	 ELA 103
Taiwan	CNLA	47 CFR FCC Part 15 Subpart B, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 13438, AS/NZS 3548, VCCI, CNS 13022-1/2/3, EN 55022, EN 55013, EN 55014-1, EN 61000-4-2/3/4/5/6/8/11, ENV 50204, ENV 50141, ENV 50142	 1108 ILAC MRA
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439	 SL2-IN-E-0005 SL2-A1-E-0005 SL2-R1-E-0005 SL2-R2-E-0005
Canada	Industry Canada	RSS212, Issue 1	 IC 5742

Note: No part of this report may be used to claim or imply product endorsement by CNLA, A2LA or other government agency.



6 INSTRUMENT AND CALIBRATION

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 TEST AND MEASUREMENT EQUIPMENT

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and other equivalent standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective manual.

Equipment Used for Emission Measurement

Open Area Test Site # I				
EQUIPMENT	MFR	MODEL	SERIAL NUMBER	CAL. DUE
SITE NSA	CCS	I Site	N/A	09/17/2005
MEASURE RECEIVER	SCHAFFNER	SCR3501	338	06/27/2006
SPECTRUM ANALYZER	ADVANTEST	R3132	120900008	No Calibration Required
ANTENNA	SCHAFFNER	CBL 6112B	2809	09/24/2005
AMPLIFIER	MCL	ZKL-1R5	6511600436	03/06/2006
CABLE	SUHNER	RG 214	N-TYPE #Q2	02/18/2006
THERMO-HYGRO METER	TFA	N/A	NO.2	11/09/2005
Above 1GHz Used				
EMC ANALYZER (100Hz-22GHz)	HP	8566B	2937A06102	06/30/2006
ANTENNA (1-18GHz)	EMCO	3115	5761	01/17/2006
AMPLIFIER (1-18GHz)	HP	8449B	3008A01266	02/16/2006
CABLE (1-18GHz)	JYEBAO	LL142	SMA#RS1&2	02/16/2006
CABLE (1-18GHz)	JYEBAO	LL142	SMA#C1	04/28/2006

Note: The measurement uncertainty is less than +/- 3.36dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



Conducted Emission Test Site # A				
EQUIPMENT	MFR	MODEL	SERIAL NUMBER	CAL. DUE
TEST RECEIVER	R&S	ESHS20	840455/006	02/17/2006
LISN (EUT)	SCHWARZBECK	NSLK 8127	8127382	01/03/2006
LISN	SOLAR	8012-50-R-24-BNC	8305114	01/03/2006
BNC CABLE	MIYAZAKI	5D-FB	BNC A1	01/28/2006
THERMO-HYGRO METER	TOP	HA-202	9303-1	03/02/2006

Note: The measurement uncertainty is less than +/- 2.83dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

7 LINE CONDUCTED & RADIATED EMISSION TEST

7.1 LIMIT

Maximum permissible level of Line Conducted Emission

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: The lower limit shall apply at the transition frequency.

Maximum permissible level of Radiated Emission measured at 10 meter

FREQUENCY (MHz)	Class A (dBuV/m)	Class B (dBuV/m)
	Quasi-peak	Quasi-peak
30 – 230	40	30
230 - 1000	47	37

Note: The lower limit shall apply at the transition frequency.

Maximum permissible level of Radiated Emission measured at 3 meter

FREQUENCY (MHz)	Class A (dBuV/m)		Class B (dBuV/m)	
	Average	Peak	Average	Peak
Above 1000	59.3	79.3	53.9	73.9

Note: The lower limit shall apply at the transition frequency.



7.2 TEST PROCEDURE OF LINE CONDUCTED EMISSION

Procedure of Preliminary Test

- The EUT was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per ANSI C63.4.
- All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- The test system with EUT received AC power, 120V/60Hz, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane.
- All support equipment received power from a second LISN.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a EMI Test Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to the Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Receiver.
- The Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- During the above scans, the emissions were maximized by cable manipulation.
- The test mode(s) described in Item 3.2 were scanned during the preliminary test.
- After the preliminary scan, we found the test mode described in Item 3.2 producing the highest emission level.
- The EUT configuration and cable configuration of the above highest emission level were recorded for reference of the final test.

**Procedure of Final Test**

- EUT and support equipment were set up on the test bench as per step 10 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the AV. limit in Q.P. mode, then the emission signal was re-checked using an AV. detector.
- The test data of the worst-case condition(s) was recorded.

Data Sample:

Freq. MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dB	Reading Type (P/Q/A)	Line (L1/L2)
x.xx	42.95	0.55	43.50	73	-29.50	Q	L1

Freq. = Emission frequency in MHz
 Read Level = Uncorrected Analyzer/Receiver reading
 Factor = Insertion loss of LISN + Cable Loss
 Level = Read Level + Factor
 Limit = Limit stated in standard
 Over Limit = Reading in reference to limit
 P = Peak Reading
 Q = Quasi-peak Reading
 A = Average Reading
 L1 = Hot side
 L2 = Neutral side

Calculation Formula

Over Limit (dB) = Level (dBuV) – Limit (dBuV)



7.3 TEST PROCEDURE OF RADIATED EMISSION

Procedure of Preliminary Test

- The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per ANSI C63.4.
- All I/O cables were positioned to simulate typical usage as per ANSI C63.4.
- The EUT received AC power source, 120V/60Hz, from the outlet socket under the turntable. All support equipment received power from another socket under the turntable.
- The antenna was placed at 10 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.
- The Analyzer / Receiver quickly scanned from 30MHz to 16000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- The test mode(s) described in Item 3.2 were scanned during the preliminary test:
- After the preliminary scan, we found the test mode described in Item 3.2 producing the highest emission level.
- The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

**Procedure of Final Test**

- EUT and support equipment were set up on the turntable as per step 8 of the preliminary test.
- The Analyzer / Receiver scanned from 30MHz to 16000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.
- The test data of the worst case condition(s) was recorded.

Data Sample:

Freq. MHz	Read Level dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Over Limit dB	Reading Type (P/Q/A)	Pol. (H/V)
x.xx	14.0	12.2	26.2	40	-13.8	Q	H

- Freq. = Emission frequency in MHz
 Read Level = Uncorrected Analyzer/Receiver reading
 Factor = Antenna Factor + Cable Loss + Attenuator (3/6/10dB) – Amplifier Gain
 Level = Read Level + Factor
 Limit = Limit stated in standard
 Over Limit = Reading in reference to limit
 P = Peak Reading
 Q = Quasi-peak Reading
 A = Average Reading
 H = Antenna Polarization: Horizontal
 V = Antenna Polarization: Vertical

Calculation Formula

$$\text{Over Limit (dB)} = \text{Level (dBuV/m)} - \text{Limit (dBuV/m)}$$



7.4 TEST RESULTS

Line Conducted Emission

Model: EMB-900M**Test Mode:** Mode 1**Temperature:** 26°C**Humidity:** 46% RH**Test Results:** Passed**Tested by:** Sam Su

(The chart below shows the highest readings taken from the final data, see **Appendix II** for details.)

Six Highest Conducted Emission Readings							
Frequency Range Investigated				150 kHz to 30 MHz			
Freq (MHz)	Read Level (dBuV)	Factor (dB)	Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Reading Type (P/Q/A)	Line (L1/L2)
0.160	52.85	0.14	52.99	79.00	-26.01	P	L1
0.238	46.25	0.16	46.41	79.00	-32.59	P	L1
21.147	39.83	1.55	41.38	73.00	-31.62	P	L1
0.160	53.13	0.13	53.26	79.00	-25.74	P	L2
9.011	39.98	0.81	40.79	73.00	-32.21	P	L2
21.830	42.82	1.82	44.64	73.00	-28.36	P	L2

NOTE: The emission level was or more than 2dB below the Average limit, so no re-check anymore.

**Radiated Emission****Model:** EMB-900M**Test Mode:** Mode 1**Temperature:** 27°C**Humidity:** 45% RH**Test Results:** Passed**Tested by:** Jimmy Chen(The chart below shows the highest readings taken from the final data, see **Appendix II** for details.)


Six Highest Radiated Emission Readings							
Frequency Range Investigated				30 MHz to 1000 MHz at 10m			
Freq (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Reading Type (P/Q/A)	Pol. (H/V)
66.100	63.64	-26.89	36.75	40.00	-3.25	P	V
75.530	61.24	-25.90	35.34	40.00	-4.66	P	V
122.750	53.25	-19.83	33.42	40.00	-6.58	P	V
166.000	56.96	-21.22	35.74	40.00	-4.26	P	V
207.700	52.59	-20.90	31.69	40.00	-8.31	P	V
122.740	54.34	-19.83	34.51	40.00	-5.49	P	H

NOTE: 30MHz to 1000MHz test is Applicable CISPR 22 / EN 55022 standard.



APPENDIX I - PHOTOGRAPHS OF TEST SETUP

LINE CONDUCTED EMISSION TEST

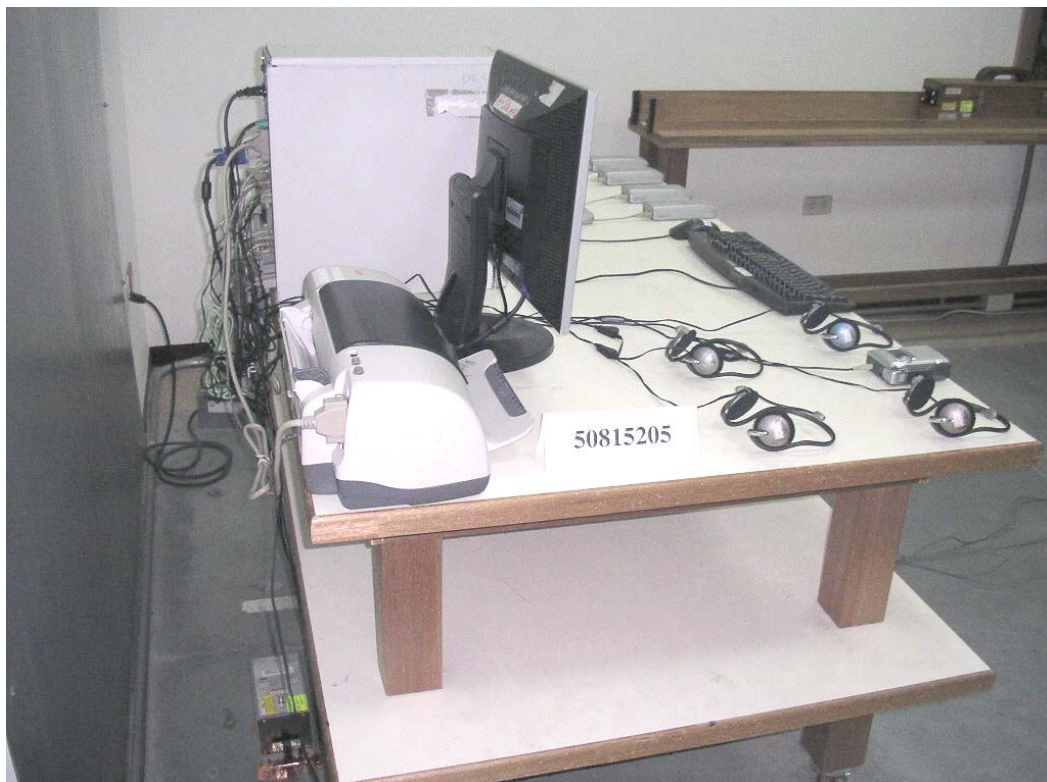

RADIATED EMISSION TEST






APPENDIX II - TEST RESULT OF FINAL DATAS

Conducted Emission Plot

Radiated Emission Data

Data#: 25 File#: 50815205CA.EMI

Date: 2005-09-05 Time: 22:42:26

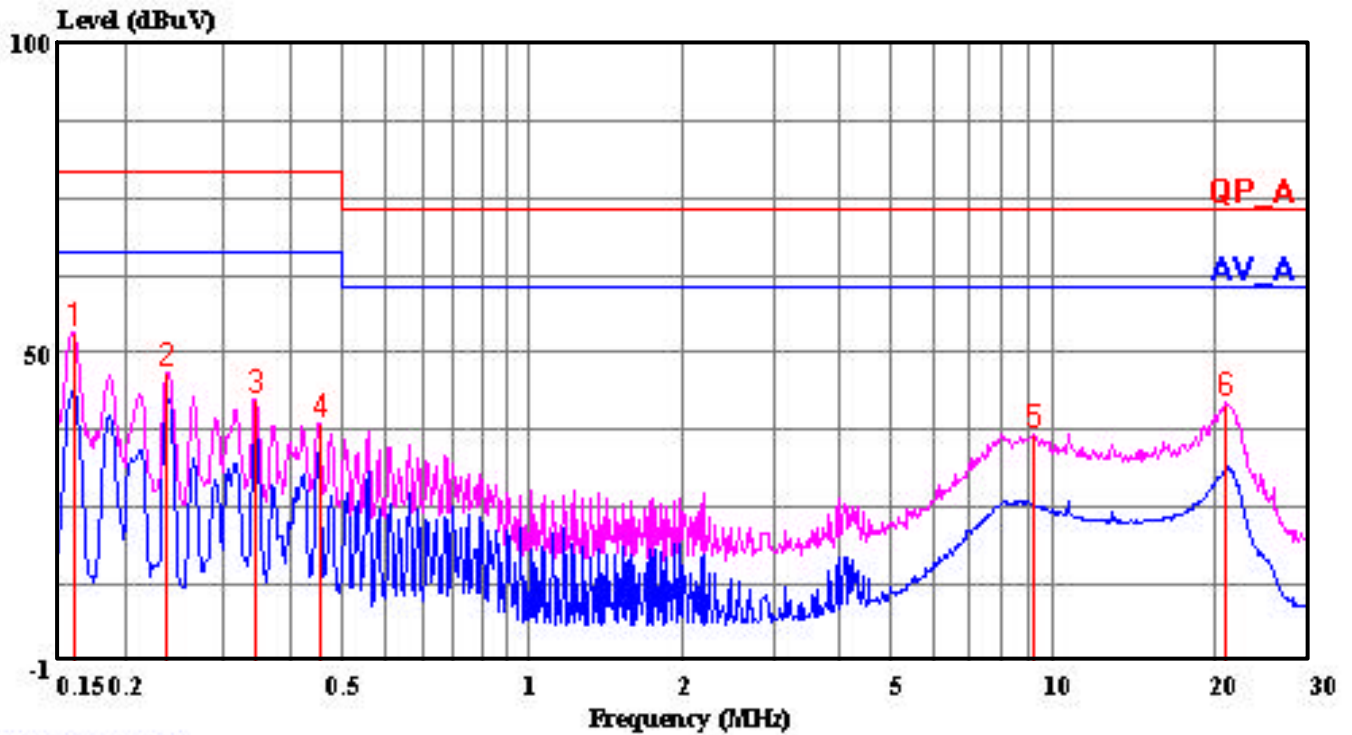

(Conduction A)

Trace: 6 5

Ref Trace:


Condition: LINE
 Report No. : 50815205
 Test Engr. : SAM SU
 Company : AAEON Technology Inc.
 EUT : EMB-900M
 Test Config : EUT / ALL PERIPHERALS
 Type of Test: FCC CLASS A
 Mode of Op. : DVI TO D-SUB MODE

Page: 1

	Read	Limit	Over			
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.160	52.85	0.14	52.99	79.00	-26.01 Peak
2	0.238	46.25	0.16	46.41	79.00	-32.59 Peak
3	0.346	41.86	0.19	42.06	79.00	-36.95 Peak
4	0.454	37.85	0.20	38.05	79.00	-40.95 Peak
5	9.352	35.63	0.75	36.38	73.00	-36.62 Peak
6	21.147	39.83	1.55	41.38	73.00	-31.62 Peak

Data#: 26 File#: 50815205CA.EMI

Date: 2005-09-05 Time: 22:43:15

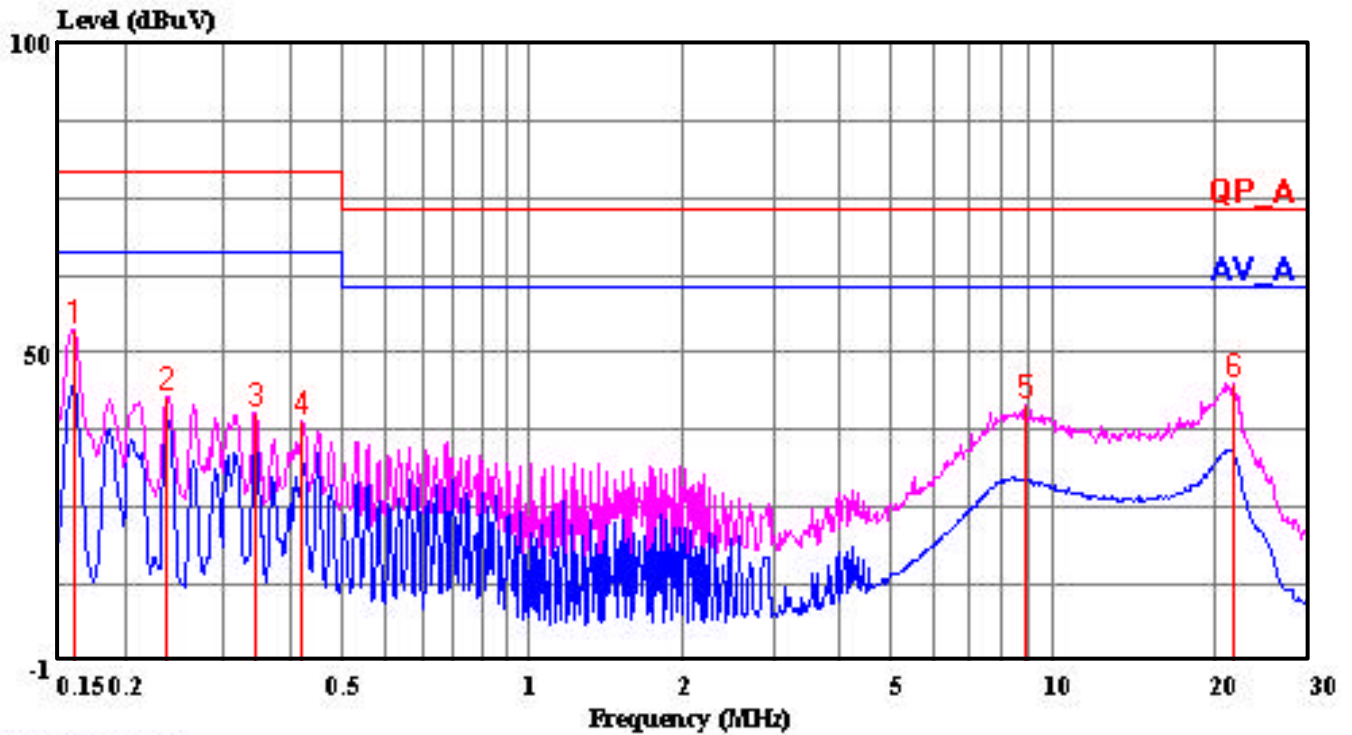

(Conduction A)

Trace: 8 7

Ref Trace:

Condition: NEUTRAL
Report No. : 50815205
Test Engr. : SAM SU
Company : AAEON Technology Inc.
EUT : EMB-900M
Test Config : EUT / ALL PERIPHERALS
Type of Test: FCC CLASS A
Mode of Op. : DVI TO D-SUB MODE

Page: 1

	Read	Limit	Over				
Freq	Level	Line	Limit	Remark			
MHz	dBuV	dB	dBuV	dB			
1	0.160	53.13	0.13	53.26	79.00	-25.74	Peak
2	0.238	41.98	0.14	42.12	79.00	-36.88	Peak
3	0.346	39.38	0.16	39.55	79.00	-39.46	Peak
4	0.421	38.16	0.19	38.35	79.00	-40.65	Peak
5	9.011	39.98	0.81	40.79	73.00	-32.21	Peak
6	21.830	42.82	1.82	44.64	73.00	-28.36	Peak



No. 199, Chung Sheng Road,
 Hsin Tien City, Taipei,
 Taiwan, R.O.C.
 Tel:02-2217-0894 Fax:02-2217-1029

Data#: 1 File#: 50815205-I.EMI
 Site#I

Date: 2005-08-17 Time: 16:09:58

Condition: VERTICAL /10M
 Report No. : 50815205
 Test Engr. : JIMMY CHEN
 Company : AAEON Technology Inc.
 EUT : EMB-900M
 Test Config : EUT / ALL PERIPHERALS
 Type of Test: FCC CLASS A
 Mode of Op. : DVI TO D-SUB MODE

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	37.770	49.53	-19.87	29.66	40.00	-10.34	Peak
2	45.640	45.64	-24.07	21.57	40.00	-18.43	Peak
3	56.650	52.89	-26.60	26.29	40.00	-13.71	Peak
4	66.100	63.64	-26.89	36.75	40.00	-3.25	Peak
5	75.530	61.24	-25.90	35.34	40.00	-4.66	Peak
6	120.070	46.19	-19.84	26.35	40.00	-13.65	Peak
7	122.750	53.25	-19.83	33.42	40.00	-6.58	Peak
8	125.110	49.66	-19.91	29.76	40.00	-10.25	Peak
9	166.000	56.96	-21.22	35.74	40.00	-4.26	Peak
10	169.930	47.23	-21.36	25.88	40.00	-14.13	Peak
11	207.700	52.59	-20.90	31.69	40.00	-8.31	Peak
12	233.380	51.16	-18.86	32.30	47.00	-14.70	Peak
13	250.020	43.06	-17.53	25.53	47.00	-21.47	Peak
14	400.020	45.32	-12.76	32.56	47.00	-14.44	Peak
15	432.080	40.27	-11.75	28.52	47.00	-18.48	Peak
16	480.020	40.96	-10.46	30.50	47.00	-16.50	Peak



No. 199, Chung Sheng Road,
 Hsin Tien City, Taipei,
 Taiwan, R.O.C.
 Tel:02-2217-0894 Fax:02-2217-1029

Data#: 2 File#: 50815205-I.EMI
 Site#I

Date: 2005-08-17 Time: 16:37:34


Condition: HORIZONTAL
 Report No. : 50815205
 Test Engr. : JIMMY CHEN
 Company : AAEON Technology Inc.
 EUT : EMB-900M
 Test Config : EUT / ALL PERIPHERALS
 Type of Test: FCC CLASS A
 Mode of Op. : DVI TO D-SUB MODE

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	56.650	48.66	-26.60	22.06	40.00	-17.94	Peak
2	56.650	53.21	-26.60	26.61	40.00	-13.39	Peak
3	66.090	55.69	-26.89	28.80	40.00	-11.20	Peak
4	75.530	56.36	-25.90	30.46	40.00	-9.54	Peak
5	113.310	46.12	-20.28	25.84	40.00	-14.16	Peak
6	122.740	54.34	-19.83	34.51	40.00	-5.49	Peak
7	169.930	47.36	-21.36	26.01	40.00	-14.00	Peak
8	207.720	50.26	-20.90	29.36	40.00	-10.64	Peak
9	233.380	51.40	-18.86	32.54	47.00	-14.46	Peak
10	250.030	47.82	-17.53	30.29	47.00	-16.71	Peak
11	300.030	43.27	-16.09	27.18	47.00	-19.82	Peak
12	400.050	42.44	-12.76	29.68	47.00	-17.32	Peak
13	480.070	45.26	-10.46	34.80	47.00	-12.20	Peak
14	500.060	48.32	-9.96	38.36	47.00	-8.64	Peak

Data#: 1 File#: 50815205MC.EMI

Date: 2005-09-05 Time: 22:35

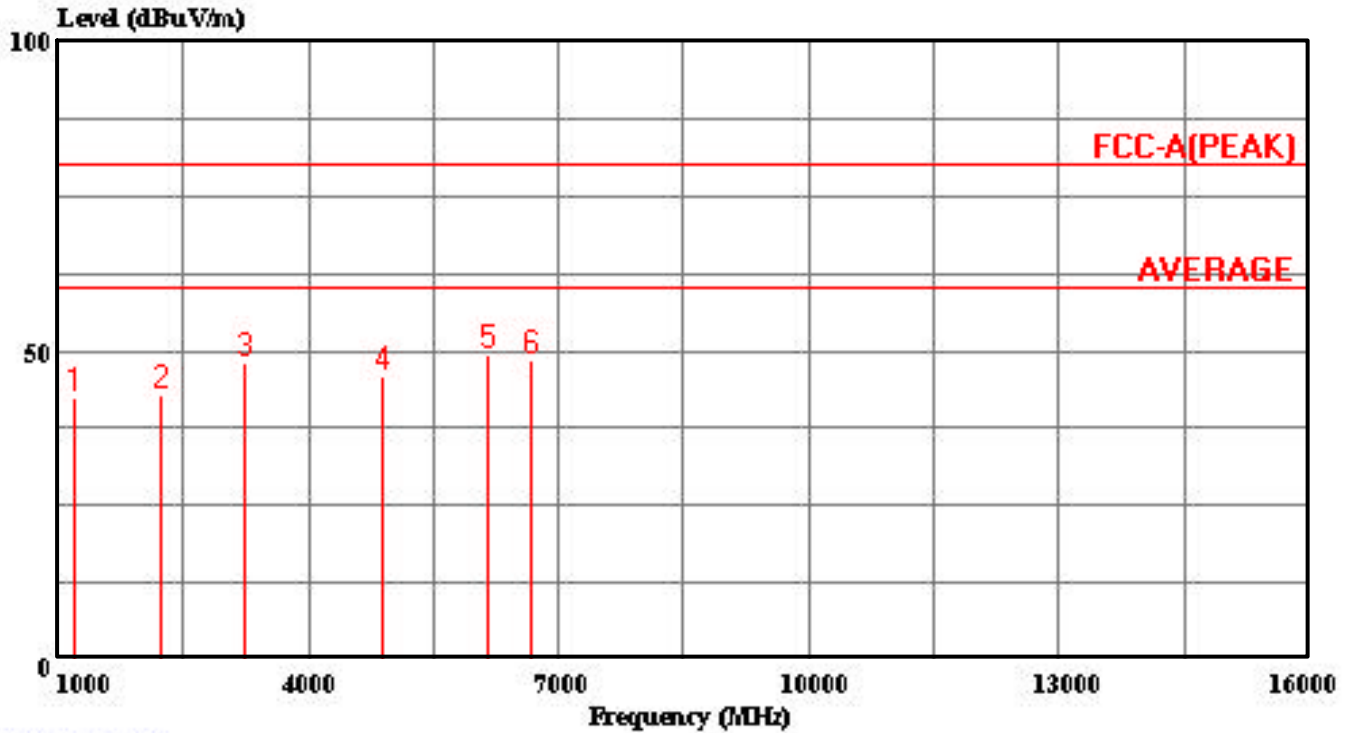

(Chamber C)

Trace:

Ref Trace:


Condition: VERTICAL /3M
Report No. : 50815205
Test Engr. : SAM SU
Company : AAEON Technology Inc.
EUT : EMB-900M
Test Config : EUT / ALL PERIPHERALS
Type of Test: FCC CLASS A
Mode of Op. : 1-16GHz
: All test data under the average limit

Page: 1

	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	1201.000	53.32	-11.09	42.23	80.00	-37.77 Peak
2	2217.000	49.23	-6.52	42.71	80.00	-37.29 Peak
3	3250.000	51.00	-3.02	47.98	80.00	-32.02 Peak
4	4886.000	45.25	0.77	46.02	80.00	-33.98 Peak
5	6159.000	46.94	2.22	49.16	80.00	-30.84 Peak
6	6664.700	45.64	2.87	48.51	80.00	-31.49 Peak

Data#: 2 File#: 50815205MC.EMI

Date: 2005-09-05 Time: 23:01

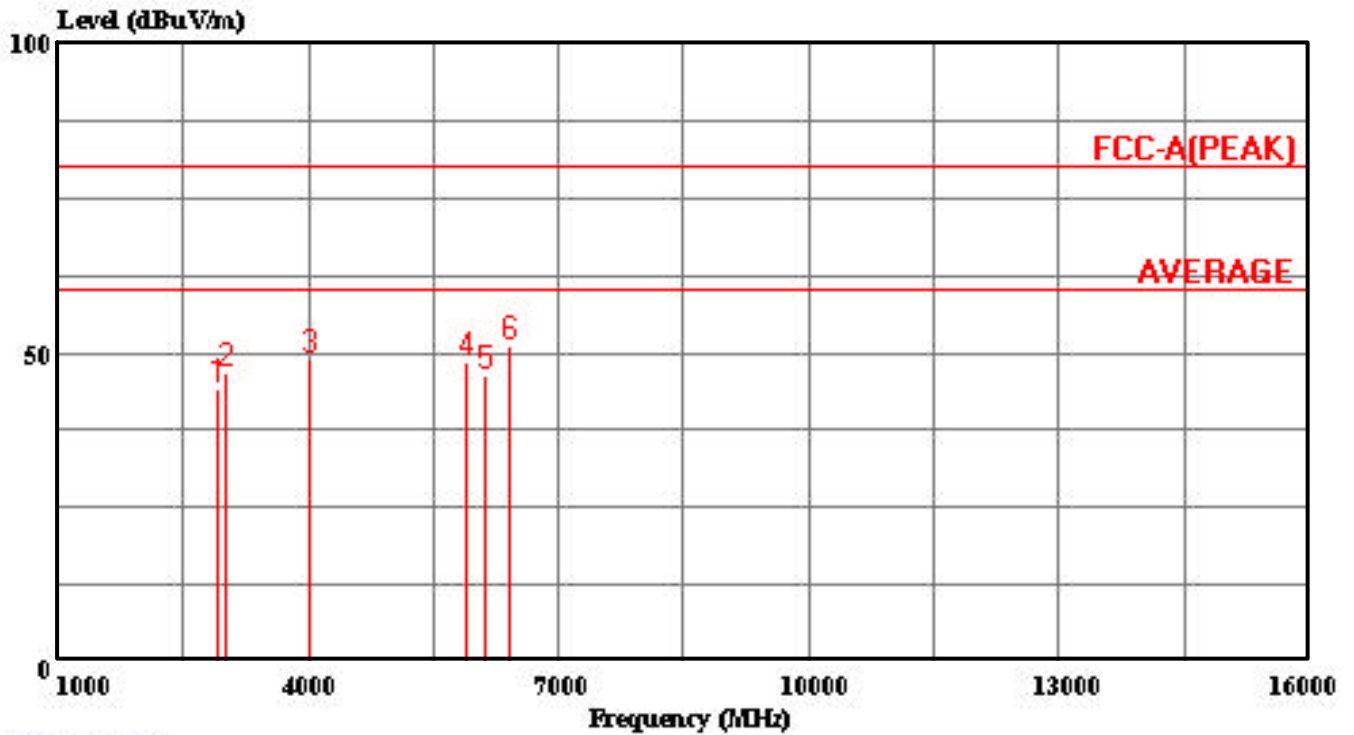

(Chamber C)

Trace:

Ref Trace:

Condition: HORIZONTAL /3M
 Report No. : 50815205
 Test Engr. : SAM SU
 Company : AAEON Technology Inc.
 EUT : EMB-900M
 Test Config : EUT / ALL PERIPHERALS
 Type of Test: FCC CLASS A
 Mode of Op. : 1-16GHz
 : All test data under the average limit

Page: 1

	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2897.000	48.34	-4.09	44.25	80.00	-35.75 Peak
2	2997.000	50.54	-3.67	46.87	80.00	-33.13 Peak
3	4012.000	49.63	-0.89	48.74	80.00	-31.26 Peak
4	5887.000	46.34	2.12	48.46	80.00	-31.54 Peak
5	6131.000	43.93	2.19	46.12	80.00	-33.88 Peak
6	6398.770	48.74	2.41	51.15	80.00	-28.85 Peak