

FCC 47 CFR PART 15 SUBPART B TEST REPORT

for

15.6" Fanless Touch Panel

MODEL: xOMNI-2155x(x - Where x may be any combination of alphanumeric characters or "-" or blank.)

Test Report Number:
T150612D05-F

Issued to:

AAEON Technology Inc.

**5F, No.135, Lane 235, Pao Chiao Rd, Hsin-Tien Dist.,
New Taipei City, Taiwan, R.O.C.**

Issued by:

Compliance Certification Services Inc.

Xindian Lab.

**No.163-1, Jhongsheng Rd., Xindian Dist.,
New Taipei City, 23151 Taiwan.**

TEL: 886-2-22170894

FAX: 886-2-22171029

Issued Date: June 18, 2015



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	June 18, 2015	Initial Issue	ALL	Andrea Chen

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION 4

2 EUT DESCRIPTION..... 5

3 TEST METHODOLOGY..... 7

 3.1. DECISION OF FINAL TEST MODE 7

 3.2. EUT SYSTEM OPERATION 7

4 SETUP OF EQUIPMENT UNDER TEST 8

 4.1. DESCRIPTION OF SUPPORT UNITS..... 8

 4.2. CONFIGURATION OF SYSTEM UNDER TEST..... 9

5 FACILITIES AND ACCREDITATIONS 10

 5.1. FACILITIES 10

 5.2. ACCREDITATIONS..... 10

 5.3. MEASUREMENT UNCERTAINTY 10

6 CONDUCTED EMISSION MEASUREMENT 11

 6.1. LIMITS OF CONDUCTED EMISSION MEASUREMENT..... 11

 6.2. TEST INSTRUMENTS 11

 6.3. TEST PROCEDURES..... 12

 6.4. TEST SETUP 13

 6.5. DATA SAMPLE 13

 6.6. TEST RESULTS 14

7 RADIATED EMISSION MEASUREMENT 16

 7.1. LIMITS OF RADIATED EMISSION MEASUREMENT 16

 7.2. TEST INSTRUMENTS 18

 7.3. TEST PROCEDURES..... 19

 7.4. TEST SETUP 20

 7.5. DATA SAMPLE 21

 7.6. TEST RESULTS 22

8 PHOTOGRAPHS OF THE TEST CONFIGURATION..... 25

APPENDIX 1 - PHOTOGRAPHS OF EUT A1-1

1 TEST RESULT CERTIFICATION

Product:	15.6" Fanless Touch Panel
Model:	xOMNI-2155x(x - Where x may be any combination of alphanumeric characters or "-"or blank.)
Brand:	AAEON
Applicant:	AAEON Technology Inc. 5F, No.135, Lane 235, Pao Chiao Rd, Hsin-Tien Dist., New Taipei City, Taiwan, R.O.C.
Manufacturer:	AAEON Technology Inc. 5F, No.135, Lane 235, Pao Chiao Rd, Hsin-Tien Dist., New Taipei City, Taiwan, R.O.C.
Tested:	June 15, 2015 ~ June 17, 2015


EMISSION			
Standard	Item	Result	Remarks
FCC 47 CFR Part 15 Subpart B, ICES-003 Issue 5-2012 ANSI C63.4-2009	Conducted (Power Port)	PASS	Meet Class A limit
	Radiated	PASS	Meet Class A limit

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
2. The information of measurement uncertainty is available upon the customer's request.

Deviation from Applicable Standard
None

The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:



Sam Hu
Assistant Manager

Reviewed by:



Eva Fan
Supervisor of report document dept.

2 EUT DESCRIPTION

Product	15.6" Fanless Touch Panel
Brand Name	AAEON
Model	xOMNI-2155x(x - Where x may be any combination of alphanumeric characters or "-"or blank.)
Applicant	AAEON Technology Inc.
Housing material	Plastic w/ metal plate
Identify Number	T150612D05
Received Date	June 12, 2015
EUT Power Rating	19VDC from Adaptor
AC Power During Test	120VAC / 60Hz to Adaptor
Adaptor Manufacturer	FSP
Adaptor Model Number	FSP120-AAB
Adaptor Power Rating	I/P: 100-240VAC, 50-60Hz, 2A O/P: 19VDC, 6.32A
DC Power Cable Type	Unshielded, 1.8m (Non-detachable, with a core)
AC Power Cable Type	Unshielded, 1.8m (Detachable)
OSC/Clock Frequencies	25MHz; 32.768kHz; 24MHz

Model Differences

Model	Difference	Tested (Check)
OMNI-2155HTT-A2-1010	Capacitive	<input checked="" type="checkbox"/>
OMNI-2155HTT-A1-1010	Resistive	<input checked="" type="checkbox"/>
xOMNI-2155x	1. For marketing purpose only. 2. x - Where x may be any combination of alphanumeric characters or "-"or blank.	<input type="checkbox"/>

I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
1. VGA Port	1	1
2. COM Port	1	1
3. LAN Port	2	2
4. USB 2.0 Port	3	3
5. USB 3.0 Port	1	1
6. HDMI Port	1	1
7. CFast Slot	1	1

I/O PORT (USB / COM / LAN Module)

I/O PORT TYPES	Q'TY	TESTED WITH
1. COM Port	2	2
2. LAN Port	1	1
3. USB 2.0 Port	2	2

I/O PORT (Dual LAN Module)

I/O PORT TYPES	Q'TY	TESTED WITH
1. LAN Port	2	2

I/O PORT (Mini Card & SIM Card Module)

I/O PORT TYPES	Q'TY	TESTED WITH

Note: None.

3 TEST METHODOLOGY

3.1. DECISION OF FINAL TEST MODE

The EUT was tested together with the below additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The test configuration/ modes are the following:

Conduction Modes:

1	OMNI-2155HTT-A2-1010 + USB / COM / LAN Module	EUT + HDMI Mode	1366X768, VF=60Hz
2		EUT + VGA Mode	1366X768, VF=60Hz
3	OMNI-2155HTT-A2-1010 + Dual LAN Module	EUT + HDMI Mode	1366X768, VF=60Hz
4	OMNI-2155HTT-A2-1010 + Mini Card & SIM Card Module	EUT + HDMI Mode	1366X768, VF=60Hz
5	OMNI-2155HTT-A1-1010 + USB / COM / LAN Module	EUT + HDMI Mode	1366X768, VF=60Hz
6		EUT + VGA Mode	1366X768, VF=60Hz
7	OMNI-2155HTT-A1-1010 + Dual LAN Module	EUT + HDMI Mode	1366X768, VF=60Hz
8	OMNI-2155HTT-A1-1010 + Mini Card & SIM Card Module	EUT + HDMI Mode	1366X768, VF=60Hz

Radiation Modes:

1	OMNI-2155HTT-A2-1010 + USB / COM / LAN Module	EUT + HDMI Mode	1366X768, VF=60Hz
2		EUT + VGA Mode	1366X768, VF=60Hz
3	OMNI-2155HTT-A2-1010 + Dual LAN Module	EUT + HDMI Mode	1366X768, VF=60Hz
4	OMNI-2155HTT-A2-1010 + Mini Card & SIM Card Module	EUT + HDMI Mode	1366X768, VF=60Hz
5	OMNI-2155HTT-A1-1010 + USB / COM / LAN Module	EUT + HDMI Mode	1366X768, VF=60Hz
6		EUT + VGA Mode	1366X768, VF=60Hz / 1-9.95GHz
7	OMNI-2155HTT-A1-1010 + Dual LAN Module	EUT + HDMI Mode	1366X768, VF=60Hz
8	OMNI-2155HTT-A1-1010 + Mini Card & SIM Card Module	EUT + HDMI Mode	1366X768, VF=60Hz

Worst:

Conduction: Mode 5

Radiation: Mode 5

3.2. EUT SYSTEM OPERATION

1. Windows 8 boots system.
2. Run Emctest.exe to activate all peripherals and display "H" pattern on monitor screen.
3. Run Winemc.exe and choose "F:/ & G:/ & H:/ & I:/" to test EUT.
4. Press the start menu, select executive and type ping 192.168.1.10 -t (EUT), 192.168.1.20 -t (EUT), 192.168.1.30 -t (EUT), ping 192.168.1.40 -t (Server PC).

Note: Test program is self-repeating throughout the test.

4 SETUP OF EQUIPMENT UNDER TEST

4.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

EUT Devices:

No.	Equipment	Model No.	Brand Name
1	Panel (15.6")	G156XW01	AUO
2	CPU (1.99GHz)	Celeron J1900	Intel
3	Memory (8GB)	K4B4G0846D	SEC
4	Power Adapter	FSP120-AAB	FSP
5	HDD (100GB)	MK1060GSC	Toshiba


Peripherals Devices:

No.	Equipment	Model No.	Serial No.	FCC ID / BSMI ID	Brand Name	Data Cable	Power Cord
1	USB Mouse	MOC5UO	H1606PRO	DOC BSMI: R41108	DELL	Shielded, 1.8m	N/A
2	USB Keyboard	Y-U0003-DEL5	N/A	DOC BSMI: T41126	DELL	Shielded, 1.8m	N/A
3-5	Modem	AL-56ERM	N/A	DOC	GALILEO	Shielded, 1.8m	Unshielded, 1.8m with a core
6-9	USB HDD	HD-EG5	N/A	DOC BSMI: D33021	SONY	Shielded, 0.7m	N/A
10	Monitor	U2713MHt	N/A	DOC BSMI: R33002	DELL	VGA: Shielded, 1.8m with two cores HDMI: Shielded, 1.8m	Unshielded, 1.8m
11	HUB	DGS-1008D	N/A	N/A	D-Link	Unshielded, 20m X3	Unshielded, 1.8m
12	Server PC	T3500	6X36VBX	DOC BSMI: R33002	DELL	Unshielded, 1.0m	Unshielded, 1.8m
13	CFast Card	AP-CF03222	N/A	N/A	N/A	Apacer	N/A

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.2. CONFIGURATION OF SYSTEM UNDER TEST

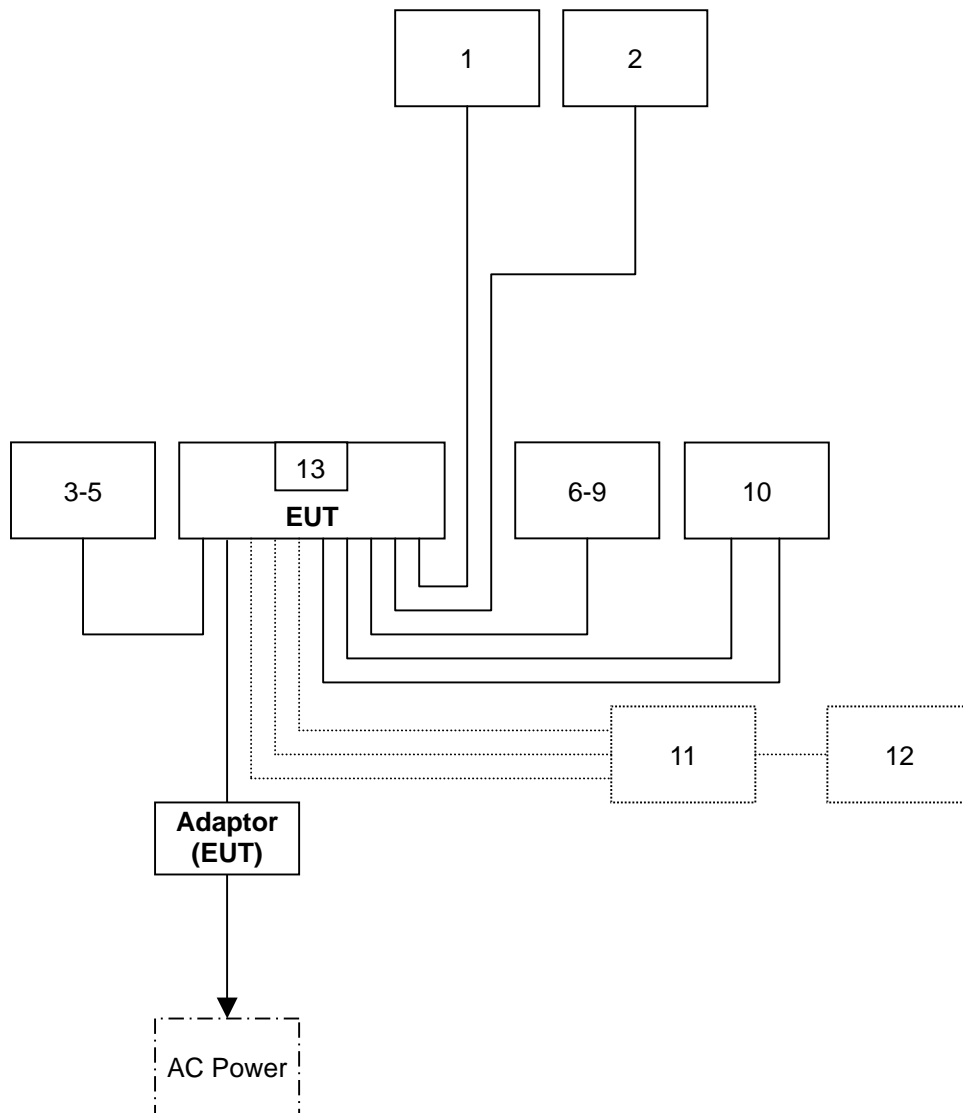

5 FACILITIES AND ACCREDITATIONS

5.1. FACILITIES

All measurement facilities used to collect the measurement data are located at CCSrf Taiwan Xindian Lab. at No.163-1, Jhongsheng Rd., Xindian Dist., New Taipei City, 23151 Taiwan.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4 and CISPR 16-1-5.

5.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
USA	A2LA

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada
Norway	Nemko
Japan	VCCI
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	0.15MHz ~ 30MHz	± 1.59
	30MHz ~ 1000MHz	± 4.10
Radiated emissions	1000MHz ~ 18000MHz	± 4.74
	18000MHz ~ 26000MHz	± 3.03
	26000MHz ~ 40000MHz	± 3.38

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 22: 2005, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than U_{CISPR} which is 3.6dB and 5.2dB respectively. CCS values (called U_{Lab} in CISPR 16-4-2) is less than U_{CISPR} as shown in the table above. Therefore, MU need not be considered for compliance.

6 CONDUCTED EMISSION MEASUREMENT

6.1. LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

6.2. TEST INSTRUMENTS

Conducted Emission room # A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TEST RECEIVER	R&S	ESCI	101201	08/31/2015
LISN (EUT)	SCHWARZBECK	NSLK 8127	8127527	08/28/2015
LISN	SCHWARZBECK	NSLK 8127	8127526	08/28/2015
BNC CABLE	EMCI	CFD300-NL	BNC#A8	05/19/2016
Pulse Limiter	R&S	ESH3Z2	SD-C002	08/26/2015
THERMO-HYGRO METER	WISEWIND	201A	No. 02	05/10/2016
Test S/W	EZ-EMC			

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. N.C.R = No Calibration Request.


6.3. TEST PROCEDURES (please refer to measurement standard or CCS SOP PA-031)**Procedure of Preliminary Test**

- The EUT and support equipment, if needed, were set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor standing equipment, it is placed on the ground plane, which has a 12 mm non-conductive covering to insulate the EUT from the ground plane.
- All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- The test equipment EUT installed by AC 120VAC/60Hz main power, through a Line Impedance Stabilization Network (LISN), which was supplied power source and was grounded to the ground plane.
- All support equipment power by from a second LISN.
- The test program of the EUT was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- During the above scans, the emissions were maximized by cable manipulation.
- The test mode(s) described in Item 3.1 were scanned during the preliminary test.
- After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.
- The worst configuration of EUT and cable of the above highest emission level were recorded for reference of the final test.

Procedure of Final Test

- EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- The test data of the worst-case condition(s) was recorded.

6.4. TEST SETUP

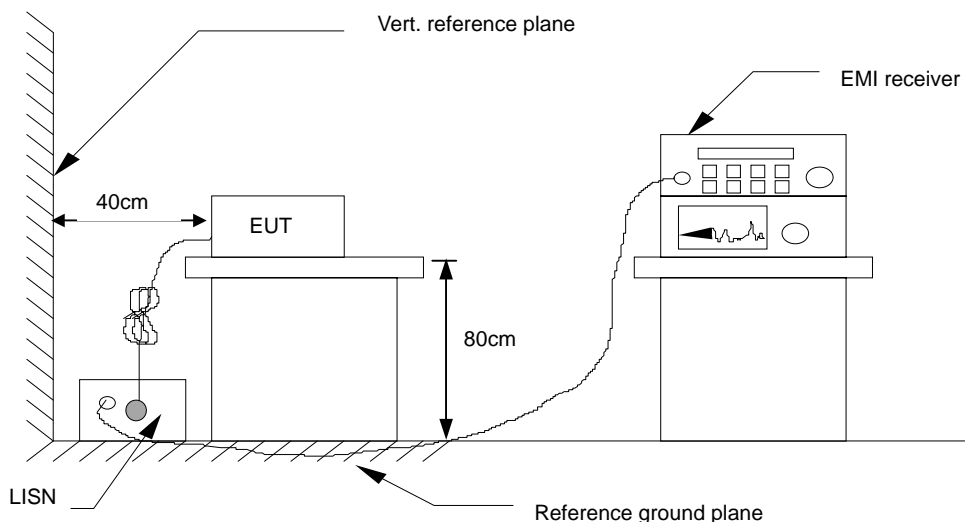

- For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

6.5. DATA SAMPLE

Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
x.xx	42.95	0.55	43.50	73	-29.50	Q	L1


- Freq. = Emission frequency in MHz
- Reading = Uncorrected Analyzer/Receiver reading
- Factor = Insertion loss of LISN + Cable Loss + Pulse Limit
- Result = Reading + Factor
- Limit = Limit stated in standard
- Margin = Reading in reference to limit
- P = Peak Reading
- Q = Quasi-peak Reading
- A = Average Reading
- L1 = Hot side
- L2 = Neutral side

Calculation Formula

Margin (dB) = Result (dBuV) – Limit (dBuV)

6.6. TEST RESULTS


Model No.	OMNI-2155HTT-A1-1010	6dB Bandwidth	9 kHz
Environmental Conditions	24°C, 55% RH	Test Mode	Mode 5
Tested by	JIM LIAN	Phase	L1
Standard	FCC CLASS A		

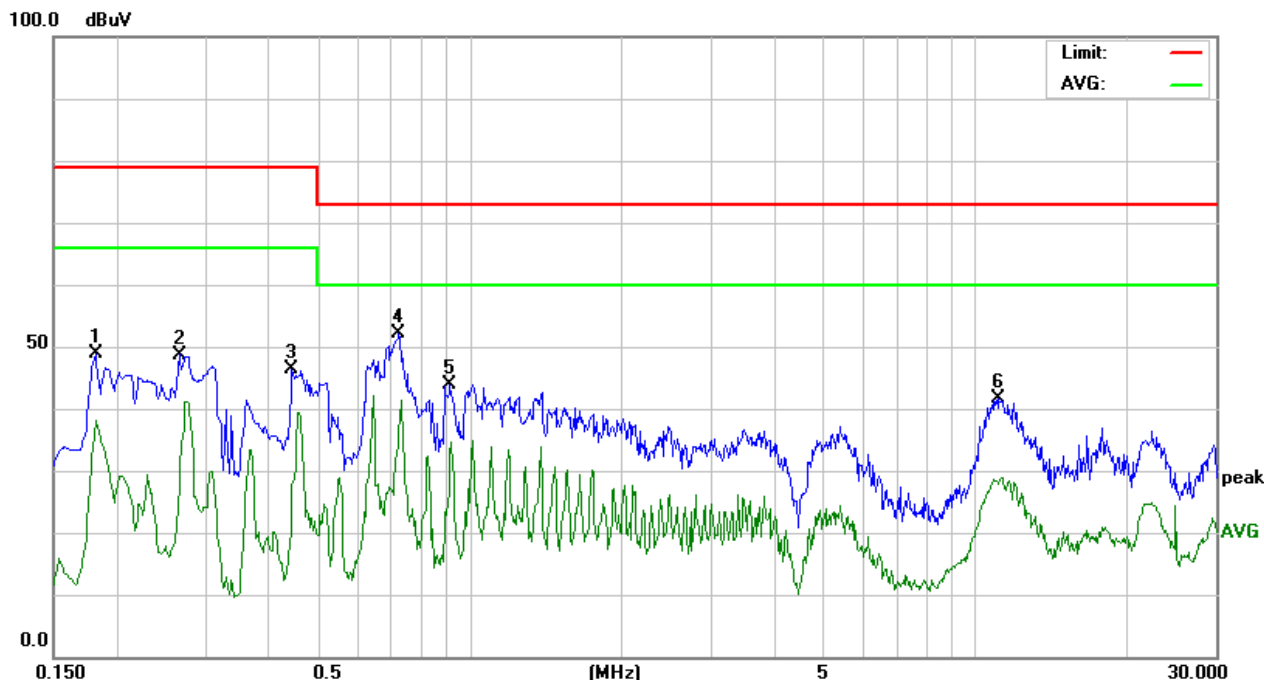

Conducted Emission Readings							
Frequency Range Investigated				150 kHz to 30 MHz			
Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
0.1819	38.97	10.02	48.99	79.00	-30.01	P	L1
0.2660	38.73	10.02	48.75	79.00	-30.25	P	L1
0.4460	36.32	10.03	46.35	79.00	-32.65	P	L1
0.7260	41.95	10.07	52.02	73.00	-20.98	P	L1
0.9180	33.76	10.10	43.86	73.00	-29.14	P	L1
11.1940	31.18	10.54	41.72	73.00	-31.28	P	L1

Note: L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Model No.	OMNI-2155HTT-A1-1010	6dB Bandwidth	9 kHz
Environmental Conditions	24°C, 55% RH	Test Mode	Mode 5
Tested by	JIM LIAN	Phase	L2
Standard	FCC CLASS A		

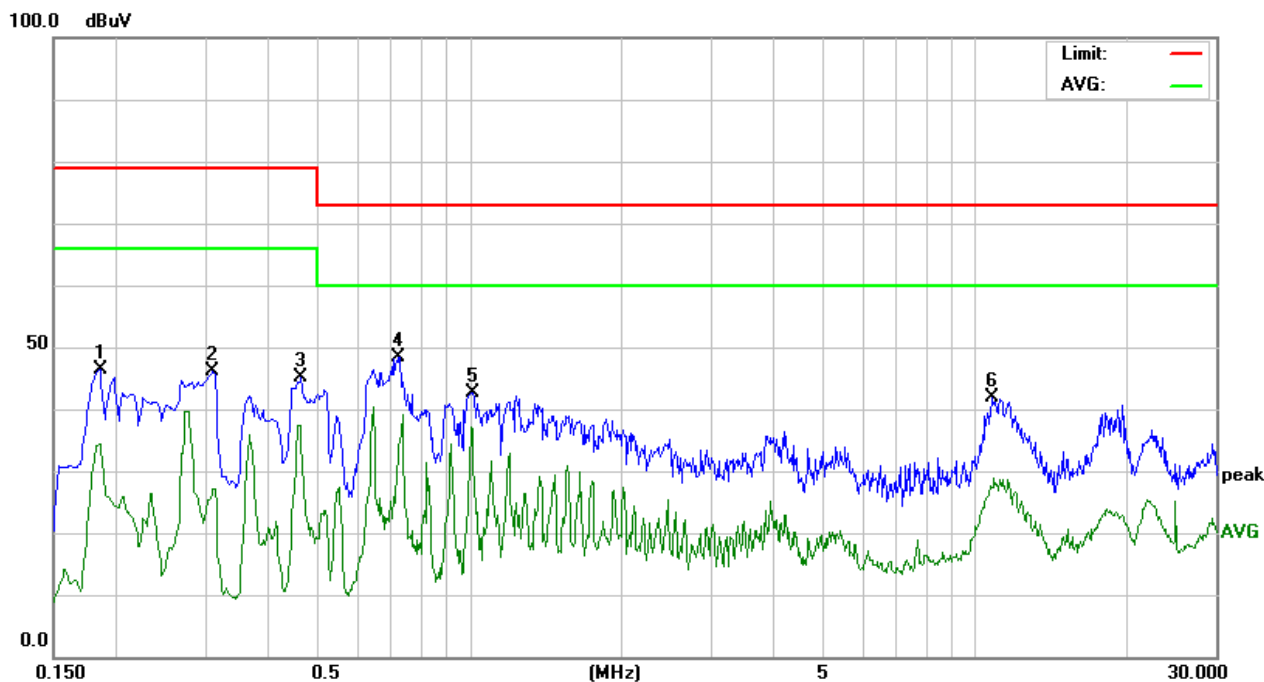

Conducted Emission Readings							
Frequency Range Investigated				150 kHz to 30 MHz			
Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
0.1860	36.45	10.02	46.47	79.00	-32.53	P	L2
0.3100	36.20	10.02	46.22	79.00	-32.78	P	L2
0.4660	35.01	10.04	45.05	79.00	-33.95	P	L2
0.7260	38.28	10.07	48.35	73.00	-24.65	P	L2
1.0140	32.65	10.10	42.75	73.00	-30.25	P	L2
10.8420	31.34	10.53	41.87	73.00	-31.13	P	L2

Note: L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

7 RADIATED EMISSION MEASUREMENT

7.1. LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1GHz (for digital device)

FREQUENCY (MHz)	dBuV/m (At 10m)	
	Class A	Class B
30 ~ 230	40	30
230 ~ 1000	47	37

Limit tables for non-digital device:

Class A Radiated Emission limit at 10m (for others)

Frequency (MHZ)	Field Strength Limit (uV/m)Q.P.	Field Strength Limit (dBuV/m)Q.P.
30 - 88	90	39
88 - 216	150	43.5
216 – 960	210	46.4
Above 960	300	49.5

Class B Radiated Emission limit at 3m (for others)

Frequency (MHZ)	Field Strength Limit (uV/m)Q.P.	Field Strength Limit (dBuV/m)Q.P.
30 - 88	100	40
88 - 216	150	43.5
216 – 960	200	46
Above 960	500	54

Above 1GHz(for all device)

Frequency (MHZ)	Class A (dBuV/m) (At 10m)		Class B (dBuV/m) (At 3m)	
	Average	Peak	Average	Peak
Above 1000	49.5	69.5	54	74

- NOTE:** (1) The lower limit shall apply at the transition frequencies.
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
 (3) The measurement above 1GHz is at close-in distances 3m, and determine the limit L₂ corresponding to the close-in distance **d₂** by applying the following relation: **L₂ = L₁ (d₁/d₂)**, where L₁ is the specified limit in microvolts per metre (uV/m) at the distance **d₁** (10m), L₂ is the new limit for distance **d₂** (3m).
 So the new Class A limit above 1GHz at 3m is as following table:

Frequency (MHZ)	Class A (dBuV/m) (At 3m)	
	Average	Peak
Above 1000	60	80

According to FCC Part 15.33 (b), for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower

7.2. TEST INSTRUMENTS

Open Area Test Site # J				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101054	03/31/2016
Bilog Antenna	Sunol	JB1	A100209-2	08/18/2015
Pre-Amplifier	Schaffner	CPA9231A	3613	05/28/2016
CABLE	EMCI	8Dr	N-Type#J4/6	08/15/2015
Thermo-Hygro Meter	Wisewind	201A	No. 04	06/02/2016
Test S/W	EZ-EMC			
Above 1GHz Used				
Signal Analyzer (9k – 44GHz)	Agilent	N9010A	MY53440125	12/15/2015
Horn Antenna (1 – 18GHz)	EMCO	3117	00139062	10/19/2015
Pre-Amplifier (1 – 26.5GHz)	HP	8449B	3008A01266	12/15/2015
CABLE (1 – 26.5GHz)	Huber+Suhner	SUCOFLEX 104PEA	39448/4PEA	12/14/2015
CABLE (1 – 40GHz)	Huber+Suhner	SUCOFLEX 102	33633/2	12/14/2015
THERMO- HYGRO METER	WISEWIND	201A	No. 02	05/10/2016
Test S/W	EZ-EMC			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. N.C.R = No Calibration Request.

7.3. TEST PROCEDURES (please refer to measurement standard or CCS SOP PA-031)**Procedure of Preliminary Test**


- The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 12 mm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per ANSI C63.4.
- All I/O cables were positioned to simulate typical usage as per ANSI C63.4.
- The EUT received AC 120VAC/60Hz power source from the outlet socket under the turntable. All support equipment power received from another socket under the turntable.
- The antenna was placed at 3 or 10 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.
- The Analyzer / Receiver quickly scanned from 30MHz to 40GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- The test mode(s) described in Item 3.1 were scanned during the preliminary test:
- After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.
- The worst configuration of EUT and cable of the above highest emission level were recorded for reference of the final test.

Procedure of Final Test


- EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.
- The Analyzer / Receiver scanned from 30MHz to 40GHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 or 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- Recording at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. Below 1GHz the Q.P. reading and above 1GHz the Peak and Average reading are presented.
- The test data of the worst-case condition(s) was recorded.

7.4. TEST SETUP

Below 1GHz

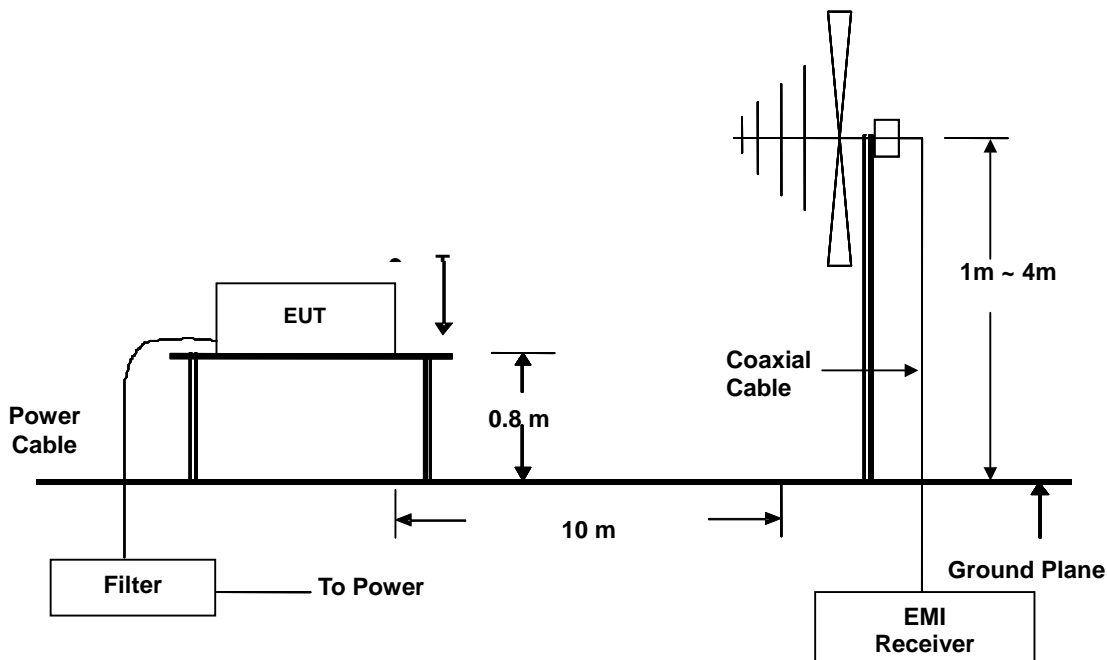

Above 1GHz

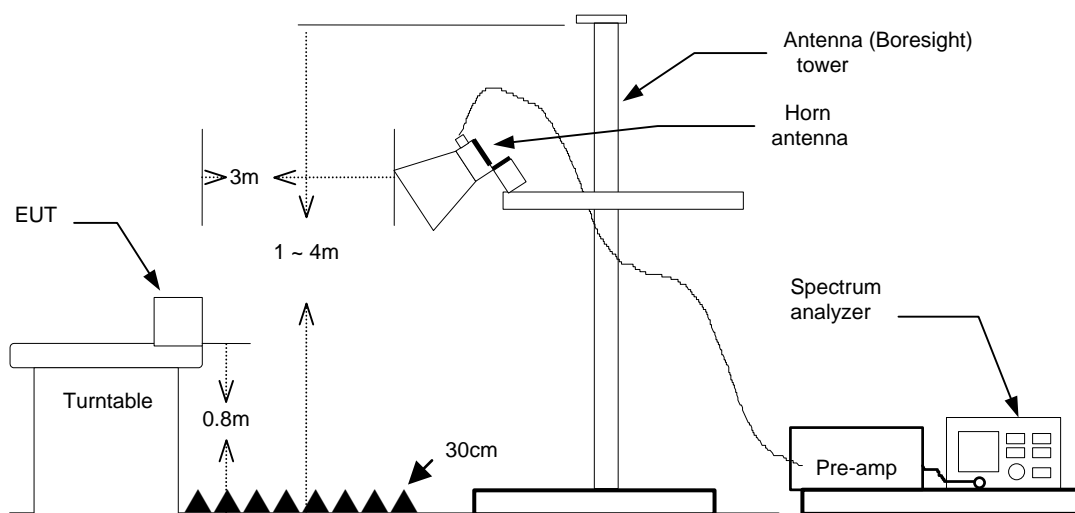

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.5. DATA SAMPLE

Below 1GHz

Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/Q)	Pol. (H/V)
x.xx	14.0	12.2	26.2	40	-13.8	Q	H

Above 1GHz

Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
x.xx	42.95	0.55	43.50	60	-16.50	A	H

- Freq. = Emission frequency in MHz
- Reading = Uncorrected Analyzer/Receiver reading
- Factor = Antenna Factor + Cable Loss - Amplifier Gain
- Result = Reading + Factor
- Limit = Limit stated in standard
- Margin = Reading in reference to limit
- P = Peak Reading
- Q = Quasi-peak Reading
- A = Average Reading
- H = Antenna Polarization: Horizontal
- V = Antenna Polarization: Vertical


Calculation Formula

Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)

7.6. TEST RESULTS

Below 1GHz


Model No.	OMNI-2155HTT-A1-1010	Test Mode	Mode 5
Environmental Conditions	25°C, 68% RH	6dB Bandwidth	120 kHz
Antenna Pole	Vertical	Antenna Distance	10m
Detector Function	Quasi-peak.	Tested by	JIM LIAN
Standard	FCC CLASS A W/ CISPR 22 CLASS A LIMIT		

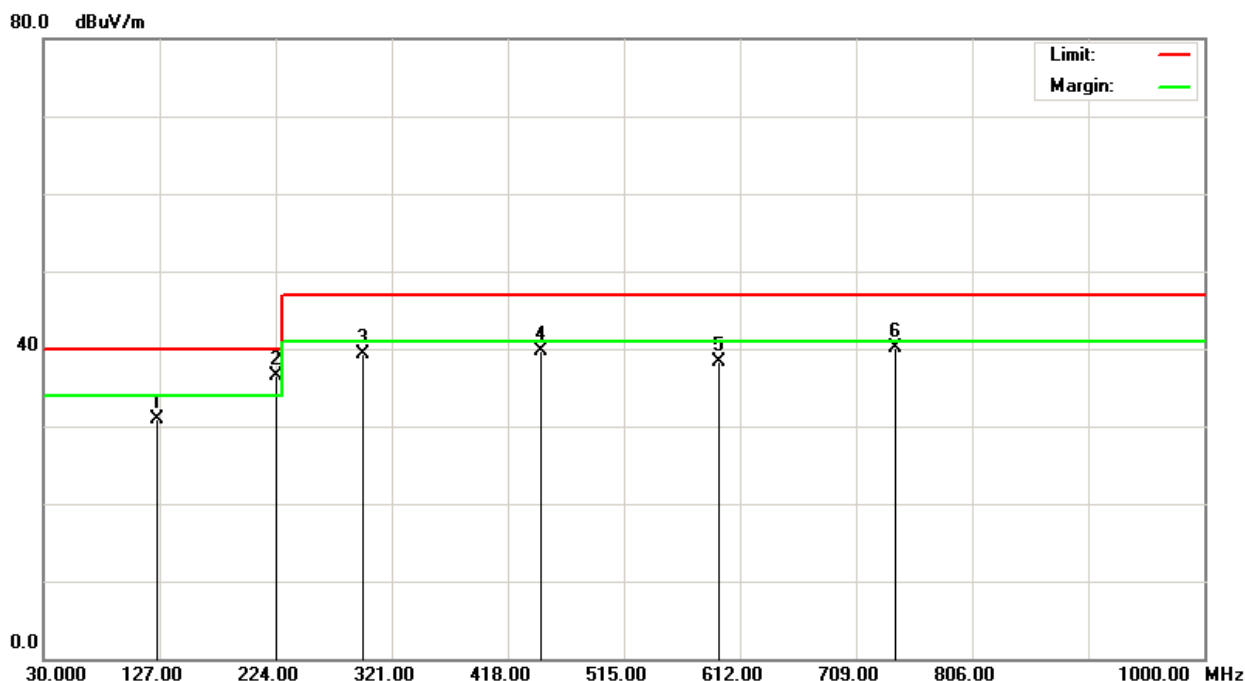

Radiated Emission Readings									
Frequency Range Investigated				30 MHz to 1000 MHz at 10m					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
125.0040	44.00	-13.10	30.90	40.00	-9.10	100	320	Q	V
225.0000	51.70	-15.21	36.49	40.00	-3.51	100	268	Q	V
297.0020	51.60	-12.33	39.27	47.00	-7.73	100	189	Q	V
445.5020	47.80	-8.06	39.74	47.00	-7.26	400	57	Q	V
594.0040	43.80	-5.48	38.32	47.00	-8.68	400	142	Q	V
742.5000	42.60	-2.42	40.18	47.00	-6.82	400	233	Q	V

Note: 1. 30MHz to 1000MHz test is Applicable CISPR 22 standard.
 2. P= Peak Reading; Q= Quasi-peak Reading.

Model No.	OMNI-2155HTT-A1-1010	Test Mode	Mode 5
Environmental Conditions	25°C, 68% RH	6dB Bandwidth	120 kHz
Antenna Pole	Horizontal	Antenna Distance	10m
Detector Function	Quasi-peak.	Tested by	JIM LIAN
Standard	FCC CLASS A W/ CISPR 22 CLASS A LIMIT		

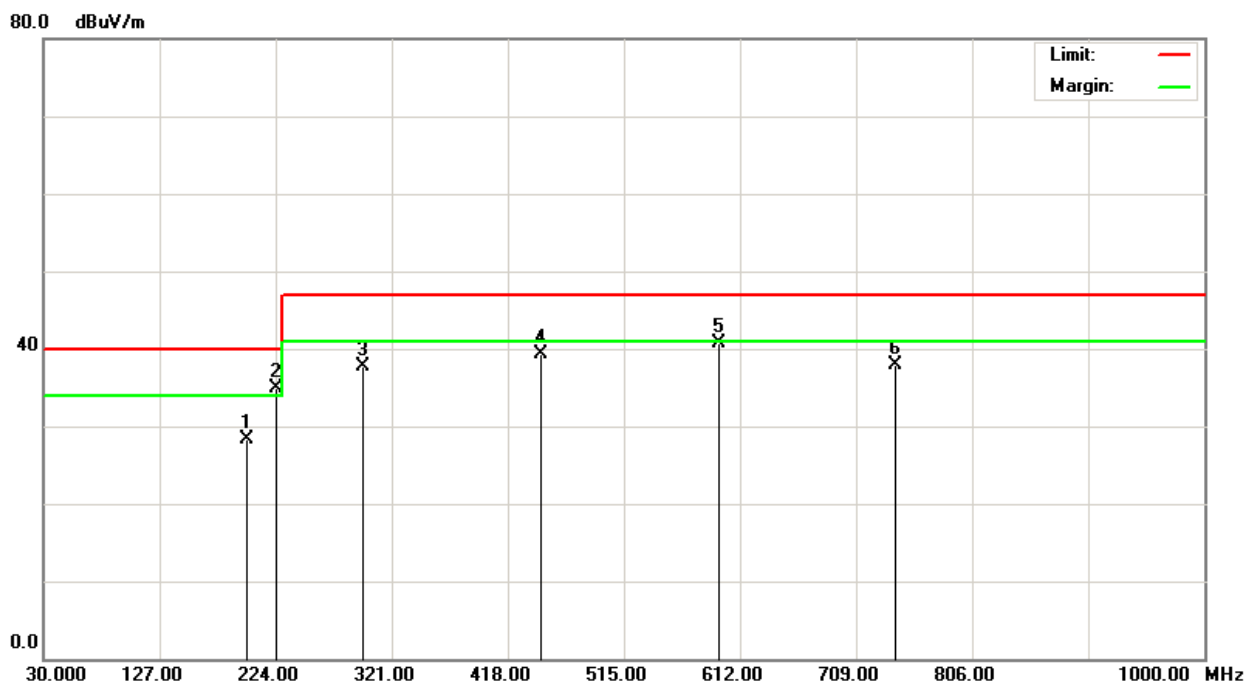

Radiated Emission Readings									
Frequency Range Investigated				30 MHz to 1000 MHz at 10m					
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
200.0020	42.60	-14.29	28.31	40.00	-11.69	400	241	Q	H
224.9980	50.10	-15.22	34.88	40.00	-5.12	400	332	Q	H
297.0060	50.00	-12.33	37.67	47.00	-9.33	400	103	Q	H
445.5060	47.30	-8.06	39.24	47.00	-7.76	100	61	Q	H
594.0040	46.10	-5.48	40.62	47.00	-6.38	100	285	Q	H
742.5060	40.40	-2.42	37.98	47.00	-9.02	100	123	Q	H

Note: 1. 30MHz to 1000MHz test is Applicable CISPR 22 standard.
 2. P= Peak Reading; Q= Quasi-peak Reading.

Above 1GHz

Model No.	OMNI-2155HTT-A1-1010	Test Mode	Mode 5
Environmental Conditions	26°C, 60% RH	6dB Bandwidth	1 MHz
Antenna Pole	Vertical / Horizontal	Antenna Distance	3m
Highest frequency generated or used	1990MHz	Upper frequency	9950MHz
Detector Function	Peak and average.	Tested by	BONNY TSAI
Standard	FCC CLASS A		

Radiated Emission Readings							
Frequency Range Investigated				Above 1GHz at 3m			
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
1308.333	52.60	-7.41	45.19	80.00	-34.81	P	V
1458.333	49.59	-6.94	42.65	80.00	-37.35	P	V
1950.000	47.33	-2.71	44.62	80.00	-35.38	P	V
2241.667	47.49	-1.87	45.62	80.00	-34.38	P	V
3608.333	48.96	0.20	49.16	80.00	-30.84	P	V
4558.333	47.77	1.80	49.57	80.00	-30.43	P	V

Radiated Emission Readings							
Frequency Range Investigated				Above 1GHz at 3m			
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
1250.000	50.90	-7.58	43.32	80.00	-36.68	P	H
1333.333	51.34	-7.32	44.02	80.00	-35.98	P	H
1500.000	50.74	-6.81	43.93	80.00	-36.07	P	H
2000.000	49.40	-2.25	47.15	80.00	-32.85	P	H
2725.000	47.86	-1.05	46.81	80.00	-33.19	P	H
3350.000	47.49	-0.17	47.32	80.00	-32.68	P	H

Note: P= Peak Reading; A= Average Reading.

8 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

