



EMC

TEST REPORT

REPORT NO. : F87112708

MODEL NO. : PCM-4335

DATE OF TEST : Nov. 27, 1998

PREPARED FOR: AAEON TECHNOLOGY INC.

ADDRESS : 1F, NO. 6, ALLEY 6, LANE 45, PAO-HSIN RD.,
HSIN-TIEN CITY, TAIPEI, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

12F, NO.1, SEC.4, NAN-KING EAST RD.,
TAIPEI, TAIWAN, R.O.C.

This test report consists of 13 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



TABLE OF CONTENTS

1. CERTIFICATION	3
2. GENERAL INFORMATION.....	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF SUPPORT UNITS	5
2.3 TEST METHODOLOGY AND CONFIGURATION	5
3. TEST INSTRUMENTS	6
3.1 TEST INSTRUMENTS (EMISSION)	6
3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION	7
4. TEST RESULTS (EMISSION).....	8
4.1 RADIO DISTURBANCE.....	8
4.2 EUT OPERATION CONDITION.....	8
4.3 TEST DATA OF CONDUCTED EMISSION	9
4.4 TEST DATA OF RADIATED EMISSION	10
5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN	12



1. **CERTIFICATION**

Issue Date: Dec. 7, 1998

Product : CPU BOARD
Trade Name : AAEON
Model No. : PCM-4335
Applicant : AAEON TECHNOLOGY INC.
Standard : FCC Part 15, Subpart B, Class A
ANSI C63.4-1992
CISPR 22: 1993+A1: 1995+A2: 1996

We hereby certify that one sample of the designation has been tested in our facility on Nov. 27, 1998. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

The test results show that the EUT as described in this report is in compliance with the Class A limits of conducted and radiated emission of applicable standards.

TESTED BY: Jackey Chang, DATE: 12/7/98
(Jackey Chang)

CHECKED BY: Ariel Hsieh, DATE: 12/7/98
(Ariel Hsieh)

APPROVED BY: Mike Su, DATE: 12/7/98
(Mike Su)

ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product : CPU BOARD
Model No. : PCM-4335
Power Supply : DC (from PC)
Data Cable : N/A

Note: During the test, the EUT was installed in the industrial PC. The Industrial PC includes the following:

- CHASSIS : AAEON, model: AMPC-204P
- HDD : SEAGATE, model: ST51270A
- CPU : STPC Client, DX-66
- BACK PLANE : AAEON, model: BP-204PSA
- SWITCHING POWER SUPPLY: ZIPPY, model: EP2-4150F

The EUT was tested under the STPC Client CPU: DX-66, frequency of clock generator is 66 MHz.

For more detailed features description, please refer to manufacturer's specification or User's Manual.



2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

No	Product	Brand	Model No.	FCC ID	I/O Cable
1.	COLOR MONITOR	ADI	PD-959	FCC DoC Approved	Shielded Signal (1.5m) Nonshielded Power (1.8m)
2.	PRINTER	HP	2225C+	DSI6XU2225	Shielded Signal (1.5m) Nonshielded Power (1.8m)
3.	MODEM	ACEEX	1414	IFAXDM1414	Shielded Signal (1.2m) Nonshielded Power (1.8m)
4.	KEYBOARD	AAEON	KB-130	Verification	Shielded Signal (1.0m)
5.	MOUSE	LOGITECH	M-M36	DEL210569	Shielded Signal (1.9m)
6.	USB MOUSE	DEXIN	A3U800A	NIYS3U800A	Shielded Signal (1.5m)

2.3 TEST METHODOLOGY AND CONFIGURATION

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 1992. Radiated testing was performed at an antenna to EUT distance of 3/10 m on an open area test site.

Please refer to the photos of test configuration in Item 5.



3. TEST INSTRUMENTS

3.1 TEST INSTRUMENTS (EMISSION)

RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	8594E	3412A01132	Sept. 24, 1999
CHASE Preamplifier	CPA9231A/4	3215	Nov. 1, 1999
ROHDE & SCHWARZ TEST RECEIVER	ESVS 30	841977/002	Jan. 08, 1999
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 25, 1999
CHASE BILOG Antenna	CBL6112	2074	Dec. 25, 1998
CHANCE Turn Table & Tower Controller	ACS-I	N/A	N/A
Open Field Test Site	Site 6	ADT-R06	Dec. 23, 1998

Note: 1. The measurement uncertainty is less than +/- 3dB, which is calculated as per NAMA's document NIS81.

2. The calibration interval of the above test instruments is 12 months.
And the calibrations are traceable to NML/ROC and NIST/USA.

CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 22, 1999
ROHDE & SCHWARZ Artificial Mains Network	ESH2-Z5	892107/003	July 20, 1999
EMCO L.I.S.N. Shielded Room	3825/2 Site 3	9504-2359 ADT-C03	July 20, 1999 N/A

Note: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per NAMA's document NIS81.

2. The calibration interval of the above test instruments is 12 months.
And the calibrations are traceable to NML/ROC and NIST/USA.



3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION

LIMIT OF RADIATED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
Above 1000	300	49.5	500	54.0

Note: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

LIMIT OF CONDUCTED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4. TEST RESULTS (EMISSION)

4.1 RADIO DISTURBANCE

Frequency Range : 0.15 - 30 MHz (Conducted Emission)
30 - 1000 MHz (Radiated Emission)
Input Voltage : 120 Vac, 60 Hz
Temperature : 24 °C
Humidity : 86 %
Atmospheric Pressure : 1011 mbar

TEST RESULT	Remarks
PASS	Minimum passing margin of conducted emission: -3.4 dB at 0.156 MHz Minimum passing margin of radiated emission: -3.0 dB at 157.51 MHz

4.2 EUT OPERATION CONDITION

1. Turn on the power of all equipments.
2. Industrial PC reads a test program to enable all functions.
3. Industrial PC reads and writes messages from HDD.
4. Industrial PC sends "H" messages to monitor and monitor displays "H" patterns on screen.
5. Industrial PC sends "H" messages to modem.
6. Industrial PC sends "H" messages to printer and the printer prints them on paper.
7. Repeat steps 2-7.



4.3 TEST DATA OF CONDUCTED EMISSION

EUT: CPU BOARD

MODEL: PCM-4335

6 dB Bandwidth: 10 kHz

Freq. [MHz]	L Level [dB (μV)]		N Level [dB (μV)]		Limit [dB (μV)]		Margin [dB (μV)]			
	QP	AV	QP	AV	QP	AV	L		N	
0.156	63.4	61.8	64.2	62.6	79.0	66.0	-26.6	-4.2	-29.0	-3.4
0.246	52.4	-	50.0	-	79.0	66.0	-40.3	-	-42.8	-
0.603	32.7	-	30.2	-	73.0	60.0	-41.0	-	-39.0	-
7.766	32.0	-	34.0	-	73.0	60.0	-39.3	-	-38.9	-
10.103	33.7	-	34.1	-	73.0	60.0	-42.2	-	-43.0	-
15.359	30.8	-	30.0	-	73.0	60.0	-15.6	-	-14.8	-


- Remarks:
1. "***": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value

ATTN: JIMMY CHANG
 Operator: JIMMY CHANG
 Unit Model: LS2H-1
 Calibration: 0420489 1B GOLDM
 FULL SYSTEM

Report No. F8711-908
 Page 9-1
 Tested by Jimmy Chang

Fast Scan Settings (if Reported)

Transmitter Settings			Receiver Settings					
BLANK	3300	3340	RF BW	Detector	M-Time	Atten	Preamp	Display
100%	400%	3A	100	PK	0.00ms	100dBH	OFF	dBm
+20%	50	3c	100	PK	0.00ms	100dBH	OFF	dBm
OFF	30%	3K	100	PK	0.00ms	100dBH	OFF	dBm

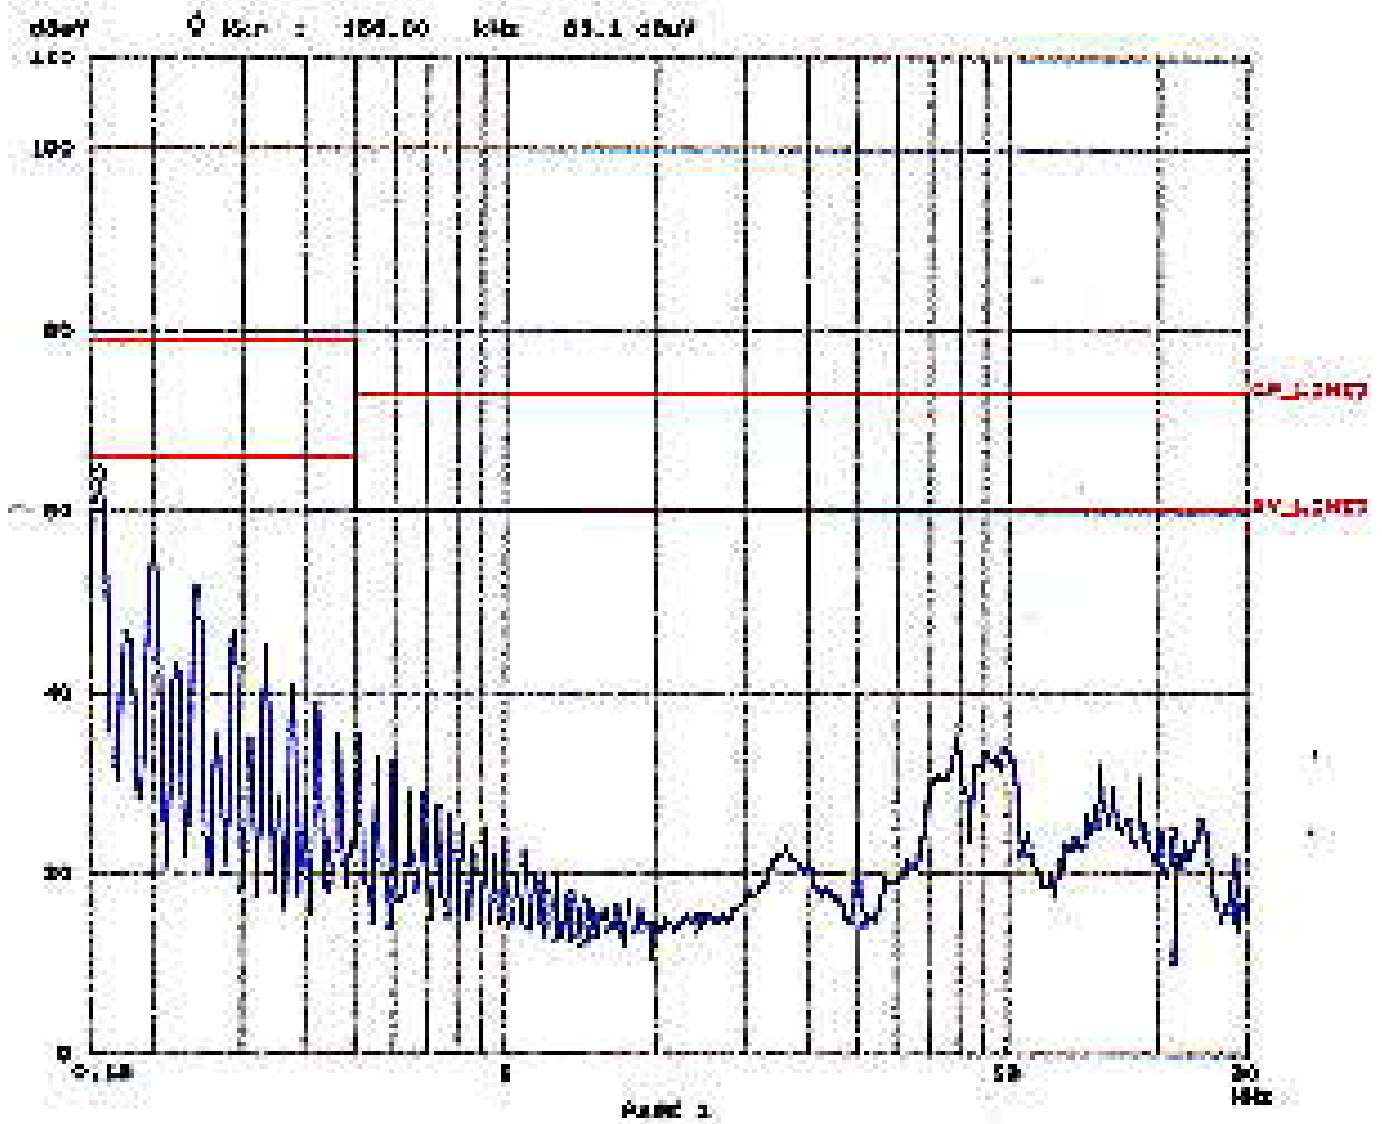


EUT: P04-4338
 Operator: JAMES D. SMITH
 File Name: TEST 1.M
 Comment: P43X480 IS COLOR
 FULL SYSTEM

Report No. E8711-708
 Page 7-2
 Tested by James Smith

Fast Scan Settings IS Range

Frequencies			Receiver Settings						
Start	Stop	Step	TP	SM	Detector	H-25dB	Video Filter	Video Preset	Display
100K	400K	2A	10K	PK	PK	0.00ms	1000Hz	OFF	dBm
400K	5M	5A	10K	PK	PK	0.00ms	1000Hz	OFF	dBm
5M	30M	2A	10K	PK	PK	0.00ms	1000Hz	OFF	dBm

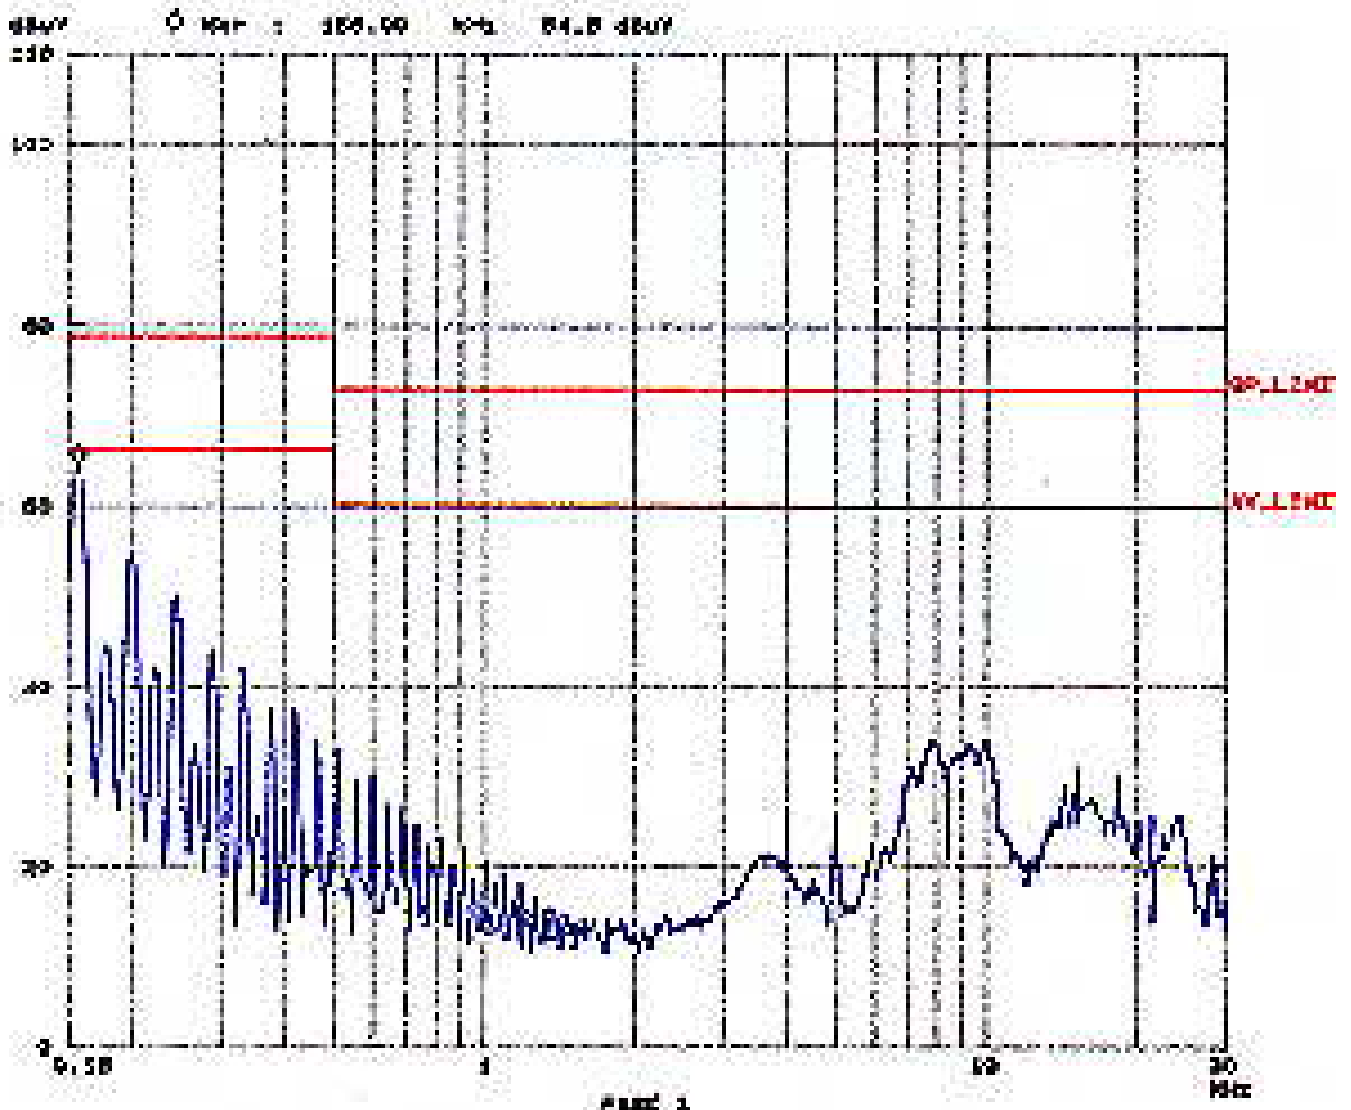



4.4 TEST DATA OF RADIATED EMISSION

EUT: CPU BOARD

MODEL: PCM-4335

ANT. POLARITY: Horizontal

DETECTOR FUNCTION: Quasi-peak

6 dB BANDWIDTH: 120 kHz

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
128.88	14.5	22.3	36.8	40.0	-3.2
132.05	14.1	19.3	33.4	40.0	-6.6
136.03	13.6	19.4	33.0	40.0	-7.0
157.50	11.3	23.9	35.2	40.0	-4.8
198.07	10.5	10.1	20.6	40.0	-19.4
200.46	10.5	19.3	29.8	40.0	-10.2
202.07	10.6	18.3	28.9	40.0	-11.1
229.10	13.2	20.3	33.5	40.0	-6.5
243.42	14.5	19.2	33.7	47.0	-13.3
319.99	16.7	14.6	31.3	47.0	-15.7

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
 2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION

EUT: CPU BOARD

MODEL: PCM-4335

ANT. POLARITY: Vertical

DETECTOR FUNCTION: Quasi-peak

6 dB BANDWIDTH: 120 kHz

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M


Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
60.31	8.2	17.6	25.8	40.0	-14.2
128.87	13.9	21.0	34.9	40.0	-5.1
132.04	13.7	21.7	35.4	40.0	-4.6
157.51	12.4	24.6	37.0	40.0	-3.0
171.80	10.7	22.3	33.0	40.0	-7.0
186.15	10.3	24.5	34.8	40.0	-5.2
198.06	11.6	17.4	29.0	40.0	-11.0
229.08	13.1	16.8	29.9	40.0	-10.1
319.97	16.3	24.9	41.2	47.0	-5.8

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
 2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH
MINIMUM MARGIN

RADIATED EMISSION TEST

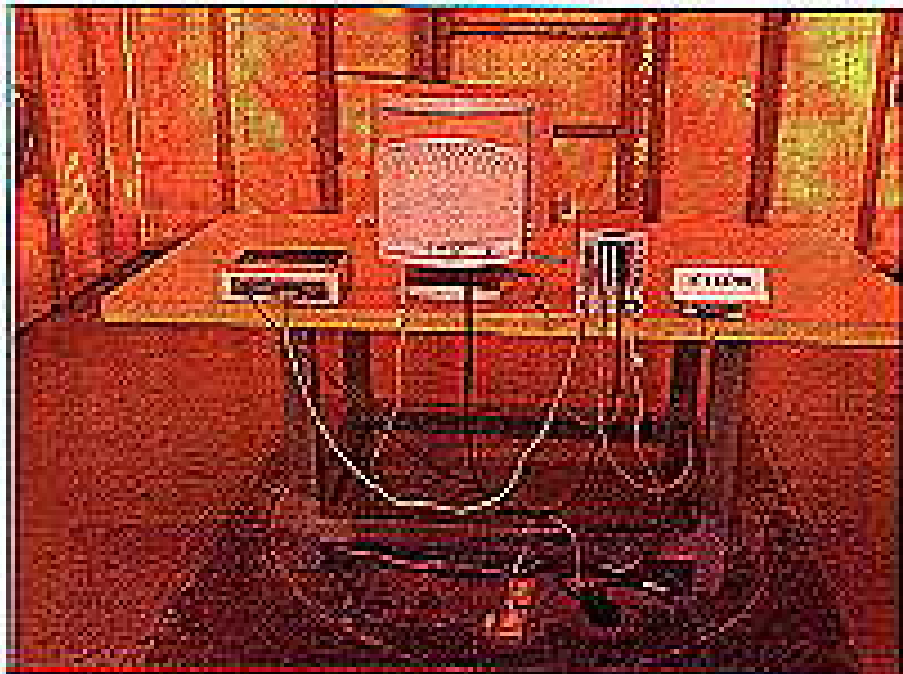



CONDUCTED EMISSION TEST

