



SPORTON LAB.

Certificate No.: FD992507

CERTIFICATE OF COMPLIANCE

Authorized under Declaration of Conformity
according to

47 CFR, Part 2 and Part 15 of the FCC Rules



EQUIPMENT : Rugged Tablet Computer

MODEL NO. : RTC-1000x (where x is A or blank)

APPLICANT : AAEON Technology Inc.

5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C




I HEREBY CERTIFY THAT:

THE MEASUREMENTS SHOWN IN THIS TEST REPORT WERE MADE IN
ACCORDANCE WITH THE PROCEDURES GIVEN IN **ANSI C63.4 - 2003** AND
THE ENERGY EMITTED BY THIS EQUIPMENT WAS **FCC Part 15 Subpart B**
IN BOTH RADIATED AND CONDUCTED EMISSIONS **CLASS B** LIMITS.

THE TESTING WAS COMPLETED ON **Oct. 12, 2009**

AT **SPORTON INTERNATIONAL INC. LAB.**


Jones Chan
Supervisor

Nov. 11. 2009



FCC TEST REPORT

Authorized under **D**eclaration of **C**onformity

according to

**47 CFR FCC Rules and Regulations Part 15 Subpart B,
Class B Digital Device**

Equipment : Rugged Tablet Computer

Model No. : RTC-1000x (where x is A or blank)

Trade Name : AAEON

Applicant : **AAEON Technology Inc.**
5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien
City, Taipei, Taiwan, R.O.C

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

History of this test report.....	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1 Applicant.....	2
1.2 Manufacturer	2
1.3 Basic Description of Equipment under Test	2
1.4 Feature of Equipment under Test	2
2. Test Configuration of Equipment under Test.....	3
2.1 Test Manner	3
2.2 Description of Support Units	3
2.3 Connection Diagram of Test System	4
3. Test Software	5
4. General Information of Test.....	6
4.1 Test Facility	6
4.2 Uncertainty of Test Site	6
4.3 Test Voltage	6
4.4 Standard for Methods of Measurement.....	6
4.5 Test in Compliance with	6
4.6 Frequency Range Investigated	6
4.7 Test Distance	6
5. Test of Conducted Powerline	7
5.1 Major Measuring Instruments.....	7
5.2 Test Procedures.....	7
5.3 Typical Test Setup Layout of Conducted Powerline	8
5.4 Test Result of AC Powerline Conducted Emission	9
5.5 Photographs of Conducted Powerline Test Configuration	11
6. Test of Radiated Emission.....	12
6.1 Major Measuring Instruments.....	12
6.2 Test Procedures.....	13
6.3 Typical Test Setup Layout of Radiated Emission.....	14
6.4 Test Result of Radiated Emission	15
6.5 Photographs of Radiated Emission Test Configuration	31
7. List of Measuring Equipment Used	32
8. TAF Certificate of Accreditation.....	34
Appendix A. Photographs of EUT.....	A1 ~ A34

CERTIFICATE OF COMPLIANCE

Authorized under **Declaration of Conformity**

according to

**47 CFR FCC Rules and Regulations Part 15 Subpart B,
Class B Digital Device**

Equipment : Rugged Tablet Computer

Model No. : RTC-1000x (where x is A or blank)

Trade Name : AAEON

Applicant : **AAEON Technology Inc.**
5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien
City, Taipei, Taiwan, R.O.C

HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 2003** and the energy emitted by this equipment was **passed FCC Part 15 Subpart B** in both Radiated and Conducted emission **Class B** limits. Testing was carried out on **Oct. 12, 2009** at **SPORTON International Inc. LAB.**



Jones Chan
Supervisor

Nov. 11, 2009

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1 Applicant

AAEON Technology Inc.

5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei 231, Taiwan, R.O.C

1.2 Manufacturer

Same as 1.1.

1.3 Basic Description of Equipment under Test

Equipment	: Rugged Tablet Computer
Model No.	: RTC-1000x (where x is A or blank)
Trade Name	: AAEON
MiniUSB to USB	: Double-Shielded, 1.8m
RJ11 Cable	: Non-Shielded, 10m
RJ45 Cable	: Double-Shielded, 10m
Power Supply Type	: Switching
AC Power Cord	: Non-Shielded, 1.8m, 3 pin
DC Power Cable	: Non-Shielded, 1.8m, 2 pin (with a core)

1.4 Feature of Equipment under Test

Display	TFT LCD 10.2" WSVGA (1024X600).18Bits, with touch screen panel, standard 220 nits.
Mother Board	A1 Version: Intel® Core Duo ULV 1.2Ghz (U2500) CPU on board A0 Version: Intel® Atom N270 1.6Ghz CPU on board
Memory	Support up to 2G DDRII 667 RAM (Factory Optional)
Storage	2.5" 9.5mm height HDD (SATA) 80/100/120GB , SSD(Optional)
Expansion	PCMCIA, CF
Bio-Tech Security	Finger Print
I/O	Two USB 2.0 Two Audio In /Out Jack for Microphone/ Earphone One DC-In Jack One RJ-11 jack for 56kbps V.92/K56 flex modem One RJ-45 jack for 10/100/100 LAN One RS232 One Mini USB port One Reset Button One RF On/Off Button Two Internal Mini-Card Slots
Wireless/Communications	Internal 56K V.92 Fax/Modem/Internal Giga bit Ethernet LAN Qcom Q802XKG Wireless mini-card (802.11b/g) Bluetooth EDR2.0 (optional)
Others	Numeric Keypad & Programmable Key Function

2. Test Configuration of Equipment under Test


2.1 Test Manner

- a. The EUT has been associated and peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The complete test system included remote workstation DELL LCD Monitor, DELL Keyboard, Microsoft Mouse, PowerSync Mic+Earphone, ACEEX Modem, Bestkept External HD Case, Compact Flash CF Card, and EUT for EMI test. The remote workstation, EASYSWITCH Central Office and DELL Notebook.
- c. The following test modes were for EMI test:
 Mode 1. LAN 1Gbps : LCD 1024 x 600, 60Hz
 Mode 2. LAN 1Gbps : LCD 800 x 600, 60Hz
 For conduction, cause "mode 1" generated the worst test result, it was reported as final data.
- d. The following test modes were for radiated (1GHz / 5TH of harmonic CPU fundamental) final test:
 Mode 1. 1-13GHz
- e. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 13,000MHz.

2.2 Description of Support Units

No.	Description	Manufacturer	Model	FCC ID	Signal Cable Description
1	LCD Monitor	DELL	2408WFPb	---	D-SUB Cable D-Shielded, 1.8m
2	(USB)Keyboard	DELL	SK-8115	DoC	AL-F-Shielded, 1.8m
3	(USB) Mouse	Microsoft	1004	DoC	D-Shielded, 1.8m
4	MIC.+ Earphone	PowerSync	MIC-03	---	Audio Cable Non-Shielded, 1.7m
5	Modem	ACEEX	DM1414	IFAXDM1414	Braided-Shielded, 1.15m
6	External HD Case	Bestkept	F12-UF	DoC	USB Cable Braided-Shielded, 1.8m
7	CF Card	Compact Flash	256MB	---	---
8	PCMCIA Card	Compact Flash	32MB	---	---
9	Central Office (Remote Workstation)	EASYSWITCH	SMS-4 Plus	---	RJ11 Cable
10	Notebook PC (Remote Workstation)	DELL	D400	DoC	RJ45 Cable, D-Shielded , 10m

2.3 Connection Diagram of Test System

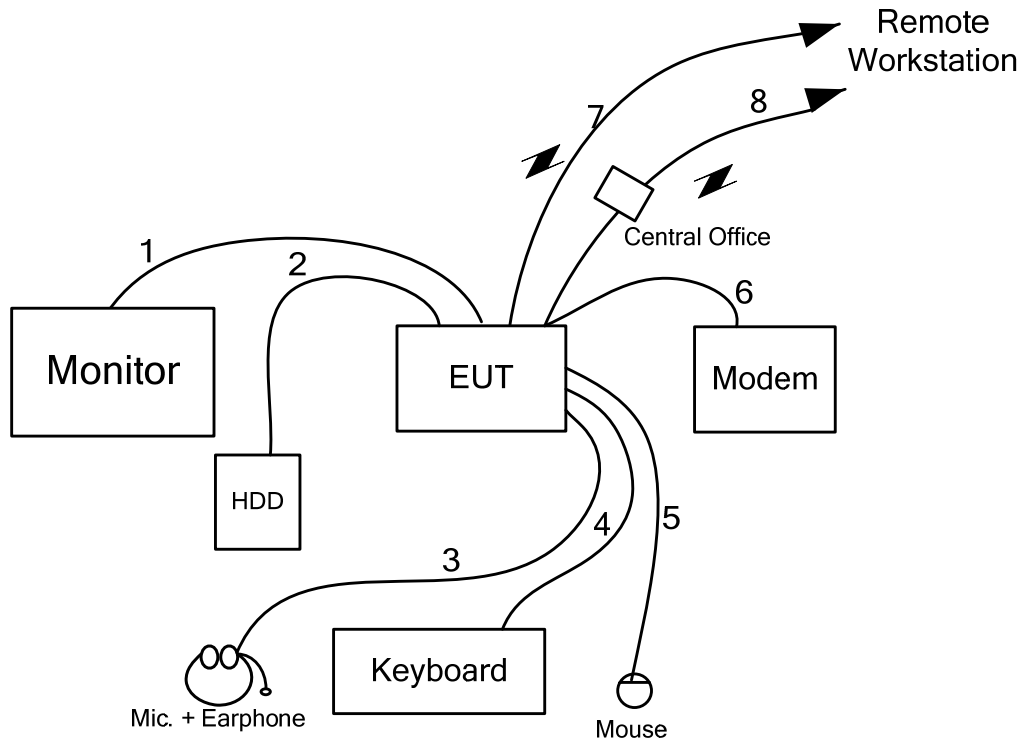

The support unit 7 and support unit 8 were inserted into EUT.

1. The D-SUB cable is connected from EUT to the support unit 1.
2. The USB cable is connected from EUT to the support unit 6.
3. The Audio cable is connected from EUT to the support unit 4.
4. The USB cable is connected from EUT to the support unit 2.
5. The USB cable is connected from EUT to the support unit 3.
6. The RS232 cable is connected from EUT to the support unit 5.
7. The RJ45 cable is connected from EUT to the remote workstation.
8. The RJ11 cable is connected from EUT to the remote workstation.

Note: Above support unit on behalf of the meaning, please refer to section 2.2 (EMI part).

3. Test Software

An executive program, " EMCTEST.EXE " under Win XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The EUT reads the test program from the hard disk drive and runs it.
- c. The EUT sends "H" messages to the external hard disk, and the hard disk reads and writes the message.
- d. The Notebook sends "H" messages to the modem.
- e. Repeat the steps from c to d.

At the same time, the following programs were executed:

- Executed "Media Player" to play music via MIC.+ Earphone.
- Executed "Winthrax.exe" to link with the EUT to receive data from external HDD.
- Executed "Winthrax.exe" to link with the EUT to receive data from internal Card.
- Executed "WLAN" to link with the remote workstation to receive and transmit data by wireless LAN.
- Executed "Bluetooth" to link with the remote workstation to receive and transmit data by Bluetooth.
- Executed "Ping" to link with the remote workstation to receive and transmit data via RJ45 cable.
- Executed "Hyper Terminal" was executed to link with the remote workstation to receive and transmit data via RJ11 Cable.

4. General Information of Test

4.1 Test Facility

Test Site Location : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
 TEL 886-3-327-3456
 FAX 886-3-318-0055

Test Site No. : CO04-HY, 10CH02-HY

<1G-13G>

Test Site Location : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
 TEL 886-3-327-3456
 FAX 886-3-318-0055

Test Site No. : 03CH03-HY

4.2 Uncertainty of Test Site

Test Items	Test Site No.	Uncertainty	Remark
Conducted Emissions	CO04-HY	± 2.26dB	Confidence levels of 95%
Radiated Emissions (Below 1GHz)	10CH02-HY	± 2.82dB	Confidence levels of 95%
Radiated Emissions (Above 1GHz)	03CH03-HY	± 2.54dB	Confidence levels of 95%

4.3 Test Voltage

120V / 60Hz

4.4 Standard for Methods of Measurement

ANSI C63.4-2003

4.5 Test in Compliance with

FCC Rules and Regulations Part 15 Subpart B

4.6 Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation: from 30 MHz to 13GHz

4.7 Test Distance

- a. The test distance of radiated emission from antenna to EUT is 10 M(from 30MHz ~ 1000MHz).
- b. The test distance of radiated emission from antenna to EUT is 3 M (from 1GHz ~ 13GHz).

5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


5.1 Major Measuring Instruments

- Test Receiver (R&S ESCS 30)
 - Attenuation 10 dB
 - Start Frequency 0.15 MHz
 - Stop Frequency 30 MHz
 - IF Bandwidth 9 kHz

5.2 Test Procedures

- a. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The CISPR states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.3 Typical Test Setup Layout of Conducted Powerline

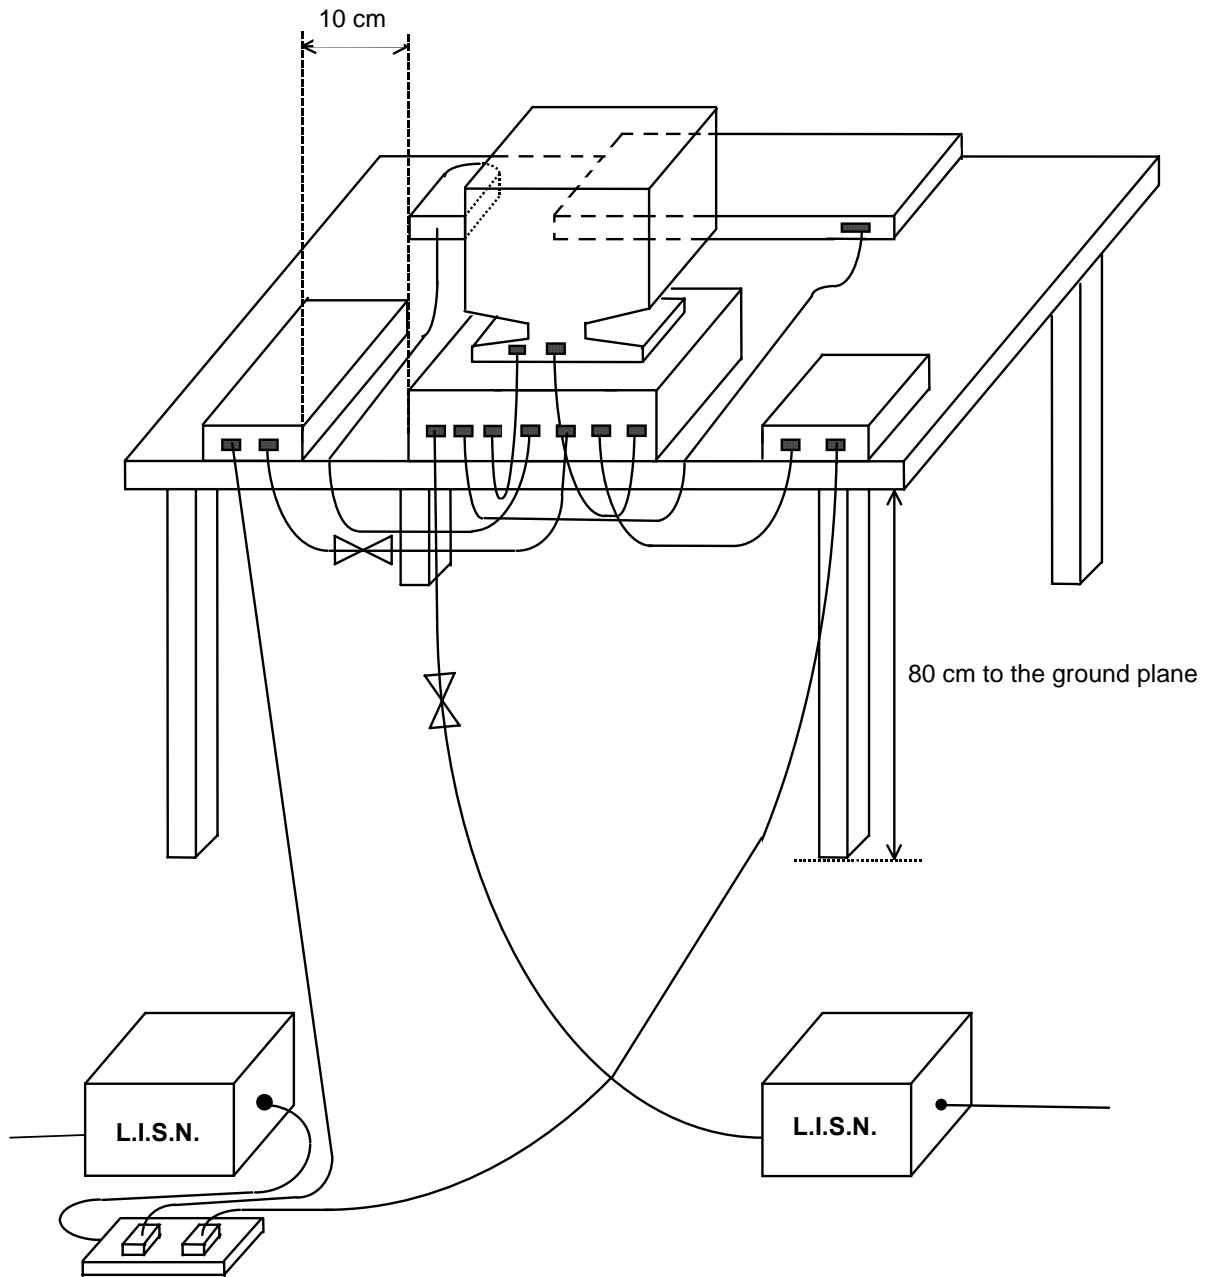


5.4 Test Result of AC Powerline Conducted Emission

Configuration	Mode 1	Temperature	25°C
Test Engineer	Chris Lin	Humidity	55%


Note: Corrected Reading (dBµV) = Probe Factor + Cable Loss + Read Level = Level

■ The test was passed at the minimum margin that marked by the frame in the following data

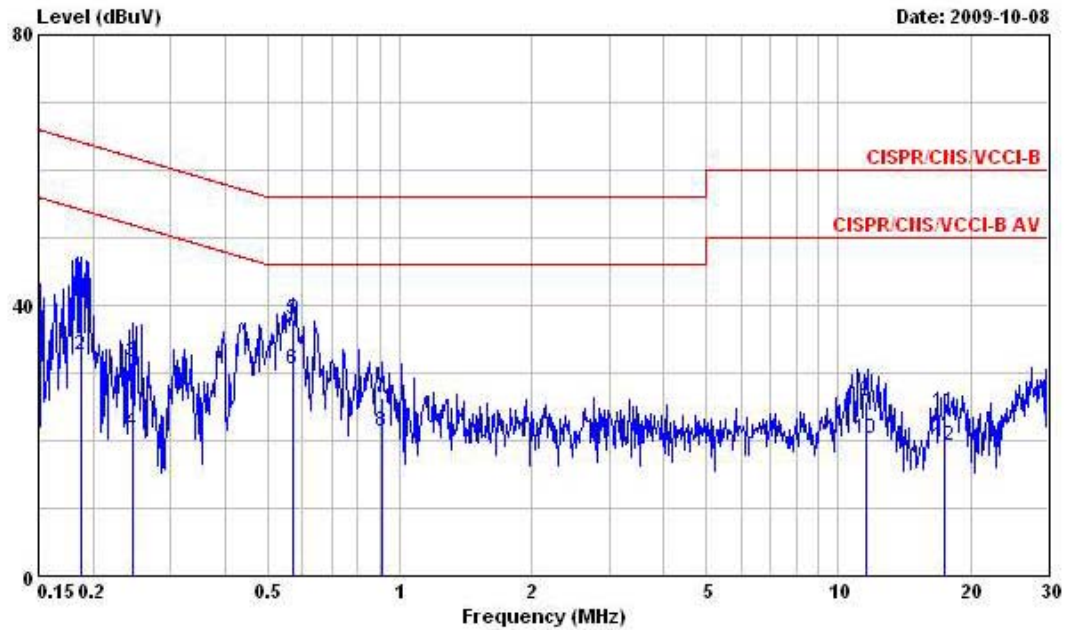

Site : CO04-HY
 Condition : CISPR/CNS/VCCI-B LISN 2009 0324 99041 LINE
 EUT : Rugged Tablet Computer
 POWER: 120V 60Hz
 Model : RTC-1000x
 Memo : LCD+D-SUB 1024*600 60Hz
 Memo : LAN 1G
 Memo : FULL SYSTEM
 Memo :

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1883800	43.39	-20.72	64.11	43.24	0.08	0.07	QP
2	0.1883800	32.52	-21.59	54.11	32.37	0.08	0.07	Average
3	0.2468240	31.54	-30.32	61.86	31.39	0.08	0.07	QP
4	0.2468240	21.29	-30.57	51.86	21.14	0.08	0.07	Average
5	0.5731280	37.89	-18.11	56.00	37.68	0.10	0.11	QP
6	0.5731280	30.49	-15.51	46.00	30.28	0.10	0.11	Average
7	0.9135710	26.38	-29.62	56.00	26.15	0.11	0.12	QP
8	0.9135710	21.25	-24.75	46.00	21.02	0.11	0.12	Average
9	11.620	25.73	-34.27	60.00	25.17	0.29	0.27	QP
10	11.620	20.33	-29.67	50.00	19.77	0.29	0.27	Average
11	17.470	24.32	-35.68	60.00	23.72	0.36	0.24	QP
12	17.470	19.24	-30.76	50.00	18.64	0.36	0.24	Average

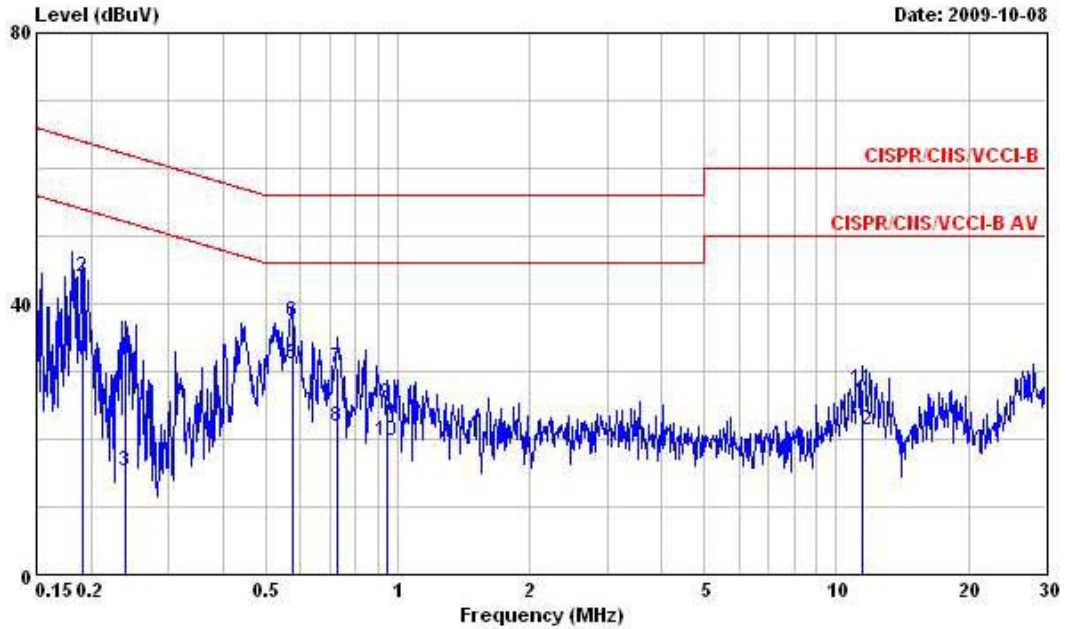


Site : CO04-HY
 Condition : CISPR/CNS/VCCI-B LISN 2009 0324 99041 NEUTRAL
 EUT : Rugged Tablet Computer
 POWER: 120V 60Hz
 Model : RTC-1000x
 Memo : LCD+D-SUB 1024*600 60Hz
 Memo : LAN IG
 Memo : FULL SYSTEM
 Memo :

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.1903870	31.66	-22.36	54.02	31.52	0.08	0.06	Average
2	0.1903870	44.02	-20.00	64.02	43.88	0.08	0.06	QP
3	0.2391010	15.15	-36.98	52.13	15.00	0.08	0.07	Average
4	0.2391010	31.81	-30.32	62.13	31.66	0.08	0.07	QP
5	0.5761730	30.93	-15.07	46.00	30.73	0.09	0.11	Average
6	0.5761730	37.36	-18.64	56.00	37.16	0.09	0.11	QP
7	0.7274420	30.41	-25.59	56.00	30.21	0.09	0.11	QP
8	0.7274420	21.86	-24.14	46.00	21.66	0.09	0.11	Average
9	0.9430800	25.21	-30.79	56.00	24.99	0.10	0.12	QP
10	0.9430800	19.83	-26.17	46.00	19.61	0.10	0.12	Average
11	11.440	27.45	-32.55	60.00	26.89	0.28	0.28	QP
12	11.440	21.37	-28.63	50.00	20.81	0.28	0.28	Average


5.5 Photographs of Conducted Powerline Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW

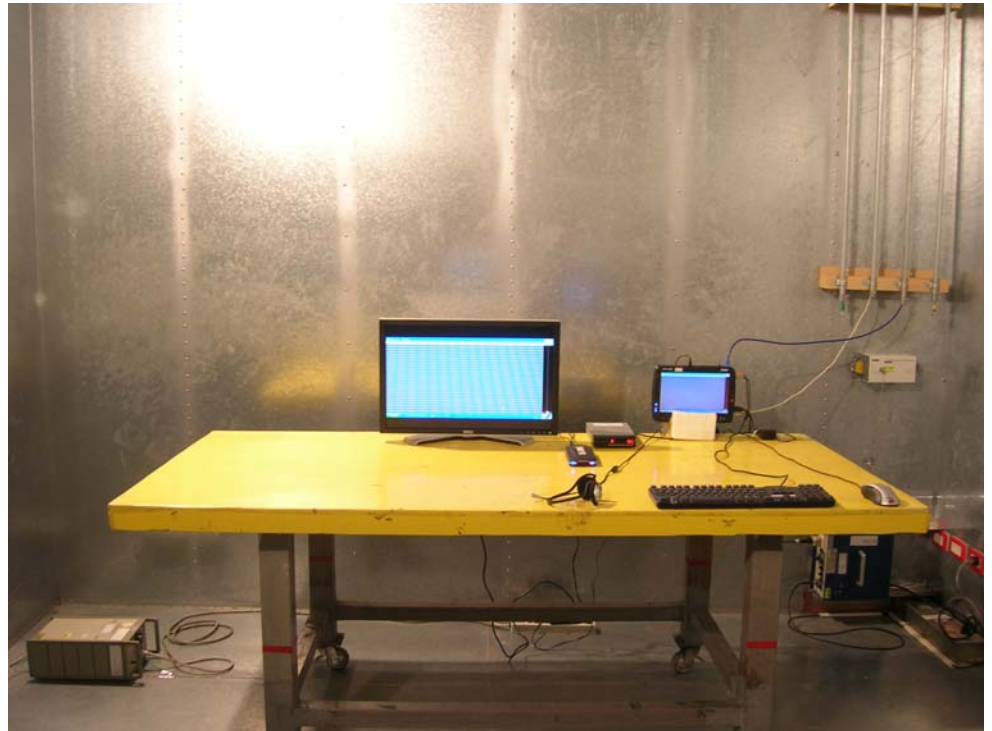

REAR VIEW

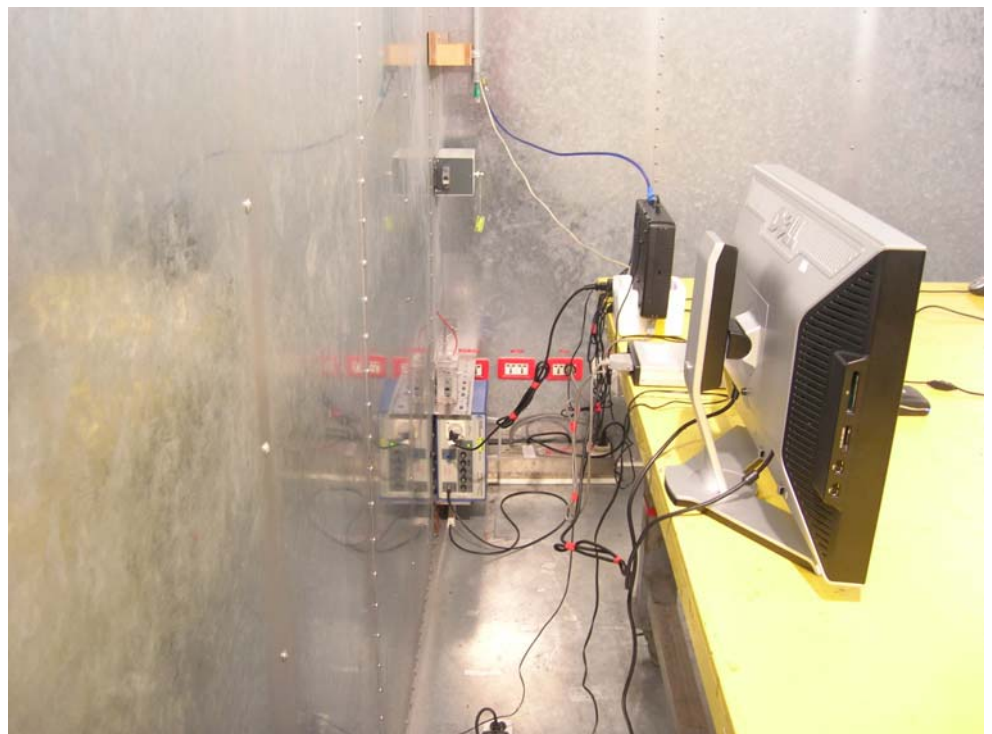

6. Test of Radiated Emission

Radiated emissions from 30 MHz to 13,000 MHz were measured with a bandwidth of 120 kHz for 30 MHz to 1000 MHz and 1 MHz for above 1GHz according to the methods defines in ANSI C63.4-2003. The EUT was placed on a nonmetallic stand, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1 Major Measuring Instruments

6.1.1 from 30MHz to 1GHz

- Amplifier (HP 8447D)
RF Gain 25 dB
Signal Input 100 kHz to 1.3GHz

- Spectrum Analyzer (R&S FSP7)
Attenuation 10 dB
Start Frequency 30 MHz
Stop Frequency 1000 MHz
Resolution Bandwidth 120 KHz
Signal Input 9 KHz to 7 GHz

- Spectrum Analyzer (R&S ESI7)
Attenuation 10 dB
Start Frequency 30 MHz
Stop Frequency 2000 MHz
Resolution Bandwidth 120 KHz
Signal Input 20 Hz to 7 GHz

6.1.2 from 1GHz to 13GHz


- Amplifier (Agilent 8449B)
RF Gain 35 dB
Signal Input 1 GHz - 26.5 GHz

- Spectrum Analyzer (R&S FSP40)
Attenuation 10 dB
Start Frequency 1 GHz
Stop Frequency 18 GHz
Resolution Bandwidth 1 MHz
Video Bandwidth 3 MHz
Signal Input 9 kHz - 40 GHz

6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3/10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

6.3 Typical Test Setup Layout of Radiated Emission

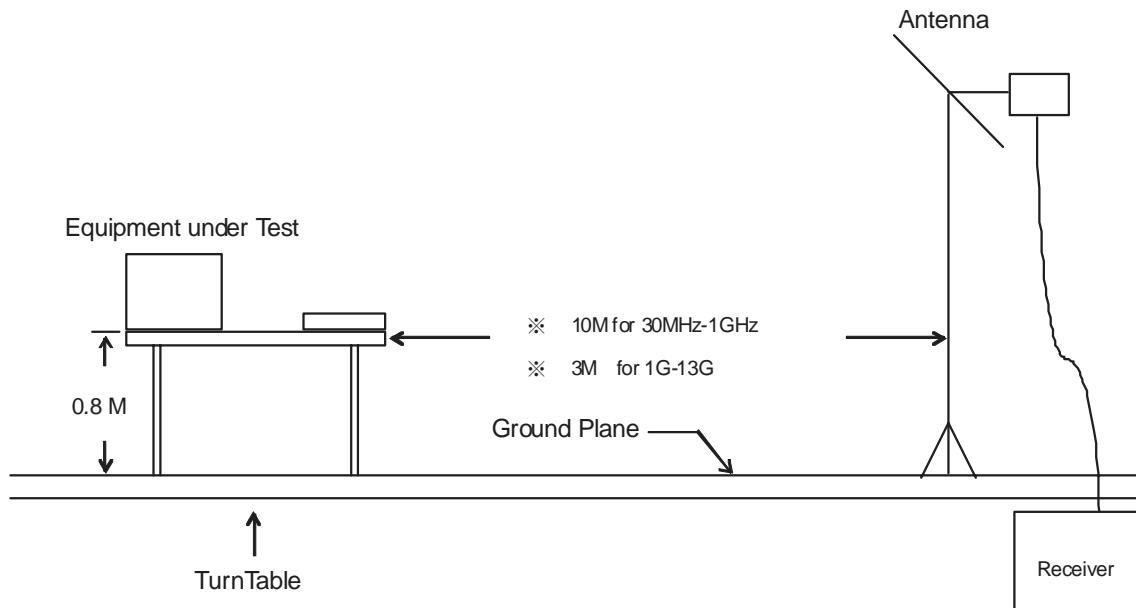


6.4 Test Result of Radiated Emission

Frequency Range of Test	from 30 MHz to 1,000 MHz	Test Distance	10m
Test Mode	Mode 1	Temperature	24°C
Test Engineer	Nick Chan	Humidity	49%

Note: 1. Emission level (dBμV/m) = 20 log Emission level (μV/m)


2. Corrected Reading : Antenna Factor + Cable Loss + Read Level – Preamp Factor = Level

■ The test was passed at the minimum margin that marked by the frame in the following data

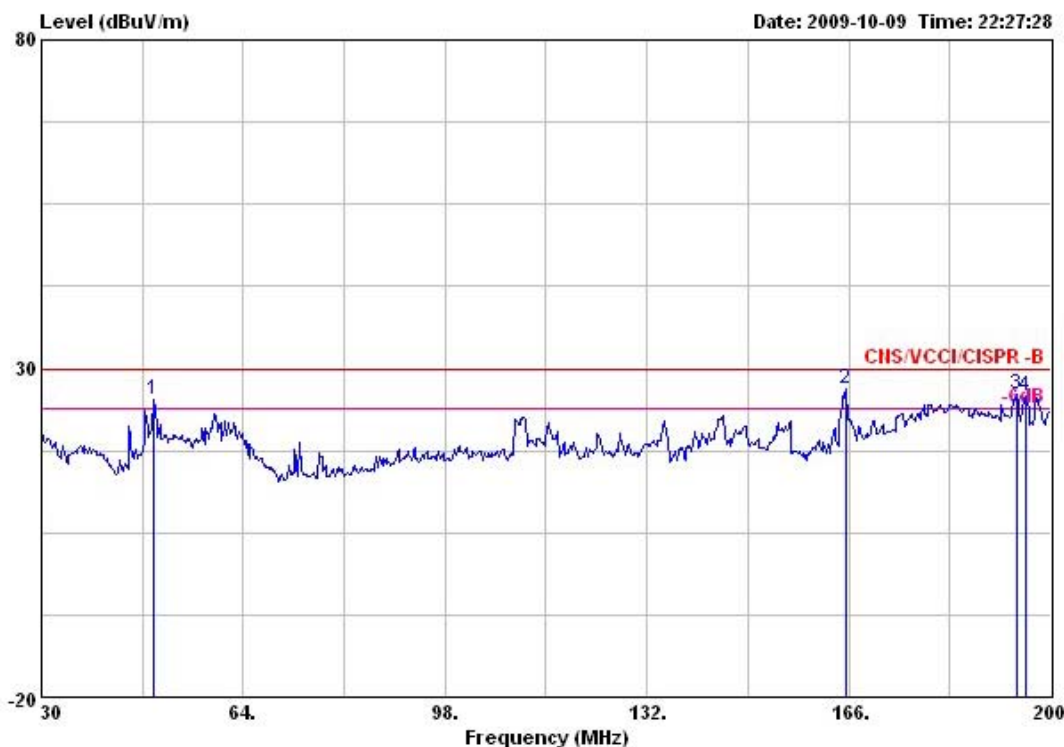


Site : 10CH02-HY
 Condition : CNS/VCCI/CISPR -B 10m BICO-VHBB9124 VERTICAL
 EUT : Rugged Tablet Computer
 POWER: 120V/60Hz
 MODEL : RTC-1000X
 MEMO : LCD 1024*600 60Hz
 MEMO : LAN 1G
 MEMO : FULL SYSTEM

	Freq	Level	Over	Limit	Read	Preamp	Cable	Antenna	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		Pos	Pos
1 @	48.870	25.33	-4.67	30.00	40.91	28.30	2.25	10.47	Peak	---	---
2 @	165.660	26.93	-3.07	30.00	37.65	27.78	3.74	13.32	Peak	---	---
3 @	194.390	26.01	-3.99	30.00	34.41	27.63	4.28	14.95	Peak	---	---
4 @	195.750	25.73	-4.27	30.00	33.99	27.62	4.32	15.04	Peak	---	---

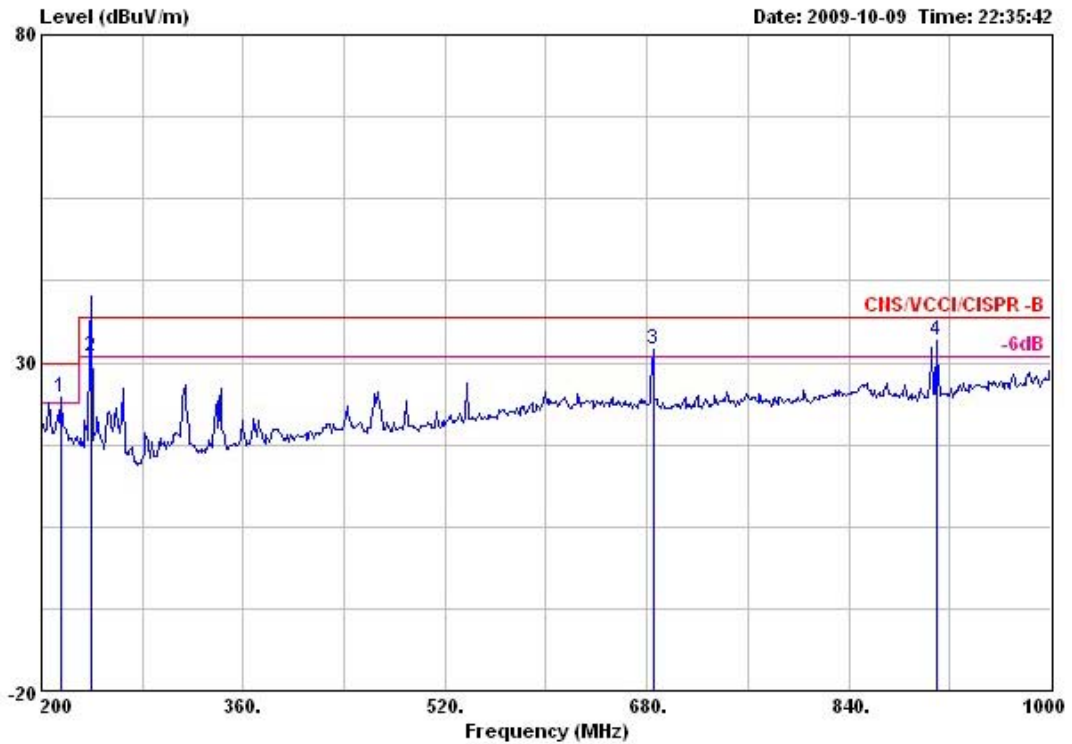


Site : 10CH02-HY
 Condition : CNS/VCCI/CISPR -B 10m LOG-9111-207 VERTICAL
 EUT : Rugged Tablet Computer
 POWER: 120V/60Hz
 MODEL : RTC-1000X
 MEMO : LCD 1024*600 60Hz
 MEMO : LAN 1G
 MEMO : FULL SYSTEM

	Freq	Level	Over Limit	Limit Line	Read Level	Preamp Factor	Cable Loss	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1 @	215.200	24.70	-5.30	30.00	34.57	27.53	3.20	14.46	Peak	---	---
2 @	240.000	31.03	-5.97	37.00	41.93	27.47	3.38	13.19	QP	100	198
3 @	684.800	31.97	-5.03	37.00	34.55	28.35	5.53	20.24	Peak	---	---
4 @	909.600	33.44	-3.56	37.00	33.68	27.67	6.17	21.26	Peak	---	---

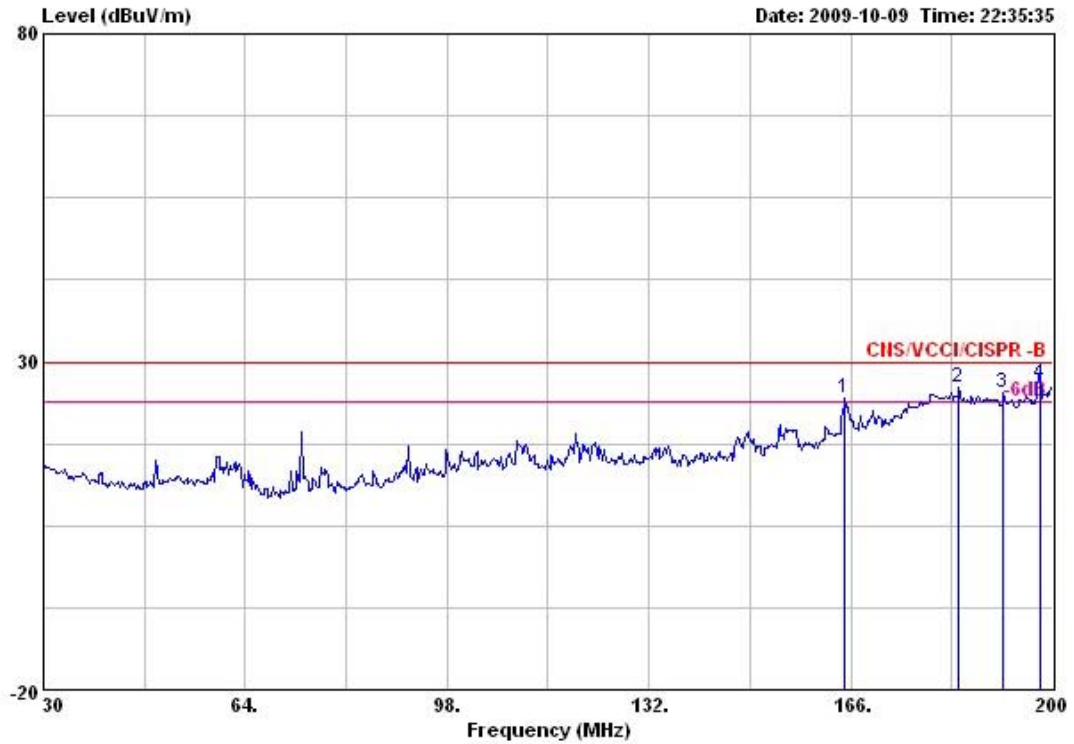

Site : 10CH02-HY
 Condition : CNS/VCCI/CISPR -B 10m BICO-VHBB9124 HORIZONTAL
 EUT : Rugged Tablet Computer
 POWER: 120V/60Hz
 MODEL : RTC-1000X
 MEMO : LCD 1024*600 60Hz
 MEMO : LAN 1G
 MEMO : FULL SYSTEM

	Freq	Level	Over Limit	Limit Line	Read Level	Preamp Factor	Cable Loss	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1 @	164.980	24.43	-5.57	30.00	35.15	27.78	3.74	13.32	Peak	---	---
2 @	184.190	25.99	-4.01	30.00	35.37	27.68	4.10	14.20	Peak	---	---
3 @	191.670	25.24	-4.76	30.00	33.89	27.65	4.25	14.75	Peak	---	---
4 @	197.790	26.74	-3.26	30.00	34.79	27.61	4.36	15.20	QP	400	120

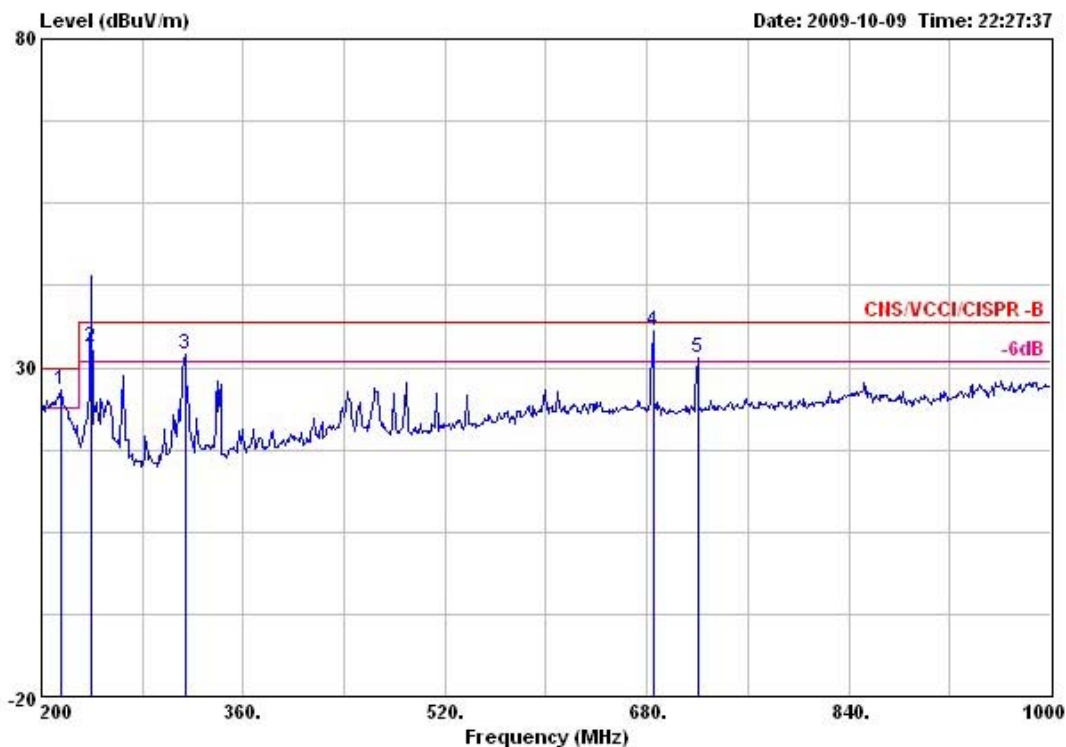

Site : 10CH02-HY
 Condition : CNS/VCCI/CISPR-B 10m LOG-9111-207 HORIZONTAL
 EUT : Rugged Tablet Computer
 POWER: 120V/60Hz
 MODEL : RTC-1000X
 MEMO : LCD 1024*600 60Hz
 MEMO : LAN 1G
 MEMO : FULL SYSTEM


	Freq	Level	Over Limit	Limit Line	Read Level	Preamp Factor	Cable Loss	Antenna Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB/m		cm	deg
1 @	215.200	26.74	-3.26	30.00	36.61	27.53	3.20	14.46	Peak	---	---
2 @	240.000	33.04	-3.96	37.00	43.94	27.47	3.38	13.19	QP	400	200
3 @	313.600	32.02	-4.98	37.00	42.08	27.43	3.91	13.46	Peak	---	---
4 @	684.800	35.43	-1.57	37.00	38.01	28.35	5.53	20.24	QP	200	187
5 @	720.000	31.37	-5.63	37.00	33.73	28.26	5.60	20.30	Peak	---	---

Frequency Range of Test	From 1000MHz to 13000MHz	Test Distance	3m
Test Mode	Mode 1	Temperature	25°C
Test Engineer	Kevin Huang	Humidity	54%

Note: 1. Emission level (dBμV/m) = 20 log Emission level (μV/m)


2. Corrected Reading : Antenna Factor + Cable Loss + Read Level – Preamp Factor = Level

■The test was passed at the minimum margin that marked by the frame in the following data

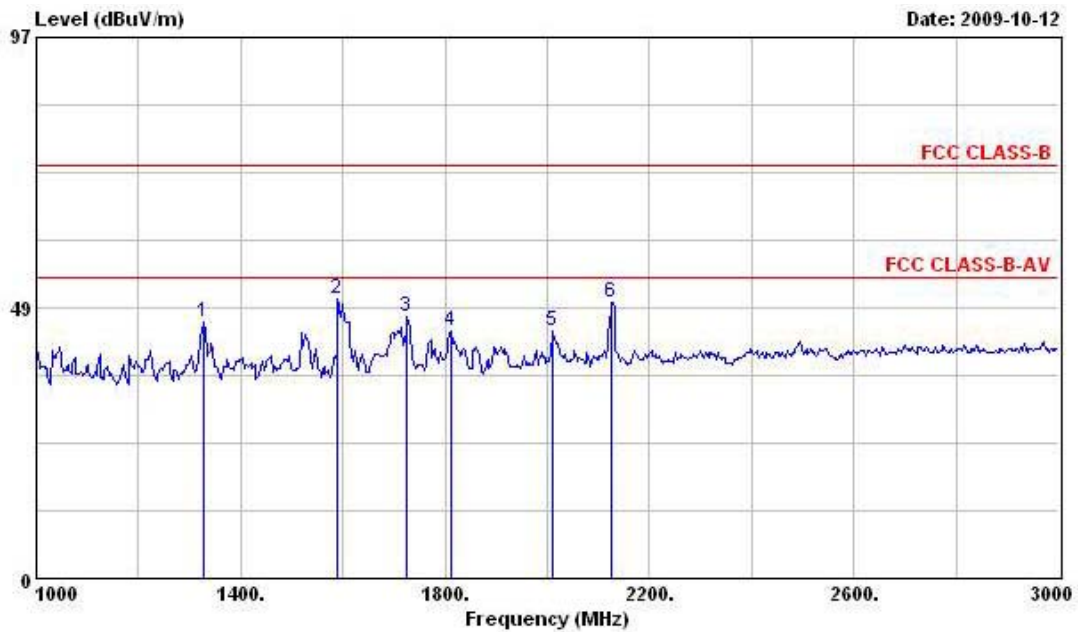


Site : site
 Condition: FCC CLASS-B 3m HORN-6741-2007-05 VERTICAL
 EVT : Rugged Tablet Computer
 Model : RTC-1000X
 Name :

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Tab I
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	d
1	1326.000	46.01	-27.99	74.00	52.32	24.95	2.00	33.26	Peak	---	-
2	1590.000	50.20	-23.80	74.00	54.91	25.82	2.16	32.70	Peak	---	-
3	1726.000	46.98	-27.02	74.00	51.02	26.38	2.24	32.66	Peak	---	-
4	1812.000	44.28	-29.72	74.00	47.90	26.73	2.28	32.63	Peak	---	-
5	2012.000	44.25	-29.75	74.00	46.88	27.53	2.37	32.54	Peak	---	-
6	2126.000	49.54	-24.46	74.00	51.76	27.74	2.44	32.39	Peak	---	-

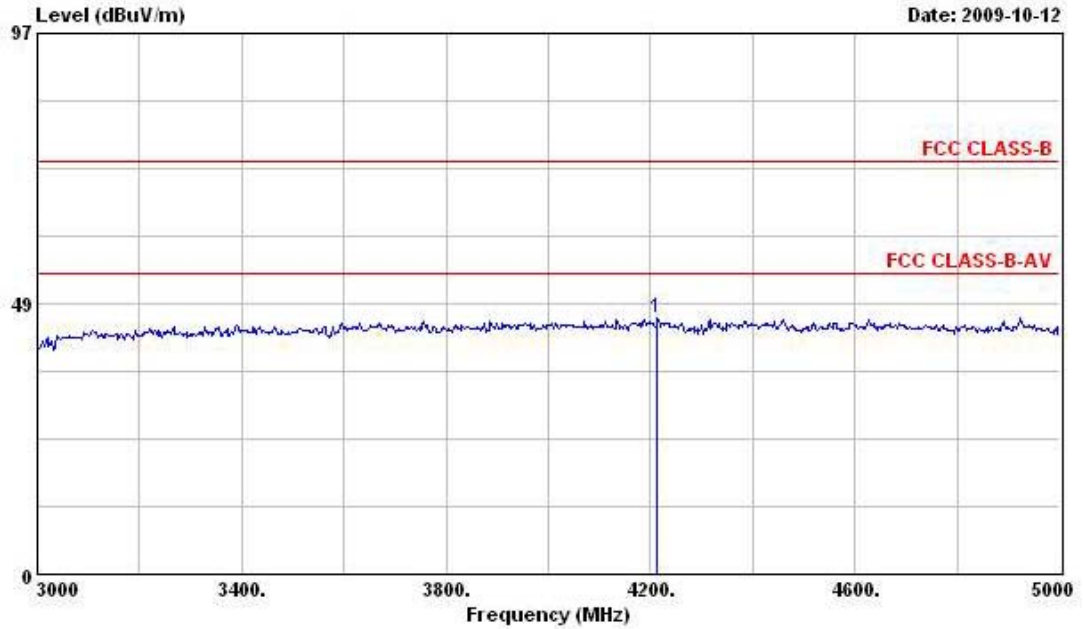


Site : site
 Condition: FCC CLASS-B 3m WORN-6741-2007-05 VERTICAL
 EVT : Rugged Tablet Computer
 Model : RTC-1000X
 Name :

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4214.000	46.07	-27.93	74.00	42.71	32.46	3.11	32.20	Peak	---

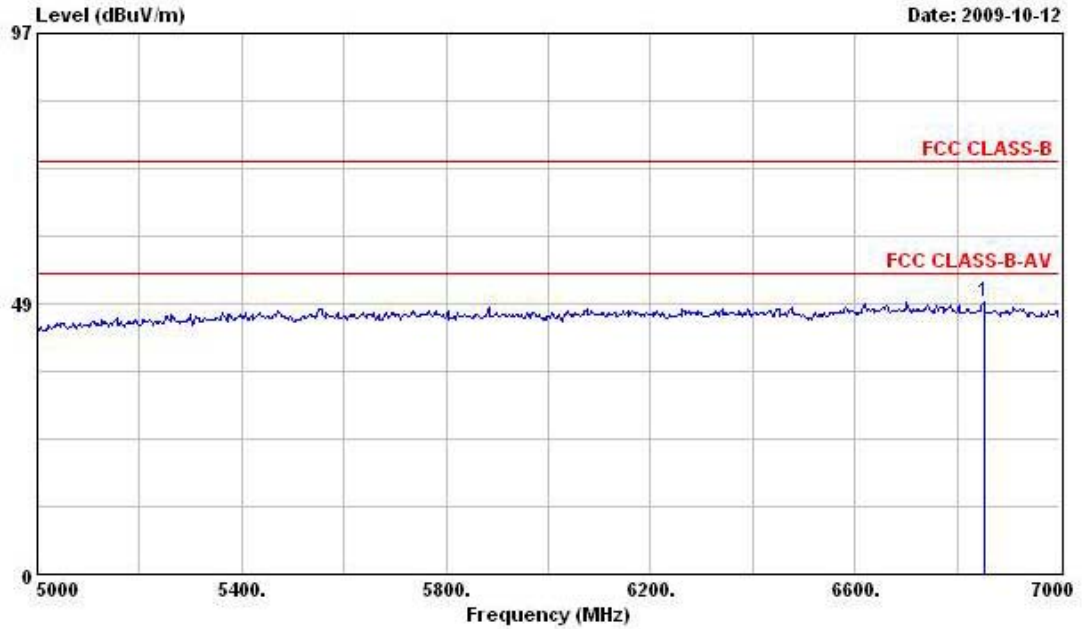


Site : site
 Condition: FCC CLASS-B 3m WORN-6741-2007-05 VERTICAL
 EVT : Rugged Tablet Computer
 Model : RTC-1000X
 Name :

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB		cm	deg
1	6852.000	48.96	-25.04	74.00	42.63	34.89	4.23	32.79 Peak	---	---

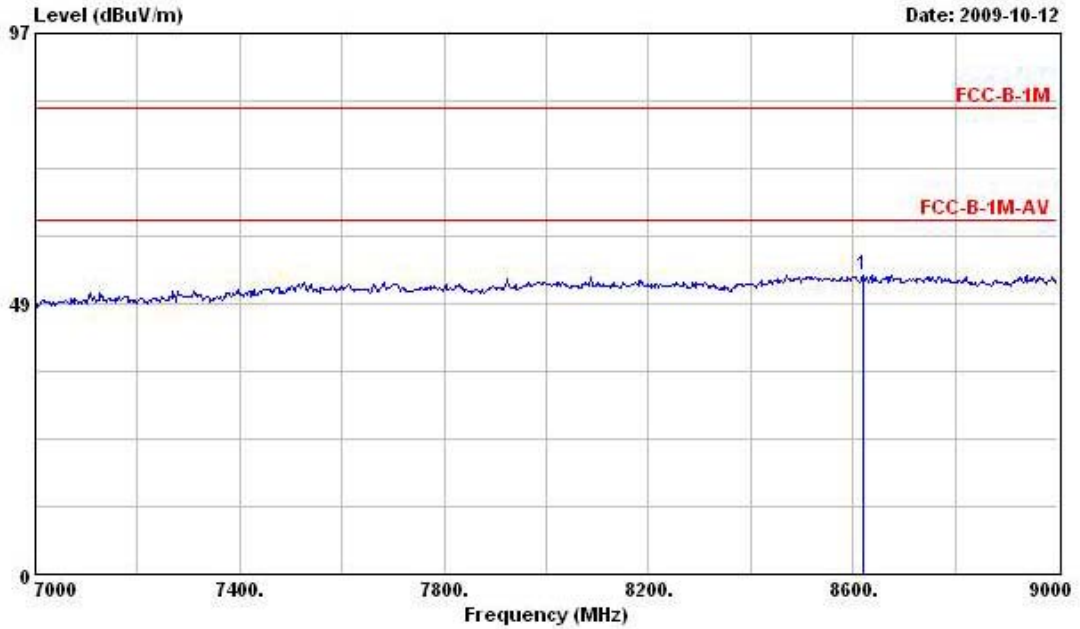


Site : site
 Condition: FCC-B-1M 1m HORN-6741-2007-05 VERTICAL
 EUT : Rugged Tablet Computer
 Model : RTC-1000X
 Mome :

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8620.000	53.57	-29.97	83.54	41.99	38.37	5.30	32.09	Peak	---	---

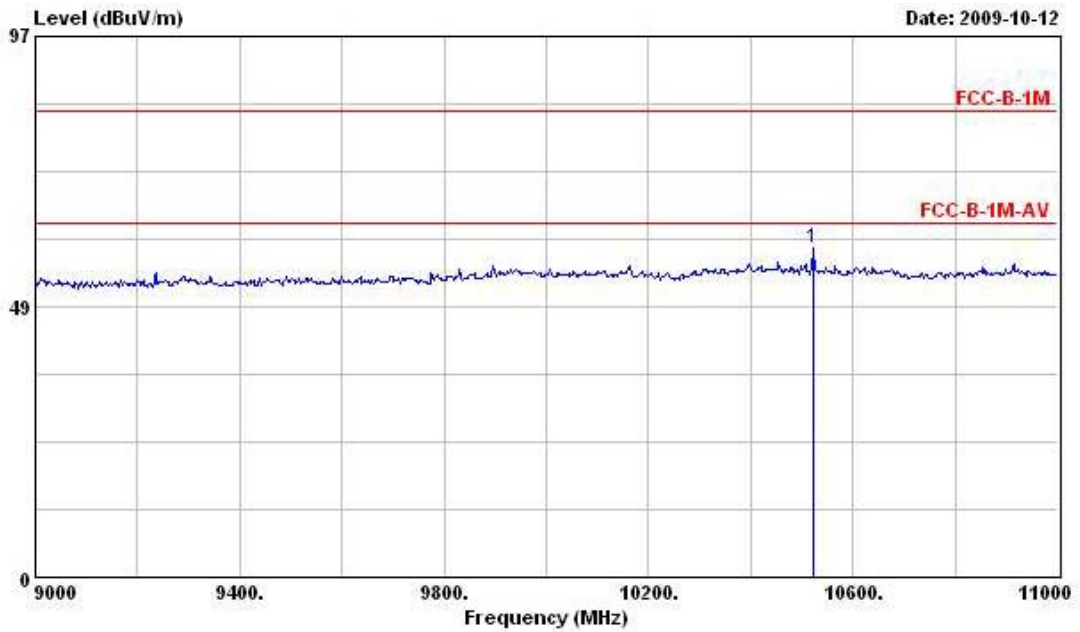


Site : site
 Condition: FCC-B-1M 1m HORN-6741-2007-05 VERTICAL
 EUT : Rugged Tablet Computer
 Model : RTC-1000X
 Mome :

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	10524.000	59.01	-24.53	83.54	45.46	39.29	5.81	31.55	Peak	---	---

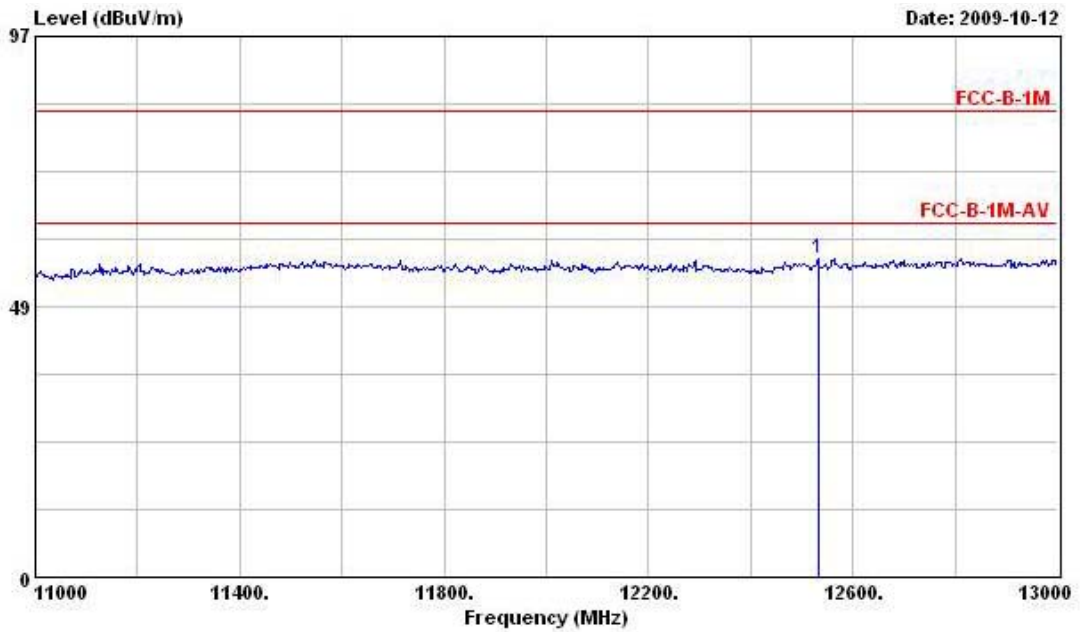


Site : site
 Condition: FCC-B-1M 1m HORN-6741-2007-05 VERTICAL
 EUT : Rugged Tablet Computer
 Model : RTC-1000X
 Mome :

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	12532.000	57.18	-26.36	83.54	42.70	38.98	6.54	31.04	Peak	---	---

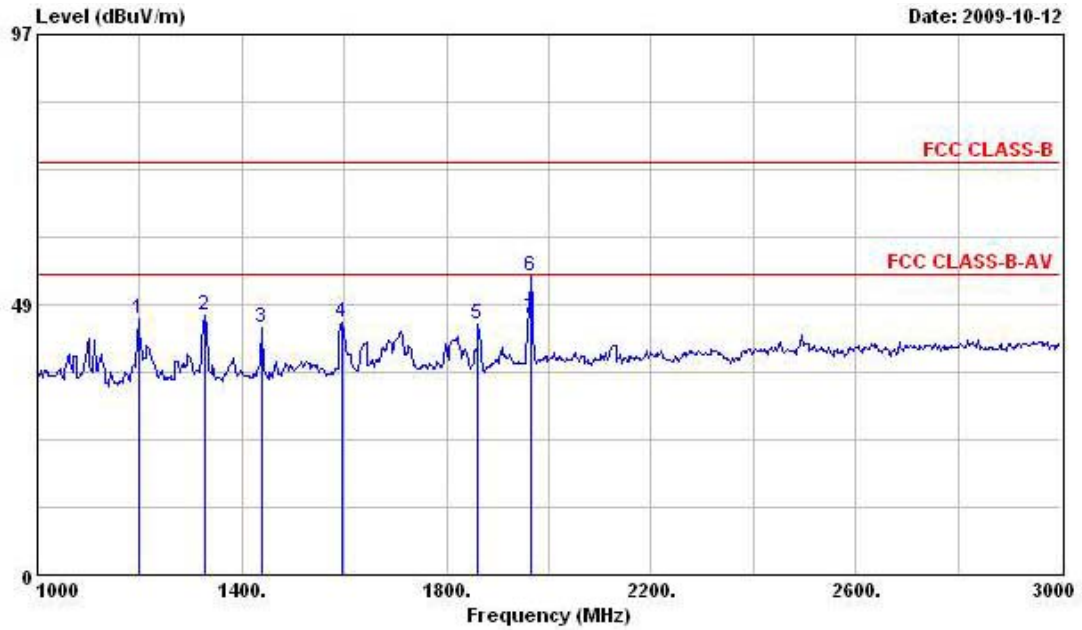


Site : site
 Condition: FCC CLASS-B 3m HORN-6741-2007-05 HORIZONTAL
 EUT : Rugged Tablet Computer
 Model : RTC-1000X
 Name :

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	1198.000	45.91	-28.09	74.00	53.04	24.64	1.87	33.64	Peak	---	---
2	1326.000	46.43	-27.57	74.00	52.74	24.95	2.00	33.26	Peak	---	---
3	1438.000	44.46	-29.54	74.00	50.08	25.27	2.06	32.95	Peak	---	---
4	1596.000	45.30	-28.70	74.00	50.00	25.82	2.18	32.70	Peak	---	---
5	1862.000	45.02	-28.98	74.00	48.39	26.94	2.30	32.61	Peak	---	---
6	1966.000	53.48	-20.52	74.00	56.34	27.36	2.35	32.58	Peak	---	---
7	1966.000	46.10	-7.90	54.00	48.96	27.36	2.35	32.58	Average	---	---

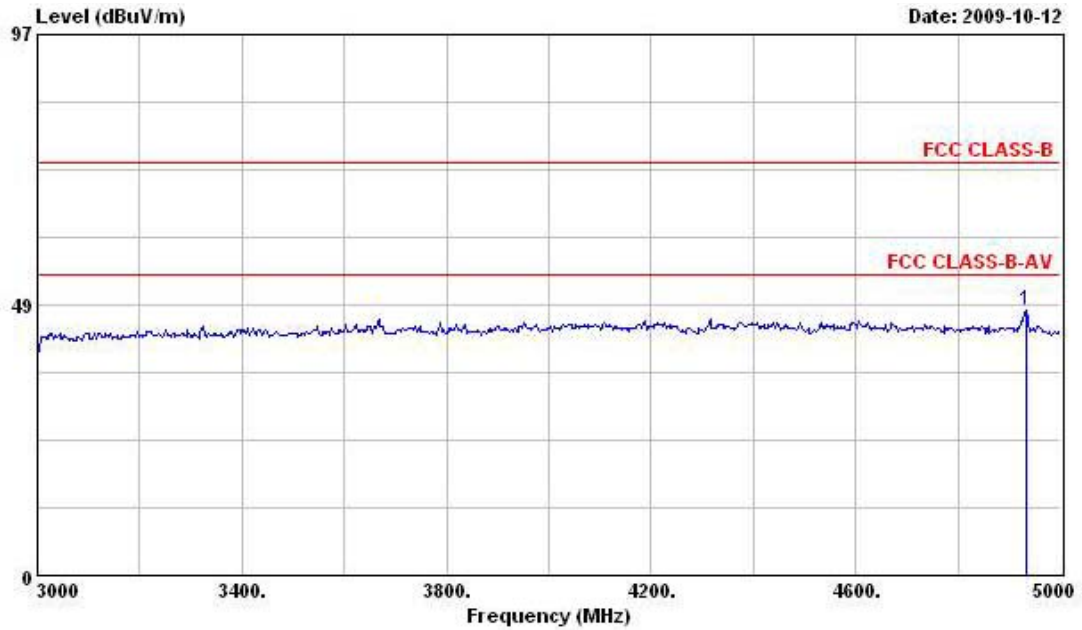


Site : site
 Condition: FCC CLASS-B 3m HORN-6741-2007-05 HORIZONTAL
 EUT : Rugged Tablet Computer
 Model : RTC-1000X
 Name :

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor		Pos	Pos
					dBuV	dB/m	dB	dB		cm	deg
1	4934.000	47.47	-26.53	74.00	44.03	33.26	2.56	32.38	Peak	---	---

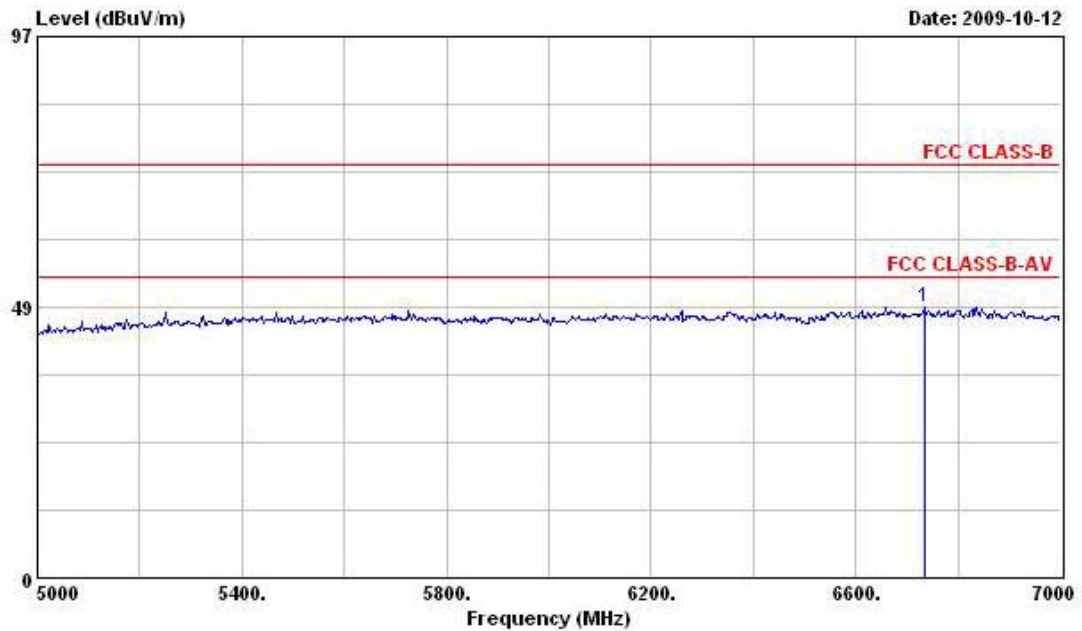


Site : site
 Condition: FCC CLASS-B 3m HORN-6741-2007-05 HORIZONTAL
 EUT : Rugged Tablet Computer
 Model : RTC-1000X
 Name :

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	6734.000	48.55	-25.45	74.00	42.20	34.65	4.21	32.50	Peak	---

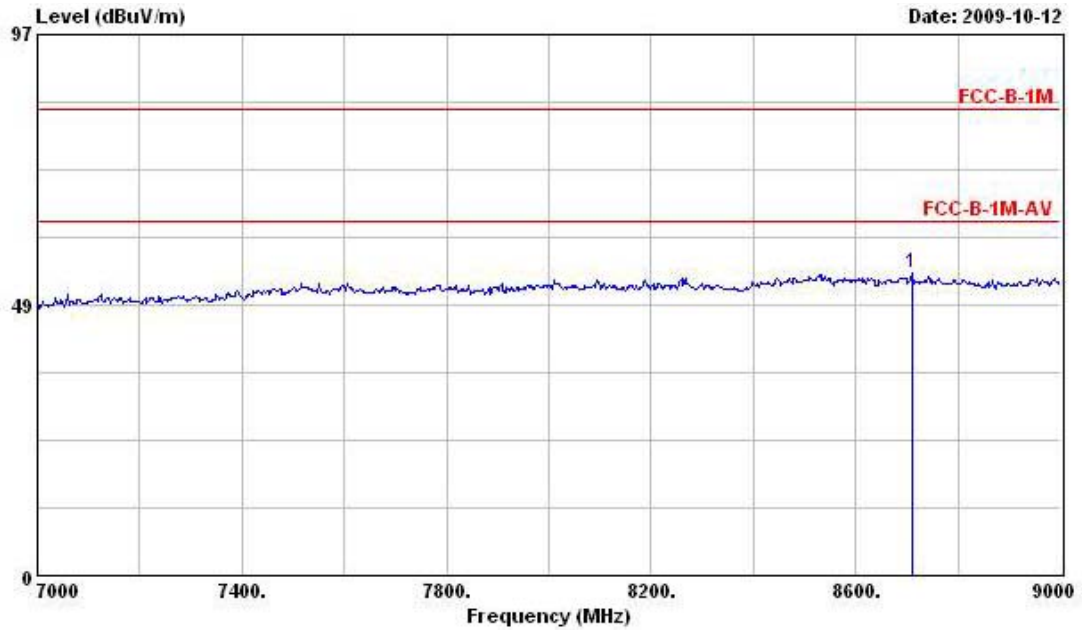


Site : site
 Condition: FCC-R-1M 1m HORN-6741-2007-05 HORIZONTAL
 EUT : Rugged Tablet Computer
 Model : RTC-1000X
 Name :

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8710.000	54.18	-29.36	83.54	42.62	38.43	5.26	32.13	Peak	---	---

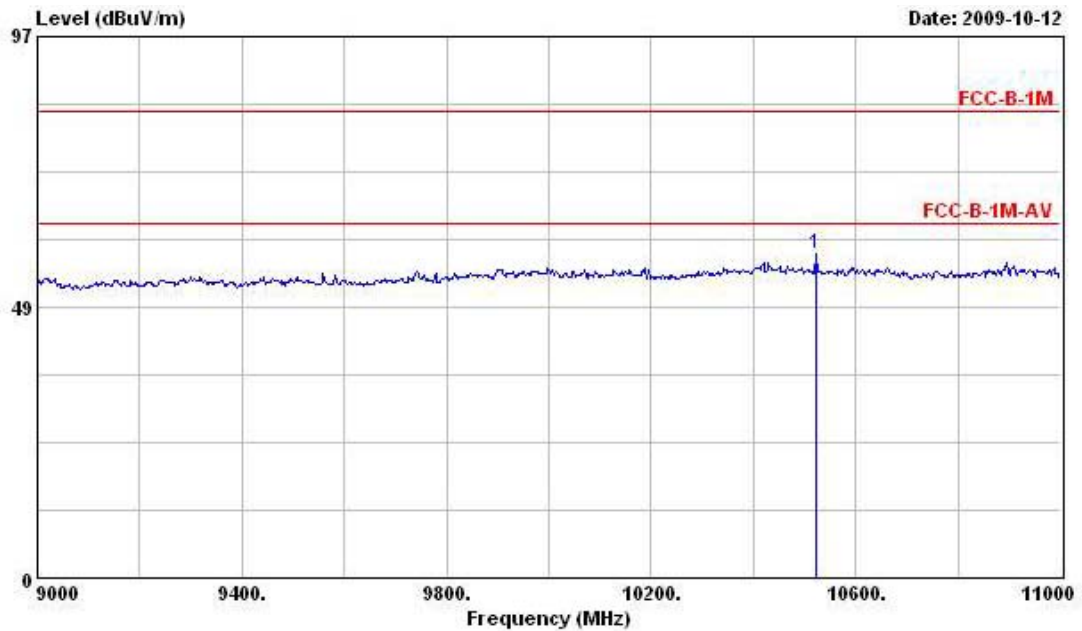

Site : site
 Condition: FCC-B-1M 1m HORN-6741-2007-05 HORIZONTAL
 EUT : Rugged Tablet Computer
 Model : RTC-1000X
 Name :

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	10524.000	57.94	-25.60	83.54	44.39	39.29	5.81	31.55	Peak	---

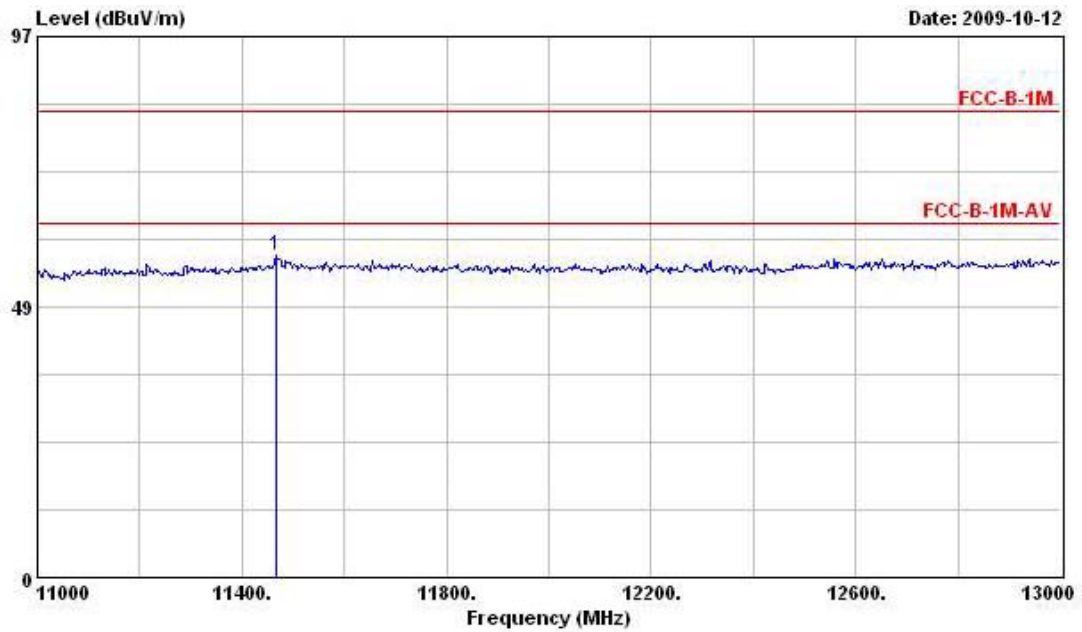


Site : site
 Condition: FCC-B-1M 1m HORN-6741-2007-05 HORIZONTAL
 EUT : Rugged Tablet Computer
 Model : RTC-1000X
 Mome :

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor		Pos	Pos
					dBuV	dB/m	dB	dB		cm	deg
1	11468.000	57.68	-25.86	83.54	43.25	39.65	5.99	31.21	Peak	---	---


6.5 Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW

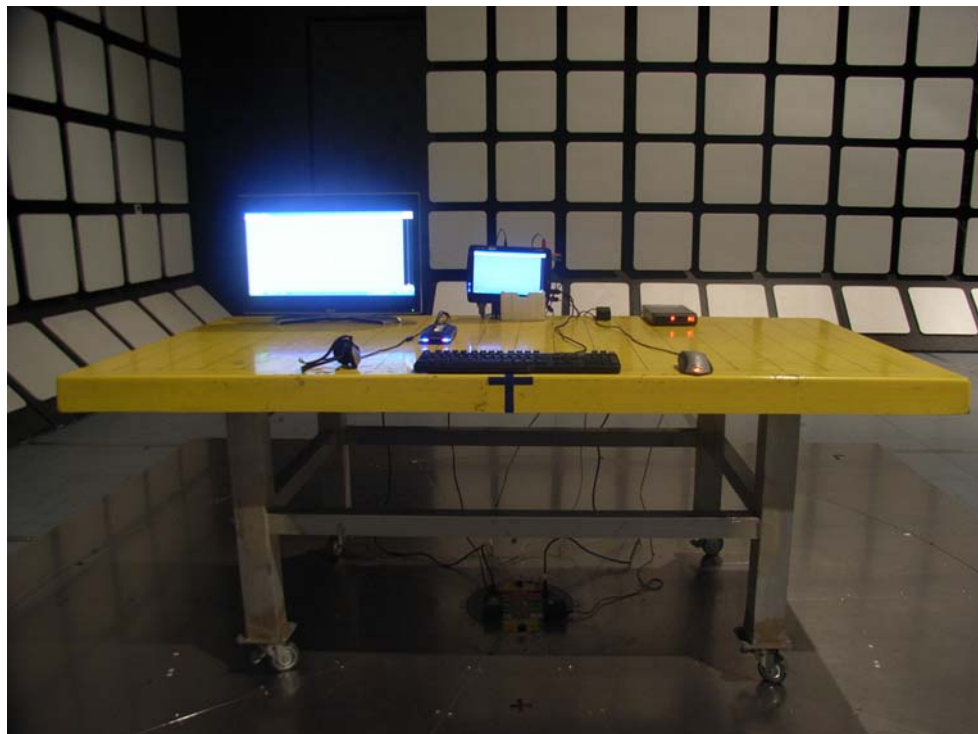

REAR VIEW

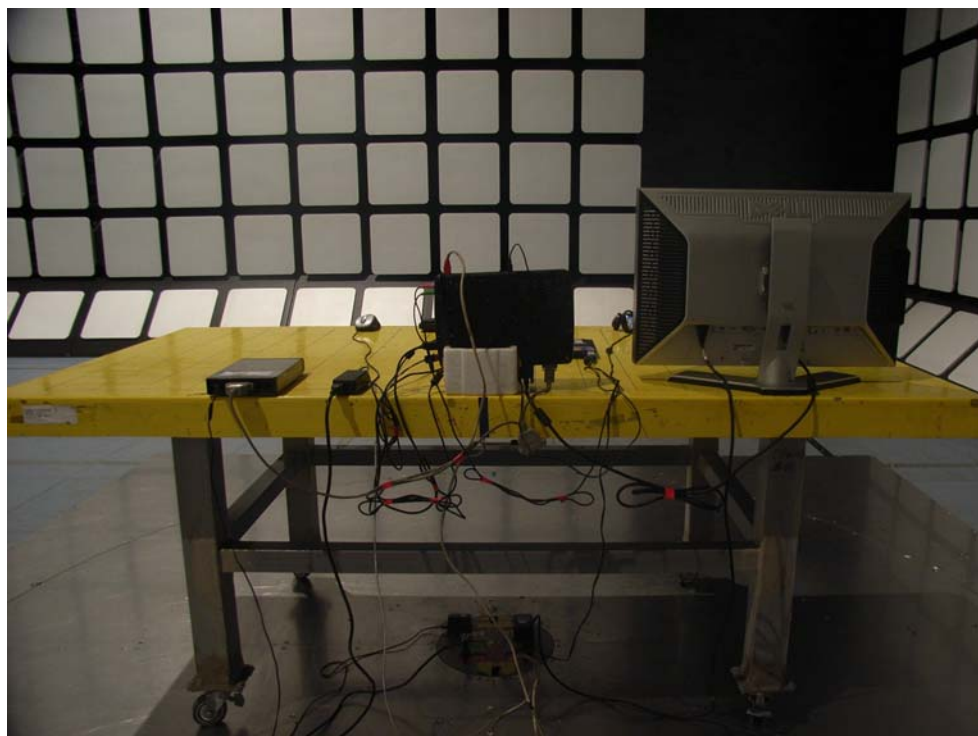

7. List of Measuring Equipment Used

< Conducted Emission >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2009	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2009	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2009	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Jun. 11, 2009	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

※ Calibration Interval of instruments listed above is one year.

< Radiation Emission below 1GHz >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
10m Semi Anechoic Chamber	TDK	SAC-10M	10CH02-HY	30MHz~1GHz 10m,3m	Mar. 04, 2009	Radiation (10CH02-HY)
Amplifier	AGILENT	8447D	2944A10827	100KHz – 1.3GHz	Jun. 04, 2009	Radiation (10CH02-HY)
Receiver	R&S	ESI	838496/008	20Hz - 7GHz	Apr. 27, 2009	Radiation (10CH02-HY)
Spectrum Analyzer	R&S	FSP7	100645	9KHz – 7GHz	Aug. 26, 2009	Radiation (10CH02-HY)
Biconical Antenna	Schwarzbeck	VHBB 9124	287	30MHz – 200MHz	Dec. 22, 2008	Radiation (10CH02-HY)
Log Antenna	Schwarzbeck	VUSLP 9111	207	200MHz - 1GHz	Dec. 22, 2008	Radiation (10CH02-HY)
Turn Table	HD	DS 430	430/360	0 ~ 360 degree	N/A	Radiation (10CH02-HY)
Antenna Mast	HD	MA240	240/664	1 m - 4 m	N/A	Radiation (10CH02-HY)
RF Cable-R10m	Jye Bao	RG142	CB027-INSIDE	30MHz~1GHz	Feb. 13, 2009	Radiation (10CH02-HY)
RF Cable-R10m	Suhner Switzerland + BELDEN	RG223/U + RG8/U	CB026-DOOR	30MHz~1GHz	Feb. 13, 2009	Radiation (10CH02-HY)

※ Calibration Interval of instruments listed above is one year.

< Radiation Emission : 1G ~ 13G >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 07, 2009	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100792	9 kHz – 30GHz	Apr. 01, 2009	Spectrum Analyzer (03CH03-HY)
Amplifier	AGILENT	8449B	3008A02326	1 GHz - 26.5 GHz	Jan. 06, 2009	Amplifier (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	CB063-HF	1 GHz - 40 GHz	Nov. 29, 2008	RF Cable-HIGH (03CH03-HY)
Horn Antenna	ETS	3117	00075954	1GHz ~ 18GHz	May 04, 2009	Horn Antenna (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year.

8. TAF Certificate of Accreditation



Certificate No. : L1190-090318

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.

EMC & Wireless Communications Laboratory

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2007 to January 09, 2010
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory for Commodities Inspection
Accreditation Program for Telecommunication Equipment Testing Laboratory
Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : March 18, 2009

Pl, total 19 pages

APPENDIX A. Photographs of EUT

992507




992507





992507

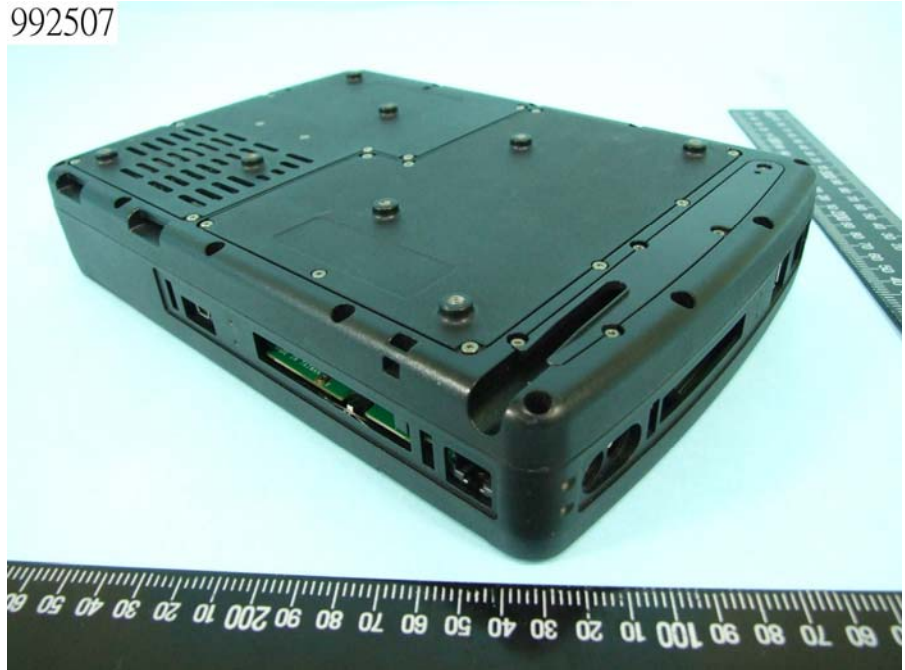

992507





992507



992507





992507



992507





992507




992507





992507

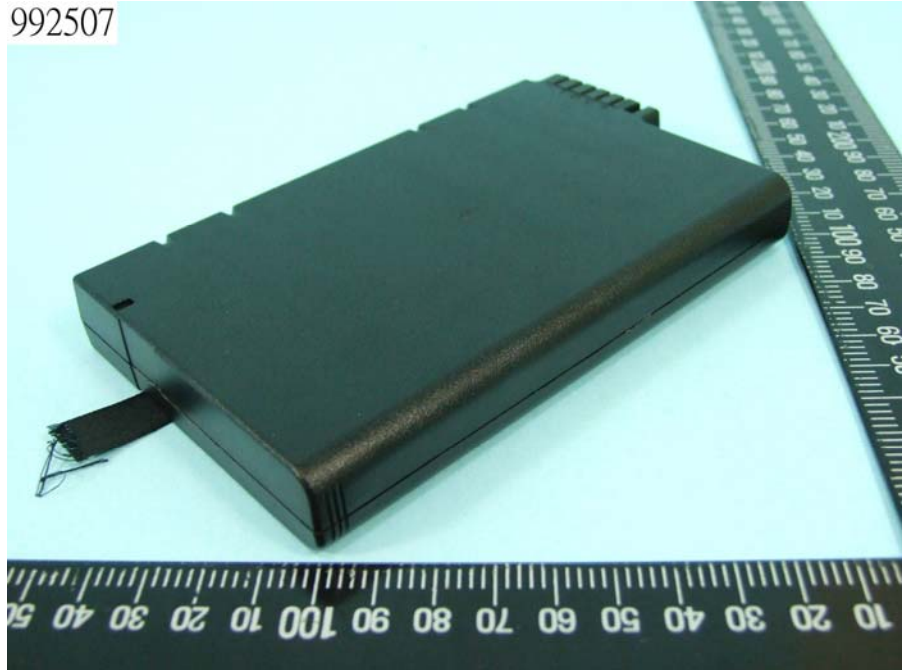

992507






992507



992507



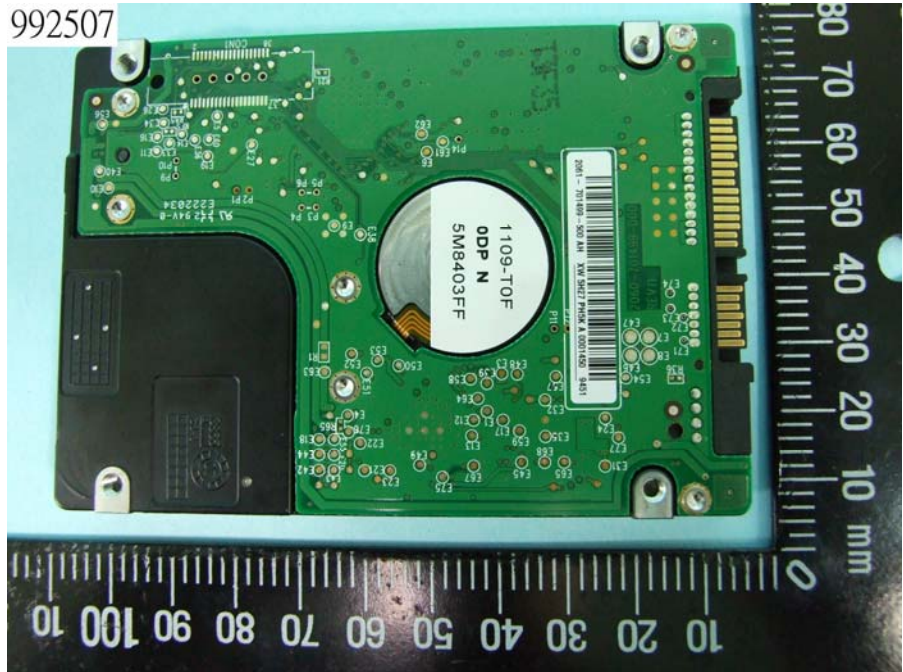




992507




992507




992507

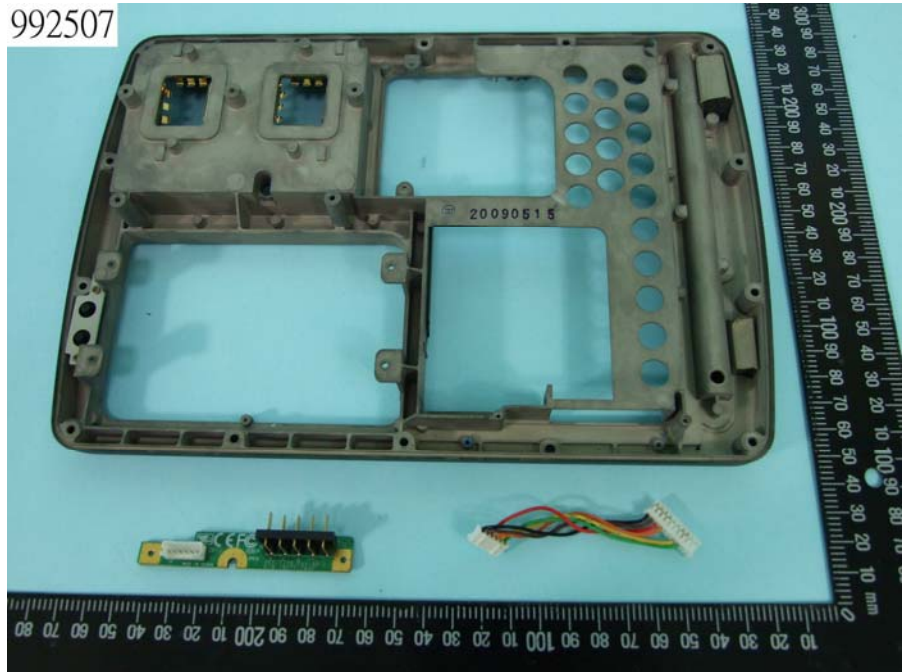


992507

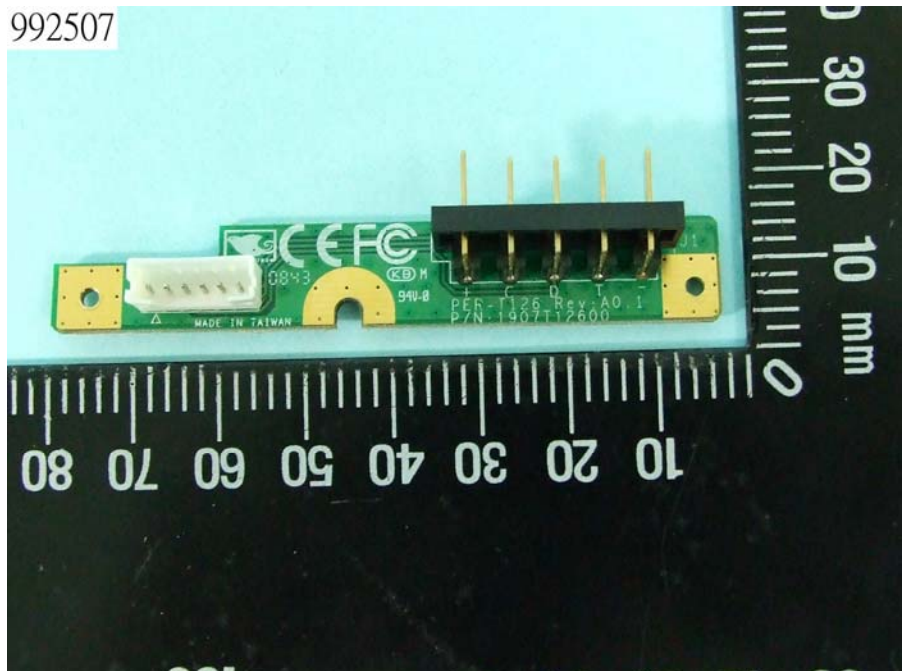

992507

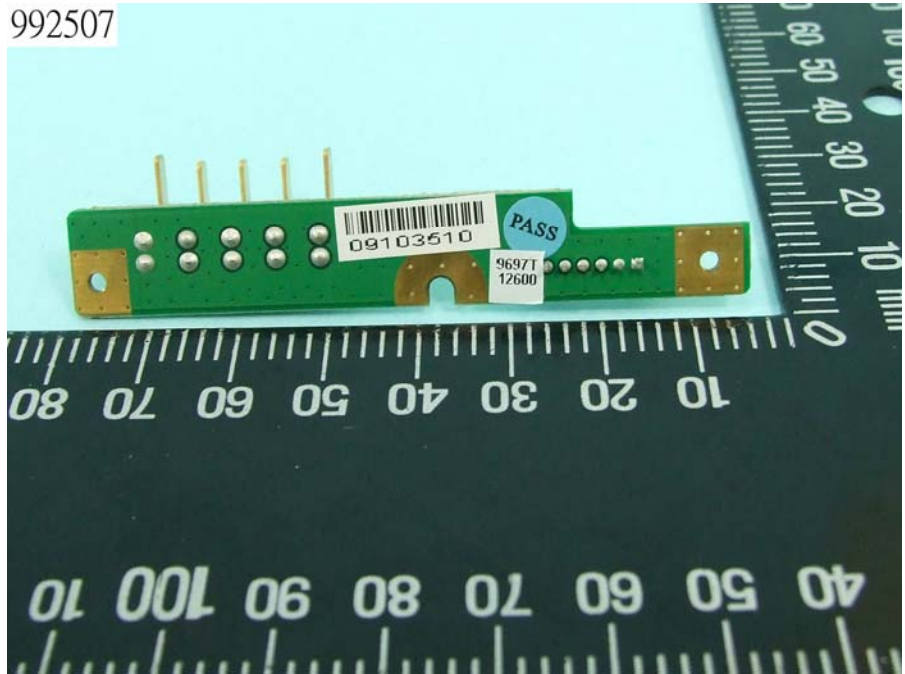

992507

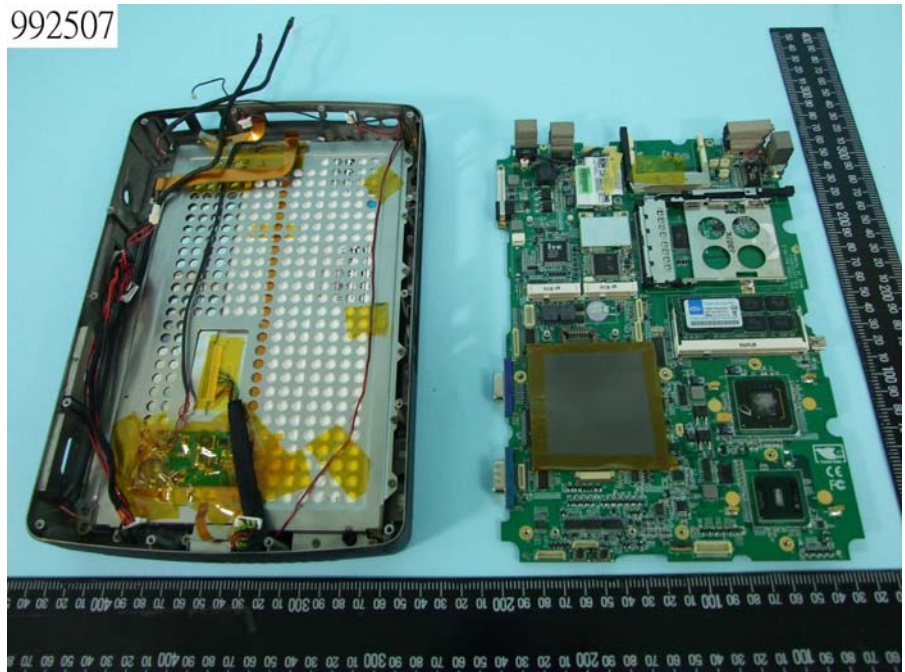



992507




992507



992507



992507

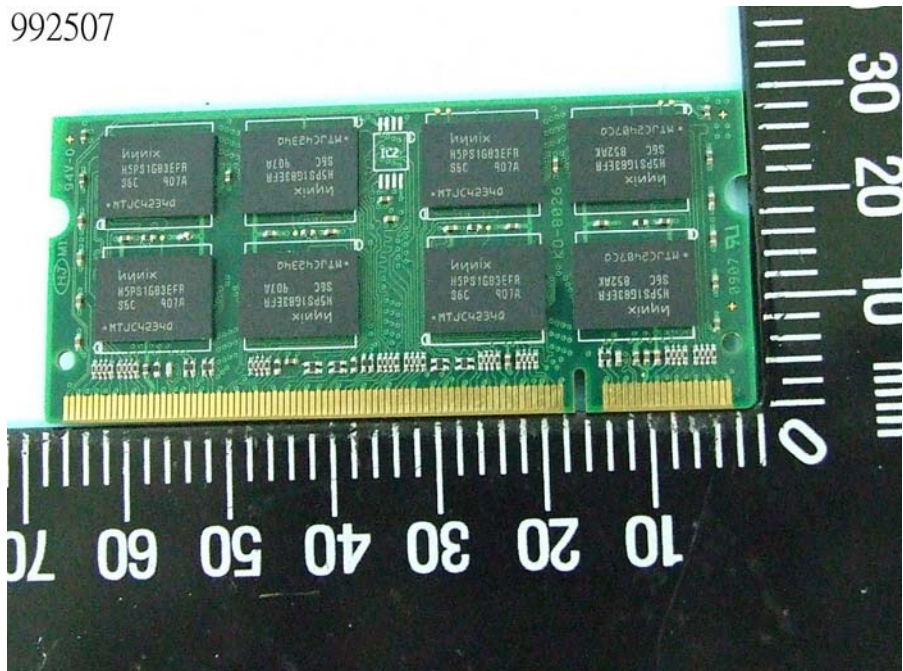





992507




992507

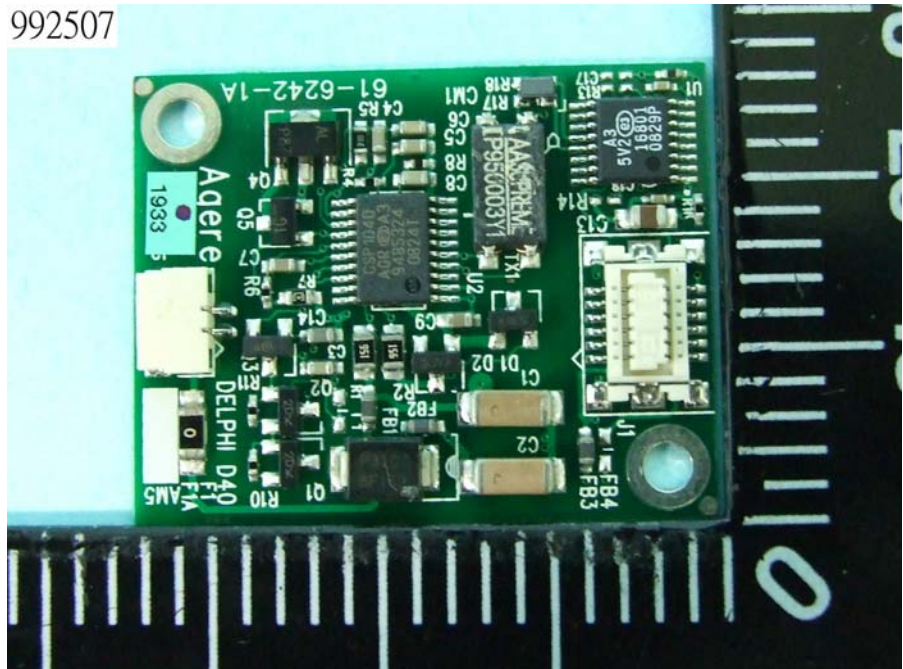

992507

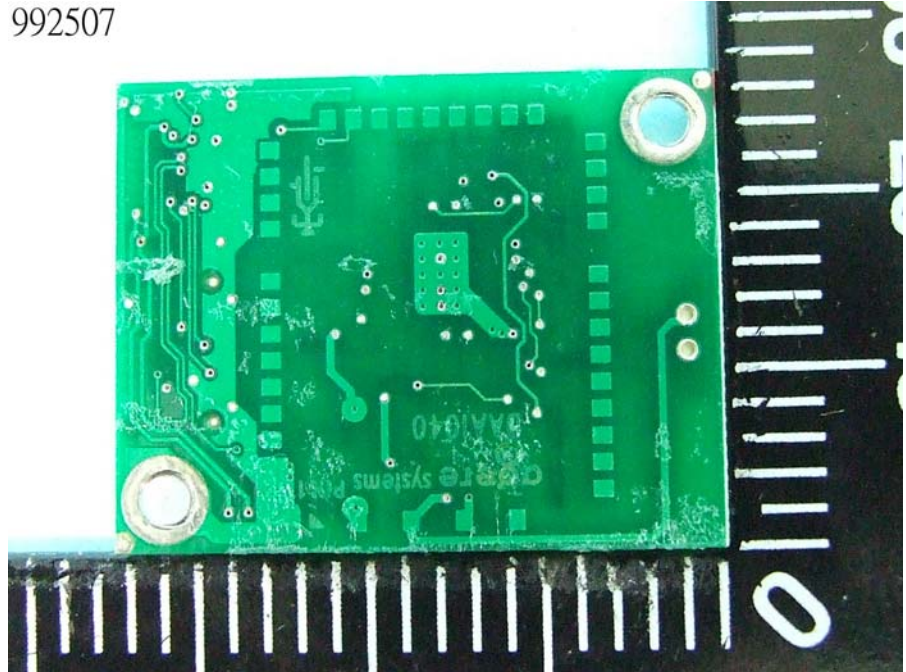


992507

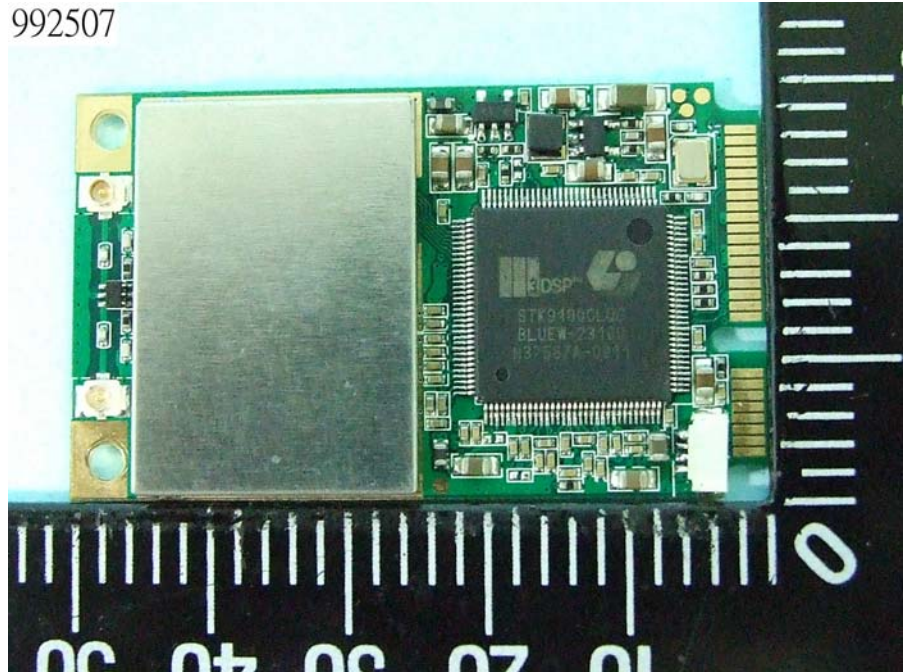





992507

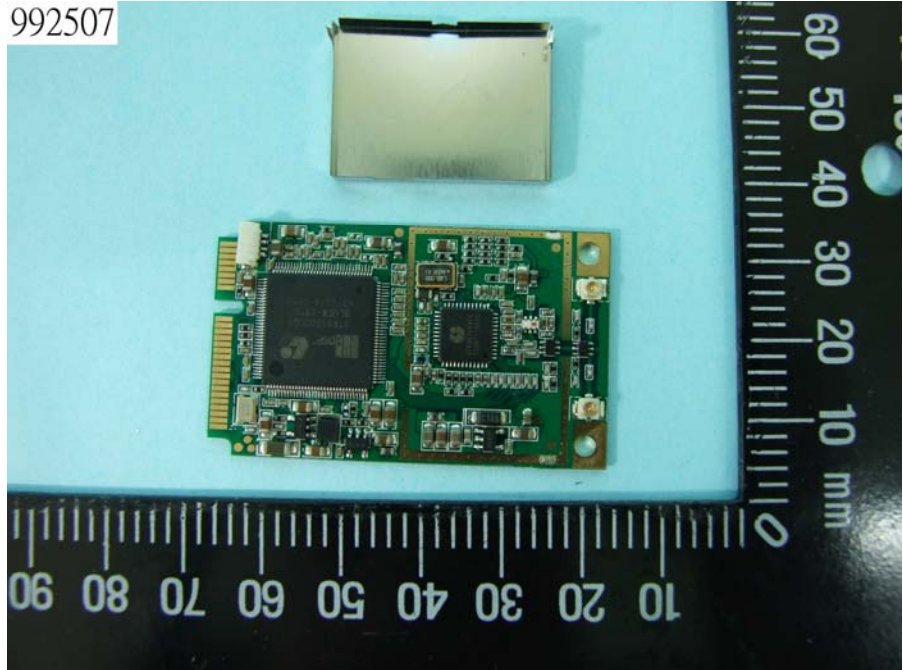


992507

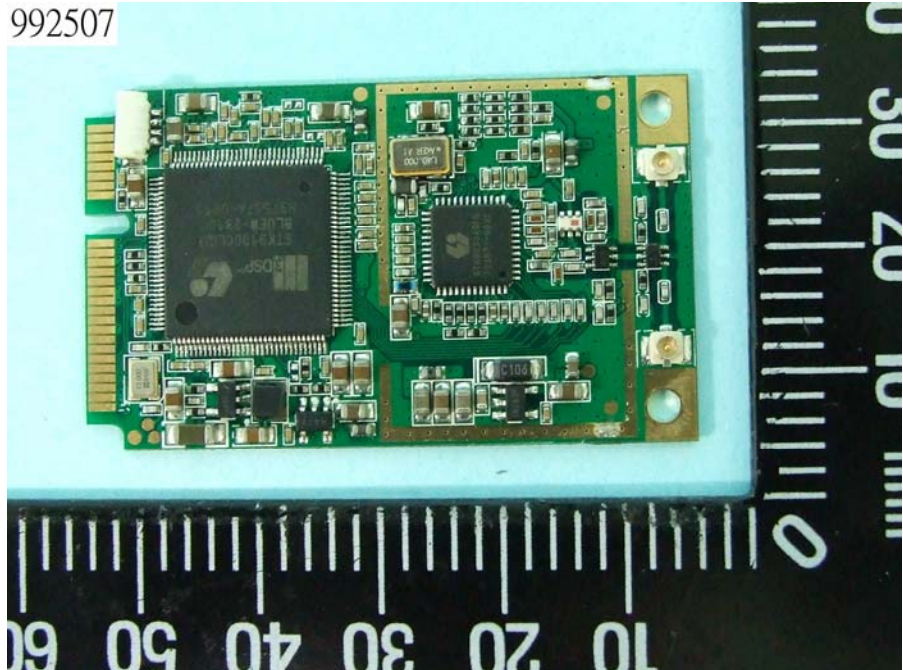


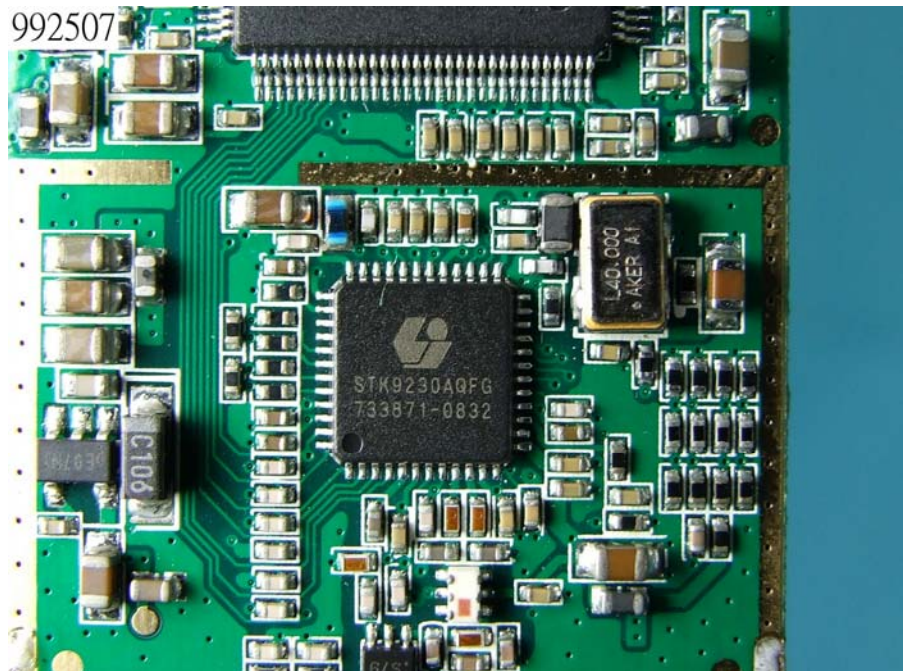

992507

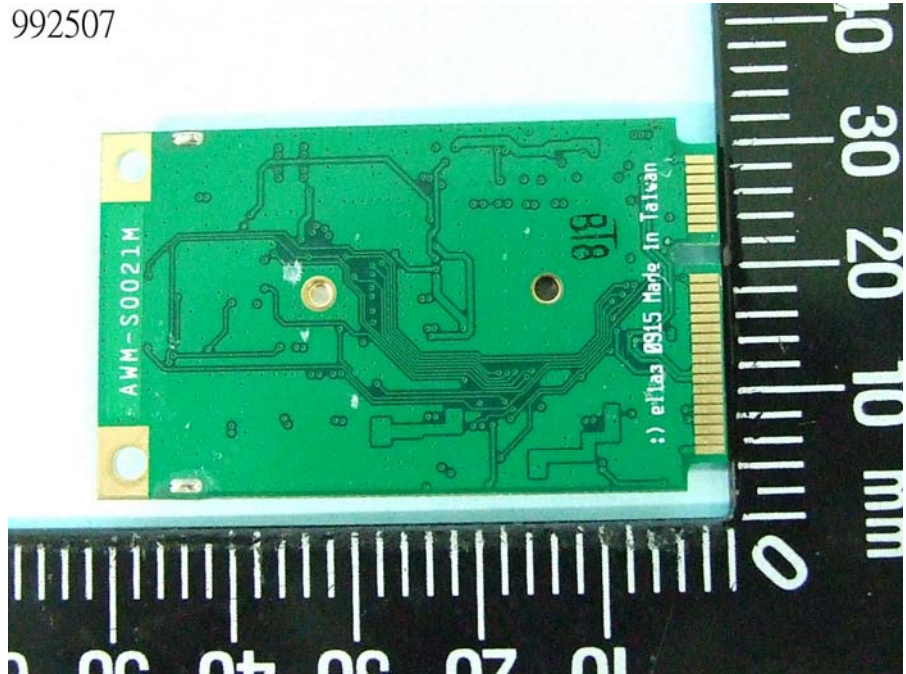


992507

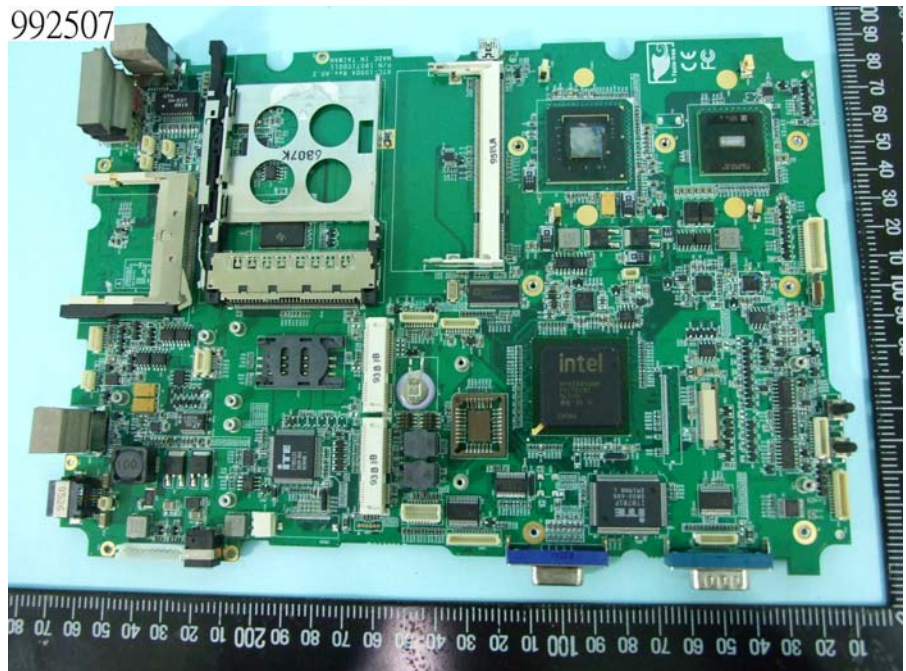




992507

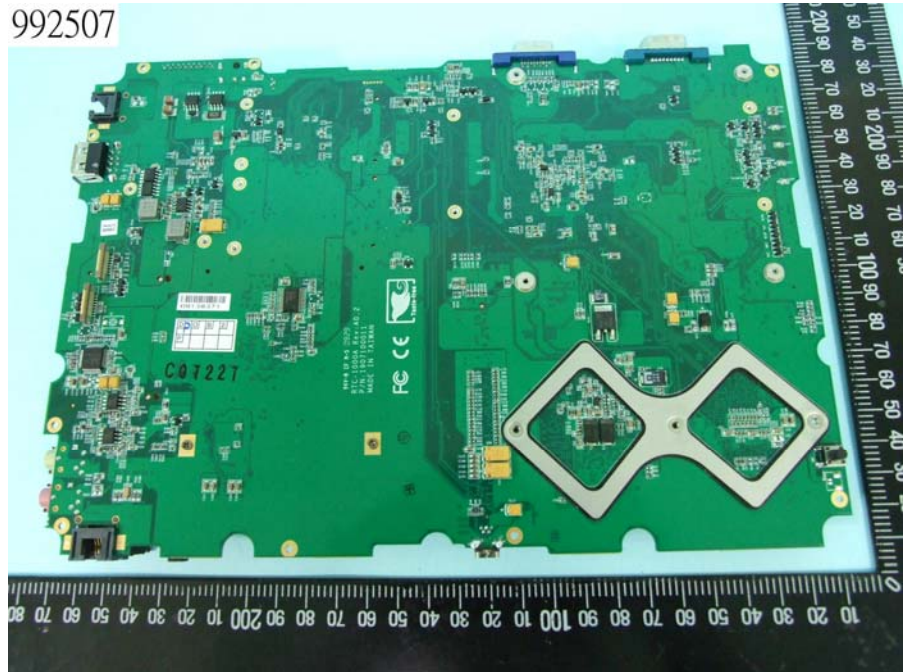

992507

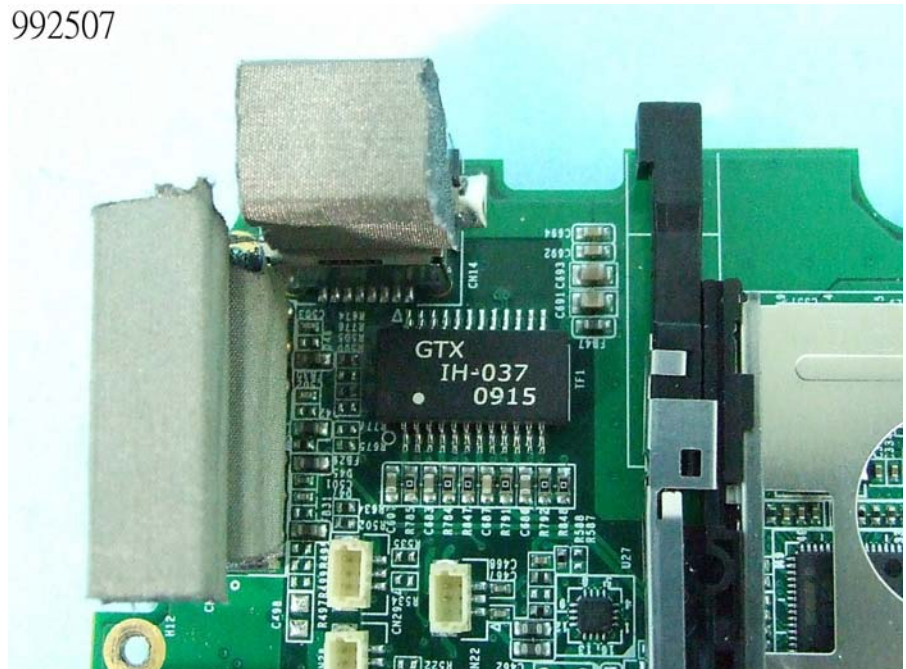








992507




992507



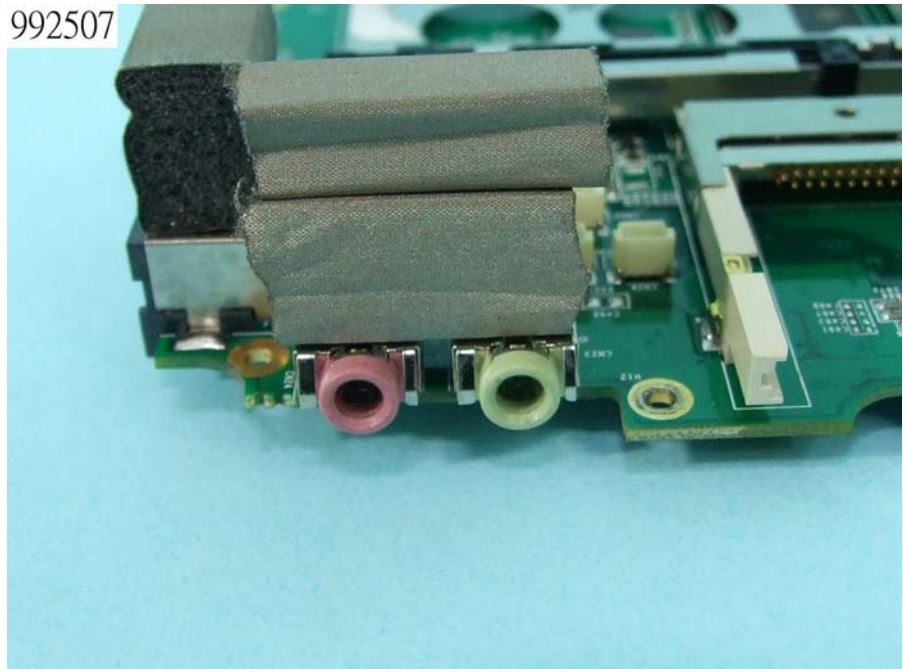




992507

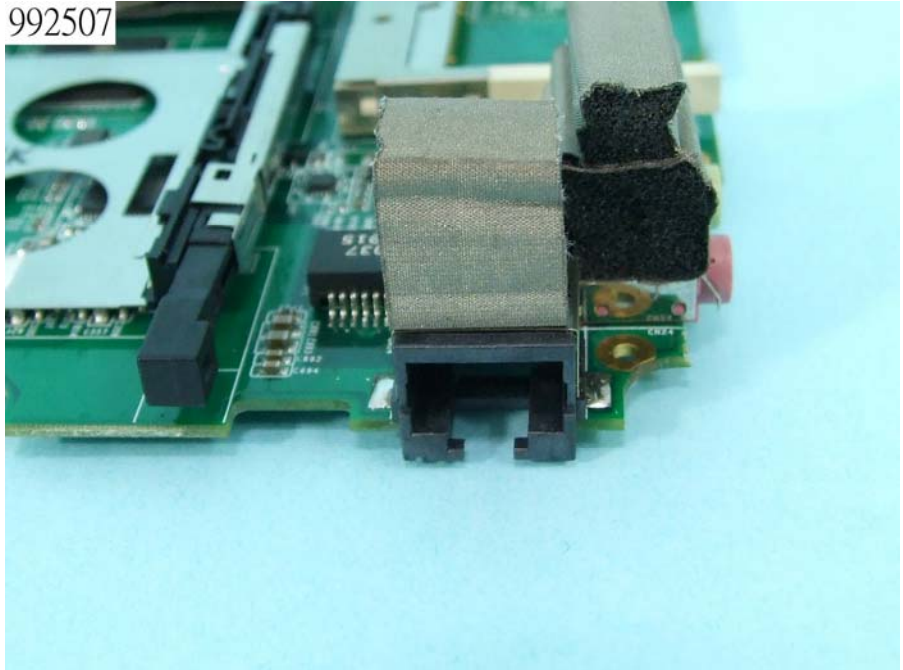


992507

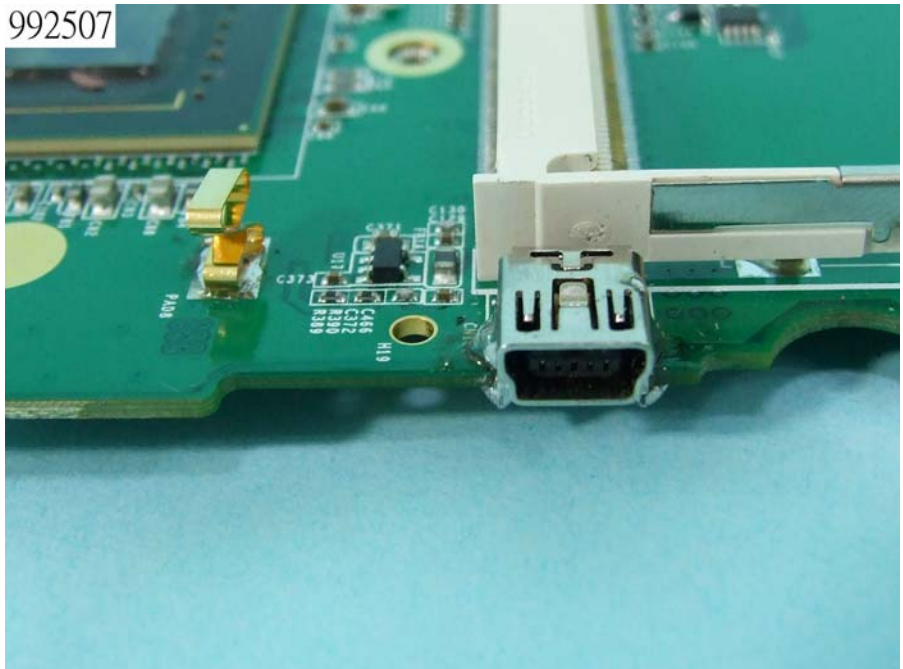




992507

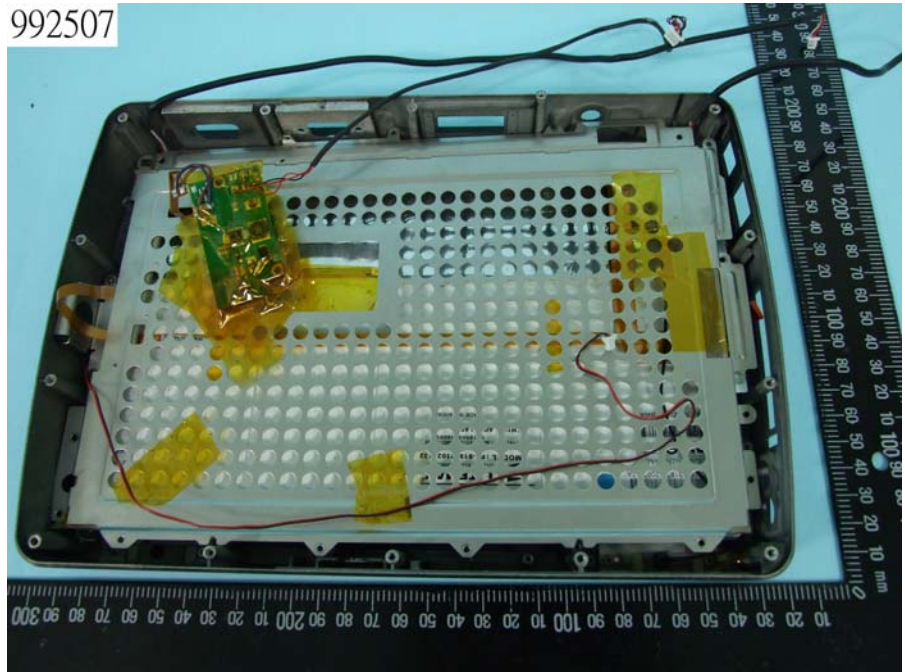


992507

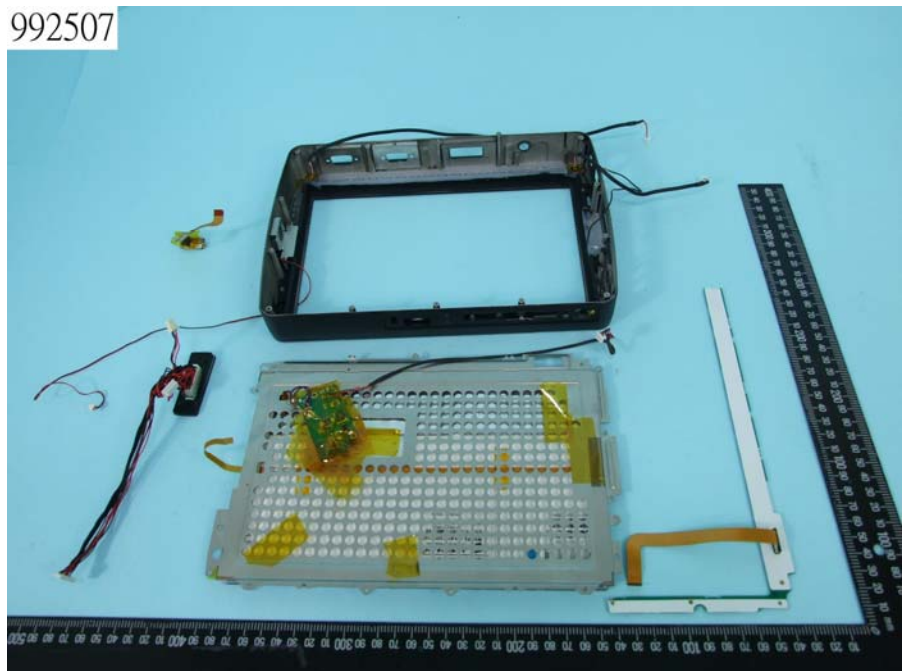




992507

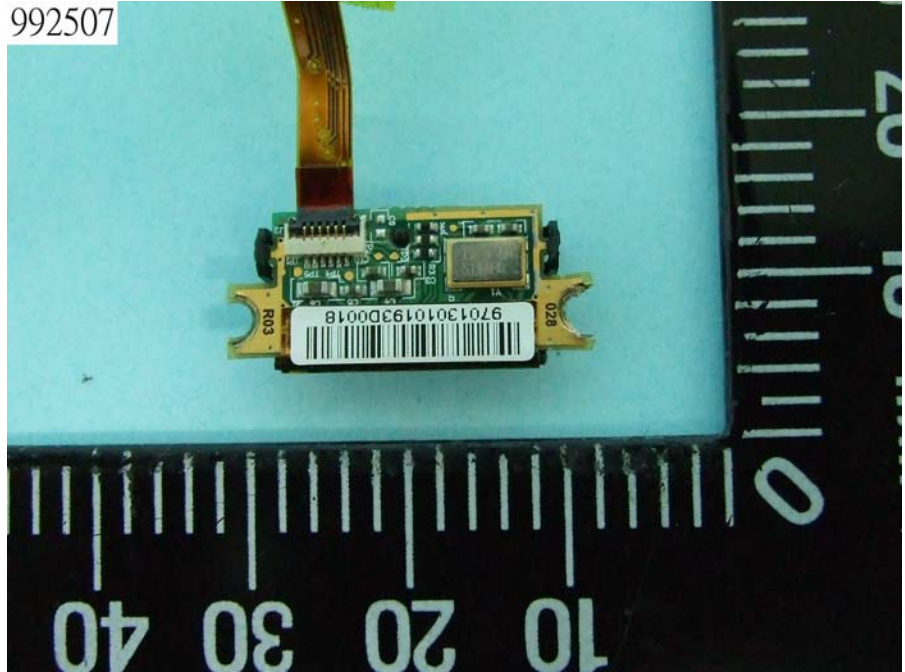


992507

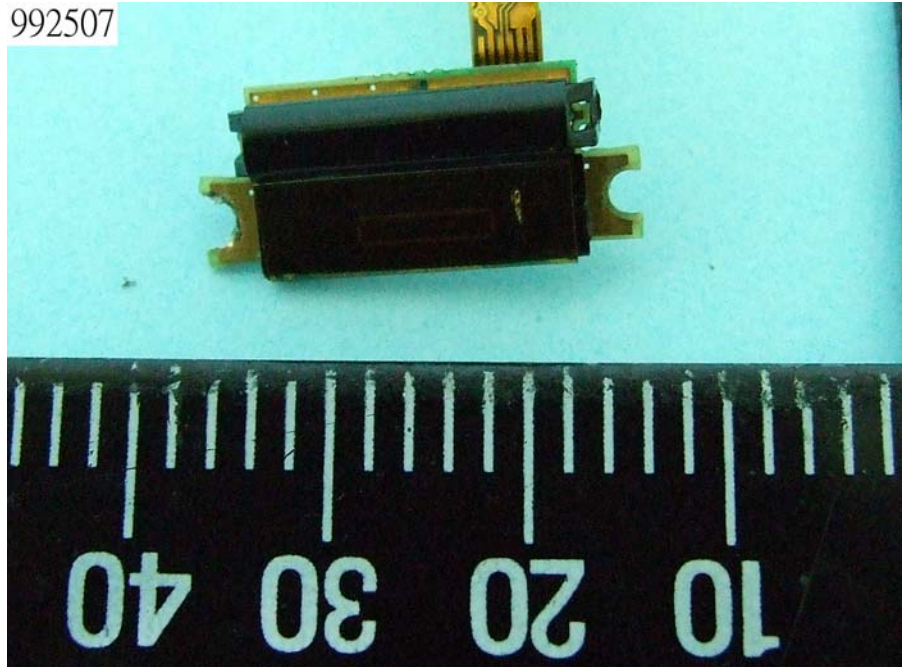

992507




992507

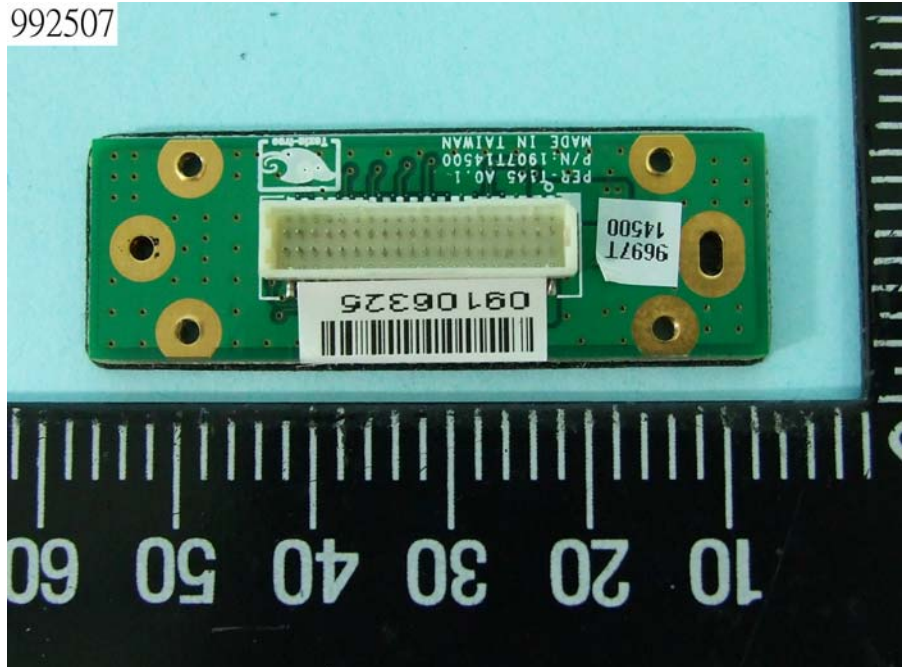




992507

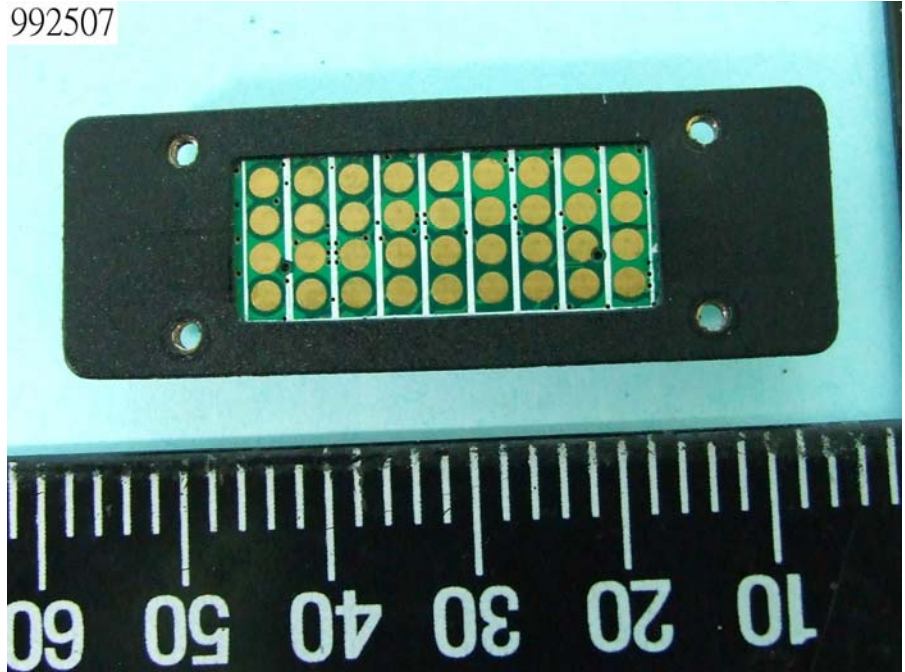

992507

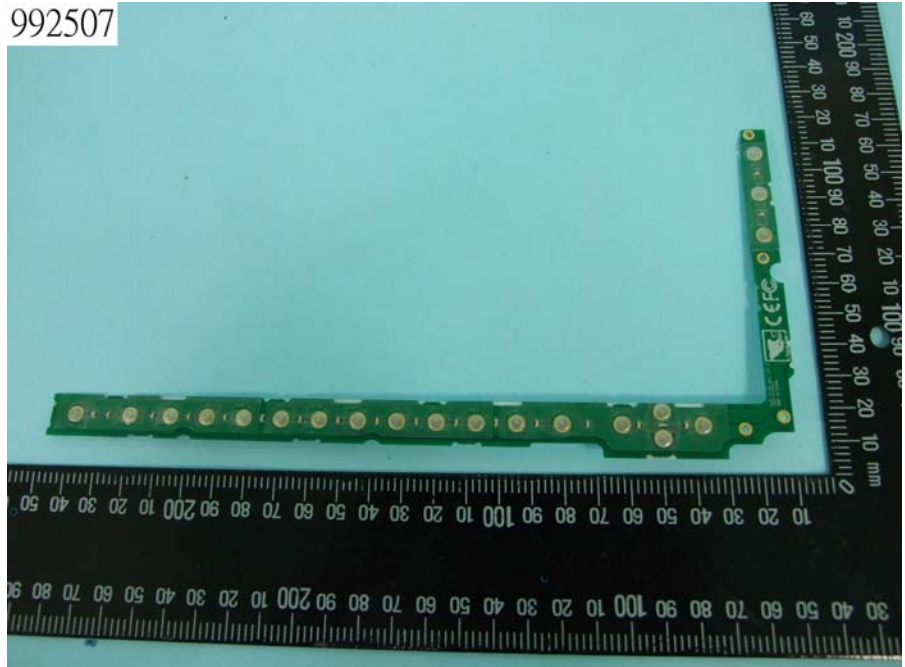





992507



992507



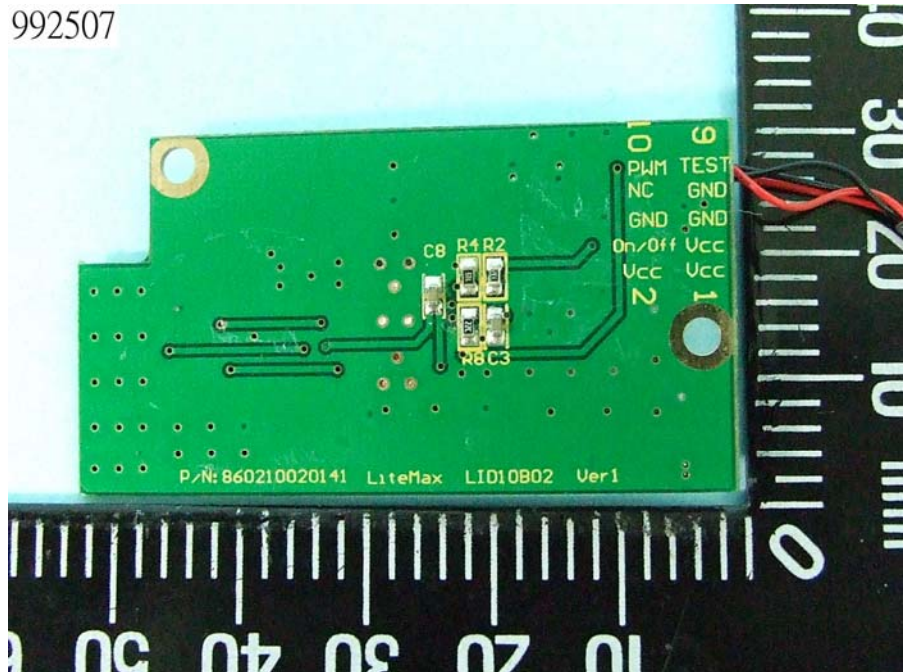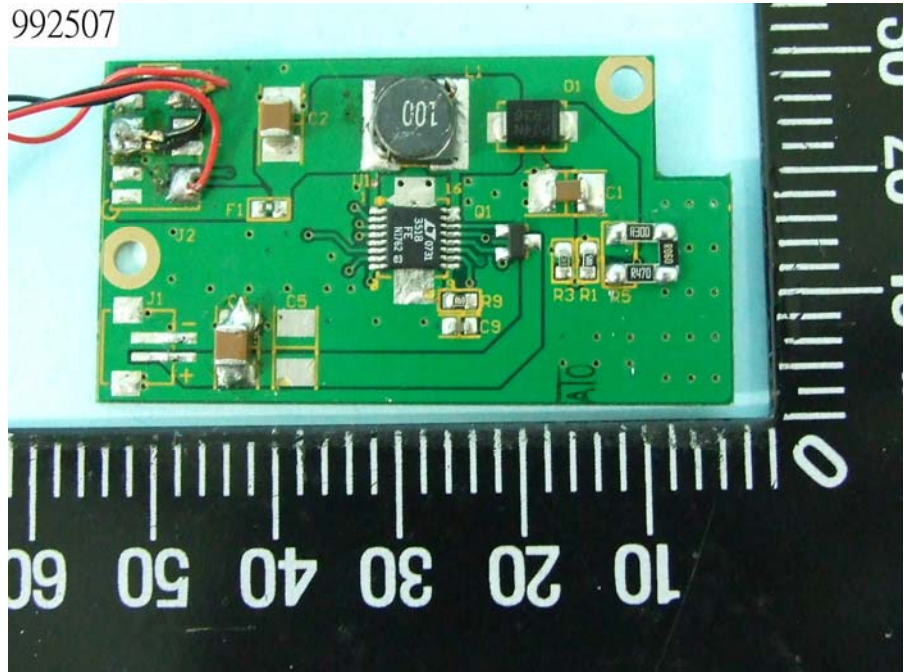



992507



992507





992507



992507



992507



992507



992507



992507

