



EMC

TEST REPORT

REPORT NO. : F87112707
MODEL NO. : SBC-556
DATE OF TEST : Dec. 1, 1998

PREPARED FOR: AAEON TECHNOLOGY INC.

ADDRESS : 1F, NO. 6, ALLEY 6, LANE 45, PAO-HSIN RD.,
HSIN-TIEN CITY, TAIPEI, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

11F, NO.1, SEC.4, NAN-KING EAST RD.,
TAIPEI, TAIWAN, R.O.C.

This test report consists of 13 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



TABLE OF CONTENTS

1. CERTIFICATION	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF SUPPORT UNITS	5
2.3 TEST METHODOLOGY AND CONFIGURATION	5
3. TEST INSTRUMENTS	6
3.1 TEST INSTRUMENTS (EMISSION)	6
3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION	7
4. TEST RESULTS (EMISSION)	8
4.1 RADIO DISTURBANCE	8
4.2 EUT OPERATION CONDITION	8
4.3 TEST DATA OF CONDUCTED EMISSION	9
4.4 TEST DATA OF RADIATED EMISSION	10
5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN	12



1. CERTIFICATION

Issue Date: Dec. 8, 1998

Product : CPU BOARD
 Trade Name : AAEON
 Model No. : SBC-556
 Applicant : AAEON TECHNOLOGY INC.
 Standard : FCC Part 15, Subpart B, Class A
 ANSI C63.4-1992
 CISPR 22: 1993+A1: 1995+A2: 1996

We hereby certify that one sample of the designation has been tested in our facility on Dec. 1, 1998. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

The test results show that the EUT as described in this report is in compliance with the Class A limits of conducted and radiated emission of applicable standards.

TESTED BY: San Lin , DATE: 12/8/98
 (San Lin)

CHECKED BY: Ariel Hsieh , DATE: 12/8/98
 (Ariel Hsieh)

APPROVED BY: Mike Su , DATE: 12/8/98
 (Mike Su)

ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product : CPU BOARD
Model No. : SBC-556
Power Supply : DC (from PC)
Data Cable : N/A

Note: During the test, the EUT was installed in the industrial PC. The Industrial PC includes the following:

- CHASSIS : AAEON, model: AMPC-204P
- HDD : SEAGATE, model: ST51270A
- CPU : INTEL PENTIUM MMX 233 MHz
- BACK PLANE : AAEON, model: BP-204PSA
- SWITCHING POWER SUPPLY: ZIPPY, model: EP2-4150F

The EUT was tested under the CPU: INTEL PENTIUM MMX 233 MHz, frequency of clock generator is 66 MHz.

For more detailed features description, please refer to manufacturer's specification or User's Manual.



2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

No	Product	Brand	Model No.	FCC ID	I/O Cable
1.	COLOR MONITOR	ADI	PD-959	FCC DoC Approved	Shielded Signal (1.5m) Nonshielded Power (1.8m)
2.	PRINTER	HP	2225C+	DSI6XU2225	Shielded Signal (1.5m) Nonshielded Power (1.8m)
3.	MODEM	ACEEX	1414	IFAXDM1414	Shielded Signal (1.2m) Nonshielded Power (1.8m)
4.	KEYBOARD	AAEON	KB-130	Verification	Shielded Signal (1.0m)
5.	USB KEYBOARD	BTC	7932	E5XKBUCP10410	Shielded Signal (1.8m)
6.	MOUSE	LOGITECH	M-M30	DFI.210569	Shielded Signal (1.9m)
7.	USB MOUSE	DEXIN	A3U800A	NYYS3U800A	Shielded Signal (1.5m)
8.	PERSONAL COMPUTER	IBM	6560-T7T	AN06260F	Nonshielded Power (1.8m)
9.	COLOR MONITOR	ACER	7134T	JVP7134T	Shielded Signal (1.5m) Nonshielded Power (1.8m)
10.	KEYBOARD	FORWARD	FDA-104GA	F4ZDA-104G	Nonshielded Signal (1.8m)
11.	MOUSE	HP	M-S34	DZL211029	Nonshielded Signal (1.8m)
12.	LAN CARD	INTEL	S82555	EJMNPDSPD035	Shielded RJ45 Signal (10m)

Note: 1. Support units 5 & 7 were connected to the USB ports of PC system.

2. Support units 1-7 were set up as the SERVER PC system and communicated with support units 8-12 which acted as WORKSTATION and partners of communication system via a Lan cable (10m).

2.3 TEST METHODOLOGY AND CONFIGURATION

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 1992. Radiated testing was performed at an antenna to EUT distance of 3/10 m on an open area test site.

Please refer to the photos of test configuration in Item 5.



3. TEST INSTRUMENTS

3.1 TEST INSTRUMENTS (EMISSION)

RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	8594E	3412A01132	Sept. 24, 1999
CHASE Preamplifier	CPA9231A/4	3215	Nov. 1, 1999
HP Preamplifier	8347A	3307A01088	Sept. 9, 1999
ROHDE & SCHWARZ TEST RECEIVER	ESVS 30	841977/002	Jan. 08, 1999
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 25, 1999
CHASE BILOG Antenna	CBL6112	2074	Dec. 25, 1998
EMCO Double Ridged Guide Antenna	3115	9312-4192	April 3, 1999
CHANCE Turn Table & Tower Controller	ACS-I	N/A	N/A
Open Field Test Site	Site 6	ADT-R06	Dec. 23, 1998

Note: 1. The measurement uncertainty is less than +/- 3dB, which is calculated as per NAMA's document NIS81.

2. The calibration interval of the above test instruments is 12 months.
And the calibrations are traceable to NML/ROC and NIST/USA.

CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 22, 1999
ROHDE & SCHWARZ Artificial Mains Network	ESH2-Z5	892107/003	July 20, 1999
EMCO L.I.S.N.	3825/2	9504-2359	July 20, 1999
Shielded Room	Site 3	ADT-C03	N/A

Note: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per NAMA's document NIS81.

2. The calibration interval of the above test instruments is 12 months.
And the calibrations are traceable to NML/ROC and NIST/USA.



3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION

LIMIT OF RADIATED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
Above 1000	300	49.5	500	54.0

- Note: (1) The lower limit shall apply at the transition frequencies.
(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

LIMIT OF CONDUCTED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- Note: (1) The lower limit shall apply at the transition frequencies.
(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz
(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4. TEST RESULTS (EMISSION)

4.1 RADIO DISTURBANCE

Frequency Range : 0.15 - 30 MHz (Conducted Emission)
30 - 2000 MHz (Radiated Emission)
Input Voltage : 120 Vac, 60 Hz
Temperature : 28 °C
Humidity : 50 %
Atmospheric Pressure : 1015 mbar

TEST RESULT	Remarks
PASS	Minimum passing margin of conducted emission: -4.2 dB at 0.156 MHz Minimum passing margin of radiated emission: -6.1 dB at 200.36 MHz

4.2 EUT OPERATION CONDITION

1. Turn on the power of all equipments.
2. Industrial PC reads a test program to enable all functions.
3. Industrial PC reads and writes messages from HDD.
4. Industrial PC sends and receives messages from WORKSTATION via a LAN cable.
5. Industrial PC sends "H" messages to monitor and monitor displays "H" patterns on screen.
6. Industrial PC sends "H" messages to modem.
7. Industrial PC sends "H" messages to printer and printer prints them on paper.
8. Repeat steps 2-8.



4.3 TEST DATA OF CONDUCTED EMISSION

EUT: CPU BOARD

MODEL: SBC-556

6 dB Bandwidth: 10 kHz

Freq. [MHz]	L Level [dB (μV)]		N Level [dB (μV)]		Limit [dB (μV)]		Margin [dB (μV)]			
	QP	AV	QP	AV	QP	AV	L		N	
0.156	63.2	60.9	63.4	61.8	79.0	66.0	-22.6	-5.1	-20.9	-4.2
0.201	56.4	-	58.1	-	79.0	66.0	-44.7	-	-44.2	-
3.910	28.3	-	28.8	-	73.0	60.0	-36.9	-	-36.8	-
8.210	36.1	-	36.2	-	73.0	60.0	-38.9	-	-40.1	-
13.000	34.1	-	32.9	-	73.0	60.0	-34.1	-	-34.3	-
23.120	38.9	-	38.7	-	73.0	60.0	-15.8	-	-15.6	-

- Remarks:
1. "*": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value

ADT CO. Shielded Room 3
 CISPR 22 CLASS A


91. Dec 23 20:47

Part: 650-558
 Operator: SAH
 Test speed: 1000 Hz
 Comment: 100-0765 650-558-0000
 FULL SYSTEM

Report No. J870-707
 Page 9-1
 Tested by *SAH*

Test Case Settings IS Range

Transmitter Settings			Receiver Settings					
Start	Stop	Step	IF BW	Detector	Hi-Z	Att'n	Preset	Defeat
500K	450K	5K	30K	PK	0.05dB	500dB	OFF	60dB
450K	5K	5K	30K	PK	0.05dB	1000dB	OFF	60dB
5K	30K	3K	30K	PK	0.05dB	1000dB	OFF	60dB

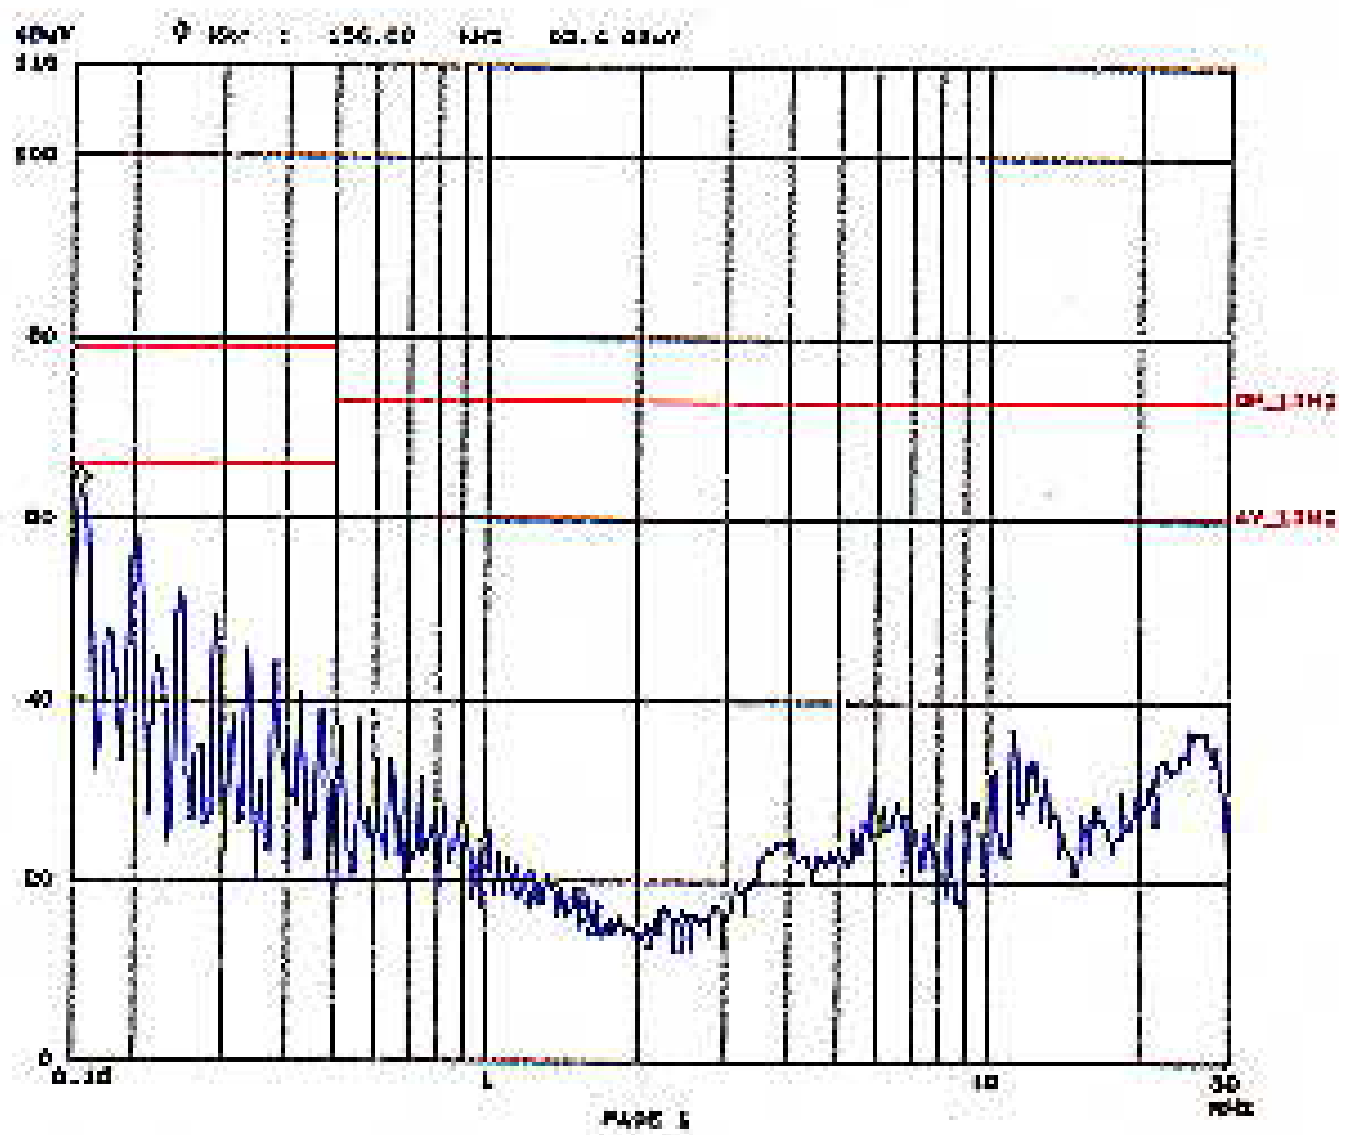


ADT CO. Shielded Room 3
 CISPR 22 CLASS A

91. 047 05 20:53

Unit: 000-050
 Operator: MAM
 Test Port: L101 - H
 Comment: 10B-0760 050 DOLBY
 FULL SWITCH

Report No. F-8711-2707
 Page 9-2
 Tested by [Signature]

Front Panel Settings			Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Att'n	Preamp	Q-Meter	
100k	450k	3k	100	PK	0.100s	10dB	OFF	0000	
100M	0M	0M	100	PK	0.100s	10dB	OFF	0000	
0M	30M	3k	10M	PK	0.100s	10dB	OFF	0000	

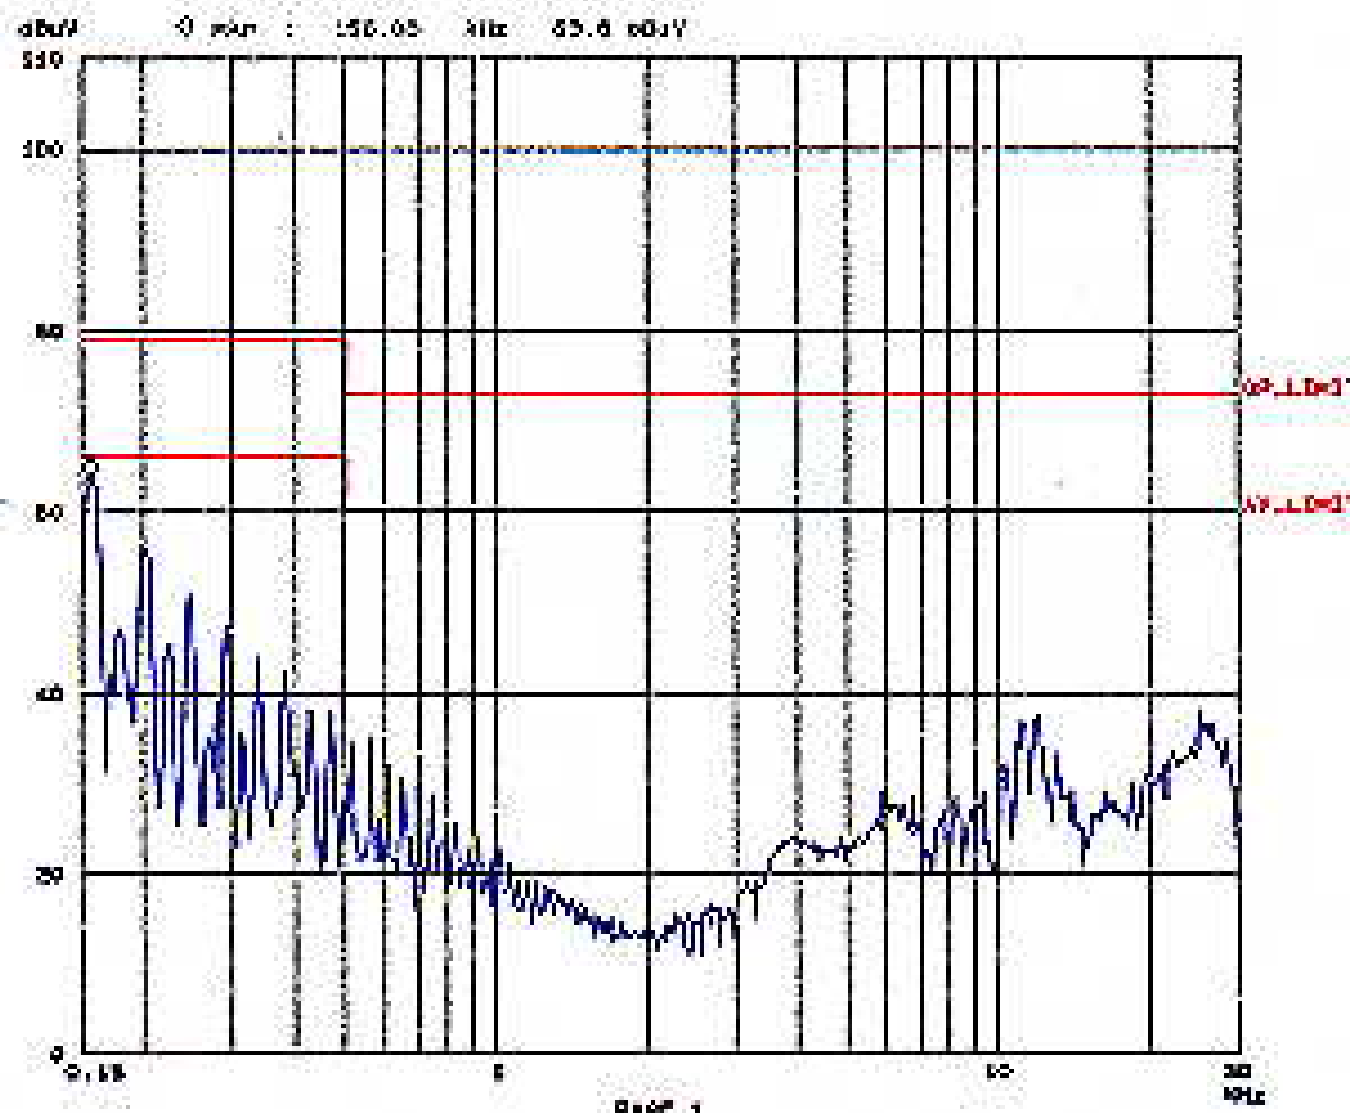



4.4 TEST DATA OF RADIATED EMISSION

EUT: CPU BOARD

MODEL: SBC-556

ANT. POLARITY: Horizontal

DETECTOR FUNCTION AND BANDWIDTH: Quasi peak, 120 kHz (30-1000 MHz)
Peak, 1 MHz (1000 MHz-2000 MHz)

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

FREQUENCY RANGE: 1000-2000 MHz

MEASURED DISTANCE: 3 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
78.23	9.8	17.9	27.7	40.0	-12.3
124.24	15.1	2.5	17.6	40.0	-22.4
133.64	13.9	9.7	23.6	40.0	-16.4
141.92	12.9	12.6	25.5	40.0	-14.5
143.20	12.7	13.1	25.8	40.0	-14.2
157.49	11.3	10.6	21.9	40.0	-18.1
166.90	10.9	9.9	20.8	40.0	-19.2
194.81	10.5	8.4	18.9	40.0	-21.1
200.45	10.5	11.6	22.1	40.0	-17.9
207.94	11.2	7.2	18.4	40.0	-21.6
207.94	11.2	7.5	18.7	40.0	-21.3
244.88	14.7	12.9	27.6	47.0	-19.4

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
 2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION

EUT: **CPU BOARD**

MODEL: **SBC-556**

ANT. POLARITY: Vertical

DETECTOR FUNCTION AND BANDWIDTH: Quasi peak, 120 kHz (30-1000 MHz)
Peak, 1 MHz (1000 MHz-2000 MHz)

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

FREQUENCY RANGE: 1000-2000 MHz

MEASURED DISTANCE: 3 M


Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
77.98	7.6	24.1	31.7	40.0	-8.3
119.73	14.3	11.9	26.2	40.0	-13.8
133.63	13.6	15.5	29.1	40.0	-10.9
143.20	13.2	17.7	30.9	40.0	-9.1
166.91	11.4	18.3	29.7	40.0	-10.3
194.81	11.3	13.1	24.4	40.0	-15.6
200.36	11.9	22.0	33.9	40.0	-6.1
207.94	12.2	20.2	32.4	40.0	-7.6
220.93	12.8	14.3	27.1	40.0	-12.9
246.93	13.9	21.6	35.5	47.0	-11.5
344.38	17.5	10.8	28.3	47.0	-18.7
370.38	18.3	14.4	32.7	47.0	-14.3

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
 2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH
MINIMUM MARGIN

RADIATED EMISSION TEST

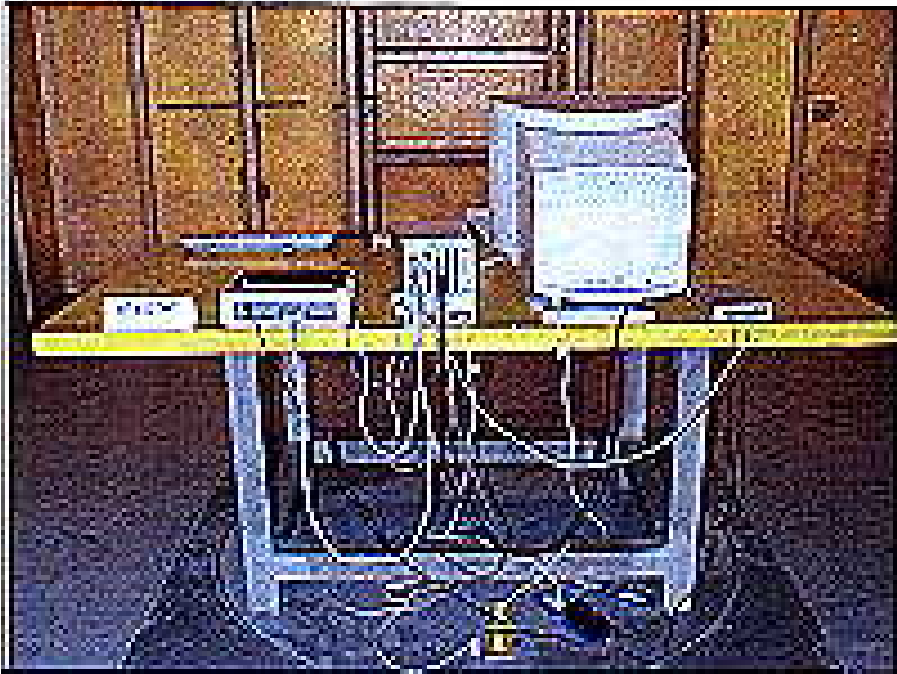



CONDUCTED EMISSION TEST

