

Certificate of Compliance

We, **ADVANCE DATA TECHNOLOGY CORP.**, hereby certify that:

The product : CPU BOARD

Trade Name : AAEON

Model No. : SBC-557

Applicant : AAEON TECHNOLOGY INC.

one sample of the designation has been tested in our facility on Nov. 9, 1999. The data, data evaluation, represented in our report No.: **F88110603**, are true and accurate representation of the measurements of the sample's emission characteristics under the conditions in following

Standards: FCC Part 15, Subpart B, Class A

CISPR 22: 1993+A1: 1995+A2: 1996, Class A

ANSI C63.4-1992



Mike Su / Project Manager

Issue Date: Nov. 11, 1999



ADVANCE DATA TECHNOLOGY CORP.

Head office: 11F, NO. 1, SEC 4, NAN-KING EAST RD., TAIPEI, TAIWAN, R.O.C.

TEL: (02) 2603-2180 FAX: (02) 2602-2943 <http://www.adt.com.tw> e-mail: service@mail.adt.com.tw



EMC

TEST REPORT

REPORT NO. : F88110603
MODEL NO. : SBC-557
DATE OF TEST : Nov. 9, 1999

PREPARED FOR: AAEON TECHNOLOGY INC.

ADDRESS : 1F, NO. 6, ALLEY 6, LANE 45, PAO-HSIN RD.,
HSIN-TIEN CITY, TAIPEI, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



11F, NO.1, SEC.4, NAN-KING EAST RD.,
TAIPEI, TAIWAN, R.O.C.

Accredited Laboratory

This test report consists of 15 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



TABLE OF CONTENTS

1. CERTIFICATION	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF SUPPORT UNITS	5
2.3 TEST METHODOLOGY AND CONFIGURATION	5
3. TEST INSTRUMENTS	6
3.1 TEST INSTRUMENTS (EMISSION)	6
3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION.....	7
4. TEST RESULTS (EMISSION).....	8
4.1 RADIO DISTURBANCE	8
4.2 EUT OPERATION CONDITION	8
4.3 TEST DATA OF CONDUCTED EMISSION	9
4.4 TEST DATA OF RADIATED EMISSION	11
5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN	13
6. APPENDIX - INFORMATION OF THE TESTING LABORATORY.....	15



I.

CERTIFICATION

Issue Date: Nov. 11, 1999

Product : CPU BOARD
Trade Name : AAEON
Model No. : SBC-557
Applicant : AAEON TECHNOLOGY INC.
Standard : FCC Part 15, Subpart B, Class A
ANSI C63.4-1992
CISPR 22:1993+A1:1995+A2:1996, Class A

We hereby certify that one sample of the designation has been tested in our facility on Nov. 9, 1999. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

The test results show that the EUT as described in this report is in compliance with the Class A limits of conducted and radiated emission of applicable standards.

TESTED BY : June Lin , DATE: 11/11/99
(June Lin)
CHECKED BY : Yenny Soong , DATE: 11/11/99
(Yenny Soong)
APPROVED BY : Mike Su , DATE: 11/11/99
(Mike Su)

ADVANCE DATA TECHNOLOGY CORPORATION

NVLAP

Accredited Laboratory



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product : CPU BOARD
Model No. : SBC-557
Power Supply : Switching (from PC)

Note: During the test, the EUT was installed in a metal enclosure with a slot board to form an industrial PC.

The EUT was tested under the following configurations:

CPU	AMD K6II 300MHz (100MHz x 3)
HDD	SEAGATE, ST34520A, 4.5GB
BACKPLANE	AAEON, PCA-6114P3
CHASSIS	AAEON, ACPI-110
MEMORY	64MB SDRAM
SPS	SEASONIC, SSG-250G

The EUT has a resolution up to 1024x768, 256 color.

For more detailed features description, please refer to Manufacturer's Specification or User's Manual.



2.2 DESCRIPTION OF SUPPORT UNITS

The EUT was installed into a system and tested together with necessary accessories or support units during the test. The following support units or accessories are used to form representative test configuration during the tests.

No	Product	Brand	Model No.	FCC ID	I/O Cable
1	COLOR MONITOR	HP	D2846	FCC DoC Approved	Nonshielded Signal (1.2m) Shielded Power (1.8m)
2	PRINTER	HP	2225C+	DS15XU2225	Nonshielded Signal (1.2m) Shielded Power (1.2m)
3	MODEM X2	ACEEX	1414	IFAXDM1414	Shielded signal (1.2m) Nonshielded Power (1.2m)
4	KEYBOARD	BTC	5140	FCC DoC Approved	Shielded Signal (1.4m)
5	MOUSE	DEXIN	A2P800A	NIYA2P800A	Shielded signal (1.5m)
6	USB KEYBOARD	BTC	7932	E5XKBUCP10410	Shielded Signal (1.4m)
7	USB MOUSE	DEXIN	AZU800A	NIYA2U800A	Shielded Signal (1.4m)
8	PERSONAL COMPUTER	IBM	2156-D1N	FCC DoC Approved	Nonshielded power (1.8m)
9	MONITOR	ADI	SM-5514A	BRESM-5514AC	Nonshielded Signal (1.2m) Shielded Power (1.8m)
10	KEYBOARD	FORWARD	FDA-104GA	F4ZDA-104G	Shielded Signal (1.4m)
11	MOUSE	DEXIN	A2P800A	NIYA2P800A	Shielded signal (1.5m)
12	LAN CARD	D-LINK	DE-220P	KA2APC260PO	NA

Note 1. Support unit 1~7 acted as SERVER PC and communicated with support unit 8-12 which acted as HOST PC and systems of communication partner via a UTP cable (10m).

2. Support unit 6 & 7 were connected to the USB ports of EUT.

2.3 TEST METHODOLOGY AND CONFIGURATION

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 1992. Radiated testing was performed at an antenna to EUT distance of 3/10 m on an open area test site.

Please refer to the photos of test configuration in Item 5.



3. TEST INSTRUMENTS

3.1 TEST INSTRUMENTS (EMISSION)

CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESHS30	828765/002	Aug. 2, 2000
ROHDE & SCHWARZ Artificial Mains Network	ESH2-Z5	828075/003	July 21, 2000
EMCO-L.I.S.N.	3825/2	90031627	July 21, 2000
Shielded Room	Site 5	ADT-C05	NA

- Note: 1. The measurement uncertainty is less than ± 2.6 dB, which is calculated as per NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	8590L	3544A01176	April 22, 2000
HP Preamplifier	8447D	2944A08485	April 21, 2000
HP Preamplifier	8347A	3307A01088	Aug. 30, 2000
ROHDE & SCHWARZ TEST RECEIVER	ESM1	839013/007 839379/002	Aug. 30, 2000
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 25, 1999
CHASE BILOG Antenna	CBL6112A	2221	Aug. 4, 2000
EMCO Turn Table	1060	1115	NA
SHOSHIN Tower	AP-4701	A6Y005	NA
Open Field Test Site	Site 5	ADT-R05	July 30, 2000

- Note: 1. The measurement uncertainty is less than ± 3 dB, which is calculated as per NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.



3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION

LIMIT OF RADIATED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (at 10m) *		Class B (at 10m) *	
	dBuV/m		dBuV/m	
30 - 230	40		30	
230 - 1000	47		37	

* Detector Function: Quasi-Peak

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	Peak	Average	Peak	Average
Above 1000	80.0	60.0	74.0	54.0

- Note: (1) The lower limit shall apply at the transition frequencies.
(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

LIMIT OF CONDUCTED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- Note: (1) The lower limit shall apply at the transition frequencies.
(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz
(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4. TEST RESULTS (EMISSION)

4.1 RADIO DISTURBANCE

Frequency Range	:	0.15 - 30 MHz (Conducted Emission) 30 - 2000 MHz (Radiated Emission)
Input Voltage	:	120 Vac, 60 Hz
Temperature	:	24 °C
Humidity	:	60 %
Atmospheric Pressure	:	997 mbar

TEST RESULT	Remarks
PASS	Minimum passing margin of conducted emission: -28.1 dB at 4.691 MHz Minimum passing margin of radiated emission: -2.1 dB at 601.36 MHz, 601.50 MHz & 701.40 MHz

4.2 EUT OPERATION CONDITION

1. Turn on the power of all equipment.
2. Industrial PC reads a test program to enable all functions.
3. Industrial PC reads and writes messages from HDD.
4. Industrial PC sends and receives messages to and from HOST PC via a UTP cable.
5. Industrial PC sends "H" messages to monitor and monitor display "H" patterns on screen.
6. Industrial PC sends "H" messages to modems.
7. Industrial PC sends "H" messages to printer, and the printer prints them on paper.
8. Repeat steps 2-8.



4.3 TEST DATA OF CONDUCTED EMISSION

EUT: CPU BOARD

MODEL: SBC-557

6 dB Bandwidth: 10 kHz

PHASE: LINE (L)

Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
		[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.200	0.2	45.4	-	45.6	-	79.0	69.0	-33.4	-
0.364	0.2	38.8	-	39.0	-	79.0	69.0	-40.0	-
1.054	0.3	25.9	-	26.2	-	73.0	63.0	-46.8	-
4.691	0.8	41.8	-	42.6	-	73.0	63.0	-30.4	-
15.878	1.3	36.1	-	37.4	-	73.0	63.0	-35.6	-
25.781	1.7	42.5	-	44.2	-	73.0	63.0	-28.8	-


- Remarks:
1. "-": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Emission Level reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT: SBC-557
Manuf: FULL SYSTEM
Test Spec: LISN : L
File name: CISPR22A.SPC

Report No. F88110603
Page 9-1
Tested by J. Rebin

Overview Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	3.9k	9k	PK	10ms	10dB LN	OFF
1M	10M	3.9k	9k	PK	0.05ms	10dB LN	OFF
10M	30M	3.9k	9k	PK	0.05ms	10dB LN	OFF

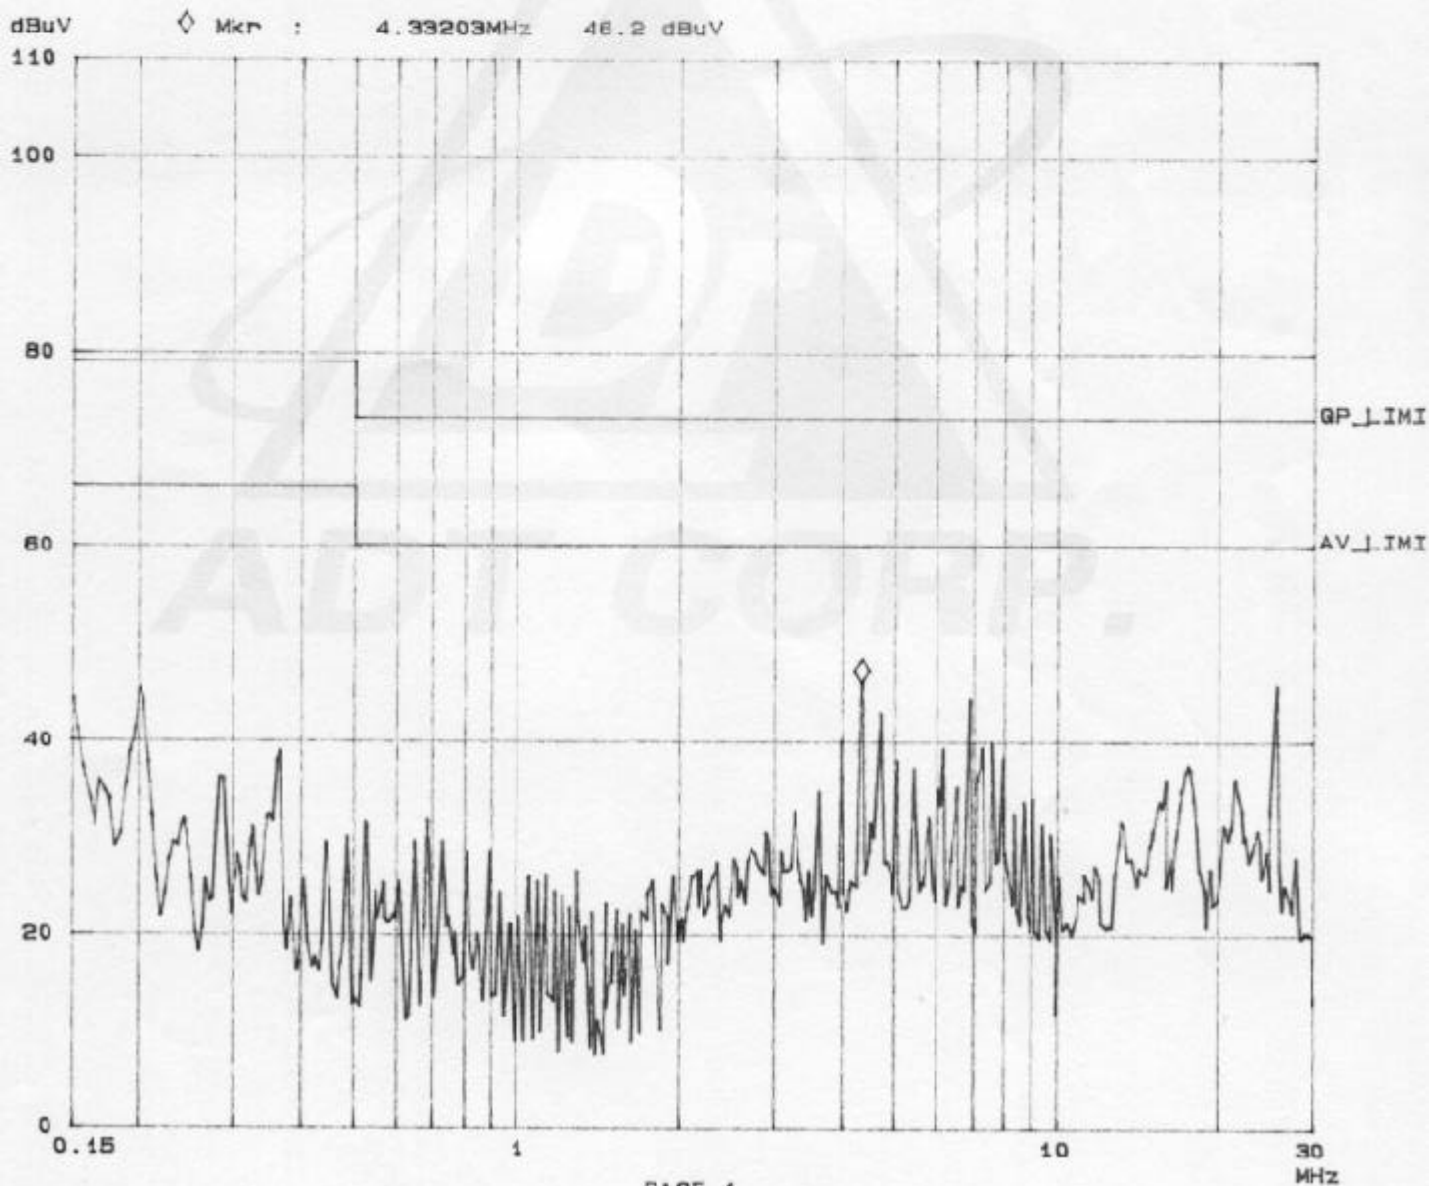



TEST DATA OF CONDUCTED EMISSION

EUT: CPU BOARD

MODEL: SBC-557

6 dB Bandwidth: 10 kHz

PHASE: NEUTRAL (N)

Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
		[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.200	0.2	45.8	-	46.0	-	79.0	69.0	-33.0	-
0.364	0.2	38.6	-	38.8	-	79.0	69.0	-40.2	-
1.054	0.3	29.1	-	29.4	-	73.0	63.0	-43.6	-
4.691	0.7	44.2	-	44.9	-	73.0	63.0	-28.1	-
15.878	1.1	35.1	-	36.2	-	73.0	63.0	-36.8	-
25.781	1.3	43.1	-	44.4	-	73.0	63.0	-28.6	-

- Remarks:
1. "-": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Emission Level reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

EUT: SBC-557
Manuf: FULL SYSTEM
Test Spec: LISN : N
File name: CISPR22A.SPC


Report No. F83110603

Page 10-1

Tested by June Lin

Overview Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	3.9K	9k	PK	10ms	10dB LN	OFF
1M	10M	3.9k	9k	PK	0.05ms	10dB LN	OFF
10M	30M	3.9K	9k	PK	0.05ms	10dB LN	OFF

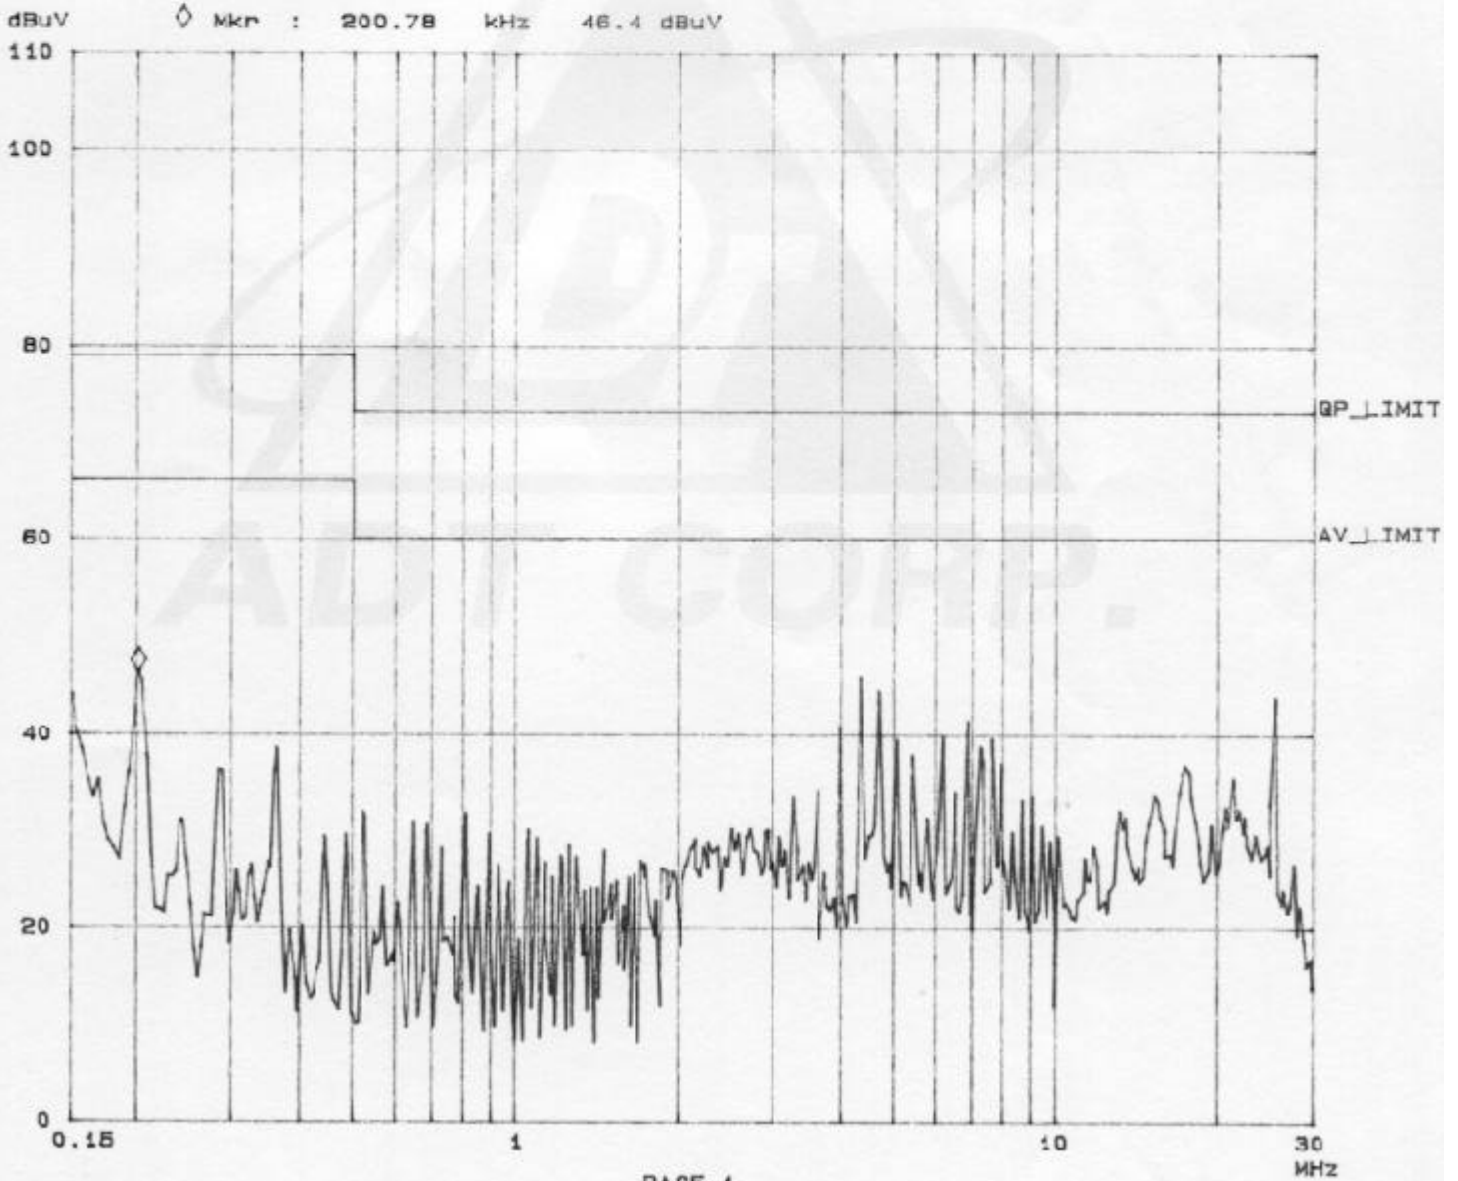



4.4 TEST DATA OF RADIATED EMISSION

EUT: CPU BOARD

MODEL: SBC-557

ANT. POLARITY: Horizontal

DETECTOR FUNCTION AND BANDWIDTH: Quasi peak, 120 kHz (30-1000 MHz)
Peak, 1 MHz (1000 MHz-2000 MHz)

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

FREQUENCY RANGE: 1000-2000 MHz

MEASURED DISTANCE: 3 M

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
116.97	12.7	18.6	31.3	40.0	-8.7	400	56
149.47	12.2	14.3	26.5	40.0	-13.5	400	130
175.47	10.9	21.5	32.4	40.0	-7.6	400	208
181.97	10.7	19.5	30.2	40.0	-9.8	400	277
192.71	10.4	22.3	32.7	40.0	-7.3	400	340
200.01	10.2	23.5	33.7	40.0	-6.3	400	12
206.03	10.6	19.9	30.5	40.0	-9.5	400	224
207.96	10.7	24.4	35.1	40.0	-4.9	400	81
214.46	11.2	22.9	34.1	40.0	-5.9	400	5
300.67	14.9	20.2	35.1	47.0	-11.9	400	74
601.36	20.9	24.0	44.9	47.0	-2.1	142	245
701.59	21.7	22.8	44.5	47.0	-2.5	100	74
1101.90	27.2	25.4	52.6	74.0	-21.4	100	3
1508.30	30.8	22.1	52.9	74.0	-21.1	153	88

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
 2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION

EUT: CPU BOARD

MODEL: SBC-557

ANT. POLARITY: Vertical

DETECTOR FUNCTION AND BANDWIDTH: Quasi peak, 120 kHz (30-1000 MHz)
Peak, 1 MHz (1000 MHz-2000 MHz)

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

FREQUENCY RANGE: 1000-2000 MHz

MEASURED DISTANCE: 3 M


Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
36.33	13.9	20.3	34.2	40.0	-5.8	100	178
45.51	10.4	27.0	37.4	48.0	-2.6	100	201
110.48	12.3	25.0	37.3	40.0	-2.7	100	259
116.98	12.7	23.5	36.2	40.0	-3.8	100	180
142.98	12.5	23.3	35.8	40.0	-4.2	100	101
149.47	12.2	24.5	36.7	40.0	-3.3	100	29
168.97	11.2	22.4	33.6	40.0	-6.4	100	358
181.96	10.7	26.8	37.5	40.0	-2.5	100	45
200.03	10.2	21.8	32.0	40.0	-8.0	100	171
207.95	10.7	24.5	35.2	40.0	-4.8	100	134
214.45	11.2	25.0	36.2	40.0	-3.8	100	118
229.10	12.2	21.9	34.1	40.0	-5.9	100	86
601.50	20.9	24.0	44.9	47.0	-2.1	400	50
701.40	21.7	23.2	44.9	47.0	-2.1	323	50
1002.50	27.2	24.4	51.6	74.0	-22.4	100	372
1401.50	30.1	23.2	53.3	74.0	-20.7	125	228
1507.00	30.8	22.3	53.1	74.0	-20.9	145	78

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
 2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value




**5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH
MINIMUM MARGIN**

CONDUCTED EMISSION TEST

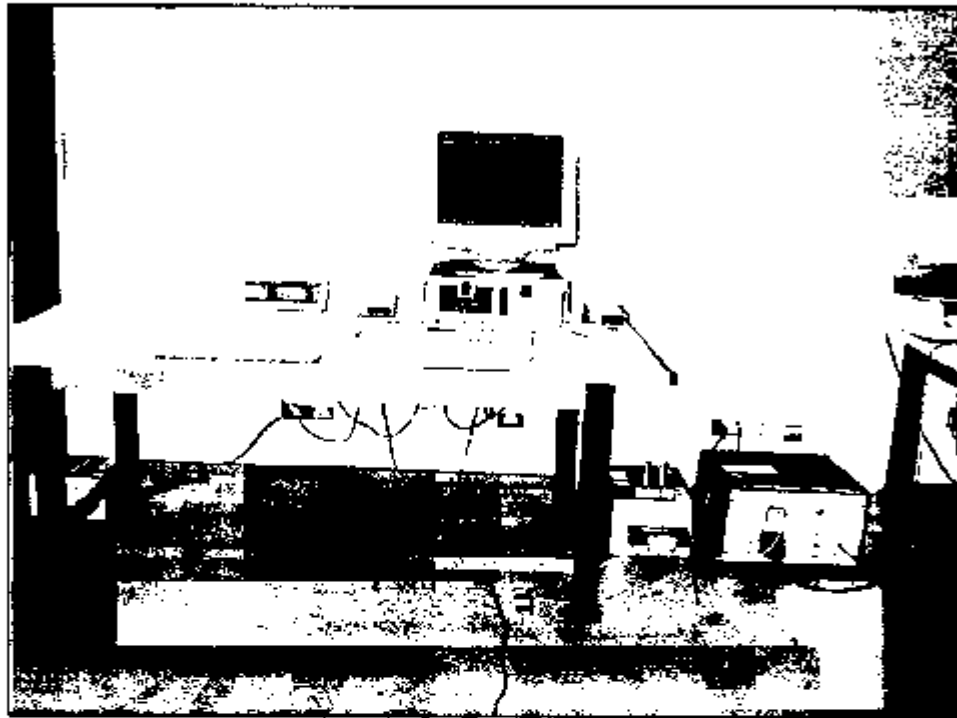



RADIATED EMISSION TEST

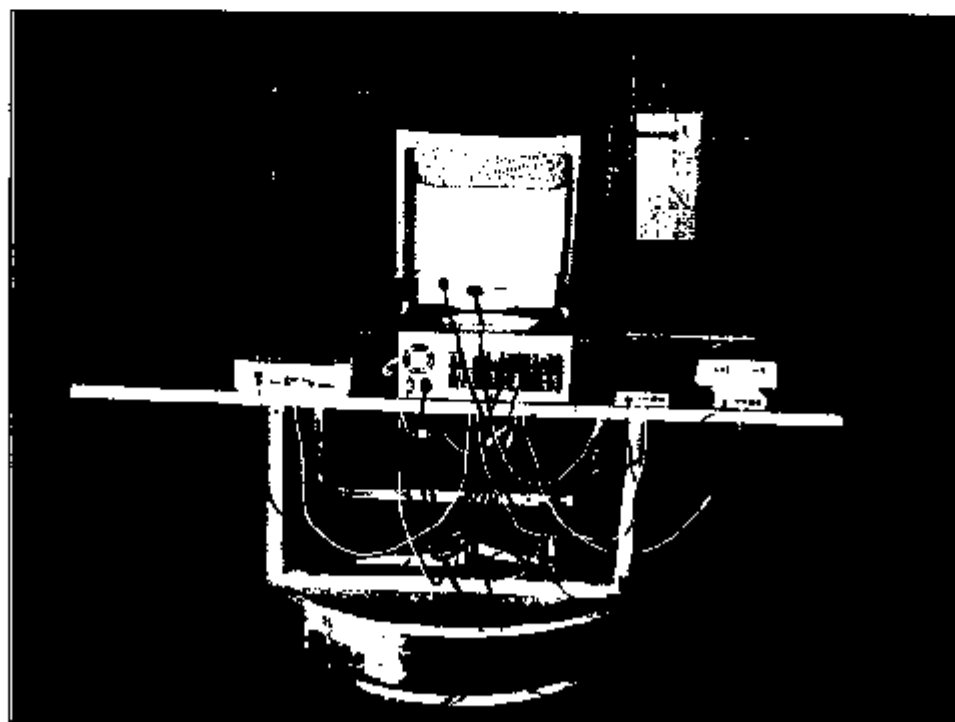



6. APPENDIX - INFORMATION OF THE TESTING LABORATORY

Information of the testing laboratory

We, ADT Corp., are founded in 1988, to provide our best service in EMC and Safety consultation. Our laboratory is accredited by the following approval agencies according to ISO/IEC Guide 25 or EN 45001:

- | | |
|---------------|--------------------------------------|
| ● USA | FCC, UL, NVLAP |
| ● Germany | TUV Rheinland
TUV Product Service |
| ● Japan | VCCI |
| ● New Zealand | RFS |
| ● Norway | NEMKO, DNV |
| ● U.K. | INCHCAPE |
| ● R.O.C. | BSMI |

Enclosed please find some certificates of our laboratory obtained from approval agencies. If you have any comments, please feel free to contact us with the following:

Lin Kou EMC Lab.:
Tel: 886-2-26032180
Fax: 886-2-26022943

Hsin Chu EMC Lab.:
Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab.:
Tel: 886-2-26093195
Fax: 886-2-26093184

Design Center:
Tel: 886-2-26093195
Fax: 886-2-26093184

E-mail: service@mail.adt.com.tw
<http://www.adt.com.tw>