



Certificate of Compliance

with
European Low Voltage Directive

No. 10001 538 001

Type of equipment: Robust Panel PC

Certificate holder: AAEON Technology Inc.

Type designation: xxxxxAPC-9172HTy-xxxxxxx
(where y is T or blank; x is 0-9, A-Z, "-" or blank for marketing purpose)

Trademark: AAEON Technology Inc.

Technical data: Rating (s) :Input: 100-240Vac, 50-60Hz,1.2-0.5A

A sample of the equipment has been tested for CE-marking according to the EC Low Voltage Directive, 2006/95/EC

Standard used for showing compliance with the essential requirements of the directive:

Standard(s):
IEC 60950-1:2001
EN 60950-1:2001
+A11:2004

Test report(s):
10001 538 001

Issued by:
Cerpas

Date(s):
31/Aug/07

The referred test report(s) show that the product fulfills the requirements in the EC Low Voltage Directive for CE marking. On this basis, together with the manufacturer's own documented production control, the manufacturer (or his European authorized representative) can in his EC Declaration of Conformity verify compliance with the EC Low Voltage Directive.




Edward Lin
Testing Department


Jackie Lin
Certification Department




TEST REPORT IEC 60950-1 and/or EN 60950-1 Information technology equipment – Safety – Part 1: General requirements	
Report reference No	<10001 538 001>
Tested by (printed name and signature)	Sprewell Chien <i>Sprewell Chien</i>
Approved by (printed name and signature)	Edward Lin <i>Edward Lin</i>
Date of issue	August 31, 2007
Testing Laboratory Name	Cerpass Technology Corp.
Address	9F, No. 200, Gangcian Rd., Neihu District, Taipei City 114, Taiwan
Testing location	Same as above
Applicant's Name	AAEON Technology Inc.
Address	5th Fl 135 Lane 235 Pao Chiao Rd Hsin-Tien, Taipei Taiwan
Test specification	
Standard	IEC 60950-1:2001 EN 60950-1:2001+A11:2004
Test procedure	Service of CE Marking in LVD
Non-standard test method	N/A
Test item description	
Manufacturer	Same as applicant
Trademark	See copy of marking plate
Model and/or type reference	xxxxxAPC-9172HTy-xxxxxxx (where y is T or blank; x is 0-9, A-Z, "-" or blank for marketing purpose)
Serial number	Pre-production samples w/o serial numbers
Rating(s)	Input: 100-240Vac, 50-60Hz, 1.2-0.5A



<p>Particulars: test item vs. test requirements</p> <p>Equipment mobility: Building-in Operating condition: Continuous Mains supply tolerance (%): +10%, -10% Tested for IT power systems: Yes (for Norway) IT testing, phase-phase voltage (V): IT, 230V (for Norway) Class of equipment: Class I Mass of equipment (kg).....: 10.3 kg Protection against ingress of water: IPX0</p>
<p>Test case verdicts</p> <p>Test case does not apply to the test object ...: N/A Test item does meet the requirement: P(ass) Test item does not meet the requirement: F(ail)</p>
<p>Testing</p> <p>Date of receipt of test item: August 10, 2007 Date(s) of performance of test: August 14, 2007 - August 30, 2007</p>
<p>General remarks</p> <p>This report shall not be reproduced except in full without the written approval of the testing laboratory. The test results presented in this report relate only to the item(s) tested. "(see remark #)" refers to a remark appended to the report. "(see Annex #)" refers to an annex appended to the report. Throughout this report a point is used as the decimal separator.</p> <p><u>Factories:</u> AAEON Technology Inc. 5th Fl 135 Lane 235 Pao Chiao Rd Hsin-Tien, Taipei Taiwan</p> <p><u>General description:</u> This equipment, model xxxxxAPC-9172HTy-xxxxxxx, is Robust Panel PC (building-in type) which is intended to use within information technology equipment. The equipment consists of building-in power supply, HDD, ODD, DC fan and mother board housed with metallic enclosure, and no operator accessible area inside declared by manufacturer. The unit is considered as building-in type equipment; additional evaluation must be conducted in end-use condition. USB ports and PS/2 ports were not investigated as a limited power source. Power cord complying with national standard must be provided when shipment. The power supply for used with this product is approved components which is CB scheme tested according to IEC 60950-1. See appended table 1.5.1 for detail information about the switching power supply.</p> <p><u>Other remarks:</u> Maximum specified ambient temperature: 50°C.</p>



Copy of marking plate(s):

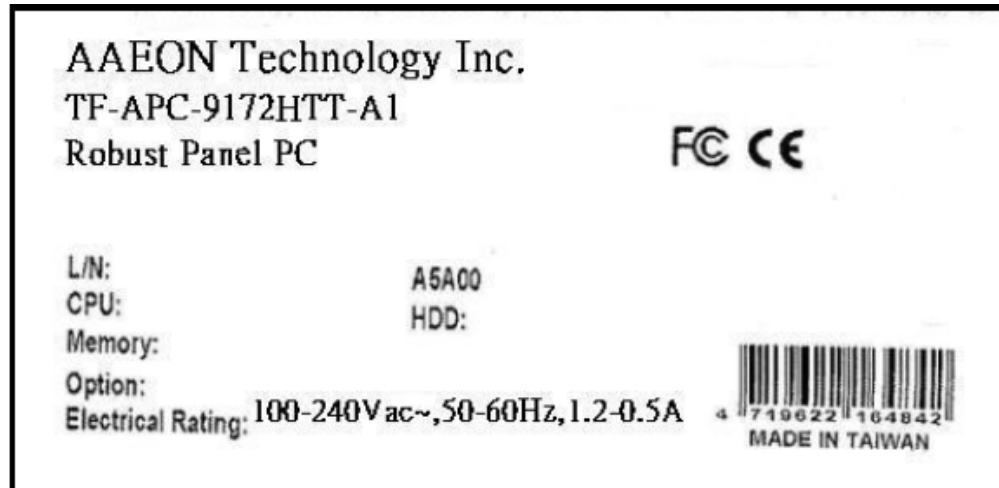



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
1	GENERAL		P
1.5	Components		P
1.5.1	General	See below.	P
	Comply with IEC 60950 or relevant component standard	Components which were found to affect safety aspects comply with the requirements of this standard or with the safety aspects of the relevant IEC/EN component standards (see appended table 1.5.1).	P
1.5.2	Evaluation and testing of components	Components that are certified to IEC and /or national standards are used correctly within their ratings. Components not covered by IEC standards are tested under the conditions present in the equipment.	P
1.5.3	Thermal controls	No thermal control.	N
1.5.4	Transformers	Evaluated in approved SPS.	P
1.5.5	Interconnecting cables	Interconnecting cables comply with the relevant requirements of this standard.	P
1.5.6	Capacitors in primary circuits	Evaluated in approved SPS.	P
1.5.7	Double insulation or reinforced insulation bridged by components		N
1.5.7.1	General		N
1.5.7.2	Bridging capacitors		N
1.5.7.3	Bridging resistors		N
1.5.7.4	Accessible parts		N
1.5.8	Components in equipment for IT power systems	Approved SPS is evaluated for IT power system	P
1.6	Power interface		P
1.6.1	AC power distribution systems	TN power system. IT power system for Norway only.	P
1.6.2	Input current	Highest load according to 1.2.2.1 for this equipment is cross reading/writing data in HDD, ODD playing continuously, the dummy loads of 2.5W in each USB port (five provided) and PS/2 ports connect to keyboard/mouse. (see appended table)	P



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
1.6.3	Voltage limit of hand-held equipment	This appliance is not hand-held equipment.	N
1.6.4	Neutral conductor	Neutral is isolated from earth with basic insulation throughout the equipment.	P

1.7	Marking and instructions		P
1.7.1	Power rating	See below.	P
	Rated voltage(s) or voltage range(s) (V)	100-240Vac	P
	Symbol for nature of supply, for d.c. only	Mains from AC source	N
	Rated frequency or rated frequency range (Hz) ..	50-60Hz	P
	Rated current (mA or A)	1.2-0.5A	P
	Manufacturer's name or trademark or identification mark	See copy of marking plate	P
	Type/model or type reference	xxxxxAPC-9172HTy-xxxxxxx	P
	Symbol for Class II equipment only	Class I equipment.	N
	Other symbols	Additional symbols or markings do not give rise to misunderstanding.	P
	Certification marks	No such mark.	N
1.7.2	Safety instructions	The user's manual contains information for operation, installation, servicing, transport, storage and technical data. The operation guide is provided to the user.	P
1.7.3	Short duty cycles	Equipment is designed for continuous operation.	N
1.7.4	Supply voltage adjustment	No voltage selector.	N
	Methods and means of adjustment; reference to installation instructions		N
1.7.5	Power outlets on the equipment	No outlets.	N
1.7.6	Fuse identification (marking, special fusing characteristics, cross-reference)	Evaluated in approved SPS.	P
1.7.7	Wiring terminals	See below.	N
1.7.7.1	Protective earthing and bonding terminals	Appliance coupler was provided in approval SPS.	N
1.7.7.2	Terminal for a.c. mains supply conductors	The equipment is provided with appliance inlet, which is for connection of a detachable type power supply cord.	N
1.7.7.3	Terminals for d.c. mains supply conductors	AC mains supply only.	N
1.7.8	Controls and indicators	See below.	P



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
1.7.8.1	Identification, location and marking	The marking and indication of the standby switch is located that indication of function is clearly.	P
1.7.8.2	Colours	No safety relevant control or indicator.	N
1.7.8.3	Symbols according to IEC 60417	The power switch is marked with symbol according to 60417-1-IEC-5007 and 5008 (1 and 0), and stand-by type switch is marked with symbol according to 60417-1-IEC-5009.	P
1.7.8.4	Markings using figures	No indicators for different positions.	N
1.7.9	Isolation of multiple power sources	Single mains supply.	N
1.7.10	IT power distribution systems	It shall be evaluated when submitted for Norway national approval.	N
1.7.11	Thermostats and other regulating devices	No thermostats provided.	N
1.7.12	Language(s)	User manual and marking label are in English. Versions of other languages will be provided when submitted for national approval.	—
1.7.13	Durability	The labels were subjected to the permanence of marking test. The labels were rubbed with cloth soaked with water for 15 s and then again for 15 s with the cloth soaked with petroleum spirit. After this test there was no damage to the labels. The marking on the labels did not fade. There was no curling or lifting of the label's edges.	P
1.7.14	Removable parts	No removable parts provided.	N
1.7.15	Replaceable batteries	Lithium battery for real time clock is exchangeable. Warning sentence is printed in manual.	P
	Language(s).....	English. Versions in other languages have to be provided during the corresponding national approvals.	—
1.7.16	Operator access with a tool	No operator accessible area that needs to be accessed by the use of a tool.	N



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
1.7.17	Equipment for restricted access locations	No restricted access location.	N

2	PROTECTION FROM HAZARDS		P
2.1	Protection from electric shock and energy hazards		P
2.1.1	Protection in operator access areas		P
2.1.1.1	Access to energized parts	See below.	P
	Test by inspection	No access with test finger to any parts with only basic insulation to ELV or hazardous voltage. The test pin cannot touch hazardous voltage through any openings within the appliance.	P
	Test with test finger	Ditto.	P
	Test with test pin	Ditto.	P
	Test with test probe	No TNV.	N
2.1.1.2	Battery compartments	No battery compartments and TNV circuits.	N
2.1.1.3	Access to ELV wiring	No ELV wiring in operator accessible area.	N
	Working voltage (V _{peak} or V _{rms}); minimum distance (mm) through insulation	Ditto.	—
2.1.1.4	Access to hazardous voltage circuit wiring	No hazardous voltage wiring in operator accessible area.	N
2.1.1.5	Energy hazards	No energy hazard in operator access area.	P
2.1.1.6	Manual controls	No conductive shafts of operating knobs and handles.	N
2.1.1.7	Discharge of capacitors in equipment	Evaluated in approved SPS	P
	Time-constant (s); measured voltage (V)		—
2.1.2	Protection in service access areas	No maintenance work in operation mode necessary.	N
2.1.3	Protection in restricted access locations	It is not intended to use in restricted locations.	N

2.2	SELV circuits		P
2.2.1	General requirements	See below.	P
2.2.2	Voltages under normal conditions (V)	Between any conductor of the SELV circuits 42.4 V peak or 60 V d.c. are not exceeded.	P



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
2.2.3	Voltages under fault conditions (V).....:	Single fault did not cause excessive voltage in accessible SELV circuits. Limits of 71 V peak and 120 V d.c. were not exceed and SELV limits not for longer than 0.2 s.	P
2.2.3.1	Separation by double insulation or reinforced insulation (method 1)	Evaluated in approved SPS	P
2.2.3.2	Separation by earthed screen (method 2)		N
2.2.3.3	Protection by earthing of the SELV circuit (method 3)		N
2.2.4	Connection of SELV circuits to other circuits.....:	See 2.2.2 and 2.2.3. No direct connection between SELV and any primary circuits.	P

2.3	TNV circuits <i>No TNV circuit within this equipment.</i>		N
2.3.1	Limits		N
	Type of TNV circuits		—
2.3.2	Separation from other circuits and from accessible parts		N
	Insulation employed		—
2.3.3	Separation from hazardous voltages		N
	Insulation employed		—
2.3.4	Connection of TNV circuits to other circuits		N
	Insulation employed		—
2.3.5	Test for operating voltages generated externally		N

2.4	Limited current circuits		P
2.4.1	General requirements	See below.	P
2.4.2	Limit values	See below.	P
	Frequency (Hz)	See appended table 2.4.2	—
	Measured current (mA).....:	See appended table 2.4.2	—
	Measured voltage (V)	Max. 1.02k Vp.	—
	Measured capacitance (µF).....:	No such component used.	—
2.4.3	Connection of limited current circuits to other circuits	Complied.	P

2.5	Limited power sources		N
	Inherently limited output		N



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	Impedance limited output		N
	Overcurrent protective device limited output		N
	Regulating network limited output under normal operating and single fault condition		N
	Regulating network limited output under normal operating conditions and overcurrent protective device limited output under single fault condition		N
	Output voltage (V), output current (A), apparent power (VA).....:		—
	Current rating of overcurrent protective device (A)		—

2.6	Provisions for earthing and bonding		P
2.6.1	Protective earthing	Metal chassis is connected reliably to the main protective earthing terminal.	P
2.6.2	Functional earthing	Secondary functional earthing is connected to protectively earthed conductive part that separated from primary by basic insulation.	P
2.6.3	Protective earthing and protective bonding conductors	Evaluated in approved SPS	P
2.6.3.1	General		N
2.6.3.2	Size of protective earthing conductors	No power cord provided.	N
	Rated current (A), cross-sectional area (mm ²), AWG.....:		—
2.6.3.3	Size of protective bonding conductors	See sub-clause 2.6.3.4, rated current below 16A.	—
	Rated current (A), cross-sectional area (mm ²), AWG.....:		—
2.6.3.4	Resistance (Ω) of earthing conductors and their terminations, test current (A).....:	See appended table 2.6.3.3.	—
2.6.3.5	Colour of insulation.....:	Evaluated in approved SPS.	P
2.6.4	Terminals	Appliance inlet used.	P
2.6.4.1	General	See below.	P
2.6.4.2	Protective earthing and bonding terminals	Appliance inlet used.	P
	Rated current (A), type and nominal thread diameter (mm).....:		—
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors	Evaluated in approved SPS	P
2.6.5	Integrity of protective earthing	See below.	P



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
2.6.5.1	Interconnection of equipment	This unit has its own earthing connection. Any other units connected via the output shall be provided SELV only.	P
2.6.5.2	Components in protective earthing conductors and protective bonding conductors	No switch or overcurrent protective device in protective earthing or bonding conductor.	P
2.6.5.3	Disconnection of protective earth	It is not possible to disconnect earth without disconnecting from mains as an appliance inlet is used.	P
2.6.5.4	Parts that can be removed by an operator	Ditto.	P
2.6.5.5	Parts removed during servicing	Ditto.	P
2.6.5.6	Corrosion resistance	All parts comprising the connections are plated and metal to metal which comply with Annex J.	P
2.6.5.7	Screws for protective bonding	No such screws provided.	N
2.6.5.8	Reliance on telecommunication network or cable distribution system	No TNV.	N

2.7	Overcurrent and earth fault protection in primary circuits		P
2.7.1	Basic requirements	Equipment relies on rated fuse or circuit breaker of the wall outlet installation protection of the building installation in case of L to N short circuit. Overcurrent protection is provided by approved SPS.	P
	Instructions when protection relies on building installation	Pluggable equipment type A.	N
2.7.2	Faults not covered in 5.3		N
2.7.3	Short-circuit backup protection	Pluggable equipment type A, hence building installation is considered as providing short circuit backup protection.	P
2.7.4	Number and location of protective devices	Overcurrent protection is provided by approved SPS.	P
2.7.5	Protection by several devices	One protective device in approved SPS.	P



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
2.7.6	Warning to service personnel	Hazardous voltage may be still presented in the equipment after the internal fuse opens. However, as it is considered that the plug to the mains will be disconnected during service work, no marking were requested.	N
2.8	Safety interlocks <i>No such device within this equipment.</i>		N
2.8.1	General principles		N
2.8.2	Protection requirements		N
2.8.3	Inadvertent reactivation		N
2.8.4	Fail-safe operation		N
2.8.5	Moving parts		N
2.8.6	Overriding		N
2.8.7	Switches and relays		N
2.8.7.1	Contact gaps (mm)		N
2.8.7.2	Overload test		N
2.8.7.3	Endurance test		N
2.8.7.4	Electric strength test		N
2.8.8	Mechanical actuators		N
2.9	Electrical insulation		P
2.9.1	Properties of insulating materials	Natural rubber, asbestos or hygroscopic materials are not used.	P
2.9.2	Humidity conditioning	Considered in approved SPS. Carried out for 120 hr.	P
	Humidity (%)	91-95% R.H.	—
	Temperature (°C)	40°C	—
2.9.3	Grade of insulation	The adequate levels of safety insulation is provided and maintained to comply with the requirements of this standard.	P
2.10	Clearances, creepage distances and distances through insulation		P
2.10.1	General	Approved SPS is used. Hence requirements of below sub-clauses are in compliance with IEC/EN 60950-1.	P



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
2.10.2	Determination of working voltage		P
2.10.3	Clearances		P
2.10.3.1	General		P
2.10.3.2	Clearances in primary circuits	Clearances distances inside SPS have been evaluated during type approval and are in compliance with the requirements of this standard.	P
2.10.3.3	Clearances in secondary circuits	Sub-clause 5.3.4 considered.	P
2.10.3.4	Measurement of transient voltage levels	No transient voltage across the clearance lower than due or normal.	N
2.10.4	Creepage distances	Insulation between other parts in the equipment is functional. For details see sub-clause 5.3.4. Creepage distances inside SPS have been evaluated during type approval and are in compliance with the requirements of this standard.	P
	CTI tests	CTI rating for all materials of IIIa + IIIb assumed.	—
2.10.5	Solid insulation	See bellow.	P
2.10.5.1	Minimum distance through insulation		N
2.10.5.2	Thin sheet material	Evaluated in approved SPS.	P
	Number of layers (pcs)	Ditto.	—
	Electric strength test	Ditto.	—
2.10.5.3	Printed boards		N
	Distance through insulation		N
	Electric strength test for thin sheet insulating material		—
	Number of layers (pcs)		N
2.10.5.4	Wound components		N
	Number of layers (pcs)		N
	Two wires in contact inside wound component; angle between 45° and 90°		N
2.10.6	Coated printed boards		N
2.10.6.1	General		N
2.10.6.2	Sample preparation and preliminary inspection		N
2.10.6.3	Thermal cycling		N
2.10.6.4	Thermal ageing (°C)		N



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
2.10.6.5	Electric strength test		—
2.10.6.6	Abrasion resistance test		N
	Electric strength test		—
2.10.7	Enclosed and sealed parts	No hermetically sealed components.	N
	Temperature T1=T2 + Tma – Tamb +10K (°C).....		N
2.10.8	Spacings filled by insulating compound.....	Photo-couplers used in approved SPS	N
	Electric strength test	Ditto.	—
2.10.9	Component external terminations		N
2.10.10	Insulation with varying dimensions	No such transformer used.	N

3	WIRING, CONNECTIONS AND SUPPLY		P
3.1	General		P
3.1.1	Current rating and overcurrent protection	All internal wires are UL recognized. Cross-sectional area of internal wiring is suitable for current intended to be carried. Internal wiring for power distribution protected by fuse in SPS.	P
3.1.2	Protection against mechanical damage	Wires do not touch sharp edges or heat sinks, which could damage insulation and cause hazard.	P
3.1.3	Securing of internal wiring	Internal wiring is secured reliable so that loosening of terminal connections is unlikely.	P
3.1.4	Insulation of conductors	Insulation of the conductor is suitable for the application. For insulation material see sub-clause 3.1.1.	P
3.1.5	Beads and ceramic insulators	Not used.	N
3.1.6	Screws for electrical contact pressure	Evaluated in approved SPS.	P
3.1.7	Insulating materials in electrical connections	All connections are metal to metal.	N
3.1.8	Self-tapping and spaced thread screws	No self-tapping and spaced screws are used.	N
3.1.9	Termination of conductors	All conductors are reliable secured.	P
	10 N pull test	Break away or pivot on its terminal is unlikely.	P



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
3.1.10	Sleeving on wiring	Evaluated in approved SPS.	P

3.2	Connection to an a.c. mains supply or a d.c. mains supply		P
3.2.1	Means of connection	See below.	P
3.2.1.1	Connection to an a.c. mains supply	Appliance coupler used.	P
3.2.1.2	Connection to a d.c. mains supply	AC mains supply only.	N
3.2.2	Multiple supply connections	Only one mains connection.	N
3.2.3	Permanently connected equipment	Not a permanently connected equipment.	N
	Number of conductors, diameter (mm) of cable and conduits		—
3.2.4	Appliance inlets	Appliance coupler complies with IEC 60320. The connector can be easily inserted and does not support the equipment.	P
3.2.5	Power supply cords	No power cord provided.	N
3.2.5.1	AC power supply cords		N
	Type		—
	Rated current (A), cross-sectional area (mm ²), AWG		—
3.2.5.2	DC power supply cords		N
3.2.6	Cord anchorages and strain relief		N
	Mass of equipment (kg), pull (N)		—
	Longitudinal displacement (mm)		—
3.2.7	Protection against mechanical damage	No parts under this unit likely to damage the power supply cord. No sharp edge.	P
3.2.8	Cord guards	No cord guard.	N
	D (mm); test mass (g)	Ditto.	—
	Radius of curvature of cord (mm)	Ditto.	—
3.2.9	Supply wiring space		N

3.3	Wiring terminals for connection of external conductors		N
3.3.1	Wiring terminals		N
3.3.2	Connection of non-detachable power supply cords		N
3.3.3	Screw terminals		N
3.3.4	Conductor sizes to be connected		N
	Rated current (A), cord/cable type, cross-sectional area (mm ²)		—



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
3.3.5	Wiring terminal sizes		N
	Rated current (A), type and nominal thread diameter (mm)		—
3.3.6	Wiring terminals design		N
3.3.7	Grouping of wiring terminals		N
3.3.8	Stranded wire		N

3.4	Disconnection from the mains supply		P
3.4.1	General requirement	Disconnect device provided.	P
3.4.2	Disconnect devices	Appliance coupler in approved SPS.	P
3.4.3	Permanently connected equipment	Not a permanently connected equipment.	N
3.4.4	Parts which remain energized	No parts remaining energized after appliance inlet is disconnected.	N
3.4.5	Switches in flexible cords	No switches in flexible cords.	N
3.4.6	Single-phase equipment and d.c. equipment	Appliance coupler disconnects both poles simultaneously.	P
3.4.7	Three-phase equipment	Single-phase equipment.	N
3.4.8	Switches as disconnect devices	No switch as disconnect device.	N
3.4.9	Plugs as disconnect devices	No plugs as disconnect device.	N
3.4.10	Interconnected equipment	Interconnection with other equipment only via SELV outputs.	N
3.4.11	Multiple power sources	Only one power source.	N

3.5	Interconnection of equipment		P
3.5.1	General requirements	See below.	P
3.5.2	Types of interconnection circuits	Interconnection circuits of SELV through sec connector.	P
3.5.3	ELV circuits as interconnection circuits	No ELV interconnection.	N

4	PHYSICAL REQUIREMENTS <i>Building-in type equipment, shall be evaluated in the final system assembly.</i>		N
4.1	Stability		N
	Angle of 10°	Compliance has to be evaluated in end-use condition.	N
	Test: force (N).....	Equipment is not a floorstanding unit.	N



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict

4.2	Mechanical strength <i>Building-in type equipment, shall be evaluated in the final system assembly.</i>		N
4.2.1	General	Compliance has to be evaluated in end-use condition.	N
4.2.2	Steady force test, 10 N		N
4.2.3	Steady force test, 30 N		N
4.2.4	Steady force test, 250 N		N
4.2.5	Impact test		N
	Fall test		N
	Swing test		N
4.2.6	Drop test	Moveable equipment without telephone handset.	N
4.2.7	Stress relief test	Metal chassis.	N
4.2.8	Cathode ray tubes	No CRT in the unit.	N
	Picture tube separately certified	Ditto.	N
4.2.9	High pressure lamps	No high pressure lamp provided.	N
4.2.10	Wall or ceiling mounted equipment; force (N)	Compliance has to be evaluated in end-use condition.	N

4.3	Design and construction		P
4.3.1	Edges and corners	Edges and corners of the enclosure are rounded.	P
4.3.2	Handles and manual controls; force (N).....	No handles or controls used.	N
4.3.3	Adjustable controls	No hazardous adjustable controls.	N
4.3.4	Securing of parts	Mechanical fixings are reliable designed to withstand mechanical stress occurring during normal use.	P
4.3.5	Connection of plugs and sockets	No misconnection of plugs, connections or sockets possible.	P
4.3.6	Direct plug-in equipment	EUT not of direct plug-in type.	N
	Dimensions (mm) of mains plug for direct plug-in :		—
	Torque and pull test of mains plug for direct plug-in; torque (Nm); pull (N)		—
4.3.7	Heating elements in earthed equipment	No heating elements.	N



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
4.3.8	Batteries	For RTC battery: Prevent from force charging by series circuit of a diode (D11, D12) with a 1 K ohm resistor (R98).	P
4.3.9	Oil and grease	Insulation in intended use not considered to be exposed to oil and grease.	N
4.3.10	Dust, powders, liquids and gases	EUT in intended use does not produce dust or use powders, liquids or gases.	N
4.3.11	Containers for liquids or gases	No such containers provided.	N
4.3.12	Flammable liquids.....:	No flammable liquids used.	N
	Quantity of liquid (l).....:		N
	Flash point (°C).....:		N
4.3.13	Radiation; type of radiation	No concerned radiation within this equipment.	P
4.3.13.1	General	Ditto.	P
4.3.13.2	Ionizing radiation	No ionizing radiation or flammable liquids present.	P
	Measured radiation (pA/kg)	Ditto.	—
	Measured high-voltage (kV)	Ditto.	—
	Measured focus voltage (kV)	Ditto.	—
	CRT markings	Ditto.	—
4.3.13.3	Effect of ultraviolet (UV) radiation on materials	No UV presents.	N
	Part, property, retention after test, flammability classification	Ditto.	N
4.3.13.4	Human exposure to ultraviolet (UV) radiation	Ditto.	N
4.3.13.5	Laser (including LEDs)	AEL of LED far below the limiting values for LED Class 1.	P
	Laser class	Below Class 1.	—
4.3.13.6	Other types	No other type.	N
4.4	Protection against hazardous moving parts		P
4.4.1	General	See below.	P
4.4.2	Protection in operator access areas	No moving parts except for DC fan located within equipment which was no operator accessible area inside.	P
4.4.3	Protection in restricted access locations	Not limited for restricted access locations.	N



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
4.4.4	Protection in service access areas	Unintentional contact with inside DC fan possible, when adding or removing devices. However, indication for power off equipment first in service manual provided.	N
4.5	Thermal requirements		P
4.5.1	Maximum temperatures	See appended table 4.5.1.	P
	Normal load condition per Annex L.....:	See appended table 1.6.2.	P
4.5.2	Resistance to abnormal heat		N
4.6	Openings in enclosures <i>Building-in type equipment, shall be evaluated in the final system assembly.</i>		N
4.6.1	Top and side openings		N
	Dimensions (mm)		—
4.6.2	Bottoms of fire enclosures		N
	Construction of the bottom		—
4.6.3	Doors or covers in fire enclosures	No doors or covers provided.	N
4.6.4	Openings in transportable equipment	Not a transportable equipment.	N
4.6.5	Adhesives for constructional purposes		N
	Conditioning temperature (°C)/time (weeks)		—
4.7	Resistance to fire		P
4.7.1	Reducing the risk of ignition and spread of flame	Use of materials with the required flammability classes.	P
	Method 1, selection and application of components wiring and materials	Method 1 used.	P
	Method 2, application of all of simulated fault condition tests	Ditto.	N
4.7.2	Conditions for a fire enclosure	See below.	P



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
4.7.2.1	Parts requiring a fire enclosure	With having the following components: - Components in primary circuits - Insulated wiring - Components in secondary (not supplied by LPS) The fire enclosure is required. However, with this unit as a building-in component, the meeting of the requirements has to be observed with the final system assembly.	P
4.7.2.2	Parts not requiring a fire enclosure		N
4.7.3	Materials		P
4.7.3.1	General	PCB rated accordingly. For details see table 1.5.1.	P
4.7.3.2	Materials for fire enclosures	Building-in type equipment.	P
4.7.3.3	Materials for components and other parts outside fire enclosures	Building-in type equipment.	P
4.7.3.4	Materials for components and other parts inside fire enclosures	Internal components except small parts are V-2 or better.	P
4.7.3.5	Materials for air filter assemblies	No air filter provided.	N
4.7.3.6	Materials used in high-voltage components	No high voltage components provided.	N

5	ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS		P
5.1	Touch current and protective conductor current		P
5.1.1	General	See sub-clauses 5.1.2 to 5.1.6.	P
5.1.2	Equipment under test (EUT)	EUT has only one mains connection.	P
5.1.3	Test circuit	Equipment of figure 5A used.	P
5.1.4	Application of measuring instrument	Using measuring instrument in annex D.	P
5.1.5	Test procedure	The touch current was measured from primary to enclosure and output terminal.	P
5.1.6	Test measurements	See below.	P
	Test voltage (V)	See appended table 5.1.6.	—
	Measured touch current (mA)	See appended table 5.1.6.	—
	Max. allowed touch current (mA)	See appended table 5.1.6.	—
	Measured protective conductor current (mA)	Not applicable.	—



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	Max. allowed protective conductor current (mA) .:	Not applicable.	—
5.1.7	Equipment with touch current exceeding 3.5 mA :	Not exceeded.	N
5.1.8	Touch currents to and from telecommunication networks and cable distribution systems and from telecommunication networks	No TNV circuit connection.	N
5.1.8.1	Limitation of the touch current to a telecommunication network and a cable distribution system		N
	Test voltage (V)		—
	Measured touch current (mA)		—
	Max. allowed touch current (mA)		—
5.1.8.2	Summation of touch currents from telecommunication networks		N
5.2	Electric strength		P
5.2.1	General	See appended table 5.2.	P
5.2.2	Test procedure	See appended table 5.2.	P
5.3	Abnormal operating and fault condition		P
5.3.1	Protection against overload and abnormal operation	See below.	P
5.3.2	Motors	Approved components used. See appended table 1.5.1.	P
5.3.3	Transformers	Only used in approved SPS.	P
5.3.4	Functional insulation	Method c). See appended table 5.3.	P
5.3.5	Electromechanical components	No electromechanical components.	N
5.3.6	Simulation of faults	Faults in primary/secondary components and operational insulation were already considered during the approval of the SPS. DC fan stalled and ventilation openings blocked tested. See appended table 5.3.	P
5.3.7	Unattended equipment	None of the listed components provided.	N
5.3.8	Compliance criteria for abnormal operating and fault conditions	No fire occurs, no emit molten metal, no hazardous.	P
6	CONNECTION TO TELECOMMUNICATION NETWORKS		N



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
6.1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment		N
6.1.1	Protection from hazardous voltages		N
6.1.2	Separation of the telecommunication network from earth		N
6.1.2.1	Requirements		N
	Test voltage (V)		—
	Current in the test circuit (mA)		—
6.1.2.2	Exclusions.....		N
6.2	Protection of equipment users from overvoltages on telecommunication networks		N
6.2.1	Separation requirements		N
6.2.2	Electric strength test procedure		N
6.2.2.1	Impulse test		N
6.2.2.2	Steady-state test		N
6.2.2.3	Compliance criteria		N
6.3	Protection of the telecommunication wiring system from overheating		N
	Max. output current (A).....		—
	Current limiting method		—
7	CONNECTION TO CABLE DISTRIBUTION SYSTEMS		N
7.1	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment		N
7.2	Protection of equipment users from overvoltages on the cable distribution system		N
7.3	Insulation between primary circuits and cable distribution systems		N
7.3.1	General		N
7.3.2	Voltage surge test		N
7.3.3	Impulse test		N
A	ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE		N
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)		N
A.1.1	Samples.....		—
	Wall thickness (mm).....		—
A.1.2	Conditioning of samples; temperature (°C)		N



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
A.1.3	Mounting of samples		N
A.1.4	Test flame (see IEC 60695-11-3)		N
	Flame A, B, C or D		—
A.1.5	Test procedure		N
A.1.6	Compliance criteria		N
	Sample 1 burning time (s)		—
	Sample 2 burning time (s)		—
	Sample 3 burning time (s)		—
A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)		N
A.2.1	Samples, material		—
	Wall thickness (mm)		—
A.2.2	Conditioning of samples		N
A.2.3	Mounting of samples		N
A.2.4	Test flame (see IEC 60695-11-4)		N
	Flame A, B or C		—
A.2.5	Test procedure		N
A.2.6	Compliance criteria		N
	Sample 1 burning time (s)		—
	Sample 2 burning time (s)		—
	Sample 3 burning time (s)		—
A.2.7	Alternative test acc. to IEC 60695-2-2, cl. 4 and 8		N
	Sample 1 burning time (s)		—
	Sample 2 burning time (s)		—
	Sample 3 burning time (s)		—
A.3	Hot flaming oil test (see 4.6.2)		N
A.3.1	Mounting of samples		N
A.3.2	Test procedure		N
A.3.3	Compliance criterion		N
B	ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)		N
B.1	General requirements		N
	Position		—
	Manufacturer		—
	Type		—



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	Rated values		—
B.2	Test conditions		N
B.3	Maximum temperatures		N
B.4	Running overload test		N
B.5	Locked-rotor overload test		N
	Test duration (days)		—
	Electric strength test: test voltage (V)		—
B.6	Running overload test for d.c. motors in secondary circuits		N
B.7	Locked-rotor overload test for d.c. motors in secondary circuits		N
B.7.1	Test procedure		N
B.7.2	Alternative test procedure; test time (h).....		N
B.7.3	Electric strength test		N
B.8	Test for motors with capacitors		N
B.9	Test for three-phase motors		N
B.10	Test for series motors		N
	Operating voltage (V)		—
C	ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)		N
	Position		—
	Manufacturer		—
	Type		—
	Rated values		—
	Method of protection		—
C.1	Overload test		N
C.2	Insulation		N
	Protection from displacement of windings		N
D	ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)		P
D.1	Measuring instrument		P
D.2	Alternative measuring instrument		N
E	ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)		N
F	ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10)		P



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
G	ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES		N
G.1	Summary of the procedure for determining minimum clearances		N
G.2	Determination of mains transient voltage (V)		N
G.2.1	AC mains supply		N
G.2.2	DC mains supply		N
G.3	Determination of telecommunication network transient voltage (V).....		N
G.4	Determination of required withstand voltage (V)....		N
G.5	Measurement of transient levels (V).....		N
G.6	Determination of minimum clearances		N
H	ANNEX H, IONIZING RADIATION (see 4.3.13)		N
J	ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)		P
	Metal used	Metal alloy.	—
K	ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.7)		N
K.1	Making and breaking capacity		N
K.2	Thermostat reliability; operating voltage (V)		N
K.3	Thermostat endurance test; operating voltage (V)		N
K.4	Temperature limiter endurance; operating voltage (V)		N
K.5	Thermal cut-out reliability		N
K.6	Stability of operation		N
L	ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.1)		P
L.1	Typewriters		N
L.2	Adding machines and cash registers		N
L.3	Erasers		N
L.4	Pencil sharpeners		N
L.5	Duplicators and copy machines		N
L.6	Motor-operated files		N
L.7	Other business equipment	See 1.6.2.	P





IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
M	ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)		N
M.1	Introduction		N
M.2	Method A		N
M.3	Method B		N
M.3.1	Ringling signal		N
M.3.1.1	Frequency (Hz)		—
M.3.1.2	Voltage (V)		—
M.3.1.3	Cadence; time (s), voltage (V)		—
M.3.1.4	Single fault current (mA).....		—
M.3.2	Tripping device and monitoring voltage		N
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N
M.3.2.2	Tripping device		N
M.3.2.3	Monitoring voltage (V).....		N
N	ANNEX N, IMPULSE TEST GENERATORS (see 2.10.3.4, 6.2.2.1, 7.3.2 and clause G.5)		N
N.1	ITU-T impulse test generators		N
N.2	IEC 60065 impulse test generator		N
P	ANNEX P, NORMATIVE REFERENCES		P
Q	ANNEX Q, BIBLIOGRAPHY		P
R	ANNEX R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES		N
R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6)		N
R.2	Reduced clearances (see 2.10.3)		N
S	ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)		N
S.1	Test equipment		N
S.2	Test procedure		N
S.3	Examples of waveforms during impulse testing		N
T	ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)		N
			—



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
U	ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)		N
			—
V	ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1)		P
V.1	Introduction	See below.	P
V.2	TN power distribution systems	Considered.	P
V.3	TT power systems		N
V.4	IT power systems	Considered.	P
W	ANNEX W, SUMMATION OF TOUCH CURRENTS		N
W.1	Touch current from electronic circuits		N
W.1.2	Earthed circuits		N
W.2	Interconnection of several equipments		N
W.2.1	Isolation		N
W.2.2	Common return, isolated from earth		N
W.2.3	Common return, connected to protective earth		N
X	ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)		N
X.1	Determination of maximum input current		N
X.2	Overload test procedure		N
Y	ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)		N
Y.1	Test apparatus		N
Y.2	Mounting of test samples		N
Y.3	Carbon-arc light-exposure apparatus		N
Y.4	Xenon-arc light exposure apparatus		N



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
CENELEC COMMON MODIFICATIONS [C], SPECIAL NATIONAL CONDITIONS [S] AND A-DEVIATIONS (NATIONAL DEVIATIONS) [A] (EN 60950-1:2001, Annex ZB and Annex ZC)			P
General	C: Delete all the "country" notes in the reference document according to the following list: 1.1.5 Note 2 1.5.8 Note 2 1.6.1 Note 1.7.2 Note 4 1.7.12 Note 2 2.6 Note 2.2.3 Note 2.2.4 Note 2.3.2 Note 2, 7, 8 2.3.3 Note 1, 2 2.3.4 Note 2,3 2.7.1 Note 2.10.3.1 Note 4 3.2.1.1 Note 3.2.3 Note 1, 2 3.2.5.1 Note 2 4.3.6 Note 1,2 4.7.2.2 Note 4.7.3.1 Note 2 6.1.2.1 Note 6.1.2.2 Note 6.2.2 Note 6.2.2.1 Note 2 6.2.2.2 Note 7 Note 4 7.1 Note G2.1 Note 1, 2 Annex H Note 2	Deleted.	N
1.2.4.1	S (DK): Certain types of Class I appliances (see 3.2.1.1) may be provided with a plug not establishing earthing conditions when inserted into Danish socket-outlets.	Appliance inlet provided in approved SPS.	P
1.5.1	A (SE, Ordinance 1990:944 and CH, Ordinance on environmentally hazardous substances SR 814.013, Annex 3.2, Mercury): Add NOTE – Switches containing mercury such as thermostats, relays and level controllers are not allowed.	No such switches.	N
1.5.8	S (NO): Due to the IT power system used (see annex V, Fig. V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V).	In approved SPS.	P
1.7.2	S (FI, NO, SE): CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text in the applicable countries shall be as follows:	Shall be evaluated when submitted to national approval.	N
	FI: "Laitte on liitettävä suojamaadoituskoskettimilla varustettuun pistorasiaan"	Ditto.	N
	NO: "Apparatet må tilkoples jordet stikkontakt"	Ditto.	N
	SE: "Apparaten skall anslutas till jordat uttag"	Ditto.	N
	A (DK, Heavy Current Regulations): Supply cords of class I equipment, which is delivered without a plug, must be provided with a visible tag with the following text: Vigtigt! Lederen med grøn/gul isolation må kun tilsluttes en klemme mærket  eller  If essential for the safety of the equipment, the	No power supply cord provided.	N



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	tag must in addition be provided with a diagram which shows the connection of the other conductors, or be provided with the following text: "For tilslutning af de øvrige ledere, se medfølgende installationsvejledning."		
1.7.5	S (DK): Socket-outlets for providing power to other equipment shall be in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-3a, DK 1-5a or DK 1-7a, when used on Class I equipment. For stationary equipment the socket-outlet shall be in accordance with Standard Sheet DK 1-1b or DK 1-5a.	No socket-outlets.	N
1.7.5	A (DK, Heavy Current Regulations): CLASS II EQUIPMENT shall not be fitted with socket-outlets for providing power to other equipment.	Class I equipment.	N
1.7.12	A (DE, Gesetz über technische Arbeitsmittel (Gerätesicherheitsgesetz) [Law on technical labour equipment {Equipment safety law}], of 23 rd October 1992, Article 3, 3 rd paragraph, 2 nd sentence, together with the "Allgemeine Verwaltungsvorschrift zur Durchführung des Zweiten Abschnitts des Gerätesicherheitsgesetzes" [General administrative regulation on the execution of the Second Section of the Equipment safety law], of 10 th January 1996, article 2, 4 th paragraph item 2): Directions for use with rules to prevent certain hazards for (among others) maintenance of the technical labour equipment, also for imported technical labour equipment shall be written in the German language. NOTE: Of this requirement, rules for use even only by service personnel are not exempted.	Shall be evaluated when submitted to national approval.	P
1.7.15	A (CH, Ordinance on environmentally hazardous substances SR 814.013): Annex 4.10 of SR 814.013 applies for batteries.	RTC battery are in compliance with requirements of IEC 60950-1. Overall compliance needs to be evaluated during the national approval process.	N
	A (DE, Regulation on protection against hazards by X-ray, of 8 th January 1987, Article 5 [Operation of X-ray emission source], clauses 1 to 4): a) A licence is required by those who operate an X-ray emission source. b) A licence in accordance with Cl. 1 is not required by those who operate an X-ray emission source on which the electron acceleration voltage does not exceed 20 kV if 1) the local dose rate at a distance of 0,1 m from the surface does not exceed 1 µSv/h and 2) it is adequately indicated on the X-ray emission source that i) X-rays are generated and	This national difference was deleted by A11 of EN 60950-1.	N



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	<p>ii) the electron acceleration voltage must not exceed the maximum value stipulated by the manufacturer or importer.</p> <p>c) A licence in accordance with Cl. 1 is also not required by persons who operate an X-ray emission source on which the electron acceleration voltage exceeds 20 kV if</p> <p>1) the X-ray emission source has been granted a type approval and</p> <p>2) it is adequately indicated on the X-ray emission source that</p> <p>i) X-rays are generated</p> <p>ii) the device stipulated by the manufacturer or importer guarantees that the maximum permissible local dose rate in accordance with the type approval is not exceeded and</p> <p>iii) the electron acceleration voltage must not exceed the maximum value stipulated by the manufacturer or importer.</p> <p>d) Furthermore, a licence in accordance with Cl. 1 is also not required by persons who operate X-ray emission sources on which the electron acceleration voltage does not exceed 30 kV if</p> <p>1) the X-rays are generated only by intrinsically safe CRTs complying with Enclosure III, No. 6,</p> <p>2) the values stipulated in accordance with Enclosure III, No. 6.2 are limited by technical measures and specified in the device and</p> <p>3) it is adequately indicated on the X-ray emission source that the X-rays generated are adequately screened by the intrinsically safe CRT.</p>		
2.2.4	S (NO): Requirements according to this annex, 1.7.2 and 6.1.2.1 apply.	Shall be evaluated when submitted to national approval.	N
2.3.2	S (NO): Requirements according to this annex, 6.1.2.1 apply.	Ditto.	N
2.3.3 and 2.3.4	S (NO): Requirements according to this annex, 1.7.2 and 6.1.2.1 apply.	Ditto.	N
2.6.3.3	S (GB): The current rating of the circuit shall be taken as 13 A, not 16 A.	Considered.	P
2.7.1	<p>C: Replace the subclause as follows:</p> <p><i>Basic requirements</i></p> <p>To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the</p>	Replaced.	P



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	<p>requirements of 5.3 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> <p>c) it is permitted for PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for PLUGGABLE EQUIPMENT TYPE A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>		
	S (GB): To protect against excessive currents and short-circuits in the PRIMARY CIRCUIT OF DIRECT PLUG-IN EQUIPMENT, protective device shall be included as integral parts of the DIRECT PLUG-IN EQUIPMENT.	Not direct plug-in equipment.	N
2.7.2	C: Void.	Void.	N
2.10.2	C: Replace in the first line "(see also 1.4.7)" by "(see also 1.4.8)".	Replaced.	P
2.10.3.1	S (NO): Due to the IT power distribution system used (see annex V, Fig. V.7), the A.C. MAINS SUPPLY voltage is considered to be equal to the line-to-line voltage and will remain at 230 V in case of a single earth fault	Considered.	P
3.2.1.1	<p>S (CH): Supply cords of equipment having a RATED CURRENT not exceeding 10 A shall be provided with a plug complying with SEV 1011 or IEC 60884-1 and one of the following dimension sheets:</p> <p>SEV 6532-2.1991, Plug type 15, 3P+N+PE 250/400 V, 10 A SEV 6533-2.1991, Plug type 11, L+N 250 V, 10 A SEV 6534-2.1991, Plug type 12, L+N+PE 250 V, 10 A</p> <p>In general, EN 60309 applies for plugs for currents exceeding 10 A. However, a 16 A plug and socket-outlet system is being introduced in Switzerland, the plugs of which are according to the following dimension sheets, published in February 1998:</p> <p>SEV 5932-2.1998, Plug type 25, 3L+N+PE 230/400 V, 16 A SEV 5933-2.1998, Plug type 21, L+N 250 V, 16 A SEV 5934-2.1998, Plug type 23, L+N+PE 250 V, 16 A</p>	No power supply cord provided.	N



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	<p>S (DK): Supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to the Heavy Current Regulations, Section 107-2-D1.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If poly-phase equipment and single-phase equipment having a RATED CURRENT exceeding 13 A is provided with a supply cord with a plug, this plug shall be in accordance with the Heavy Current Regulations, Section 107-2-D1 or EN 60309-2.</p>	Ditto.	N
	<p>S (ES): Supply cords of single-phase equipment having a rated current not exceeding 10 A shall be provided with a plug according to UNE 20315:1994.</p> <p>Supply cords of single-phase equipment having a rated current not exceeding 2,5 A shall be provided with a plug according to UNE-EN 50075:1993.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules, shall be provided with a plug in accordance with standard UNE 20315:1994.</p> <p>If poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with UNE-EN 60309-2.</p>	Ditto.	N
	<p>S (GB): Apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug, shall be fitted with a 'standard plug' in accordance with Statutory Instrument 1768:1994 – The Plugs and Socket etc. (Safety) Regulations 1994, unless exempted by those regulations.</p> <p>NOTE – 'Standard plug' is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p>	Ditto.	N



IEC 60950-1 / EN 60950-1									
Clause	Requirement – Test	Result – Remark	Verdict						
	S (IE): Apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to I.S. 411 by means of that flexible cable or cord and plug, shall be fitted with a 13 A plug in accordance with Statutory Instrument 525:1997 – National Standards Authority of Ireland (section 28) (13 A Plugs and Conversion Adaptors for Domestic Use) Regulations 1997.	Ditto.	N						
3.2.3	C: Delete Note 1 and in Table 3A, delete the conduit sizes in parentheses.	Deleted.	N						
3.2.5.1	C: Replace "60245 IEC 53" by "H05 RR-F"; "60227 IEC 52" by "H03 VV-F or H03 VVH2-F"; "60227 IEC 53" by "H05 VV-F or H05 VVH2-F2". In Table 3B, replace the first four lines by the following: <table style="border-collapse: collapse; width: 100%;"> <tr> <td style="width: 70%;">Up to and including 6</td> <td style="text-align: right; vertical-align: bottom;">0,75¹⁾</td> </tr> <tr> <td>Over 6 up to and including 10 (0,75)²⁾</td> <td style="text-align: right; vertical-align: bottom;">1,0</td> </tr> <tr> <td>Over 10 up to and including 16 (1,0)³⁾</td> <td style="text-align: right; vertical-align: bottom;">1,5</td> </tr> </table> In the Conditions applicable to Table 3B delete the words "in some countries" in condition ¹⁾ . In Note 1, applicable to Table 3B, delete the second sentence.	Up to and including 6	0,75 ¹⁾	Over 6 up to and including 10 (0,75) ²⁾	1,0	Over 10 up to and including 16 (1,0) ³⁾	1,5	Replaced.	N
Up to and including 6	0,75 ¹⁾								
Over 6 up to and including 10 (0,75) ²⁾	1,0								
Over 10 up to and including 16 (1,0) ³⁾	1,5								
3.2.5.1	S (GB): A power supply cord with conductor of 1,25 mm ² is allowed for equipment with a rated current over 10 A and up to and including 13 A.	No power supply cord provided.	N						
3.3.4	C: In table 3D, delete the fourth line: conductor sizes for 10 to 13 A, and replace with the following: "Over 10 up to and including 16 " Delete the fifth line: conductor sizes for 13 to 16 A.	Deleted.	N						
3.3.4	S (GB): The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a RATED CURRENT of over 10 A up to and including 13 A is: - 1,25 mm ² to 1,5 mm ² nominal cross-sectional area.	No power supply cord provided.	N						
4.3.6	S (GB): The torque test is performed using a socket outlet complying with BS 1363 and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.16 and 12.17, except that the test of 12.17 is performed at not less than 125 °C.	Not direct plug-in equipment.	N						



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	S (IE): DIRECT PLUG-IN EQUIPMENT is known as plug similar devices. Such devices shall comply with Statutory Instrument 526:1997 – National Standards Authority of Ireland (Section 28) (Electrical plugs, plug similar devices and sockets for domestic use) Regulations, 1997.	Ditto.	N
4.3.13.6	C: Add the following note: NOTE Attention is drawn to 1999/519/EC: Council Recommendation on the limitation of exposure of the general public to electromagnetic fields 0 Hz to 300 GHz. Standards taking into account this recommendation are currently under development.	Added.	N
6.1.2.1	S (FI, NO, SE): Add the following text between the first and second paragraph: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES AND CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition - passes the tests and inspection criteria of 2.10.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.7 shall be performed using 1,5 kV), and - is subject to ROUTING TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV. It is permitted to bridge this insulation with a capacitor complying with EN 132400:1994, subclass Y2. A capacitor classified Y3 according to EN 132400:1994, may bridge this insulation under the following conditions: - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 132400, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950:2000, 6.2.2.1; - the additional testing shall be performed on all	No TNV.	N



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	the test specimens as described in EN 132400; - the impulse test of 2,5 kV is to be performed before the endurance test in EN 132400, in the sequence of tests as described in EN 132400.		
6.1.2.2	S (FI, NO, SE): The exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT and PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a service person.	Ditto.	N
7.1	S (FI, NO, SE): Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply with the term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.	Not such equipment.	N
G.2.1	S (NO): Due to the IT power distribution system used (see annex V, Fig. V.7), the A.C. MAINS SUPPLY voltage is considered to be equal to the line-to-line voltage, and will remain at 230 V in case of a single earth fault.	Annex G not applied for.	N
Annex H	C: Replace the last paragraph of this annex by: At any point 10 cm from the surface of the operator access area, the dose rate shall not exceed 1 μ Sv/h (0,1 mR/h) (see note). Account is taken of the background level. Replace the notes as follows: NOTE These values appear in Directive 96/29/Euratom. Delete Note 2.	Replaced.	N
Annex P	C: Replace the text of this annex by: See annex ZA.	Replaced.	P
Annex Q	C: Replace the title of IEC 61032 by "Protection of persons and equipment by enclosures – Probes for verification". Add the following notes for the standards indicated: IEC 60127 NOTE Harmonized as EN 60127 (Series) (not modified) IEC 60269-2-1 NOTE Harmonized as HD 630.2.1 S4:2000 (modified) IEC 60529 NOTE Harmonized as EN 60529:1991 (not modified) IEC 61032 NOTE Harmonized as EN 61032:1998 (not modified) IEC 61140 NOTE Harmonized as EN 61140:2001 (not modified) ITU-T Recommendation K.31 NOTE in Europe, the suggested document is EN 50083-1.		P



IEC 60950-1 / EN 60950-1																																																																																							
Clause	Requirement – Test	Result – Remark	Verdict																																																																																				
Annex ZA	<p>C: NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR RELEVANT EUROPEAN PUBLICATIONS</p> <p>This European Standard incorporates, by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies (including amendments).</p> <p>NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.</p> <table> <tr><td>—</td><td>IEC 60050-151</td></tr> <tr><td>—</td><td>IEC 60050-195</td></tr> <tr><td>EN 60065:1998 + corr. June 1999</td><td>IEC 60065 (mod):1998</td></tr> <tr><td>EN 60073:1996</td><td>IEC 60073:1996</td></tr> <tr><td>HD 566 S1:1990</td><td>IEC 60085:1984</td></tr> <tr><td>HD 214 S2:1980</td><td>IEC 60112:1979</td></tr> <tr><td>HD 611.4.1.S1:1992</td><td>IEC 60216-4-1:1990</td></tr> <tr><td>HD 21¹⁾ Series</td><td>IEC 60227 (mod) Series</td></tr> <tr><td>HD 22²⁾ Series</td><td>IEC 60245 (mod) Series</td></tr> <tr><td>EN 60309 Series</td><td>IEC 60309 Series</td></tr> <tr><td>EN 60317-43:1997</td><td>IEC 60317-43:1997</td></tr> <tr><td>EN 60320 Series</td><td>IEC 60320 (mod) Series</td></tr> <tr><td>HD 384.3 S2:1995</td><td>IEC 60364-3 (mod):1993</td></tr> <tr><td>HD 384.4.41 S2:1996</td><td>IEC 60364-4-41 (mod):1992³⁾</td></tr> <tr><td>EN 132400:1994⁴⁾</td><td>IEC 60384-14:1993</td></tr> <tr><td>+ A2:1998 + A3:1998 + A4:2001</td><td></td></tr> <tr><td>EN 60417-1</td><td>IEC 60417-1</td></tr> <tr><td>HD 625.1 S1:1996 + corr. Nov. 1996</td><td>IEC 60664-1 (mod):1992</td></tr> <tr><td>EN 60695-2-2:1994</td><td>IEC 60695-2-2:1991</td></tr> <tr><td>EN 60695-2-11:2001</td><td>IEC 60695-2-11:2000</td></tr> <tr><td>—</td><td>IEC 60695-2-20:1995</td></tr> <tr><td>—</td><td>IEC 60695-10-2:1995</td></tr> <tr><td>—</td><td>IEC 60695-11-3:2000</td></tr> <tr><td>—</td><td>IEC 60695-11-4:2000</td></tr> <tr><td>EN 60695-11-10:1999</td><td>IEC 60695-11-10:1999</td></tr> <tr><td>EN 60695-11-20:1999</td><td>IEC 60695-11-20:1999</td></tr> <tr><td>EN 60730-1:2000</td><td>IEC 60730-1:1999 (mod)</td></tr> <tr><td>EN 60825-1:1994 + corr. Febr. 1995 + A11:1996 + corr. July 1997</td><td>IEC 60825-1:1993</td></tr> <tr><td>EN 60825-2:2000</td><td>IEC 60825-2:2000</td></tr> <tr><td>—</td><td>IEC 60825-9:1999</td></tr> <tr><td>EN 60851-3:1996</td><td>IEC 60851-3:1996</td></tr> <tr><td>EN 60851-5:1996</td><td>IEC 60825-5:1996</td></tr> <tr><td>EN 60851-6:1996</td><td>IEC 60851-6:1996</td></tr> <tr><td>—</td><td>IEC 60885-1:1987</td></tr> <tr><td>EN 60990:1999</td><td>IEC 60990:1999</td></tr> <tr><td>—</td><td>IEC 61058-1:2000</td></tr> <tr><td>EN 61965:2001</td><td>IEC 61965:2000</td></tr> <tr><td>EN ISO 178:1996</td><td>ISO 178:1993</td></tr> <tr><td>EN ISO 179 Series</td><td>ISO 179 Series</td></tr> <tr><td>EN ISO 180:2000</td><td>ISO 180:1993</td></tr> <tr><td>—</td><td>ISO 261:1998</td></tr> <tr><td>—</td><td>ISO 262:1998</td></tr> </table>	—	IEC 60050-151	—	IEC 60050-195	EN 60065:1998 + corr. June 1999	IEC 60065 (mod):1998	EN 60073:1996	IEC 60073:1996	HD 566 S1:1990	IEC 60085:1984	HD 214 S2:1980	IEC 60112:1979	HD 611.4.1.S1:1992	IEC 60216-4-1:1990	HD 21 ¹⁾ Series	IEC 60227 (mod) Series	HD 22 ²⁾ Series	IEC 60245 (mod) Series	EN 60309 Series	IEC 60309 Series	EN 60317-43:1997	IEC 60317-43:1997	EN 60320 Series	IEC 60320 (mod) Series	HD 384.3 S2:1995	IEC 60364-3 (mod):1993	HD 384.4.41 S2:1996	IEC 60364-4-41 (mod):1992 ³⁾	EN 132400:1994 ⁴⁾	IEC 60384-14:1993	+ A2:1998 + A3:1998 + A4:2001		EN 60417-1	IEC 60417-1	HD 625.1 S1:1996 + corr. Nov. 1996	IEC 60664-1 (mod):1992	EN 60695-2-2:1994	IEC 60695-2-2:1991	EN 60695-2-11:2001	IEC 60695-2-11:2000	—	IEC 60695-2-20:1995	—	IEC 60695-10-2:1995	—	IEC 60695-11-3:2000	—	IEC 60695-11-4:2000	EN 60695-11-10:1999	IEC 60695-11-10:1999	EN 60695-11-20:1999	IEC 60695-11-20:1999	EN 60730-1:2000	IEC 60730-1:1999 (mod)	EN 60825-1:1994 + corr. Febr. 1995 + A11:1996 + corr. July 1997	IEC 60825-1:1993	EN 60825-2:2000	IEC 60825-2:2000	—	IEC 60825-9:1999	EN 60851-3:1996	IEC 60851-3:1996	EN 60851-5:1996	IEC 60825-5:1996	EN 60851-6:1996	IEC 60851-6:1996	—	IEC 60885-1:1987	EN 60990:1999	IEC 60990:1999	—	IEC 61058-1:2000	EN 61965:2001	IEC 61965:2000	EN ISO 178:1996	ISO 178:1993	EN ISO 179 Series	ISO 179 Series	EN ISO 180:2000	ISO 180:1993	—	ISO 261:1998	—	ISO 262:1998		P
—	IEC 60050-151																																																																																						
—	IEC 60050-195																																																																																						
EN 60065:1998 + corr. June 1999	IEC 60065 (mod):1998																																																																																						
EN 60073:1996	IEC 60073:1996																																																																																						
HD 566 S1:1990	IEC 60085:1984																																																																																						
HD 214 S2:1980	IEC 60112:1979																																																																																						
HD 611.4.1.S1:1992	IEC 60216-4-1:1990																																																																																						
HD 21 ¹⁾ Series	IEC 60227 (mod) Series																																																																																						
HD 22 ²⁾ Series	IEC 60245 (mod) Series																																																																																						
EN 60309 Series	IEC 60309 Series																																																																																						
EN 60317-43:1997	IEC 60317-43:1997																																																																																						
EN 60320 Series	IEC 60320 (mod) Series																																																																																						
HD 384.3 S2:1995	IEC 60364-3 (mod):1993																																																																																						
HD 384.4.41 S2:1996	IEC 60364-4-41 (mod):1992 ³⁾																																																																																						
EN 132400:1994 ⁴⁾	IEC 60384-14:1993																																																																																						
+ A2:1998 + A3:1998 + A4:2001																																																																																							
EN 60417-1	IEC 60417-1																																																																																						
HD 625.1 S1:1996 + corr. Nov. 1996	IEC 60664-1 (mod):1992																																																																																						
EN 60695-2-2:1994	IEC 60695-2-2:1991																																																																																						
EN 60695-2-11:2001	IEC 60695-2-11:2000																																																																																						
—	IEC 60695-2-20:1995																																																																																						
—	IEC 60695-10-2:1995																																																																																						
—	IEC 60695-11-3:2000																																																																																						
—	IEC 60695-11-4:2000																																																																																						
EN 60695-11-10:1999	IEC 60695-11-10:1999																																																																																						
EN 60695-11-20:1999	IEC 60695-11-20:1999																																																																																						
EN 60730-1:2000	IEC 60730-1:1999 (mod)																																																																																						
EN 60825-1:1994 + corr. Febr. 1995 + A11:1996 + corr. July 1997	IEC 60825-1:1993																																																																																						
EN 60825-2:2000	IEC 60825-2:2000																																																																																						
—	IEC 60825-9:1999																																																																																						
EN 60851-3:1996	IEC 60851-3:1996																																																																																						
EN 60851-5:1996	IEC 60825-5:1996																																																																																						
EN 60851-6:1996	IEC 60851-6:1996																																																																																						
—	IEC 60885-1:1987																																																																																						
EN 60990:1999	IEC 60990:1999																																																																																						
—	IEC 61058-1:2000																																																																																						
EN 61965:2001	IEC 61965:2000																																																																																						
EN ISO 178:1996	ISO 178:1993																																																																																						
EN ISO 179 Series	ISO 179 Series																																																																																						
EN ISO 180:2000	ISO 180:1993																																																																																						
—	ISO 261:1998																																																																																						
—	ISO 262:1998																																																																																						



IEC 60950-1 / EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	EN ISO 527 Series — EN ISO 4892 Series — EN ISO 8256:1996 — EN ISO 9773:1998 — — 1) The HD 21 series is related to, but not directly equivalent with the IEC 60227 series 2) The HD 22 series is related to, but not directly equivalent with the IEC 60245 series 3) IEC 60364-4-41:1992 is superseded by IEC 60364-4-41:2001 4) EN 132400, Sectional Specification: Fixed capacitors for electromagnetic interference suppression and connection to the supply mains (Assessment level D), and its amendments are related to, but not directly equivalent to IEC 60384-14	ISO 527 Series ISO 386:1984 ISO 4892 Series ISO 7000:1989 ISO 8256:1990 ISO 9772:1994 ISO 9773:1998 ITU-T:1988 Recommendation K.17 ITU-T:2000 Recommendation K.21	



1.5.1	TABLE: list of critical components					P
Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity ¹ .	
Metallic enclosure	--	--	1.0 mm thick min.	--	--	
PCB	--	--	V-1 min. 105°C min.	UL 796	UL	
Switching Power Supply	FSP	FSP250-50PLB	I/P: 100-240V, 50-60Hz, 5-3A, Class I O/P: DC +3.3V/18A, +5V/20A, +12V/16A, -12V/0.5A, +5Vsb/2A. (+5V & +3.3V, max. 115W. +3.3V & +5V & +12V max. 236.4W. Max. total output 250W at 25°C) (+5V & +3.3V, max. 110W. +3.3V & +5V & +12V max. 206.4W. Max. total output 220W at 50°C)	IEC/EN 60950-1:2001	CB (issued by Nemko)	
Hard Disk Drive (Optional)	--	--	5Vdc, 0.6A max.	EN 60950-1:2001	TÜV	
Optical Disk Drive (Optional)	--	--	5Vdc, 1500mA max. Laser Class I	EN 60950-1:2001 EN 60825-1/A2:2001	TÜV	
	--	--	5Vdc, 1500mA max. Laser Class I	EN 60950-1:2001+A11 EN 60825-1:1994+A1+A2	TÜV	
RTC Battery (BT1)	Hitachi Maxell Ltd.	CR2032	3Vdc, 200mAh, max. abnormal charging current 10mA.	UL 1642	UL	
	Matsushita Electric Industrial Co., Ltd. Panasonic Corp Of North America	CR2032	3Vdc, 225mAh, max. abnormal charging current 5mA.	UL 1642	UL	



	Shun Wo New Power Battery Technology Ltd.	CR2032	3Vdc, 220mAh, Max. abnormal charging current 10mA.	UL 1642	UL
	Sony Energy Devices Corp.	CR2032	3Vdc, 200mAh, Max. abnormal charging current 10mA.	UL 1642	UL
	Toshiba Battery Co., Ltd.	CR2032	3Vdc, 220mAh, Max. abnormal charging current 10mA	UL 1642	UL
	Vic-Dawn Enterprise Co., Ltd.	CR2032	3Vdc, 220mAh, Max. abnormal charging current 10mA	UL 1642	UL
	Mitsubishi	CR2032	3Vdc, 210mA, max. abnormal charging current 10mA.	UL 1642	UL
DC Fan for CPU used	Young Lin	DFC601012H	12Vdc, 2.8W. 21.46CFM	EN 60950-1:2001	TÜV
DC Fan for System used	Sunonwealth	KDE1206PHV2	12Vdc, 1W. 18CFM	EN 60950-1:2001	TÜV
LCD Panel	--	--	17.0" TFT	--	--
DC/AC Inverter	Hwa Youn	QF132V1.16(S)	I/P: 12Vdc, 1900mA. O/P: 760Vrms, 6.2mArms.	--	--
- Transformers (T1, T2)	Hwa Youn	QF132V1.16	Min. 105°C.	--	--

Note(s):

1. An asterisk indicates a mark that assures the agreed level of surveillance.

1.6.2		TABLE: electrical data (in normal conditions)					P
Fuse #	Irated (A)	U (V)	P (W)	I (A)	Ifuse (A)	Condition/status	
F1	--	90 / 50Hz	122	1.37	1.37	Maximum normal load	
F1	--	90 / 60Hz	122	1.37	1.37	Maximum normal load	
F1	1.2	100 / 50Hz	122	1.23	1.23	Maximum normal load	
F1	1.2	100 / 60Hz	122	1.23	1.23	Maximum normal load	
F1	0.5	240 / 50Hz	117	0.54	0.54	Maximum normal load	
F1	0.5	240 / 60Hz	117	0.54	0.54	Maximum normal load	
F1	--	255 / 50Hz	117	0.53	0.53	Maximum normal load	
F1	--	255 / 60Hz	117	0.53	0.53	Maximum normal load	



F1	--	264 / 50Hz	117	0.52	0.52	Maximum normal load
F1	--	264 / 60Hz	117	0.52	0.52	Maximum normal load
<p>Note(s): Maximum normal load: Cross reading/writing data in HDD, ODD playing continuously, the dummy loads of 2.5W in each USB port (five provided) and PS/2 ports connect to keyboard/mouse.</p>						

2.1.1.5	TABLE: max. V, A, VA test				N
Voltage (rated) (V)	Current (rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)	
Note(s):					

2.1.1.7	TABLE: discharge test				N
Condition	τ calculated (s)	τ measured (s)	t u→0V (s)	Comments	
Note(s):					

2.2.2	TABLE: Hazardous voltage measurement				N
Transformer	Location	max. Voltage		Voltage Limitation Component	
		V peak	V d.c.		
Note(s):					

2.2.3	TABLE: SEL voltage measurement			N
Location	Voltage measured (V)	Comments		
Note(s):				

2.4.2	TABLE: limited current circuit measurement					P
Location	Voltage (V)	Current (mA)	Freq. (kHz)	Limit (mA)	Comments	
Normal operation						
P5, Pin 1 to Pin 2	--	--	--	--	Unit shut down immediately.	



P5, Pin 1 to Earth	--	--	--	--	Unit shut down immediately.
P5, Pin 2 to Earth	12.9	6.45	41.77	29.23	
T2, Pin 6 to Pin 9	--	--	--	--	Unit shut down immediately.
T2, Pin 6 to Earth	--	--	--	--	Unit shut down immediately.
T2, Pin 9 to Earth	--	--	--	--	Unit shut down immediately.
Fault condition (R17, short)					
P5, Pin 1 to Pin 2	--	--	--	--	Unit shut down immediately.
P5, Pin 1 to Earth	--	--	--	--	Unit shut down immediately.
P5, Pin 2 to Earth	--	--	--	--	Unit shut down immediately.
T2, Pin 6 to Pin 9	--	--	--	--	Unit shut down immediately.
T2, Pin 6 to Earth	--	--	--	--	Unit shut down immediately.
T2, Pin 9 to Earth	--	--	--	--	Unit shut down immediately.
Fault condition (R7, short)					
P5, Pin 1 to Pin 2	--	--	--	--	Unit shut down immediately.
P5, Pin 1 to Earth	--	--	--	--	Unit shut down immediately.
P5, Pin 2 to Earth	--	--	--	--	Unit shut down immediately.
T2, Pin 6 to Pin 9	--	--	--	--	Unit shut down immediately.
T2, Pin 6 to Earth	--	--	--	--	Unit shut down immediately.
T2, Pin 9 to Earth	--	--	--	--	Unit shut down immediately.
Fault condition (Q2, E-C, short)					
P5, Pin 1 to Pin 2	--	--	--	--	Unit shut down immediately.
P5, Pin 1 to Earth	--	--	--	--	Unit shut down immediately.
P5, Pin 2 to Earth	--	--	--	--	Unit shut down immediately.
T2, Pin 6 to Pin 9	--	--	--	--	Unit shut down immediately.
T2, Pin 6 to Earth	--	--	--	--	Unit shut down immediately.
T2, Pin 9 to Earth	--	--	--	--	Unit shut down immediately.
Fault condition (L2, short)					
P5, Pin 1 to Pin 2	--	--	--	--	Unit shut down immediately.
P5, Pin 1 to Earth	--	--	--	--	Unit shut down immediately.
P5, Pin 2 to Earth	16.4	8.2	41.63	29.14	
T2, Pin 6 to Pin 9	--	--	--	--	Unit shut down immediately.
T2, Pin 6 to Earth	--	--	--	--	Unit shut down immediately.
T2, Pin 9 to Earth	--	--	--	--	Unit shut down immediately.
Note(s):					

2.5	TABLE: limited power source measurement			N
	Limits		Measured	Verdict



According to Table 2B			
current (in A)			
apparent power (in VA)			
Note(s):			

2.6.3.3	TABLE: ground continue test			P
Location		Resistance measured (mΩ)	Comments	
PE pin of AC inlet to metallic chassis		17.6	25A, 1min.	
Note(s):				

2.10.2	Table: working voltage measurement			N
Location		RMS voltage (V)	Peak voltage (V)	Comments
Note(s):				

2.10.3 and 2.10.4	TABLE: clearance and creepage distance measurements					N	
Clearance cl and creepage distance dcr at/of:		U p (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required dcr (mm)	dcr (mm)
Note(s):							

2.10.5	TABLE: distance through insulation measurements				N
Distance through insulation di at/of:		U r.m.s. (V)	Test voltage (V)	Required di (mm)	di (mm)
Note(s):					

4.5.1	TABLE: maximum temperatures			P
	test voltage (V)	a) 90Vac b) 264Vac		—
	t1 (°C)	--		—
	t2 (°C)	--		—



Maximum temperature T of part/at:	T (°C)		allowed T _{max} (°C)		
Condition: Normal operation					
Test Voltage:	a)	b)	--		
For switching power supply					
AC inlet (Line)	59.2	58.8	70		
LF1 coil	72.2	68.5	105		
LF2 coil	79.4	75.4	105		
C7 body	72.6	71.0	85		
L1 coil	65.3	63.7	105		
PCB near BD1	86.8	76.5	105		
HS1 body	59.5	58.1	--		
T1 coil	80.5	79.8	90		
T1 core	70.3	70.0	90		
T2 coil	66.2	66.3	90		
T2 core	63.7	63.9	90		
L8 coil	91.4	90.9	105		
HS3 body near DQ3	69.2	68.9	--		
L6 coil	62.3	62.8	105		
IC3 body	63.7	64.1	100		
For mother board					
PCB near U1 (CPU)	79.2	79.1	105		
PCB near U3	79.8	79.6	105		
PCB near U4	77.2	77.2	105		
PCB near U24	67.3	67.3	105		
RTC Battery	63.0	63.2	--		
For D/A inverter board					
T1 coil	90.5	90.3	105		
L1 coil	91.3	90.6	105		
PCB near IC1	82.8	82.9	105		
For other parts					
HDD	62.0	62.0	--		
ODD	60.2	60.2	--		
Metallic enclosure outside, near switching power supply	54.7	55.0	70		
Ambient	50.0	50.0	--		
Temperature T of winding:	R ₁ (Ω)	R ₂ (Ω)	T (°C)	allowed T _{max} (°C)	insulation class



Note(s): 1. The temperatures were measured under worst normal mode defined in 1.2.2.1 and as described in sub-clause 1.6.2 and at voltages as described above. 2. The user's manual defines the T_{mra} at 50°C. Therefore the maximum permitted temperature are recalculated for the worst T_{amb} at 50°C.				

4.5.2	TABLE: ball pressure test of thermoplastic parts			N
	allowed impression diameter (mm)	≤ 2 mm		—
Part		Test temperature (°C)	Impression diameter (mm)	
Note(s):				

4.6.1, 4.6.2	Table: enclosure openings			N
Location		Size (mm)	Comments	
Note(s):				

4.7	Table: resistance to fire				N
Part	Manufacturer of material	Type of material	Thickness (mm)	Flammability class	
Note(s):					

5.1.6	TABLE: touch current measurement				P
Condition	L → terminal A (mA)	N → terminal A (mA)	Limit (mA)	Comments	
System On	1.0	1.0	3.5	To output terminal	
System On	1.0	1.0	3.5	To metallic enclosure	
Note(s):					

5.2	TABLE: electric strength tests and impulse tests			P
Test voltage applied between:		Test voltage (V)	Breakdown	
Unit: primary and PE		3150 Vdc	No	



Unit: primary and secondary	4242 Vdc	No
Note(s):		

5.3	TABLE: fault condition tests						P
	ambient temperature (°C)				25°C if no otherwise specified.		—
	model/type of power supply				See appended table 1.5.1		—
	manufacturer of power supply				See appended table 1.5.1		—
	rated markings of power supply				See appended table 1.5.1		—
No.	Component no.	Fault	Test voltage (V)	Test time	Fuse no.	Fuse current (A)	Result
1	Ventilation openings	Block	240Vac	3.5 h	F1	0.55	Unit operated normally. Max. temp. of T1 coil = 108°C, T2 coil = 84.3°C. No damage, no hazard.
2	System Fan	Stall	240Vac	3.5 h	F1	0.55	Unit operated normally. Max. temp. of T1 coil = 58.6°C, T2 coil = 43.9°C. No damage, no hazard.
3	CPU Fan	Stall	240Vac	3.5 h	F1	0.55	Unit operated normally. Max. temp. of T1 coil = 53°C, T2 coil = 39.4°C. No damage, no hazard.
4	D11, Pin 1-2 (For RTC battery charging)	s-c	--	2 h	--	--	No hazards. Current = 3.38mA.
5	R98 (For RTC battery charging)	s-c	--	2 h	--	--	No hazards. Current = 0mA.

Note(s): In fault column: s-c=short-circuited.


C.2	Safety isolation transformer		N
Construction details:			
Transformer part name:			
Manufacturer:			
Type:			
Recurring peak voltage			
Required clearance for reinforced insulation (from table 2H and 2J)			
Effective voltage rms			



Required creepage distance for reinforced insulation (from table 2L)		
Measured min. creepage distance		
Location	inside (mm)	outside (mm)
Measured min. clearances		
Location	inside (mm)	outside (mm)
Construction:		
Pin numbers		
Prim.		
Sec.		
Bobbin		
Material		
Thickness		
Electric strength test		
With	V a.c. after humidity treatment	
Result		



Photo(s)

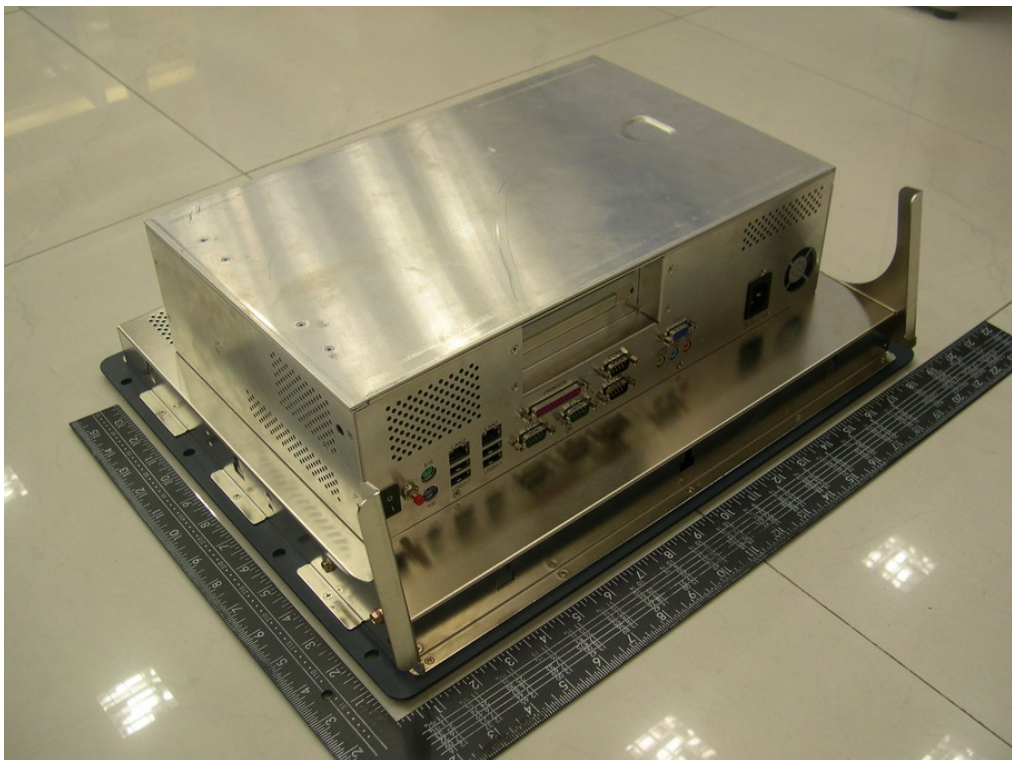




Photo(s)







Photo

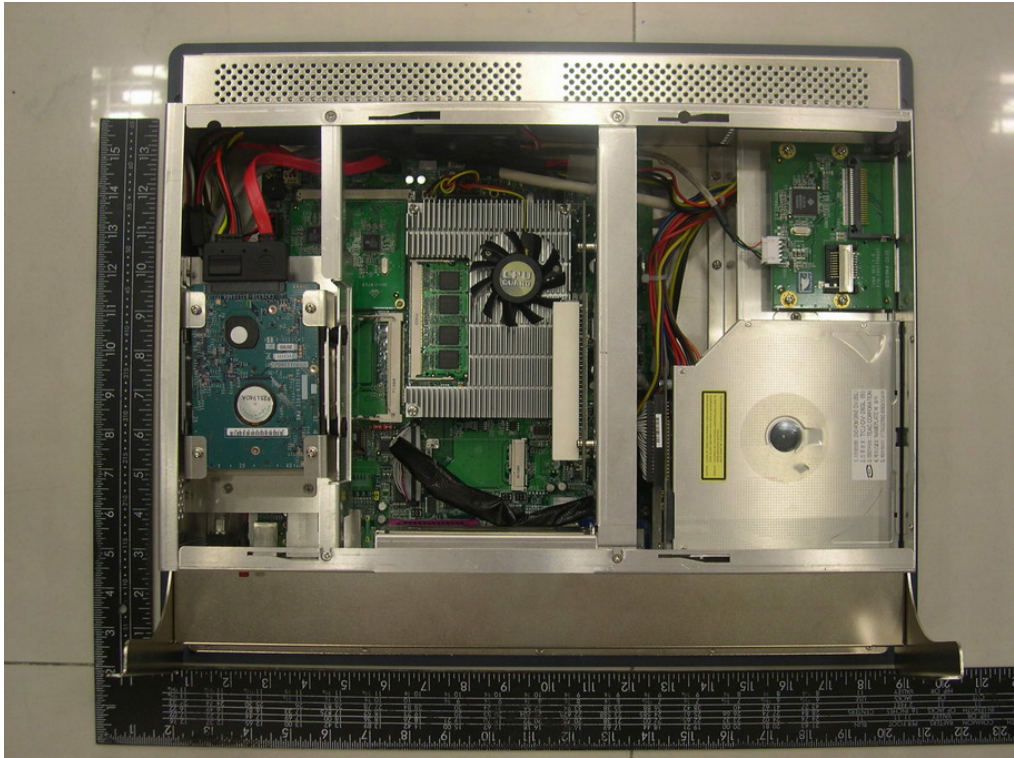




Photo

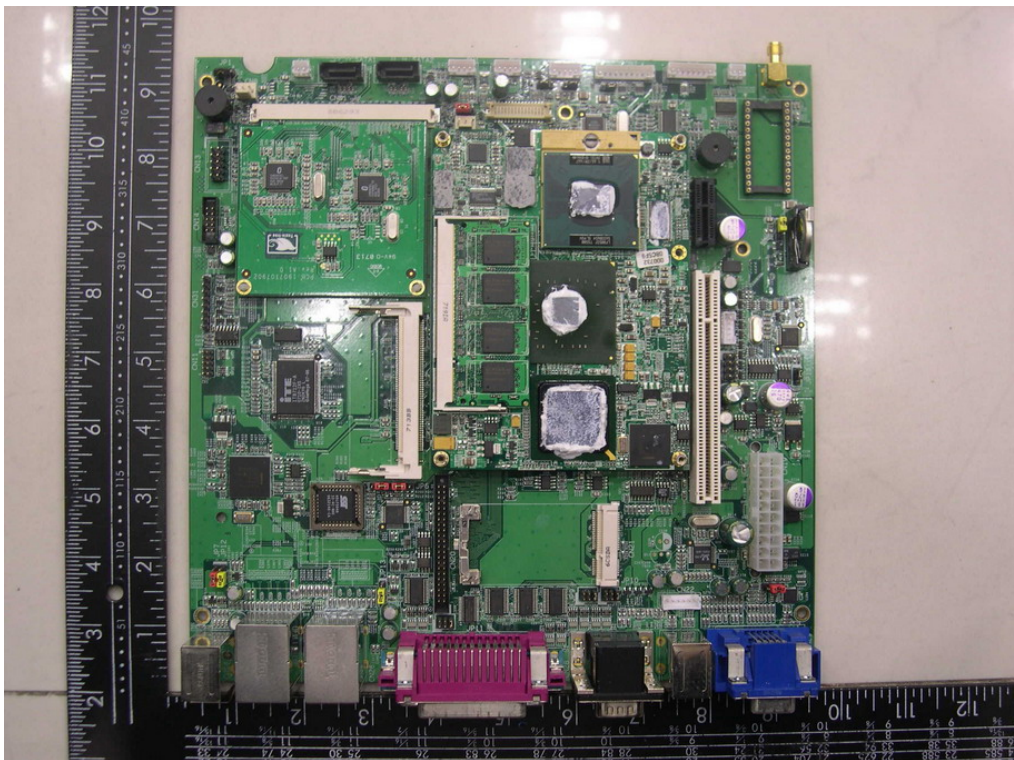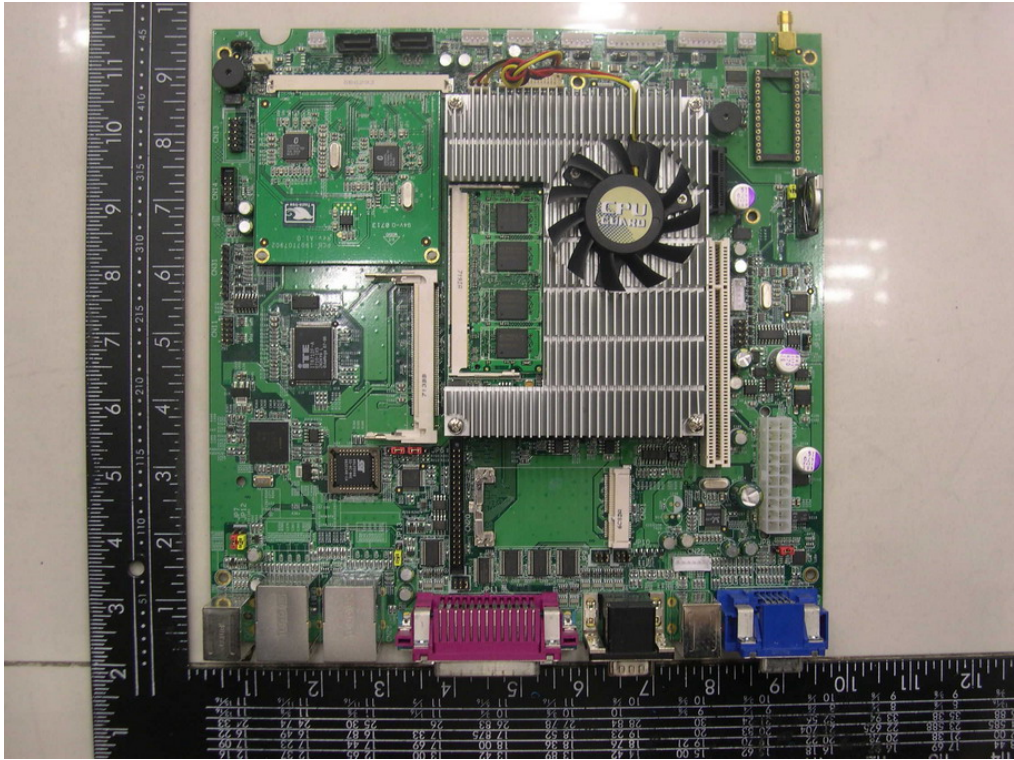



Photo

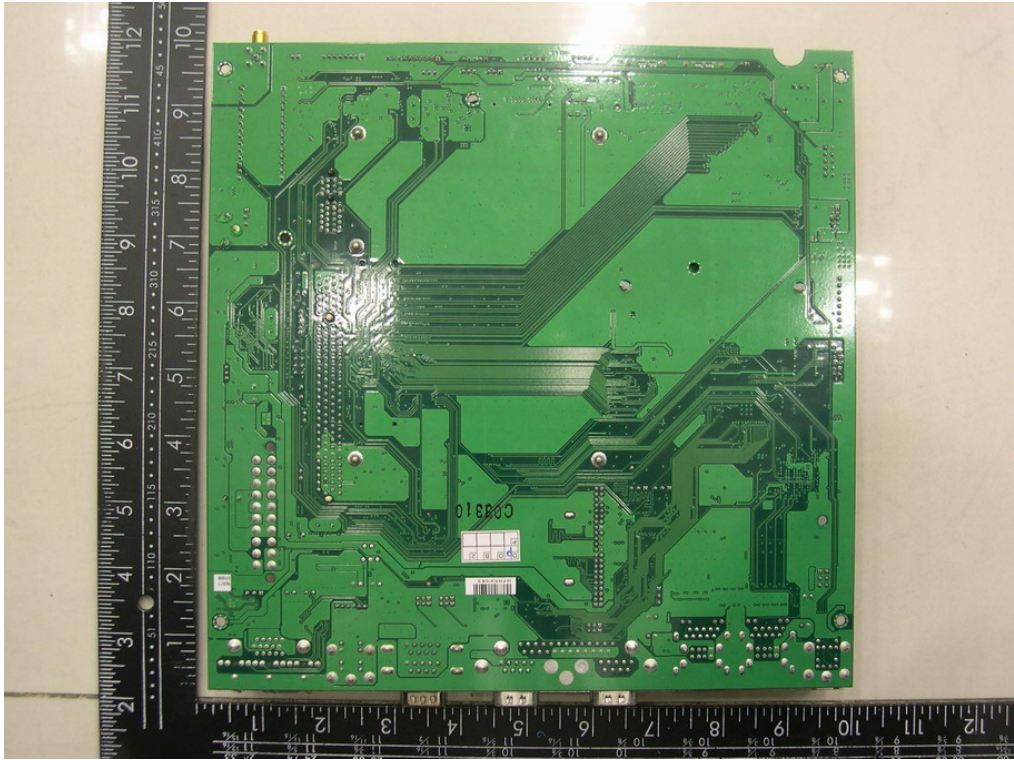



Photo

