



CE EMC TEST REPORT

REPORT NO.: CE901115A06

MODEL NO.: AMB-2053HTT

RECEIVED: Nov. 15, 2001

TESTED: Nov. 15, 2001 ~ Jan. 8, 2002

APPLICANT: AAEON TECHNOLOGY INC.

ADDRESS: 5F, No. 135, Lane 235, Pao-Hsin Rd., Hsin-Tien City, Taipei, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei, Taiwan, R.O.C.

This test report consists of 76 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Table of Contents

1	CERTIFICATION.....	5
2	SUMMARY OF TEST RESULTS	6
3	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	8
3.2.1	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	9
3.3	DESCRIPTION OF SUPPORT UNITS	10
3.3.1	FOR EMISSION TEST.....	10
3.3.2	FOR HARMONICS / FLICKER / IMMUNITY TEST.....	11
4	EMISSION TEST	12
4.1	CONDUCTED EMISSION MEASUREMENT.....	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS.....	12
4.1.3	TEST PROCEDURE.....	13
4.1.4	DEVIATION FROM TEST STANDARD.....	13
4.1.5	TEST SETUP.....	13
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT.....	17
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	17
4.2.2	TEST INSTRUMENTS.....	17
4.2.3	TEST PROCEDURE.....	18
4.2.4	DEVIATION FROM TEST STANDARD.....	18
4.2.5	TEST SETUP.....	18
4.2.6	EUT OPERATING CONDITIONS	18
4.2.7	TEST RESULTS (A).....	19
4.2.8	TEST RESULTS (B).....	22
4.3	HARMONICS CURRENT MEASUREMENT.....	25
4.3.1	LIMITS OF HARMONICS CURRENT MEASUREMENT	25
4.3.2	TEST INSTRUMENTS.....	25
4.3.3	TEST PROCEDURE.....	26
4.3.4	TEST SETUP.....	26
4.3.5	EUT OPERATING CONDITIONS	26
4.3.6	TEST RESULTS	27
4.4	VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT	28
4.5	LIMITS OF VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT	28
4.5.1	TEST INSTRUMENTS.....	28
4.5.2	TEST PROCEDURE.....	28
4.5.3	TEST SETUP.....	29
4.5.4	EUT OPERATING CONDITIONS	29
4.5.5	TEST RESULTS	30
5	IMMUNITY TEST	31
5.1	GENERAL DESCRIPTION	31



5.2	GENERAL PERFORMANCE CRITERIA DESCRIPTION	32
5.3	EUT OPERATING CONDITION.....	32
5.4	ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD).....	33
5.4.1	TEST SPECIFICATION	33
5.4.2	TEST INSTRUMENTS.....	33
5.4.3	TEST PROCEDURE.....	33
5.4.4	TEST SETUP.....	35
5.4.5	TEST RESULTS (A).....	36
5.4.6	TEST RESULTS (B).....	37
5.5	RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)	38
5.5.1	TEST SPECIFICATION	38
5.5.2	TEST INSTRUMENTS.....	38
5.5.3	TEST PROCEDURE.....	38
5.5.4	TEST SETUP.....	39
5.5.5	TEST RESULTS	40
5.6	ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT).....	41
5.6.1	TEST SPECIFICATION	41
5.6.2	TEST INSTRUMENTS.....	41
5.6.3	TEST PROCEDURE.....	41
5.6.4	TEST SETUP.....	42
5.6.5	TEST RESULTS (A).....	44
5.6.6	TEST RESULTS (B).....	45
5.7	SURGE IMMUNITY TEST	46
5.7.1	TEST SPECIFICATION	46
5.7.2	TEST INSTRUMENTS.....	46
5.7.3	TEST PROCEDURE.....	47
5.7.4	TEST SETUP.....	47
5.7.5	TEST RESULTS	48
5.8	IMMUNITY TO CONDUCTED DISTURBANCES INDUCED BY RF FIELDS (CS)	49
5.8.1	TEST SPECIFICATION	49
5.8.2	TEST INSTRUMENTS.....	49
5.8.3	TEST PROCEDURE.....	50
5.8.4	TEST SETUP.....	50
5.8.5	TEST RESULTS (A).....	52
5.8.6	TEST RESULTS (B).....	52
5.9	POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST	53
5.9.1	TEST SPECIFICATION	53
5.9.2	TEST INSTRUMENTS.....	53
5.9.3	TEST PROCEDURE.....	53
5.9.4	TEST SETUP.....	54
5.9.5	TEST RESULTS	55
5.10	VOLTAGE DIP/SHORT INTERRUPTIONS/VOLTAGE VARIATIONS (DIP) IMMUNITY TEST	56
5.10.1	TEST SPECIFICATION	56
5.10.2	TEST INSTRUMENTS.....	56



5.10.3	TEST PROCEDURE.....	56
5.10.4	TEST SETUP.....	57
5.10.5	TEST RESULTS	57
6	PHOTOGRAPHS OF THE TEST CONFIGURATION	58
7	APPENDIX - INFORMATION ON THE TESTING LABORATORIES	76



1 CERTIFICATION

PRODUCT: PANEL PC
BRAND NAME: AAEON
MODEL NO: AMB-2053HTT
TEST ITEM: ENGINEERING SAMPLE
APPLICANT: AAEON TECHNOLOGY INC.
STANDARDS: **EN 55022:1994+A1:1995** **EN 61000-6-2:2001**
+A2:1997, Class A IEC 61000-4-2:1995
EN 55011: 1998, IEC 61000-4-3:1995
Group I Class A IEC 61000-4-4:1995
EN 61000-3-2:1995+A1:1998 IEC 61000-4-5:1995
+A2:1998, Class A IEC 61000-4-6:1996
EN 61000-3-3:1995 IEC 61000-4-8:1993
IEC 61000-4-11:1994

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Nov. 15, 2001 to Jan. 8, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

TESTED BY: Arthur Lin , **DATE:** Jan. 15, 2002
(Emission) (Arthur Lin)

TESTED BY: Andy Cheng , **DATE:** Jan. 15, 2002
(Immunity) (Andy Cheng)

CHECKED BY: Vickie Yu , **DATE:** Jan. 15, 2002
(Vickie Yu)

APPROVED BY: Mike Su , **DATE:** Jan 15, 2002
(Mike Su, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

EMISSION			
Standard	Test Type	Result	Remarks
EN 55022:1994 +A1:1995+A2:1997, Class A	Conducted Test	PASS	Meets Class A Limit Minimum passing margin is -21.72 dB at 0.152 MHz
EN 55011: 1998, Group I Class A	Radiated Test	PASS	Meets Class A Limit Minimum passing margin is -2.00 dB at 233.86 MHz
EN61000-3-2:1995 +A1:1998+A2:1998, Class A	Harmonic current emissions	PASS	Meets Class A Limit
EN61000-3-3:1995	Voltage fluctuations & flicker	PASS	Meets the requirements.

IMMUNITY (EN 61000-6-2:2001)			
Standard	Test Type	Result	Remarks
IEC 61000-4-2: 1995	Electrostatic discharge immunity test	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-3: 1995	Radiated, radio-frequency, electromagnetic field immunity test	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-4: 1995	Electrical fast transient / burst immunity test.	PASS	Meets the requirements of Performance Criterion B
IEC 61000-4-5: 1995	Surge immunity test	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-6: 1996	Immunity to conducted disturbances, induced by radio-frequency fields	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-8: 1993	Power frequency magnetic field immunity test.	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-11: 1994	Voltage dips, short interruptions and voltage variations immunity tests	PASS	Meets the requirements of Voltage Dips: 1. 30% reduction - Performance Criterion A 2. 60% reduction - Performance Criterion A 3. 60% reduction - Performance Criterion A Voltage Interruptions: 1. >95% reduction - Performance Criterion C



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	PANEL PC
MODEL NO.	AMB-2053HTT
POWER SUPPLY	Switching power supply DC 10~30V, 70W Power cord: Non-shielded 3-pin (1.8m)
DATA CABLE	NA

NOTE: The EUT modular system panel PCs, is a PC-based industrial computer that are designed to serve as a Human Machine Interfaces. It is a full-function system with a 15" XGA (1024x768) color TFT LCD display.

The EUT is characterized by its compactness and a heavy-duty steel chassis with aluminum front panel.

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF TEST MODES

The EUT was pre-tested under the following condition:

- ◆ LCD panel combined with its chassis.
- ◆ LCD panel separated from its chassis.

The worst emission level was found when the EUT LCD panel was tested separated from its chassis.

The EUT also can use DC battery and AC power input, this two modes were all tested and recorded in this report.

MODE 1	AC power input
MODE 2	DC battery

The EUT was tested with the following configuration under the resolution of 1024x768.

COMPONENTS	MODEL & BRAND NAMES
CPU	Intel Celeron 366MHz
LCD PANEL	15" XGA TFT Fujitsu, Model: FLC38XGC6V-06
LCD BackPlane	Model: HP5352
LVDS BOARD	Model: LVDS-T202
HDD	Fujitsu, Model: MHK2060AT, 20GB
FDD	NEC, Model: FD1238T, 1.44MB
CD-ROM	Vintech, Model: VIN-S24A, 24X
MAIN BOARD	Model: SBC-658
AC POWER	SKY NET, Model: SNP-8071-A, I/P: 85-270V 47-63Hz, 2/1A O/P: 12V, 1.5A; 5V, 10A; -12V, 0.3A
DC BATTERY	MAGIC POWER, Model: MPD-8071-S I/P: +10Vdc ~ +30Vdc, Normal +24Vdc Max 13A O/P: +5V, 10A; +12V, 1.5A; -12V, 0.3A

3.2.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of ITE equipment and, according to the specifications of the manufacturers, must comply with the requirements of the following standards:

EN 55022:1994+A1:1995+A2:1997, Class A

EN 55011:1998, Group I Class A

EN 61000-3-2:1995+

A1:1998+A2:1998, Class A

EN 61000-3-3:1995

EN 61000-6-2:2001

IEC 61000-4-2:1995

IEC 61000-4-3:1995

IEC 61000-4-4:1995

IEC 61000-4-5:1995

IEC 61000-4-6:1996

IEC 61000-4-8:1993

IEC 61000-4-11:1994

All tests have been performed and recorded as per the above standards.

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

3.3.1 FOR EMISSION TEST

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	COLOR MONITOR	ADI	CM100	020058T10200176	FCC DoC Approved
2	PRINTER	HP	2225C+	2949S63865	DSI6XU2225
3	MODEM	ACEEX	1414	980020504	IFAXDM1414
4	MODEM	ACEEX	1414	980020505	IFAXDM1414
5	PS/2 KEYBOARD	BTC	5121W	A00801379	E5XKB5121WTH01 10
6	PS/2 MOUSE	LOGITECH	M-S43	LZE00703197	DZL211106
7	PERSONAL COMPUTER	HP	D4579A	SG73001726	FCC DoC Approved
8	21" COLOR MONITOR	HP	D2846A	JP90512317	FCC DoC Approved
9	PS/2 KEYBOARD	BTC	5121W	A00801375	E5XKB5121WTH01 10
10	PS/2 MOUSE	LOGITECH	M-S43	LZE93502451	DZL211106
11	LAN CARD	INTEL	PRO/100S DESTOP ADAPTER	0002B33BB665	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
4	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	1.6 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
6	1.8 m foil shielded wire, terminated with PS/2 connector via drain wire, w/o core.
7	NA
8	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
9	1.6 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
10	1.8 m foil shielded wire, terminated with PS/2 connector via drain wire, w/o core.
11	NA

- NOTE:**
1. All power cords of the above support units are non-shielded (1.8m).
 2. The EUT acted as SERVER PC and communicated with support units 7-11 (kept in a remote area), which acted as WORKSTATION and partners of communication system via a UTP cable (20m).

3.3.2 FOR HARMONICS / FLICKER / IMMUNITY TEST

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	MONITOR	NEC	V520	NA	FCC DoC Approved
2	PRINTER	HP	C2145A	SG5BN160GY	B94C2145X
3	MODEM	GVC	F-1128V1R6	96-191-113003	DK4F1128VR6
4	MODEM	GVC	F-1114V/R6	853E100	DK4F1114VR6
5	KEYBOARD	BTC	5140	75B110685	E5XKBM10410
6	MOUSE	LOGITECH	M-S43	LZE00703084	DZL211106
7	Personal Computer	HP	BRIO BA410	SG10602695	FCC DoC Approved
8	LAN CARD	3 COM	3C905-TXM ETHERLINK 10/100 PCI	HKQD46B282	FCC DoC Approved
9	COLOR MONITOR	ACER	7254e	9171602008	JVP7254E
10	PS/2 KEYBOARD	HP	C3758A	C3758-60223	CIGE03633
11	USB MOUSE	DEXIN Corp.	A2U800A	71001821	NIYA2U800A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.5 m braid shielded wire, terminated with VGA connector via metallic frame, one core.
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
4	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	1.6 m foil shielded wire, terminated with AT connector via drain wire, w/o core.
6	1.8 m foil shielded wire, terminated with PS2 connector via drain wire, w/o core.
7	NA
8	NA
9	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
10	1.5 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
11	1.5 m foil shielded wire, terminated with USB connector via drain wire, w/o core.

- NOTE:** 1. All power cords of the above support units are non shielded (1.8m).
 2. The EUT acted as SERVER PC and communicated with support units 7-11 (kept in a remote area), which acted as WORKSTATION and partners of communication system via a "CAT.5 UTP" cable (10m).

4 EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTE:**
- (1) The lower limit shall apply at the transition frequencies.
 - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 4, 2002
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 3, 2002
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Dec. 2, 2002
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Dec. 2, 2002
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 3, 2002
Software	Cond-V2L	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C02.01	July 5, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2002
Shielded Room	Site 2	ADT-C02	NA
VCCI Site Registration No.	Site 2	C-240	NA

- NOTE:**
1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. “*”: These equipment are used for conducted telecom port test only (if tested).


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

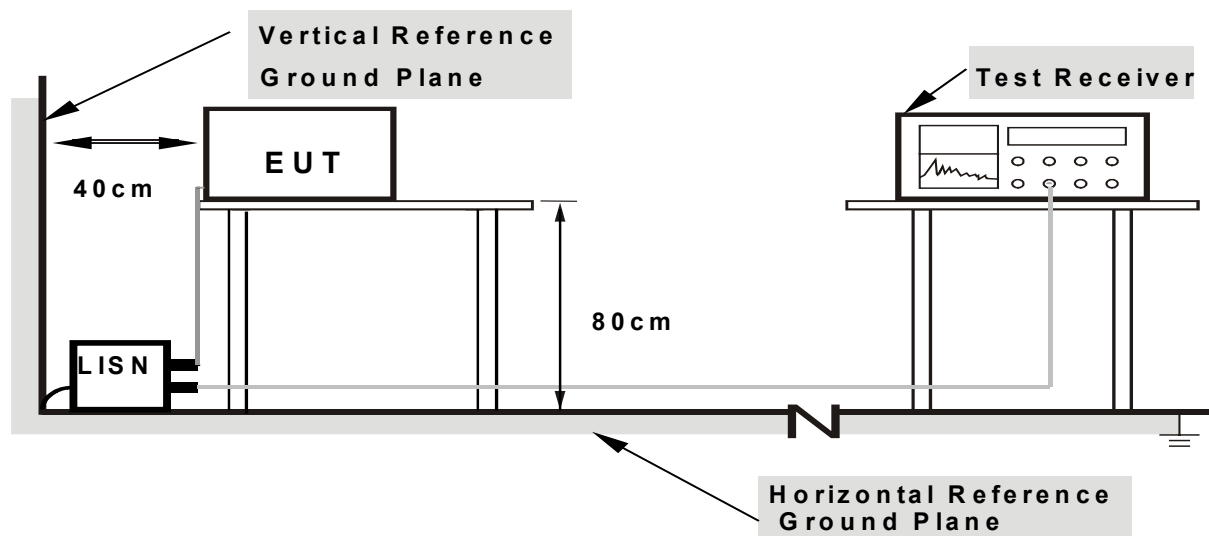

Note: 1.Support units were connected to second LISN .

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS


- a. EUT ran a test program to enable all functions.
- b. EUT read and wrote messages from HDD & FDD.
- c. EUT sent and received messages from WORKSTATION PC via a UTP cable and a telephone cable.
- d. EUT sent "H" messages to its LCD panel and monitor. Then LCD panel and monitor displayed them on their screen simultaneously.
- e. EUT sent "H" messages to printer and printer printed "H" messages on paper.
- f. EUT sent messages to modem.
- g. Steps c-g were repeated.

4.1.7 TEST RESULTS

EUT	PANEL PC	MODEL NO.	AMB-2053HTT
MODE	1	6dB BANDWIDTH	10 kHz
INPUT POWER	230Vac, 50 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1005 hPa	TESTED BY: Arthur Lin	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.152	0.10	57.18	-	57.28	-	79.00	66.00	-21.72	-
2	0.189	0.10	50.97	-	51.07	-	79.00	66.00	-27.93	-
3	1.059	0.10	34.68	-	34.78	-	73.00	60.00	-38.22	-
4	3.516	0.25	36.09	-	36.34	-	73.00	60.00	-36.66	-
5	4.648	0.32	35.28	-	35.60	-	73.00	60.00	-37.40	-
6	14.180	0.75	35.63	-	36.38	-	73.00	60.00	-36.62	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

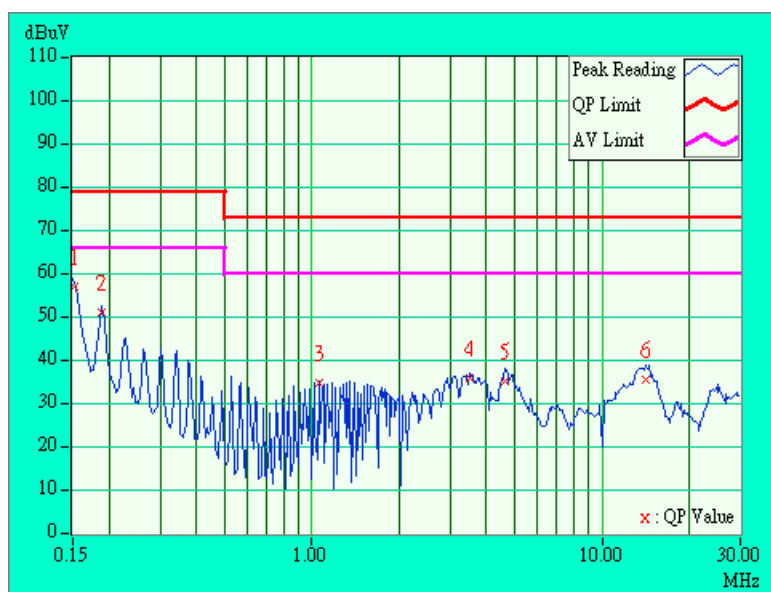

EUT	PANEL PC	MODEL NO.	AMB-2053HTT
MODE	1	6dB BANDWIDTH	10 kHz
INPUT POWER	230Vac, 50 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1005 hPa	TESTED BY: Arthur Lin	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	57.01	-	57.11	-	79.00	66.00	-21.89	-
2	0.189	0.10	50.20	-	50.30	-	79.00	66.00	-28.70	-
3	0.869	0.10	33.60	-	33.70	-	73.00	60.00	-39.30	-
4	4.805	0.31	33.02	-	33.33	-	73.00	60.00	-39.67	-
5	15.090	0.60	33.33	-	33.93	-	73.00	60.00	-39.07	-
6	22.012	0.84	36.41	-	37.25	-	73.00	60.00	-35.75	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

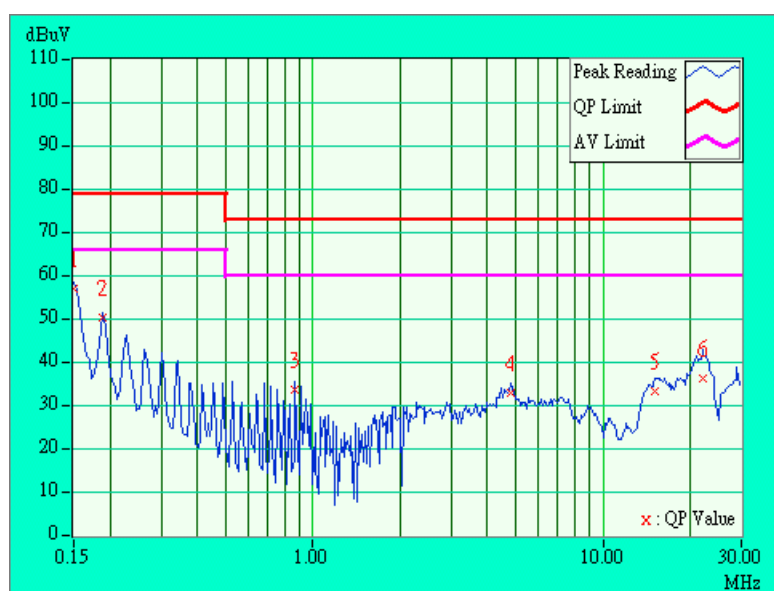



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 - 1000	47	37

- NOTE:**
- (1) The lower limit shall apply at the transition frequencies.
 - (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
 - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8590L	3544A01042	April 16, 2002
HP Preamplifier	8447D	2944A08313	April 3, 2002
* HP Preamplifier	8449B	3008A01201	Dec. 06, 2002
* HP Preamplifier	8449B	3008A01292	Aug. 21, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESI7	838496/016	Feb. 17, 2002
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 25, 2002
* CHASE BILOG Antenna	CBL6111A	1647	June 27, 2002
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 6, 2002
* EMCO Horn Antenna	3115	9312-4192	April 15, 2002
* EMCO Turn Table	1016	1722	NA
* EMCO Tower	1051	1825	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	M28342	June 27, 2002
* TIMES RF cable	LMR-600	CABLE-ST4-01	June 27, 2002
Open Field Test Site	Site 4	ADT-R04	June 8, 2002
VCCI Site Registration No.	Site 4	R-1038	NA

- NOTE:**
1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 3. "*" = These equipment are used for the final measurement.
 4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz.


4.2.3 TEST PROCEDURE

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10-meter open field site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi- peak method or average method as specified and then reported In Data sheet peak mode and QP mode.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

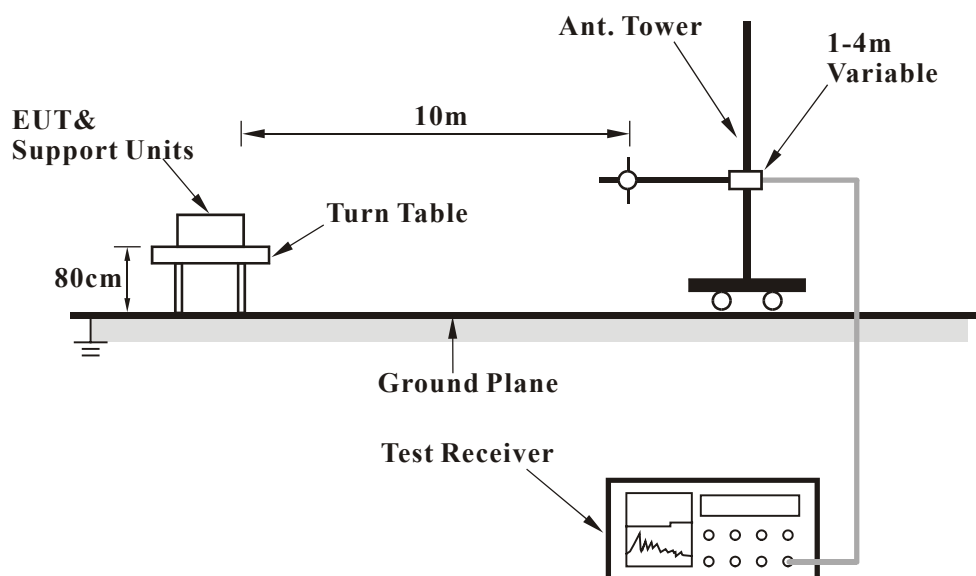

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS (A)

EUT	PANEL PC	MODEL NO.	AMB-2053HTT
MODE	1	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	230Vac, 50 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 55 % RH, 1005 hPa	TESTED BY: Arthur Lin	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	65.00	25.0 QP	40.00	-15.00	4.00H	298	19.26	5.01	0.73	0.00	-5.74
2	119.12	28.0 QP	40.00	-12.00	4.00H	95	14.82	12.22	0.96	0.00	-13.18
3	194.98	31.0 QP	40.00	-9.00	4.00H	74	20.62	8.98	1.40	0.00	-10.38
4	205.70	32.5 QP	40.00	-7.50	4.00H	340	21.73	9.33	1.43	0.00	-10.77
5	216.65	32.8 QP	40.00	-7.20	4.00H	358	21.20	10.14	1.46	0.00	-11.60
6	227.53	34.9 QP	40.00	-5.10	4.00H	298	22.63	10.79	1.49	0.00	-12.27
7	292.42	40.0 QP	47.00	-7.00	2.76H	88	25.34	13.07	1.60	0.00	-14.67
8	324.91	44.6 QP	47.00	-2.40	2.60H	304	29.00	13.76	1.81	0.00	-15.57
9	357.41	42.2 QP	47.00	-4.80	2.94H	250	25.78	14.39	2.03	0.00	-16.42
10	389.89	43.2 QP	47.00	-3.80	2.76H	7	25.60	15.58	2.06	0.00	-17.64
11	465.70	40.3 QP	47.00	-6.70	1.92H	248	20.66	17.40	2.23	0.00	-19.64
12	519.86	42.1 QP	47.00	-4.90	1.55H	279	20.64	19.21	2.22	0.00	-21.43
13	552.36	43.3 QP	47.00	-3.70	1.97H	211	20.23	20.66	2.40	0.00	-23.07
14	584.83	43.2 QP	47.00	-3.80	1.78H	127	20.41	20.27	2.52	0.00	-22.79
15	844.75	42.6 QP	47.00	-4.40	1.00H	69	15.22	24.36	3.03	0.00	-27.39

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
 3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.

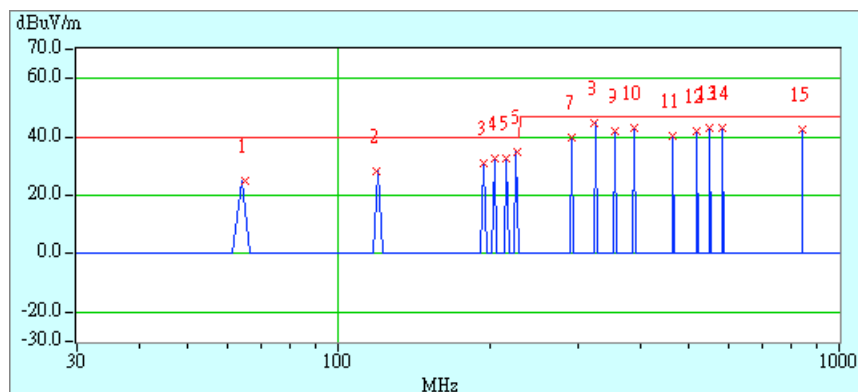




EUT	PANEL PC	MODEL NO.	AMB-2053HTT
MODE	1	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	230Vac, 50 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 55 % RH, 1005 hPa	TESTED BY: Arthur Lin	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	75.86	26.8 QP	40.00	-13.20	1.33V	33	19.69	6.29	0.82	0.00	-7.11
2	97.00	36.4 QP	40.00	-3.60	1.00V	357	25.67	9.78	0.95	0.00	-10.73
3	130.00	34.0 QP	40.00	-6.00	1.00V	249	21.08	11.93	0.99	0.00	-12.92
4	146.14	27.8 QP	40.00	-12.20	1.00V	341	15.61	11.08	1.11	0.00	-12.19
5	162.40	34.2 QP	40.00	-5.80	1.00V	46	23.10	9.84	1.29	0.00	-11.13
6	194.96	32.2 QP	40.00	-7.80	1.00V	256	21.82	8.98	1.40	0.00	-10.38
7	205.74	33.3 QP	40.00	-6.70	1.00V	5	22.53	9.33	1.43	0.00	-10.76
8	216.65	35.6 QP	40.00	-4.40	1.00V	11	24.00	10.14	1.46	0.00	-11.60
9	227.44	37.9 QP	40.00	-2.10	1.00V	4	25.60	10.79	1.49	0.00	-12.27
10	292.30	37.3 QP	47.00	-9.70	1.00V	220	22.64	13.07	1.60	0.00	-14.67
11	324.91	44.6 QP	47.00	-2.40	1.00V	299	29.01	13.76	1.81	0.00	-15.58
12	379.08	39.0 QP	47.00	-8.00	1.00V	36	21.70	15.21	2.05	0.00	-17.27
13	389.82	42.0 QP	47.00	-5.00	1.00V	213	24.36	15.58	2.06	0.00	-17.65
14	454.88	39.6 QP	47.00	-7.40	1.00V	21	20.22	17.10	2.28	0.00	-19.38
15	519.86	40.0 QP	47.00	-7.00	3.57V	318	18.57	19.21	2.22	0.00	-21.44
16	552.34	40.6 QP	47.00	-6.40	3.83V	318	17.53	20.66	2.40	0.00	-23.08
17	584.85	43.1 QP	47.00	-3.90	3.94V	323	20.35	20.27	2.52	0.00	-22.80
18	779.79	36.0 QP	47.00	-11.00	1.73V	9	10.31	22.80	2.89	0.00	-25.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
 3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.

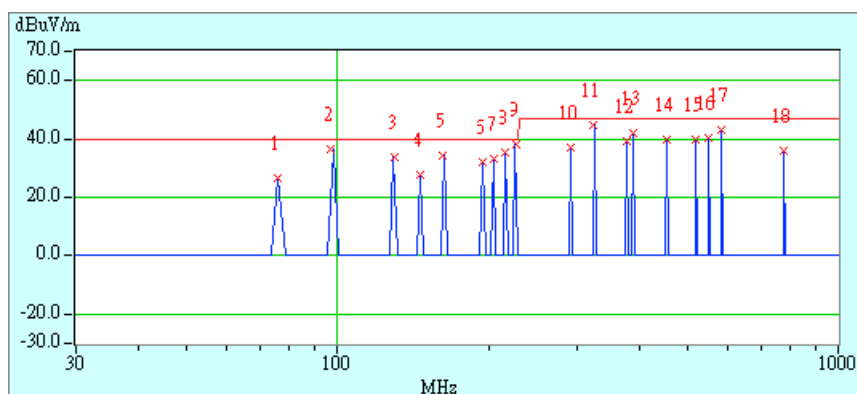



EUT	PANEL PC	MODEL NO.	AMB-2053HTT
MODE	1	FREQUENCY RANGE	11.7-12.7 GHz
INPUT POWER	230Vac, 50 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak, 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 55 % RH, 1005 hPa	TESTED BY: Arthur Lin	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
Frequency (MHz)	S.G. Output power (dBm)	Gain(Dipole)- Cable Loss= Correction Factor	EUT Radiation disturbance power (dBm→dBpW)		Limits (dBpW)	Margin (dB)
*	*	*	*	*	*	*

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
Frequency (MHz)	S.G. Output power (dBm)	Gain(Dipole)- Cable Loss= Correction Factor	EUT Radiation disturbance power (dBm→dBpW)		Limits (dBpW)	Margin (dB)
*	*	*	*	*	*	*

- REMARKS:**
- 0dBm=90dBpW
 - Radiation disturbance power =S.G output power +Correction factor
 - Gain (Dipole)= Gain of a half-wave dipole
 - "*": The emission levels were very low against the limit.


4.2.8 TEST RESULTS (B)

EUT	PANEL PC	MODEL NO.	AMB-2053HTT
MODE	2	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	230Vac, 50 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 55 % RH, 1005 hPa	TESTED BY: Arthur Lin	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	129.97	29.1 QP	40.00	-10.90	4.00H	106	16.21	11.93	0.99	0.00	-12.92
2	162.47	26.2 QP	40.00	-13.80	4.00H	298	15.12	9.84	1.29	0.00	-11.13
3	184.14	28.9 QP	40.00	-11.10	4.00H	73	18.67	8.90	1.35	0.00	-10.25
4	216.01	31.6 QP	40.00	-8.40	4.00H	326	20.02	10.14	1.46	0.00	-11.60
5	227.44	33.7 QP	40.00	-6.30	4.00H	42	21.43	10.79	1.49	0.00	-12.27
6	233.86	45.0 QP	47.00	-2.00	3.88H	312	32.18	11.27	1.51	0.00	-12.78
7	292.45	40.2 QP	47.00	-6.80	3.30H	192	25.54	13.07	1.60	0.00	-14.66
8	324.91	39.2 QP	47.00	-7.80	2.98H	29	23.59	13.76	1.81	0.00	-15.58
9	422.38	39.1 QP	47.00	-7.90	2.78H	59	20.43	16.45	2.18	0.00	-18.64
10	519.87	44.9 QP	47.00	-2.10	2.34H	147	23.47	19.21	2.22	0.00	-21.43
11	584.85	36.1 QP	47.00	-10.90	1.86H	239	13.36	20.27	2.52	0.00	-22.79
12	779.78	38.1 QP	47.00	-8.90	1.26H	261	12.42	22.80	2.89	0.00	-25.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
 3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.

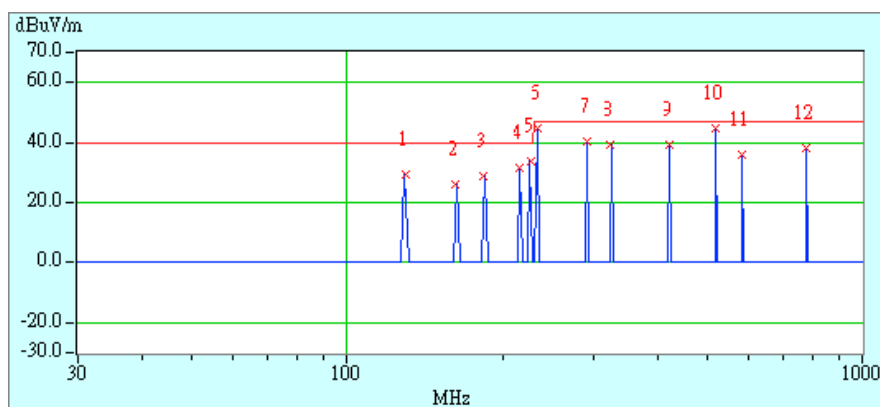


EUT	PANEL PC	MODEL NO.	AMB-2053HTT
MODE	2	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	230Vac, 50 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 55 % RH, 1005 hPa	TESTED BY: Arthur Lin	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Gain (dB)	Correction Factor (dB/m)
1	119.16	31.8 QP	40.00	-8.20	1.00V	140	18.60	12.22	0.96	0.00	-13.18
2	129.97	35.1 QP	40.00	-4.90	1.00V	288	22.19	11.93	0.99	0.00	-12.92
3	162.40	32.8 QP	40.00	-7.20	1.00V	347	21.67	9.84	1.29	0.00	-11.13
4	167.92	33.0 QP	40.00	-7.00	1.00V	358	22.11	9.55	1.30	0.00	-10.86
5	178.72	33.1 QP	40.00	-6.90	1.00V	357	22.83	8.98	1.32	0.00	-10.31
6	184.14	35.5 QP	40.00	-4.50	1.00V	174	25.27	8.90	1.35	0.00	-10.25
7	216.65	33.4 QP	40.00	-6.60	1.00V	197	21.80	10.14	1.46	0.00	-11.60
8	227.44	35.4 QP	40.00	-4.60	1.00V	196	23.13	10.79	1.49	0.00	-12.27
9	233.86	44.5 QP	47.00	-2.50	1.00V	162	31.77	11.27	1.51	0.00	-12.78
10	292.43	43.7 QP	47.00	-3.30	1.00V	50	29.04	13.07	1.60	0.00	-14.67
11	324.93	43.7 QP	47.00	-3.30	1.00V	359	28.17	13.76	1.81	0.00	-15.57
12	357.41	38.8 QP	47.00	-8.20	1.00V	63	22.36	14.39	2.03	0.00	-16.43
13	389.90	39.7 QP	47.00	-7.30	1.00V	226	22.06	15.58	2.06	0.00	-17.64
14	422.40	41.3 QP	47.00	-5.70	1.00V	57	22.72	16.45	2.18	0.00	-18.63
15	519.87	40.5 QP	47.00	-6.50	1.00V	85	19.07	19.21	2.22	0.00	-21.43
16	584.85	36.6 QP	47.00	-10.40	3.82V	137	13.85	20.27	2.52	0.00	-22.79
17	779.78	38.1 QP	47.00	-8.90	1.74V	183	12.38	22.80	2.89	0.00	-25.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB/m) = Pre-Amplifier Gain (dB) - Antenna Factor (dB/m) - Cable Factor (dB)
 3. Pre-Amplifier Gain (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.

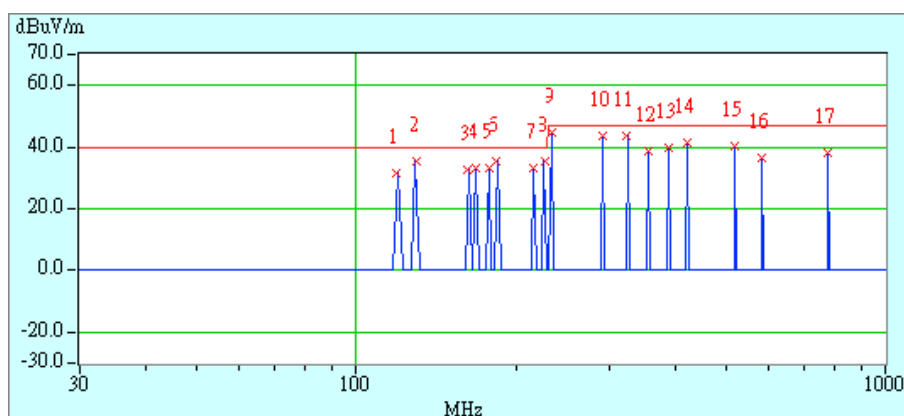



EUT	PANEL PC	MODEL NO.	AMB-2053HTT
MODE	2	FREQUENCY RANGE	11.7-12.7 GHz
INPUT POWER	230Vac, 50 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak, 1 MHz
ENVIRONMENTAL CONDITIONS	22 deg. C, 55 % RH, 1005 hPa	TESTED BY: Arthur Lin	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
Frequency (MHz)	S.G. Output power (dBm)	Gain(Dipole)- Cable Loss= Correction Factor	EUT Radiation disturbance power (dBm→dBpW)		Limits (dBpW)	Margin (dB)
*	*	*	*	*	*	*

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
Frequency (MHz)	S.G. Output power (dBm)	Gain(Dipole)- Cable Loss= Correction Factor	EUT Radiation disturbance power (dBm→dBpW)		Limits (dBpW)	Margin (dB)
*	*	*	*	*	*	*

- REMARKS:**
- 0dBm=90dBpW
 - Radiation disturbance power =S.G output power +Correction factor
 - Gain (Dipole)= Gain of a half-wave dipole
 - "*": The emission levels were very low against the limit.



4.3 HARMONICS CURRENT MEASUREMENT

4.3.1 LIMITS OF HARMONICS CURRENT MEASUREMENT

Limits for Class A equipment	
Harmonics Order n	Max. permissible harmonics current A
Odd harmonics	
3	2.30
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
15<=n<=39	0.15x15/n
Even harmonics	
2	1.08
4	0.43
6	0.30
8<=n<=40	0.23x8/n

Limits for Class D equipment		
Harmonics Order n	Max. permissible harmonics current per watt mA/W	Max. permissible harmonics current A
Odd Harmonics only		
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
13	0.30	0.21
15<=n<=39	3.85/n	0.15x15/n

- NOTE:** 1. Class A and Class D are judged by test equipment automatically as per Section 5 of EN 61000-3-2:1995.
2. The above limits for Class D equipment are for all applications having an active input power > 75 W. No limits apply for equipment with an active input power up to and including 75 W.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
KeyTek, Power Arb Waveform Generator	EP72HF	9508346	April 20, 2002
KIKUSUI AC SWITCHING POWER SUPPLY	PCR 4000L	9508355	April 20, 2002

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- b. The classification of EUT is according to section 5 of EN 61000-3-2:1995.

The EUT is classified as follows:

Class A: Balanced three-phase equipment and all other equipment, except that stated in one of the following classes.


Class B: Portable tools.

Class C: Lighting equipment, including dimming devices.

Class D: Equipment having an input current with “special wave shape” and an active input power, $P \leq 600 \text{ W}$

- c. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

4.3.4 TEST SETUP

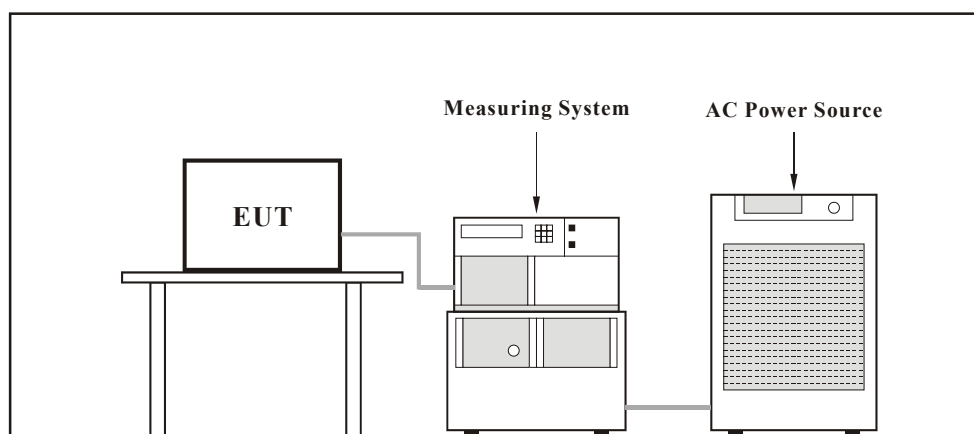

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

Same as item 4.1.6.

4.3.6 TEST RESULTS

EUT	PANEL PC	MODEL	AMB-2053HTT
MODE	1		
FUNDAMENTAL VOLTAGE/AMPERE	229.337 Vrms/ 0.634 Arms	POWER FREQUENCY	50.001 Hz
POWER CONSUMPTION	66.973 W	POWER FACTOR	0.460
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 1005 hPa	TESTED BY: Andy Cheng	

Harm. Order	Reading Data (A)	Limit (A)
1	-	-
3	0.29	2.30
5	0.27	1.14
7	0.24	0.77
9	0.21	0.40
11	0.17	0.33
13	0.13	0.21
15	0.10	0.15
17	0.06	0.13
19	0.04	0.12
21	0.02	0.11
23	0.02	0.10
25	0.03	0.09
27	0.03	0.08
29	0.03	0.08
31	0.03	0.07
33	0.02	0.07
35	0.01	0.06
37	0.01	0.06
39	0.01	0.06

Harm. Order	Reading Data (A)	Limit (A)
2	0.00	1.08
4	0.00	0.43
6	0.00	0.30
8	0.00	0.23
10	0.00	0.18
12	0.00	0.15
14	0.00	0.13
16	0.00	0.12
18	0.00	0.10
20	0.00	0.09
22	0.00	0.08
24	0.00	0.08
26	0.00	0.07
28	0.00	0.07
30	0.00	0.06
32	0.00	0.06
34	0.00	0.05
36	0.00	0.05
38	0.00	0.05
40	0.00	0.05

NOTE: Steady state values on AC mains are recorded in the table.

4.4 VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

4.5 LIMITS OF VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

TEST ITEM	LIMIT	NOTE
P_{st}	1.0	P_{st} means short-term flicker indicator.
P_{lt}	0.65	P_{lt} means long-term flicker indicator.
T_{dt} (ms)	200	T_{dt} means maximum time that dt exceeds 3 %.
d_{max} (%)	4%	d_{max} means maximum relative voltage change.
dc (%)	3%	dc means relative steady-state voltage change

4.5.1 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
KeyTek, Power Arb Waveform Generator	EP72HF	9508346	April 20, 2002
KIKUSUI AC SWITCHING POWER SUPPLY	PCR 4000L	9508355	April 20, 2002

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.2 TEST PROCEDURE

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- b. During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

4.5.3 TEST SETUP

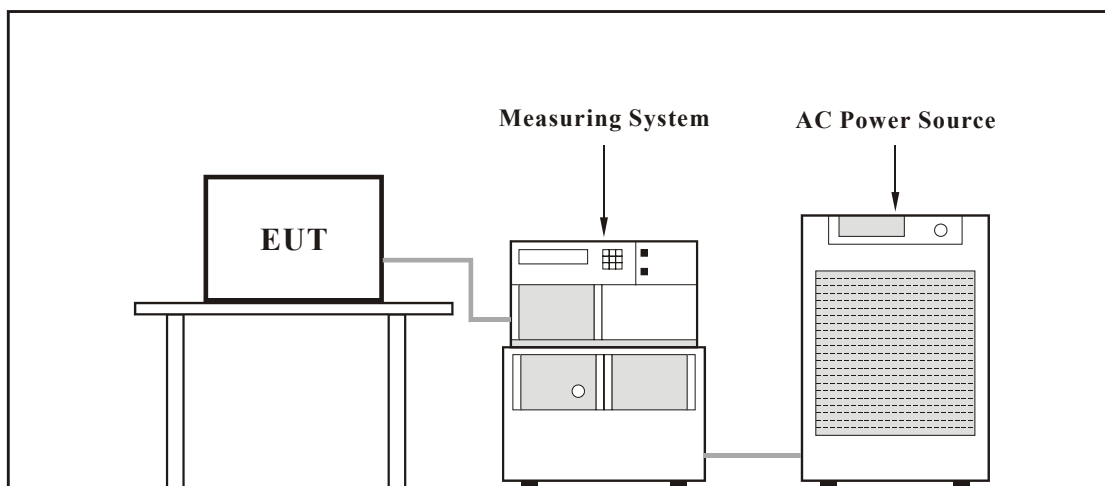

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.5.4 EUT OPERATING CONDITIONS

Same as item 4.1.6.

4.5.5 TEST RESULTS

EUT	PANEL PC	MODEL	AMB-2053HTT
MODE	1		
INPUT VOLTAGE/AMPERE	229.337 Vrms / 0.634 Arms	POWER FREQUENCY	50.001 Hz
OBSERVATION PERIOD (Tp)	2 hours	POWER FACTOR	0.460
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 1005 hPa	TESTED BY: Andy Cheng	

TEST PARAMETER	MEASUREMENT VALUE	LIMIT	REMARKS
P_{st}	0.106	1.0	Pass
P_{lt}	0.092	0.65	Pass
T_{dt} (ms)	0	200	Pass
d_{max} (%)	0	4%	Pass
dc (%)	0	3%	Pass

- NOTE:**
- (1) P_{st} means short-term flicker indicator.
 - (2) P_{lt} means long-term flicker indicator.
 - (3) T_{dt} means maximum time that dt exceeds 3 %.
 - (4) d_{max} means maximum relative voltage change.
 - (5) dc means relative steady-state voltage change.

5 IMMUNITY TEST

5.1 GENERAL DESCRIPTION

Product Standard:	EN 61000-6-2: 2001	
Basic Standard, Specification, and Performance Criteria:	IEC 61000-4-2	Electrostatic Discharge – ESD: 8kV air discharge, 4kV Contact discharge, Performance Criterion B
	IEC 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test – RS: 80-1000 MHz, 10V/m, 80% AM (1kHz), Performance Criterion A
	IEC 61000-4-4	Electrical Fast Transient/Burst - EFT, Power line: 2kV, Signal line: 1kV, Performance Criterion B
	IEC 61000-4-5	Surge Immunity Test: 1.2/50 us Open Circuit Voltage, 8 /20 us Short Circuit Current, Power Line - 1 kV, line to earth - 2kV, Performance Criterion B
	IEC 61000-4-6	Conducted Radio Frequency Disturbances Test – CS: 0.15-80 MHz, 10V, 80% AM, 1kHz, Performance Criterion A
	IEC 61000-4-8	Power Frequency Magnetic Field Test, 50 Hz, 30A/m, 60Hz, 30A/m Performance Criterion A
	IEC 61000-4-11	Voltage Dips: 30% reduction -0.5 period, Performance Criterion B 60% reduction – 5 period, Performance Criterion C 60% reduction – 50 period, Performance Criterion C Voltage Interruptions: >95% reduction – 250 period, Performance Criterion C

5.2 GENERAL PERFORMANCE CRITERIA DESCRIPTION

CRITERION A	The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.
CRITERION B	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.
CRITERION C	Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

5.3 EUT OPERATING CONDITION

Same as item 4.1.6.



5.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

5.4.1 TEST SPECIFICATION

Basic Standard:	IEC 61000-4-2
Discharge Impedance:	330 ohm / 150 pF
Discharge Voltage:	Air Discharge –8 kV (Direct) Contact Discharge – 4 kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Minimum 20 times at each test point
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum

5.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
KeyTek, ESD Simulator	MZ-15/EC	9902287	Feb. 26, 2002
EM Test ESD Simulator	ESD 30C	0201-28	Aug. 9, 2002
EM Test ESD Discharge Unit	P30C	0201-28	Aug. 9, 2002
EM Test ESD Discharge Unit	P30C-RFCI	0601-07	Aug. 9, 2002

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

5.4.3 TEST PROCEDURE


- Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- The time interval between two successive single discharges was at least 1 second.
- The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge



electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.

- g. At least ten single discharges (in the most sensitive polarity) were applied to the **Horizontal Coupling Plane** at points on each side of the EUT. The ESD generator was positioned vertically at a distance of 0.1 meters from the EUT with the discharge electrode touching the **HCP**.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

5.4.4 TEST SETUP

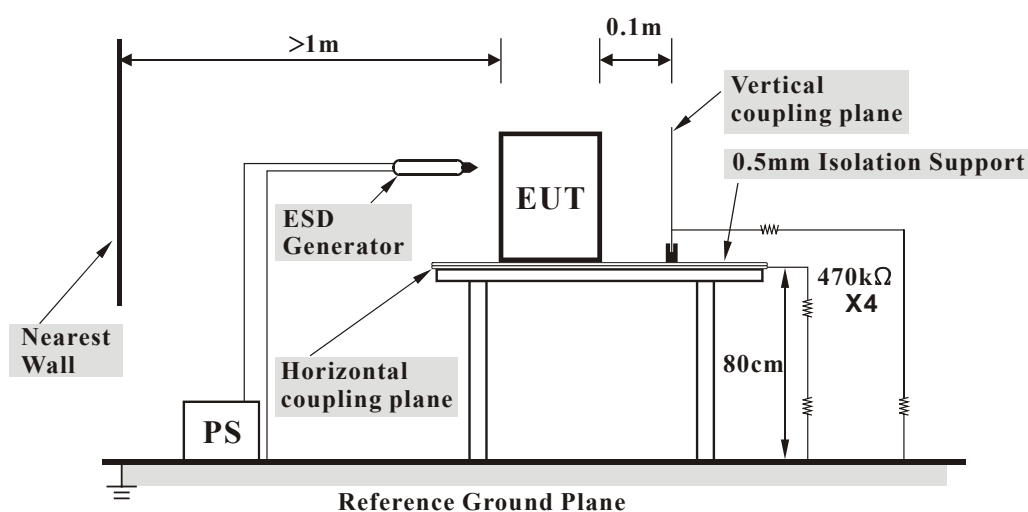

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940kΩ total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC 61000-4-2:1995, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2:1995, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The **GRP** consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.



5.4.5 TEST RESULTS (A)

EUT	PANEL PC	MODEL	AMB-2053HTT
MODE	1	INPUT POWER	230Vac, 50 Hz
ENVIRONMENTAL CONDITIONS	20 deg. C, 48 % RH, 1005 hPa	TESTED BY: Andy Cheng	

TEST RESULTS OF DIRECT APPLICATION					
Discharge Level (kV)	Polarity (+/-)	Test Point	Contact Discharge	Air Discharge	Performance Criterion
8	+/-	1-7	NA	Note (1)	A
4	+/-	8, 9	Note (1)	NA	A

Description of test point (Please refer to ESD test photo):

- | | |
|-------------------|----------------------------------|
| 1. Control button | 2. Junction between panel & case |
| 3. CD-ROM | 4. FDD |
| 5. I/O port | 6. AC in |
| 7. Power Switch | 8. Screws |
| 9. Metal case | |

TEST RESULTS OF INDIRECT APPLICATION					
Discharge Level (kV)	Polarity (+/-)	Test Point	Horizontal Coupling Plane	Vertical Coupling Plane	Performance Criterion
4	+/-	1 ~ 4	Note (1)	Note (1)	A

Description of test point:

1. Left side
2. Right side
3. Front side
4. Rear side

NOTE: (1) There was no change compared with initial operation during the test.

5.4.6 TEST RESULTS (B)

EUT	PANEL PC	MODEL	AMB-2053HTT
MODE	2	INPUT POWER	230Vac, 50 Hz
ENVIRONMENTAL CONDITIONS	19 deg. C, 46 % RH, 1005 hPa	TESTED BY: Andy Cheng	

TEST RESULTS OF DIRECT APPLICATION					
Discharge Level (kV)	Polarity (+/-)	Test Point	Contact Discharge	Air Discharge	Performance Criterion
8	+/-	1-6	NA	Note (1)	A
4	+/-	7-9	Note (1)	NA	A

Description of test point (Please refer to ESD test photo):

- | | |
|----------------------|----------------------------------|
| 1. Control button | 2. Junction between panel & case |
| 3. CD-ROM | 4. FDD |
| 5. I/O port | 6. Power Switch |
| 7. Terminal of DC in | 8. Metal case |
| 9. Screws | |

TEST RESULTS OF INDIRECT APPLICATION					
Discharge Level (kV)	Polarity (+/-)	Test Point	Horizontal Coupling Plane	Vertical Coupling Plane	Performance Criterion
4	+/-	1 ~ 4	Note (1)	Note (1)	A

Description of test point:

1. Left side
2. Right side
3. Front side
4. Rear side

NOTE: (1) There was no change compared with initial operation during the test.

5.5 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

5.5.1 TEST SPECIFICATION

Basic Standard:	IEC 61000-4-3
Frequency Range:	80 MHz - 1000 MHz
Field Strength:	10 V/m
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of fundamental
Polarity of	Horizontal and Vertical
Antenna:	
Test Distance:	3 m
Antenna Height:	1.5m
Dwell Time:	at least 3 seconds

5.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Signal Generator	SMY01	840490/009	Aug. 03, 2002
KALMUS Power Amplifier	LA1000V	091995-1	NA
KALMUS Power Amplifier	757LC	091995-2	NA
HOLADAY Field Probe	HI-4422	89915	Aug. 13, 2002
EMCO BiconiLog Antenna	3141	1001	NA
COMTEST Compact Full Anechoic Chamber (7x3x3 m)	CFAC	ADT-S01	Aug. 17, 2002

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.5.3 TEST PROCEDURE


The test procedure was in accordance with IEC 61000-4-3

- The testing was performed in a fully-anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80% amplitude modulated with a 1kHz sinewave. The rate of sweep did not exceed 1.5×10^{-3} decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the

EUT to be able to respond.

- d. The field strength level was 3V/m.
- e. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

5.5.4 TEST SETUP

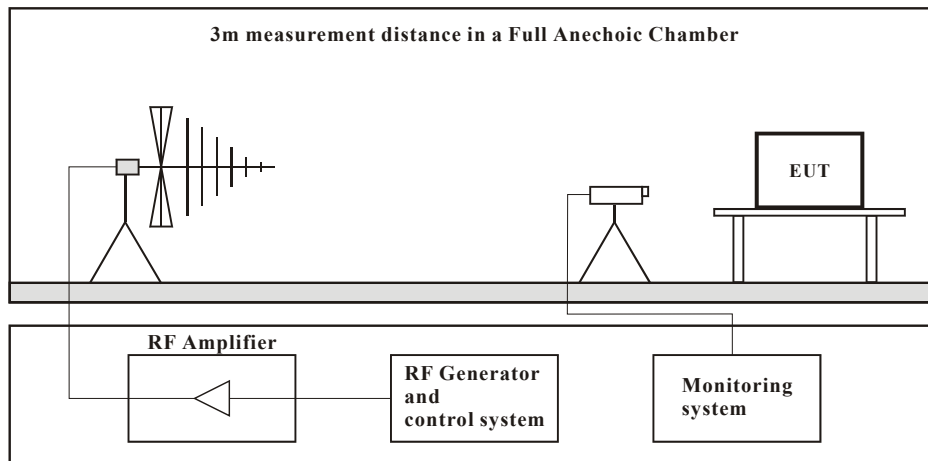

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3:1995 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3:1995 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.



5.5.5 TEST RESULTS

EUT	PANEL PC	MODEL	AMB-2053HTT
MODE	1, 2	INPUT POWER	230Vac, 50 Hz
ENVIRONMENTAL CONDITIONS	25 deg. C, 58 % RH, 1005 hPa	TESTED BY: Andy Cheng	

Frequency (MHz)	Result	Polarity	Azimuth	Field Strength (V/m)	Observation	Performance Criterion
80 -1000 MHz	PASS	V&H	0	10	Note	A
80 -1000 MHz	PASS	V&H	90	10		
80 -1000 MHz	PASS	V&H	180	10		
80 -1000 MHz	PASS	V&H	270	10		

NOTE: There was no change compared with initial operation during the test.



5.6 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)

5.6.1 TEST SPECIFICATION

Basic Standard:	IEC 61000-4-4
Test Voltage:	Power Line - 2 kV Signal/Control Line – 1 kV
Polarity:	Positive/Negative
Impulse Frequency:	5 kHz
Impulse Waveshape :	5/50 ns
Burst Duration:	15 ms
Burst Period:	300 ms
Test Duration:	Not less than 1 min.

5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
KeyTek, EFT Generator	CE-40	9508257	Aug. 28, 2002
KeyTek, Capacitive Clamp	CE-40-CCL	9508259	NA


NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.6.3 TEST PROCEDURE


- The EUT was tested with 1000 volt discharges to the AC power input leads and 500 volt discharges to the interconnect cables.
- Both positive and negative polarity discharges were applied.
- The length of the “hot wire” from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 1 meter.
- The duration time of each test sequential was 1 minute.
- The transient/burst waveform was in accordance with IEC 61000-4-4, 5/50ns.

5.6.4 TEST SETUP

a. Direct Coupling Test Setup

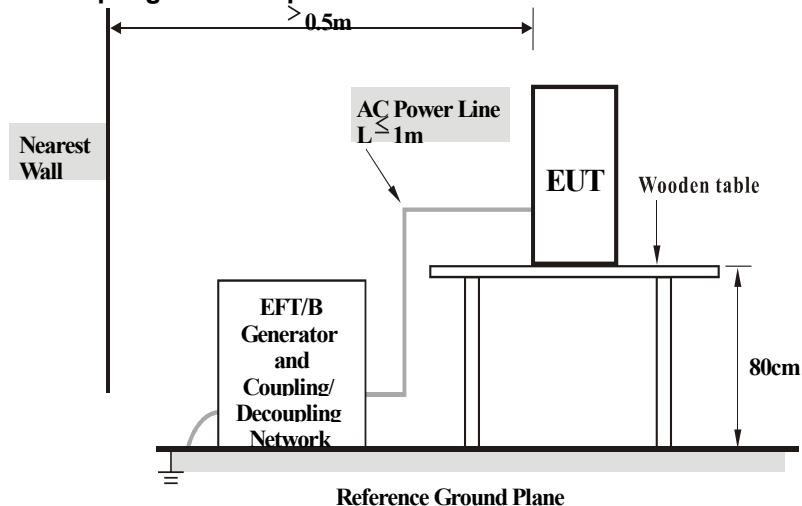

b. Capacitive Clamp Test Setup (if any)

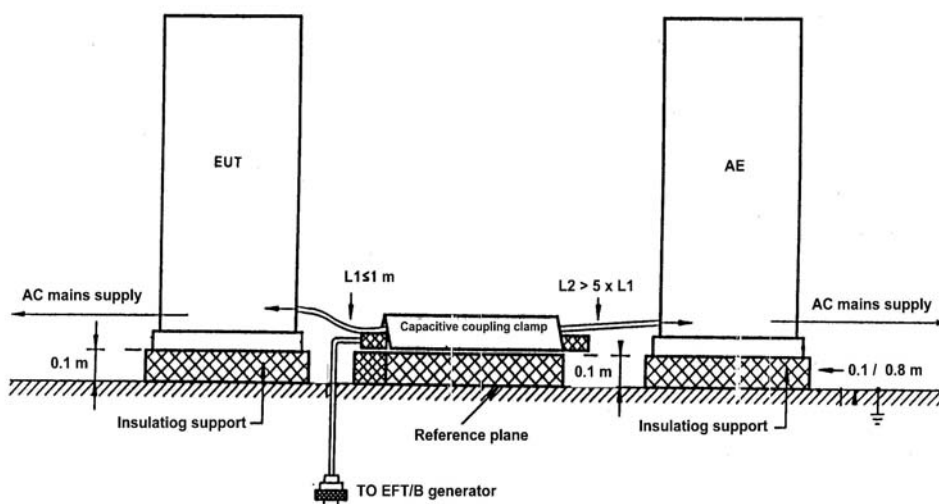

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLETOP EQUIPMENT

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.



FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-4:1995 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.



5.6.5 TEST RESULTS (A)

EUT	PANEL PC	MODEL	AMB-2053HTT
MODE	1	INPUT POWER	230Vac, 50 Hz
ENVIRONMENTAL CONDITIONS	21 deg. C, 50 % RH, 1005 hPa	TESTED BY: Andy Cheng	

Test Point	Polarity	Test Level (kV)	Observation	Performance Criterion
L1	+/-	2	Note	B
L2	+/-	2	Note	B
Ground	+/-	2	Note	B
Signal/Control Line	+/-	1	Note	B

NOTE: The transmission of data for LAN port was stopped during the test, but self-recoverable after the test.



5.6.6 TEST RESULTS (B)

EUT	PANEL PC	MODEL	AMB-2053HTT
MODE	2	INPUT POWER	DC 24V
ENVIRONMENTAL CONDITIONS	19 deg. C, 52 % RH, 1005 hPa	TESTED BY: Andy Cheng	

Test Point	Polarity	Test Level (kV)	Observation	Performance Criterion
Signal/Control Line	+/-	1	Note	B

NOTE: The transmission of data for LAN port was stopped during the test, but self-recoverable after the test.



5.7 SURGE IMMUNITY TEST

5.7.1 TEST SPECIFICATION

Basic Standard:	IEC 61000-4-5
Wave-Shape:	Combination Wave 1.2/50 us Open Circuit Voltage 8 /20 us Short Circuit Current
Test Voltage:	Power Line - 1 kV / 2 kV
Surge	L1-L2 / L1-G / L2-G / L1, L2-G
Input/Output:	
Generator Source	2 ohm between networks
Impedance:	12 ohm between network and ground
Polarity:	Positive/Negative
Phase Angle:	0° /90°/270°
Pulse Repetition	1 time / min. (maximum)
Rate:	
Number of Tests:	5 positive and 5 negative at selected points

5.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION UNTIL
KeyTek, Control Center	E103	9508347	NA
KeyTek, Surge Combination Wave	E501A	9508349	Aug. 28, 2002
KeyTek, Surge Coupler/Decoupler	E551	9508350	Aug. 28, 2002
KeyTek External Coupler/Decoupler for Telecom Lines	CM-TELCD	9906194	NA
KeyTek I/O Signal Line Coupler/Decoupler	CM-I/OCD	9907177	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.7.3 TEST PROCEDURE

- a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


- b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT:

The surge is applied to the lines via the capacitive coupling. The coupling / decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

- c. For test applied to unshielded symmetrically operated interconnection / telecommunication lines of EUT:

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

5.7.4 TEST SETUP

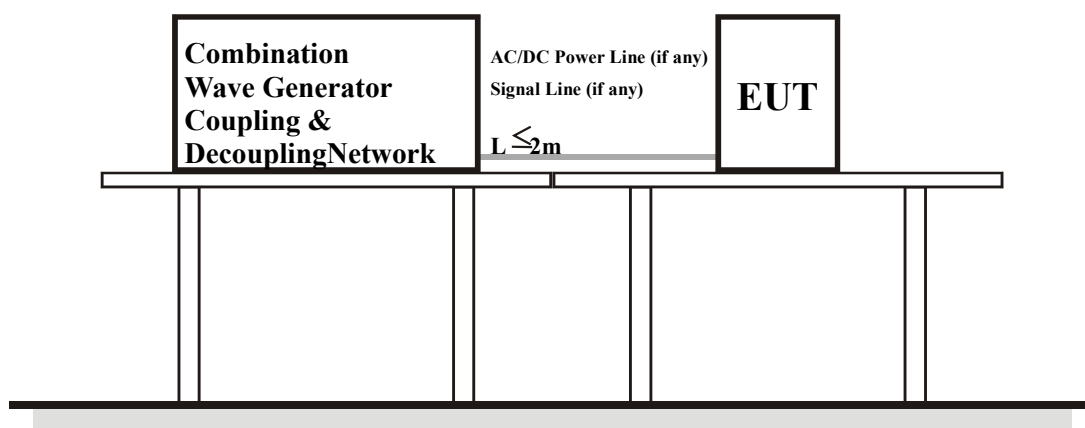

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



5.7.5 TEST RESULTS

EUT	PANEL PC	MODEL	AMB-2053HTT
MODE	1	INPUT POWER	230Vac, 50 Hz
ENVIRONMENTAL CONDITIONS	18 deg. C, 50 % RH, 1005 hPa	TESTED BY: Andy Cheng	

VOLTAGE (kV)	TEST POINT	POLARITY (+/-)	OBSERVATION	PERFORMANCE CRITERION
1	L1-L2	+/-	NOTE	A
2	L1-G	+/-	NOTE	A
2	L2-G	+/-	NOTE	A
2	L1, L2-G	+/-	NOTE	A

NOTE: There was no change compared with initial operation during the test.



5.8 IMMUNITY TO CONDUCTED DISTURBANCES INDUCED BY RF FIELDS (CS)

5.8.1 TEST SPECIFICATION

Basic Standard:	IEC 61000-4-6
Frequency Range:	0.15 MHz - 80 MHz
Field Strength:	10 V _{r.m.s.}
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of fundamental
Coupled Cable:	Power Mains, Unshielded
Coupling Device:	CDN-M3 (3 wires)/CDN-M2 (2wires), CLAMP

5.8.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Signal Generator	SMY01	848027/030	Feb. 15, 2002
COMTEST Power Amplifier	GPA301	BCS320-1038	NA
FCC Coupling Decoupling Network	FCC-801- M3-25	48	NA
FCC Coupling Decoupling Network	FCC-801- M2-16A	01047	NA
FISCHER CUSTOM COMMUNICATIONS EM Injection Clamp	FCC-203I	50	NA
FCC Coupling Decoupling Network	FCC-801- M1-25	17	NA
BOONTON RF Voltage Meter	9200B	331801AE	Aug. 03, 2002
SCHAFFNER Coupling Decoupling Network	CDN T400	16909	NA
SCHAFFNER Arranging adapter set for RJ45	ADR T444	NA	NA
SCHAFFNER Arranging adapter set for RJ11	ADR T411	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.8.3 TEST PROCEDURE

- a. The EUT shall be tested within its intended operating and climatic conditions.
- b. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.
- c. The frequency range is swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal is modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate shall not exceed 1.5×10^{-3} decades/s. The step size shall not exceed 1 % of the start and thereafter 1 % of the preceding frequency value where the frequency is swept incrementally.
- d. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequency(ies) and harmonics or frequencies of dominant interest, shall be analyzed separately.
- e. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

5.8.4 TEST SETUP

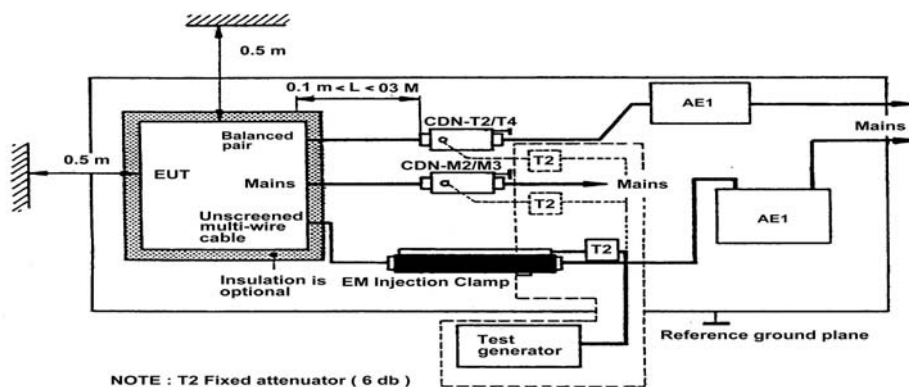

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



NOTE:

FLOOR-STANDING EQUIPMENT

The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.



5.8.5 TEST RESULTS (A)

EUT	PANEL PC	MODEL	AMB-2053HTT
MODE	1	INPUT POWER	230Vac, 50 Hz
ENVIRONMENTAL CONDITIONS	19 deg. C, 60 % RH, 1005 hPa	TESTED BY: Andy Cheng	

FREQUENCY (MHz)	RESULTS	FIELD STRENGTH (Vr.m.s.)	CABLE	OBSERVATION	INJECTION METHOD	PERFORMANCE CRITERION
0.15 –80 MHz	PASS	10	AC power line (1.8m)	Note (1)	A	CDN-M3
0.15 –80 MHz	PASS	10	LAN (10m)	Note (1)	A	CLAMP

NOTE: (1) There was no change compared with initial operation during the test.

5.8.6 TEST RESULTS (B)

EUT	PANEL PC	MODEL	AMB-2053HTT
MODE	2	INPUT POWER	230Vac, 50 Hz
ENVIRONMENTAL CONDITIONS	19 deg. C, 60 % RH, 1005 hPa	TESTED BY: Andy Cheng	

FREQUENCY (MHz)	RESULTS	FIELD STRENGTH (Vr.m.s.)	CABLE	OBSERVATION	INJECTION METHOD	PERFORMANCE CRITERION
0.15 –80 MHz	PASS	10	AC power line (1.8m)	Note (1)	A	CDN-M2
0.15 –80 MHz	PASS	10	LAN (10m)	Note (1)	A	CLAMP

NOTE: (1) There was no change compared with initial operation during the test.



5.9 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST

5.9.1 TEST SPECIFICATION

Basic Standard:	IEC 61000-4-8
Frequency Range:	50Hz /60Hz
Field Strength:	30 A/m
Observation Time:	1 minute
Inductance Coil:	Rectangular type, 1mx1m

5.9.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HAEFELY Magnetic Field Tester	MAG 100.1	083794-06	NA
COMBINOVA Magnetic Field Meter	MFM10	224	Oct. 24, 2002

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.9.3 TEST PROCEDURE

- The equipment is configured and connected to satisfy its functional requirements. It shall be placed on the GRP with the interposition of a 0.1m-thick insulating support.
- The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

5.9.4 TEST SETUP

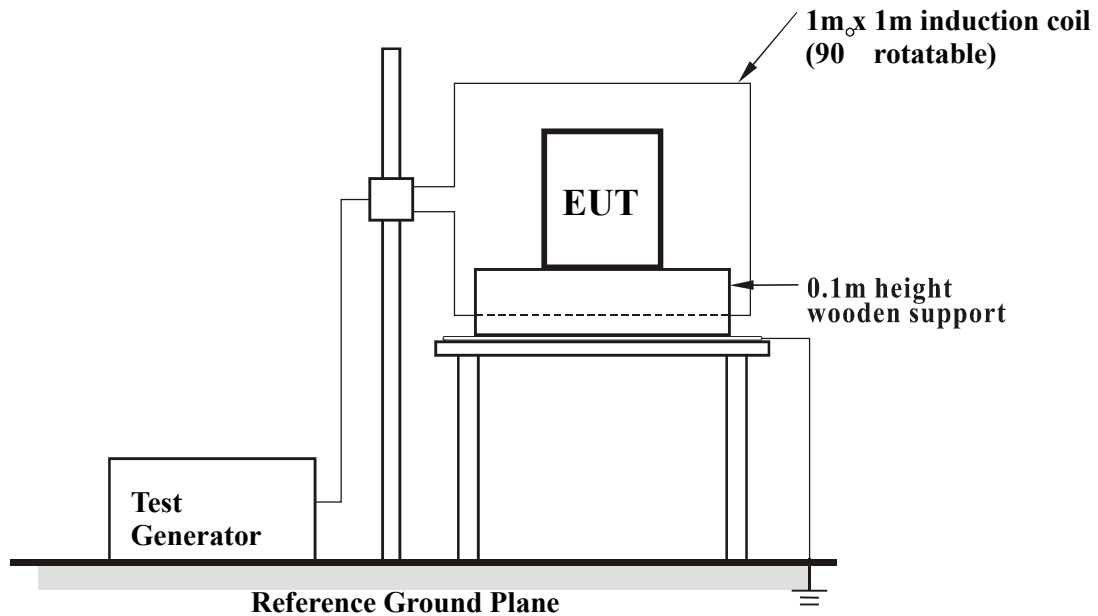

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLETOP EQUIPMENT

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.



5.9.5 TEST RESULTS

EUT	PANEL PC	MODEL	AMB-2053HTT
MODE	1, 2	INPUT POWER	230Vac, 50 Hz
ENVIRONMENTAL CONDITIONS	21 deg. C, 50 % RH, 1005 hPa	TESTED BY: Andy Cheng	

DIRECTION	RESULTS	OBSERVATION	PERFORMANCE CRITERION
X	PASS	Note	A
Y	PASS	Note	A
Z	PASS	Note	A

NOTE: There was no change compared with the initial operation during the test.



5.10 VOLTAGE DIP/SHORT INTERRUPTIONS/VOLTAGE VARIATIONS (DIP) IMMUNITY TEST

5.10.1 TEST SPECIFICATION

Basic Standard:	IEC 61000-4-11
Test Duration Time:	Minimum three test events in sequence
Interval between Event:	Minimum ten seconds
Phase Angle:	0°/45°/90°/135°/180°/225°/270°/315°/360°
Test Cycle:	3 times

5.10.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HAEFELY Mains Interference Simulator	PLINE 1610	083690-17	March 2, 2002

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.10.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

5.10.4 TEST SETUP

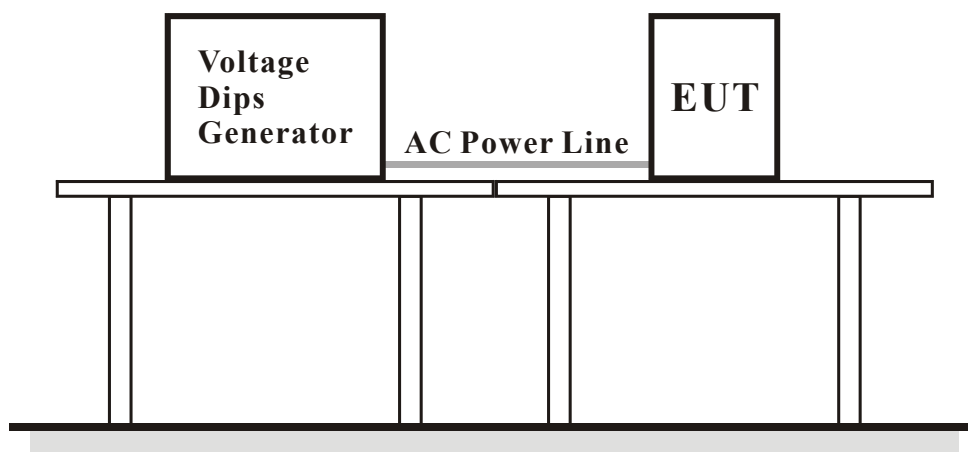

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.10.5 TEST RESULTS

EUT	PANEL PC	MODEL	AMB-2053HTT
MODE	1	INPUT POWER	230Vac, 50 Hz
ENVIRONMENTAL CONDITIONS	21 deg. C, 55 % RH, 1005 hPa	TESTED BY: Andy Cheng	

VOLTAGE % REDUCTION	PERIODS	RESULTS	OBSERVATION	PERFORMANCE CRITERION
30	0.5	PASS	Note(1)	A
60	5	PASS	Note(1)	A
60	50	PASS	Note(1)	A
>95	250	PASS	Note(2)	C


NOTES:(1) There was no change compared with initial operation during the test.

(2) The EUT shut down.


6 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST (Mode 1)

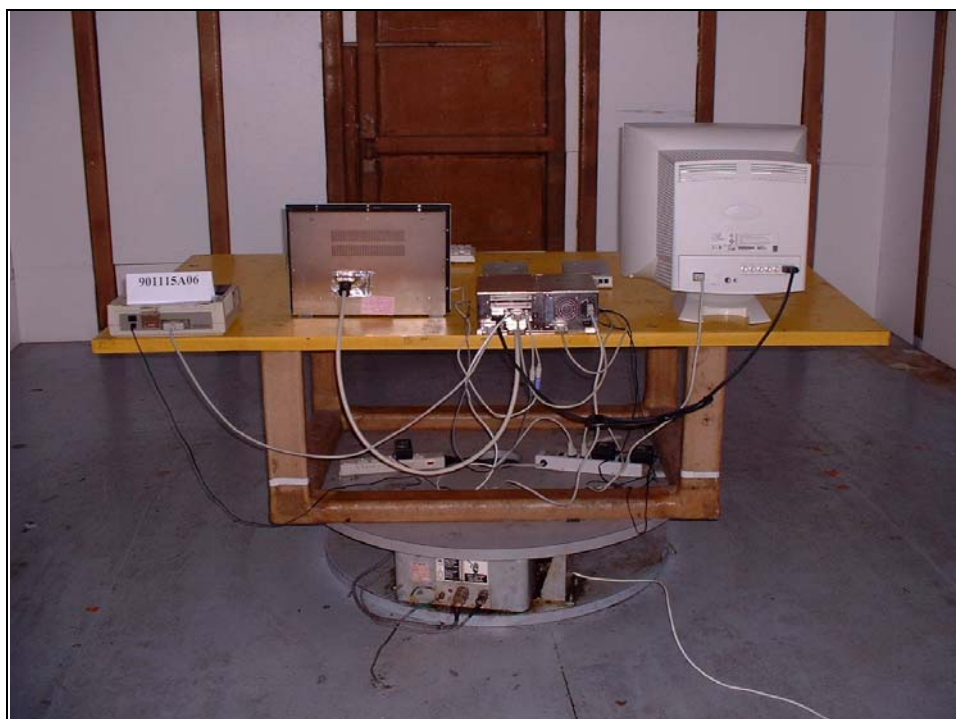


(Mode 2)

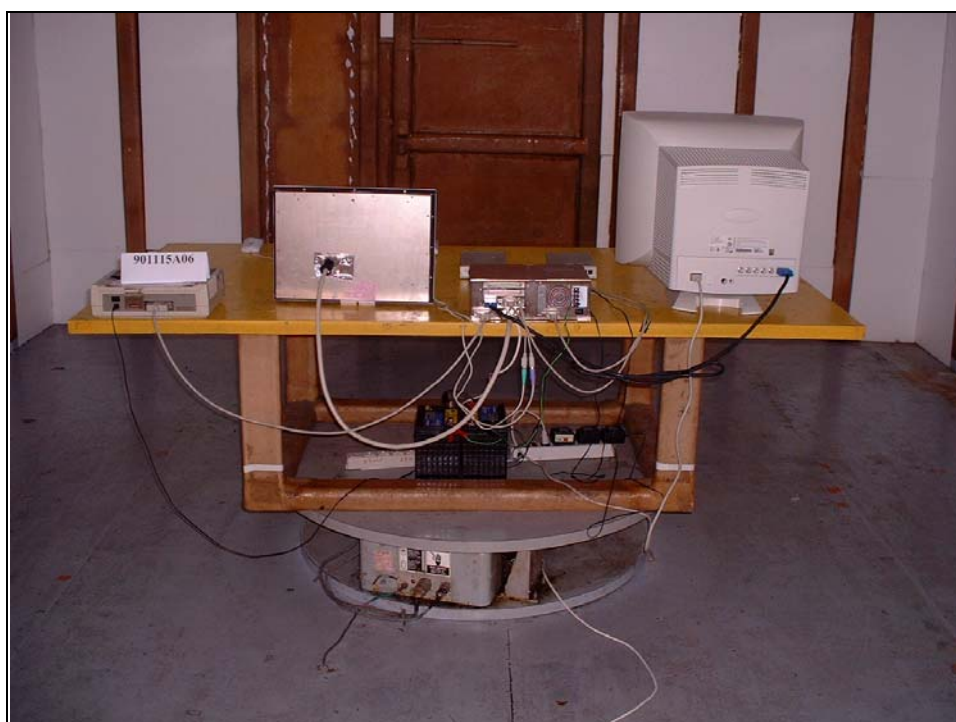

HARMONICS EMISSION TEST & VOLTAGE FLUCTUATIONS AND FLICKER TEST (Mode 1)




ESD TEST (Mode 1)

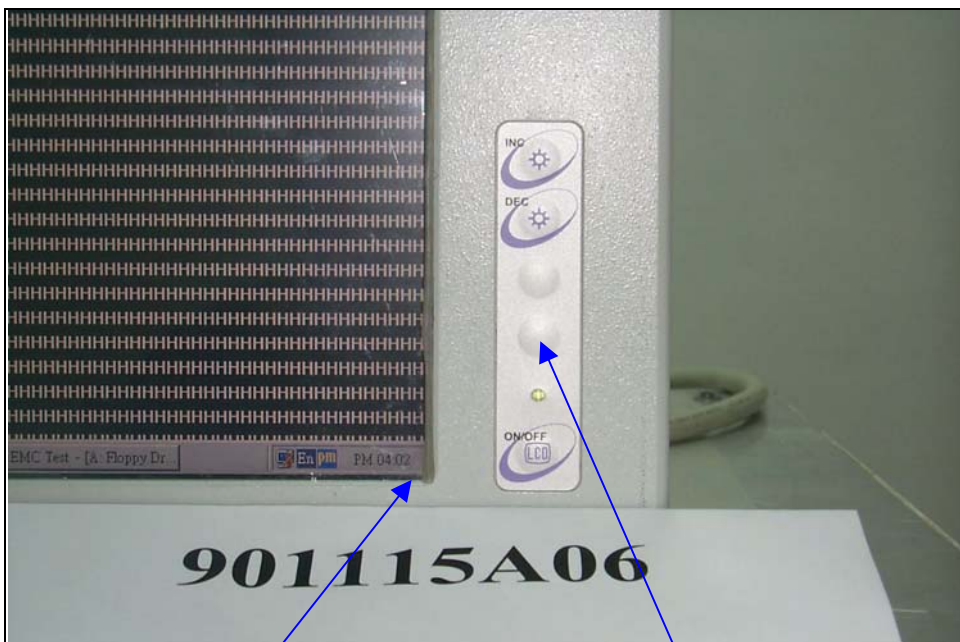

2

1

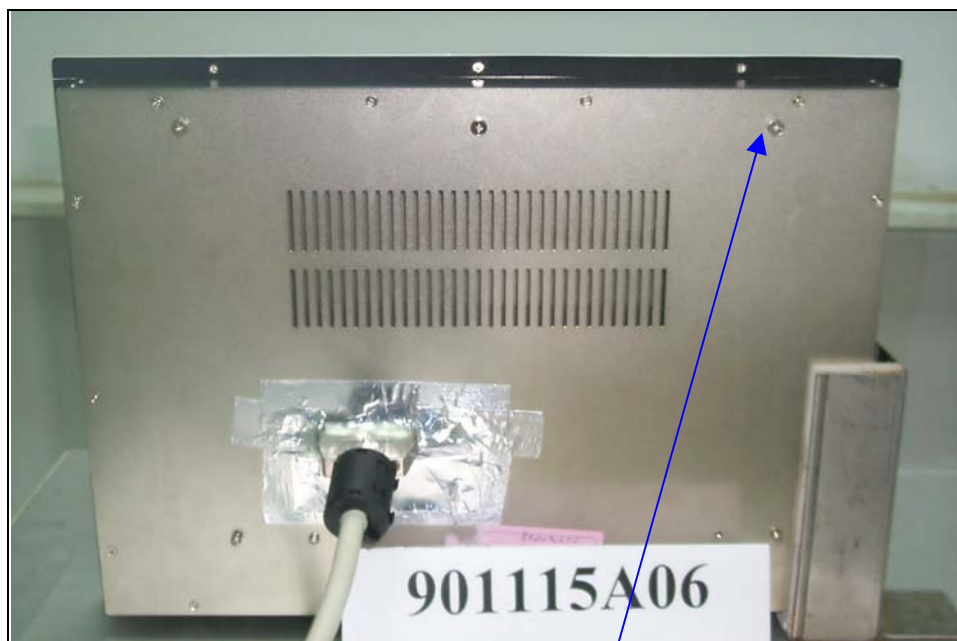

8



9



5

6

7



3


4

(Mode 2)



2

1

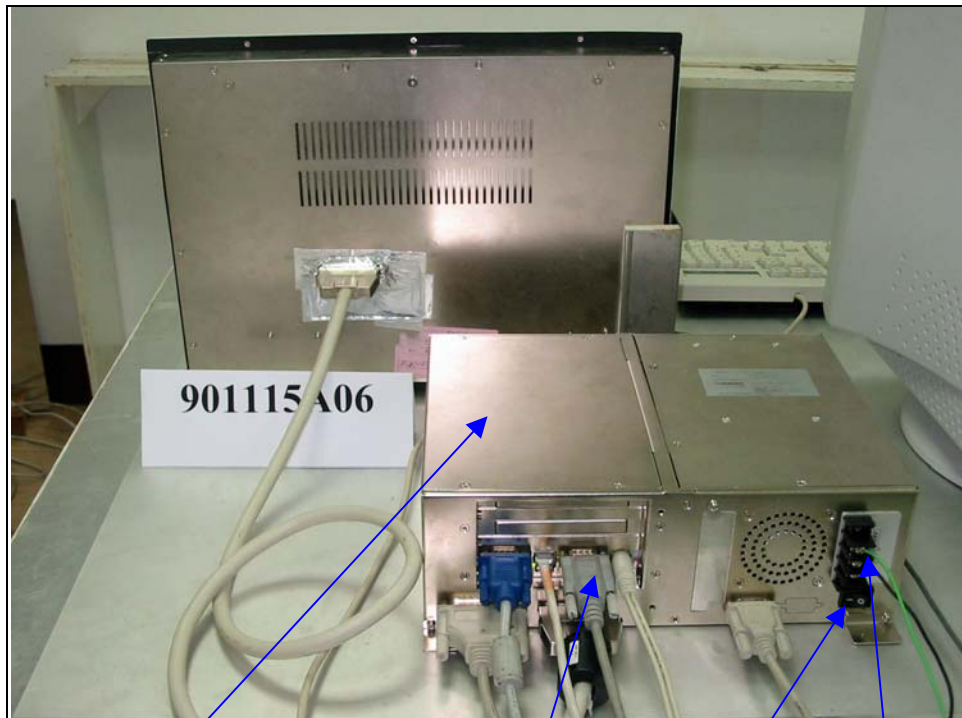

8

5

6

7



9


3

4

RS TEST (Mode 1)



(Mode 2)

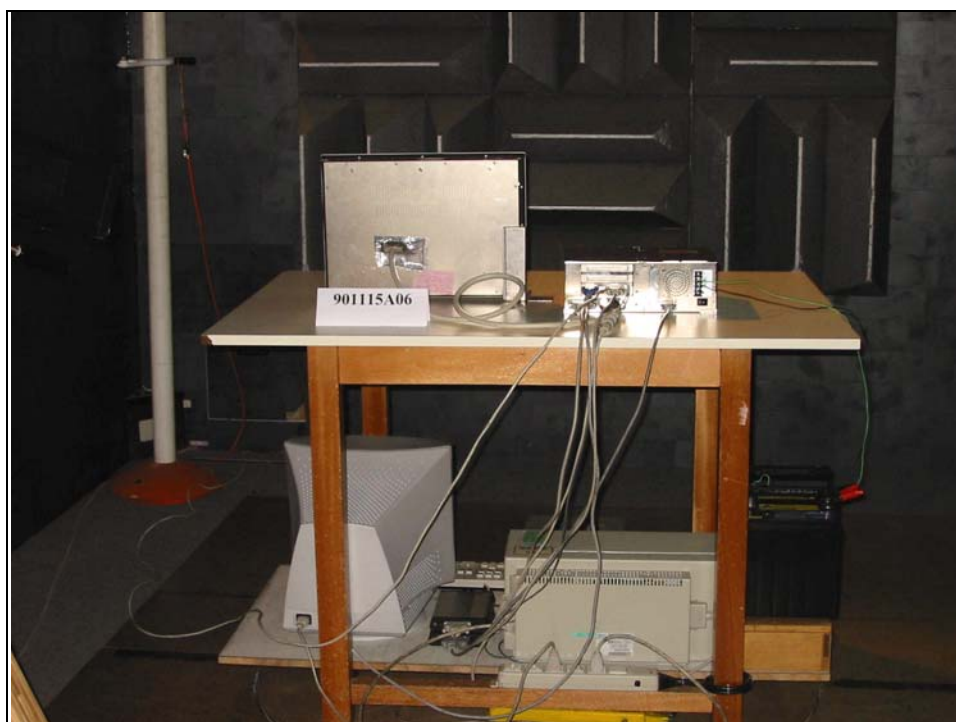

EFT TEST (Mode 1)



(Mode 2)



SURGE TEST (Mode 1)



CONDUCTED SUSCEPTIBILITY TEST (Mode 1)



(Mode 2)



POWER-FREQUENCY MAGNETIC FIELDS TEST (Mode 1)



(Mode 2)



VOLTAGE DIPS AND INTERRUPTIONS TEST (Mode 1)





7 APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO, DNV
Canada	INDUSTRY CANADA
R.O.C.	CNLA, BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF & Telecom Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.