

Certificate No: C0D1908

# CERTIFICATE

**▲**EQUIPMENT : Display Monitor

MODEL NO. : AMB-255A, AMB-255AT, AMB-255AR, AMB-255ART

APPLICANT: AAEON Technology Inc.

5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R.O.C.





#### **CERTIFY THAT:**

THE MEASUREMENTS SHOWN IN THIS TEST REPORT WERE MADE IN ACCORDANCE WITH THE PROCEDURES GIVEN IN **EUROPEAN COUNCIL DIRECTIVE 89/336/EEC.** THE EQUIPMENT WAS **PASSED** THE TEST PERFORMED ACCORDING TO **EUROPEAN STANDARD** 

EN55022:1998 Class A.

EN61000-3-2:1995/A12:1996/A13:1997/A1:1998/A2:1998,

EN61000-3-3:1995/A1:1998, and EN55024:1998 (EN61000-4-2:1995,

EN61000-4-3:1996, EN61000-4-4:1995, EN61000-4-5:1995, EN61000-4-6:1996,

EN61000-4-8:1993, EN61000-4-11:1994). THE TEST WAS CARRIED OUT ON

Apr. 30, 2001 AT SPORTON INTERNATIONAL INC. LAB.

6. T. R. May 28, 2001

Manager

SPORTON INTERNATIONAL INC.6F,No.106,Sec.1,Hsin Tai Wu Rd.,Hsi Chih,Taipei Hsien, Taiwan, R.O.C.





- THE TEST RESULT REFERS EXCLUSIVELY TO THE TEST PRESENTED TEST MODEL / SAMPLE.
- WITHOUT WRITTEN AUTHORIZATION OF TEST LAB.. THE TEST REPORT MAY NOT BE COPIED

SPORTON INTERNATIONAL INC

### SPORTON INTERNATIONAL INC.





### **CE TEST REPORT**

### according to

European Standard EN55022:1998 Class A EN61000-3-2:1995/A12:1996/A13:1997/A1:1998/A2:1998, EN61000-3-3:1995/A1:1998 and EN55024:1998 (EN61000-4-2:1995, EN61000-4-3:1996, EN61000-4-4:1995, EN61000-4-5:1995, EN61000-4-6:1996, EN61000-4-8:1993, EN61000-4-11:1994)

Equipment : Display Monitor

Model No. : AMB-255A, AMB-255AT, AMB-255AR,

AMB-255ART

Applicant : AAEON Technology Inc.

5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- This test report is only applicable to European Community.

#### SPORTON International Inc.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number

: 1 of 61

FAX : 000-2-2090-2233

Issued Date

: May 3, 2001

## Table of Contents

General Description of Equipment under Test	5
General Description of Equipment under Test	5
1.1 Applicant	5
Manufacturer      Basic Description of Equipment under Test	5
E to the Ferrimment under Test	
. Test Configuration of Equipment under Test	
T-at Custom	
T-48-64-050	
I. General Information of Test	10
4.5. T4 Distance	
4.5 Test Distance	11
4.5 Test of Conducted Powerline	11
5. Test of Conducted Powerline	12
Test Procedures     Typical Test Setup Layout of Conducted Powerline	14
Typical Test Setup Layout of Conducted Powerline     Test Result of AC Powerline Conducted Emission	16
5.5. Dhetegraphs of Conducted Powerline Test Configuration	
6. Test of Radiated Emission	10
and the set Destinated Emission Test Configuration	
7.1 Standard	25
7.5. O Usermanias Tast	
8.1 Standard	27
8.4 Test Setup  8.5 Test Result Of Voltage Fluctuation And Flicker Test  And Flicker Test	28
a a Divisional of Harmonice Test Voltage Fluctuation And Flicker rest	
8.6 Photographs Of Harmonics Test, Vollage Tiestasses	31
9. Electrostatic Discharge Immunity Test (ESD)	31
9. Electrostatic Discharge Immunity Test (ESD)	32
9.1 Test setup 9.2 Test Setup for Tests Performed in Laboratory	33
9.3 ESD Test Procedure	

#### SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255

Page Number

Issued Date

: May 3, 2001

: 2 of 61

9.5 Test Points	35
9.6 Photographs of Electrostatic Discharge Immunity Test	
10. Radio Frequency Electromagnetic Field Immunity Test (RS)	38
10.1 Test setup	
10.2 Test Procedure	
10.3 Test Severity Levels	
10.4 Photographs of Radio Frequency Electromagnetic Field Immunity Test	
11. Electrical Fast Transient/Burst Immunity Test (EFT/BURST)	
11.1 Test setup	
11.2 Test on Power Line	
11.4 Test Procedure	
11.5 Test Severity Levels	
11.6 Photographs of Electrical Fast Transient/BURST Immunity Test	
12. SURGE IMMUNITY TEST	46
12.1 TEST RECORD	
12.2 TEST LEVEL	
12.3 TEST PROCEDURE	
12.4 OPERATING CONDITION	
12.5 Photographs of SURGE IMMUNITY TEST	49
13. CONDUCTED DISTURBANCES INDUCED BY RADIO-FREQUENCY FIELD IMMUNITY TO	EST ( CS )50
13.1 TEST LEVEL	50
13.2 OPERATING CONDITION	
13.3 TEST PROCEDURE	51
14. Power Frequency Magnetic Field immunity tests	
14.1 TEST RECORD	
14.2 TEST SETUP.	
14.3 OPERATING CONDITION	
14.4 Photographs of Power Frequency Magnetic Field immunity tests	
15. VOLTAGE DIPS AND VOLTAGE INTERRUPTIONS IMMUNITY TESTS	54
15.1 TEST RECORD OF VOLTAGE INTERRUPTION	
15.2 TEST RECORD OF VOLTAGE DIPS	
15.3 TESTING REQUIREMENT AND PROCEDURE	55
15.5 OPERATING CONDITION	
15.6 Photographs of VOLTAGE DIPS AND VOLTAGE INTERRUPTIONS IMMUNITY TESTS	
16. Antenna Factor & Cable Loss	57
17. List of Measuring Equipment Used	
18. Notice for Class A Product	
19. Declaration of Conformity and the CE Mark	
Appendix A. Photographs of EUT	A1 ~ A20

FAX: 886-2-2696-2255


Page Number

: 3 of 61

Issued Date

: May 3, 2001

### SPORTON INTERNATIONAL INC.





Certificate No.: C0D1908

### CERTIFICATE OF COMPLIANCE

according to

European Standard EN55022:1998 Class A EN61000-3-2:1995/A12:1996/A13:1997/A1:1998/A2:1998, EN61000-3-3:1995/A1:1998 and EN55024:1998 (EN61000-4-2:1995, EN61000-4-3:1996, EN61000-4-4:1995, EN61000-4-5:1995, EN61000-4-6:1996, EN61000-4-8:1993, EN61000-4-11:1994)

Equipment : Display Monitor

: AMB-255A, AMB-255AT, AMB-255AR, Model No.

AMB-255ART

: AAEON Technology Inc. Applicant

5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R.O.C.

#### I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in EUROPEAN COUNCIL DIRECTIVE 89/336/EEC. The equipment was passed the test performed according to European Standard EN55022:1998 Class A,

EN61000-3-2:1995/A12:1996/A13:1997/A1:1998/A2:1998/prA14:2000, EN61000-3-3:1995/A1:1998 and EN55024:1998 ( EN61000-4-2:1995, EN61000-4-3:1996, EN61000-4-4:1995, EN61000-4-5:1995, EN61000-4-6:1996, EN61000-4-8:1993, EN61000-4-11:1994 ). The test was carried out on Apr. 30, 2001 at SPORTON International Inc. LAB. in Nei Hwu and Lin Kou.

6 J. R. May 58,200/

K. J. Lin Manager

SPORTON International Inc.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL: 886-2-2696-2468

FAX: 886-2-2696-2255

Page Number

4 of 61

Issued Date

May 3, 2001



#### 1. General Description of Equipment under Test

#### 1.1 Applicant

AAEON Technology Inc. 5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R.O.C.

#### 1.2 Manufacturer

Same as 1.1.

#### 1.3 Basic Description of Equipment under Test

Equipment

: Display Monitor

Model No.

: AMB-255A, AMB-255AT, AMB-255AR, AMB-255ART

Trade Name

: AAEON

VGA Cable

: Shielded, 1.1m

AV Cable

: Non-Shielded, 1.4m

Com Cable

: Shielded, 1.7m

Power Supply Type : Switching

AC Power Cord

: Non-Shielded, 1.75m, 2 pin

DC Power Cable

: Non-Shielded, 1.7m

#### 1.4 Feature of Equipment under Test

- 15" XGA color TFT LCD display
- · Heavy-duty stainless steel chassis and aluminum alloy front panel
- Front panel is NEMA 4/12 compliant
- · Rack-mount (optional)
- · Touch Screen (optional)
- Strengthened glass protects the front panel from shock damage
- Analog RGB signal directly input offering multi-scan function
- RGB, RCA video AV signal selectable
- VGA Cable length support up to 20Meters

SPORTON International Inc.

Page Number

5 of 61

Report No.: C0D1908

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255

May 3, 2001



2. Test Configuration of Equipment under Test

#### 2.1 Test Manner

- a. During testing, the interface cables and equipment positions were varied according to European Standard EN 55022.
- The DELL PS/2 Keyboard, LOGITECH PS/2 Mouse, HP Printer, ACEEX Modem, SONY D8 and EUT were connected to the FIC PC for EMI test.
- c. The DELL Keyboard, PRIMAX PS/2 Mouse, Will VCD Player and EUT were connected to the DELL PC for EMS test.
- d. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 1000MHz.

#### 2.2 Description of Test System

#### < EMI >

Support Unit 1. -- Personal Computer (FIC)

FCC ID

: P2L97

Model No. Power Supply Type

: Switching

Power Cord Serial No.

: Non-Shielded : SP0037

Data Cable

: Shielded

Remark

: This support device was tested to comply with FCC standards and

authorized under a declaration of conformity.

Support Unit 2. -- PS/2 Keyboard (DELL)

FCC ID

: GYUM90SK

Model No.

: AT101W

Serial No.

Data Cable

: SP0019 : Shielded, 1.5m

Support Unit 3. -- PS/2 Mouse (LOGITECH)

FCC ID

: DZL211029

Model No.

: M-S34

Serial No.

Data Cable

: SP0108

: Non-Shielded, 1.8m

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number

6 of 61

Issued Date

May 3, 2001

Report No. : C0D1908

Support Unit 4. -- Printer (HP)

FCC ID : DSI6XU2225 Model No. : 2225C Power Supply Type : Linear Power Cord : Non-Shielded Serial No. : SP0014 Data Cable : Shielded, 1.2m

Support Unit 5. -- Modem (ACEEX)

FCC ID : IFAXDM1414 Model No. : DM1414 Power Supply Type : Linear Power Cord : Non-Shielded Serial No. : SP0015 Data Cable : Shielded, 1.15m

Support Unit 6. - 1394 D8 (SONY)

FCC ID : N/A

Model No. : DCR-TRV310 Serial No. : SP0140

Data Cable : Non-Shielded, 1.4m

< EMS >

Support Unit 1. -- Personal Computer (DELL)

FCC ID : N/A Model No. : DCS Power Supply Type : Switching Power Cord : Non-Shielded Serial No. : SP0038 Data Cable : Shielded

Remark : This support device was tested to comply with FCC standards and

authorized under a declaration of conformity.

Support Unit 2. -- Keyboard (DELL)

FCC ID : GYUM92SK Model No. : AT101(DE8M) Serial No. : SP5486 Data Cable : Shielded, 1.9m

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number

: 7 of 61

Issued Date

: May 3, 2001



Support Unit 3. -- PS/2 Mouse (PRIMAX)

FCC ID : EMJMUSJQ Model No. : MUS9J Serial No. : SP0045 Data Cable : Shielded, 1.7m

Support Unit 4. -- VCD Player (Will)

FCC ID : N/A Model No. : LV-918 Serial No. : SP0140

Data Cable : Non-Shielded, 1.7m

SPORTON International Inc.

TEL: 886-2-2696-2468

FAX : 886-2-2696-2255

Page Number Issued Date

: May 3, 2001

8 of 61



#### 3. Test Software

Two executive programs, EMITEST.EXE & WINFCC.EXE under WIN 98, which generate a complete line of continuously repeating " H " pattern were used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H" messages to the monitor, and the monitor displays " H" patterns on the screen.
- d. The PC sends " H" messages to the printer, then the printer prints them on the paper.
- e. The PC sends "H" messages to the modem.
- f. The PC sends " H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

#### < EMS >


Two executive programs, EMITEST.EXE & WINFCC.EXE under WIN 98, which generate a complete line of continuously repeating " H " pattern were used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H" messages to the monitor, and the monitor displays " H" patterns on the screen.
- d. The PC sends " H" messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H" messages to the modem.
- f. The PC sends " H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

During testing, the "Video Play" was executed to play video.

Report No. : C0D1908



#### 4. General Information of Test

#### 4.1 Test Facility

#### < EMI >

This test was carried out by SPORTON International Inc.

Test Site Location

: No. 3, Lane 238, Kang Lo Street, Nei Hwu District,

Taipei 11424, Taiwan, R.O.C. TEL: 886-2-2631-4739 FAX: 886-2-2631-9740

< EMS >

This test was carried out by SPORTON International Inc.

Test Site Location

: No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,

Taipei Hsien, Taiwan, R.O.C. TEL: 886-2-2601-1640 FAX: 886-2-2601-1695

#### 4.2 Standard for Methods of Measurement

EMI Test (conduction and radiation) : European Standard EN 55022 Class A

Harmonics Test Voltage Fluctuations Test

: European Standard EN 61000-3-2.

**EMS** Test

European Standard EN 61000-3-3. European Standard EN 55024:1998.

(ESD: EN 61000-4-2, RS: EN 61000-4-3, EFT: EN 61000-4-4, SURGE: EN 61000-4-5, CS: EN 61000-4-6, Power Frequency Magnetic Field: EN 61000-4-8, DIPS: EN 61000-4-11)

#### 4.3 Test in Compliance with

EMI Test (conduction and radiation) : European Standard EN 55022 Class A Harmonics Test

: European Standard EN 61000-3-2.

Voltage Fluctuations Test **EMS** Test

European Standard EN 61000-3-3 European Standard EN 55024:1998.

(ESD: EN 61000-4-2, RS: EN 61000-4-3, EFT: EN 61000-4-4, SURGE: EN 61000-4-5, CS: EN 61000-4-6, Power Frequency Magnetic Field: EN 61000-4-8, DIPS: EN 61000-4-11)

#### 4.4 Frequency Range Investigated

- a. Conducted emission test: from 150 kHz to 30 MHz
- b. Radiated emission test: from 30 MHz to 1,000 MHz
- c. Radio frequency electromagnetic field immunity test: 80-1000 MHz.

#### 4.5 Test Distance

The test distance of radiated emission test from antenna to EUT is 10 M.

The test distance of radio frequency electromagnetic field immunity test from antenna to EUT is 3 M.

SPORTON International Inc.


TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number

: 10 of 61

Issued Date

: May 3, 2001

Report No. : C0D1908



#### 5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz on the 230V AC power and return leads of the EUT according to the methods defined in European Standard EN 55022 Clause 9. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position producing maximum conducted emissions.

#### 5.1 Description of Major Test Instruments

• Test Receiver (R&S ESH3)
Attenuation 0 dB

 Start Frequency
 0.15 MHz

 Stop Frequency
 30 MHz

 IF Bandwidth
 9 KHz

SPORTON International Inc.
TEL: 886-2-2696-2468

FAX : 886-2-2696-2255

Page Number

: 11 of 61

Issued Date

: May 3, 2001

Report No.: C0D1908




#### 5.2 Test Procedures

- a. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The CISPR states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and/or average methods and reported.



## 5.3 Typical Test Setup Layout of Conducted Powerline

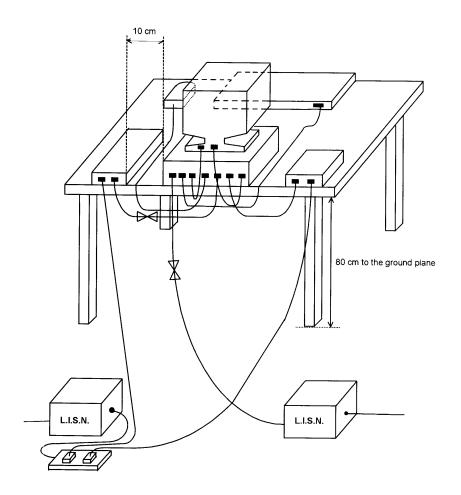

SPORTON International Inc.


TEL: 886-2-2696-2468 FAX: 886-2-2696-2255

Page Number

13 of 61

Issued Date

May 3, 2001



#### 5.4 Test Result of AC Powerline Conducted Emission

5.4.1 Test mode : 1024 x 768, 69K/85Hz

Frequency Range of Test : from 150 kHz to 30 MHz

 Temperature : 23°C · Relative Humidity : 51 % • Test Date : Apr. 27, 2001

#### The Conducted Emission test was passed at minimum margin <u>LINE 0.175 MHz / 49.20 dBuV</u>.

Freq. Line		Meter	Reading			Lin	nits		Ma	rain
or	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.
(MHz) Neutral	(dBuV)	(dBuV)	(uV)	(uV)	(dBuV)	(dBuV)	(uV)	(uV)	(dB)	(dB)
0.175 L	54.20	49.20	512.86	288.40	79.00	66.00	8912.51	1995.26	-24.8	-16.8
0.235 L	48.30	46.80	260.02	218.78	79.00	66.00	8912.51	1995.26	-30.7	-19.2
0.300 L	41.20	36.50	114.82	66.83	79.00	66.00	8912.51	1995.26	-37.8	-29.5
0.177 N	51.60	47.20	380.19	229.09	79.00	66.00	8912.51	1995.26	-27.4	-18.8
0.236 N	40.20	36.50	102.33	66.83	79.00	66.00	8912.51	1995.26	-38.8	-29.5
0.301 N	33.20	29.60	45.71	30.20	79.00	66.00	8912.51	1995.26	-45.8	-36.4

Test Engineer : \_\_\_\_\_\_\_

LOUIS LIN



5.4.2 Test mode : AV INPUT

Frequency Range of Test: from 150 kHz to 30 MHz

Temperature: 23°CRelative Humidity: 51 %Test Date: Apr. 27, 2001

### The Conducted Emission test was passed at minimum margin $\underline{\text{NEUTRAL 0.177 MHz}}/\underline{\text{46.50 dBuV}}.$

Freq. Line	!	Meter	Reading			Lim	nits		Ma	rgin
or	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.	Q.P.	A.V.
(MHz) Neutr	al (dBuV)	(dBuV)	(uV)	(uV)	(dBuV)	(dBuV)	(uV)	(uV)	(dB)	(dB)
0.181 L	50.20	46.20	323.59	204.17	79.00	66.00	8912.51	1995.26	-28.8	-19.8
0.231 L	40.80	34.50	109.65	53.09	79.00	66.00	8912.51	1995.26	-38.2	-31.5
0.291 L	39.10	34.60	90.16	53.70	79.00	66.00	8912.51	1995.26	-39.9	-31.4
0.177 N	51.60	46.50	380.19	211.35	79.00	66.00	8912.51	1995.26	-27.4	-19.5
0.238 N	46.50	42.90	211.35	139.64	79.00	66.00	8912.51	1995.26	-32.5	-23.1
0.349 N	39.80	34.10	97.72	50.70	79.00	66.00	8912.51	1995.26	-39.2	-31.9

Test Engineer: Lusico


LOUIS LIN



#### 5.5 Photographs of Conducted Powerline Test Configuration

 $\bullet\ \ \,$  The photographs show the configuration that generates the maximum emission.

1024 x 768, 69K/85Hz

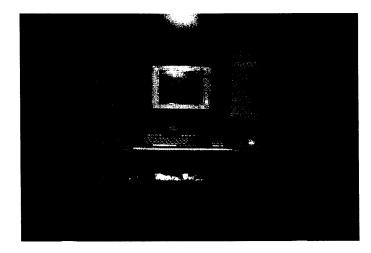

FRONT VIEW




REAR VIEW

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number Issued Date

ımber : 16 of 61


: May 3, 2001





AV INPUT

FRONT VIEW

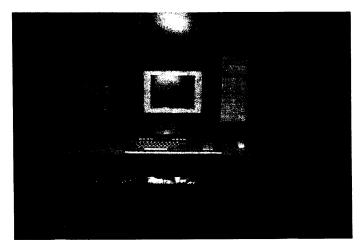



REAR VIEW

SPORTON International Inc. TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number

: 17 of 61

Issued Date

: May 3, 2001



#### 6. Test of Radiated Emission

Radiated emissions from 30 MHz to 1000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in European Standard EN 55022, Clause 10. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

#### 6.1 Description of Major Test Instruments

Amplifier (HP 8447D) Attenuation 0 dB

RF Gain 25 dB

Signal Input 0.1 MHz to 1.3 GHz

 Spectrum Analyzer (ADVANTEST R3261C)

Attenuation 0 dB Start Frequency 30 MHz Stop Frequency 1000 MHz Resolution Bandwidth 1 MHz Video Bandwidth 1 MHz

Signal Input 9 KHz to 2.6 GHz Report No.: C0D1908



#### 6.2 Test Procedures

a. The EUT was placed on a rotatable table top 0.8 meter above ground.

b. The EUT was set 10 meters from the interference-receiving antenna which was mounted on the top of a variable height antenna tower.

c. The table was rotated 360 degrees to determine the position of the highest radiation.

d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.

e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.

Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

SPORTON International Inc.

TEL: 886-2-2696-2468

FAX: 886-2-2696-2255

Page Number


19 of 61

Issued Date

May 3, 2001

Report No.: C0D1908

#### 6.3 Typical Test Setup Layout of Radiated Emission

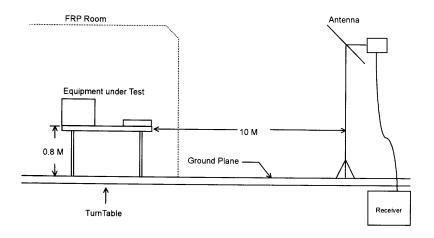

SPORTON International Inc.
TEL: 886-2-2696-2468
FAX: 886-2-2696-2255

Page Number 20 of 61

Issued Date : May 3, 2001



#### 6.4 Test Result of Radiated Emission

6.4.1 Test mode : 1024 x 768, 69K/85Hz

Frequency Range of Test : from 30 MHz to 1000 MHz

Test Distance : 10 M Temperature : 24°C • Relative Humidity : 62 % · Test Date : Apr. 9, 2001

• Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin:

VERTICAL 164.895 MHz / 36.88 dBuV Antenna Height 2 Meter , Turntable Degree 180 °.

Frequency	Polarity	Antenna Factor	Cable Loss	Reading	Limit	ts	Emission	Level	Margin
(MHz)	· oldility	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)
164.885	Н	9.66	1.54	23.88	40.00	100.00	35.08	56.75	-4.92
220.000	Н	10.70	1.72	22.36	40.00	100.00	34.78	54.83	-5.22
70.828	V	6.46	0.96	28.54	40.00	100.00	35.96	62.81	-4.04
164.895	V	9.66	1.54	25.68	40.00	100.00	36.88	69.82	-3.12
256.800	V	12.77	1.99	28.27	47.00	223.87	43.03	141.74	-3.97
268.800	V	13.15	1.98	26.30	47.00	223.87	41.43	117.90	-5.57

Test Engineer: \_\_\_\_(lockrites

Castries Huang



6.4.2 Test mode : AV INPUT

Frequency Range of Test: from 30 MHz to 1000 MHz

 Test Distance : 10 M • Temperature : 24°C · Relative Humidity: 62 % Test Date : Apr. 9, 2001

• Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

#### The Radiated Emission test was passed at minimum margin:

### VERTICAL 41.764 MHz / 36.03 dBuV Antenna Height 1 Meter , Turntable Degree 180 °.

Frequency	Dolomb.	Antenna	Cable	Reading	Limi	ts	Emission	Level	Margin
(MHz)	Polarity	Factor (dB/m)	Loss (dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)
187.430	Н	9.49	1.62	23.83	40.00	100.00	34.94	55.85	-5.06
470.400	Н	17.20	2.55	21.37	47.00	223.87	41.12	113.76	-5.88
41.764	V	13.92	0.81	21.30	40.00	100.00	36.03	63.31	-3.97
45.224	V	12.62	0.80	19.31	40.00	100.00	32.73	43.30	-7.27
81.208	V	7.29	1.08	26.97	40.00	100.00	35.34	58.48	-4.66
264.000	V	12.99	2.00	25.10	47.00	223.87	40.09	101.04	-6.91

Test Engineer : Westiles


Castries Huang




#### 6.5 Photographs of Radiated Emission Test Configuration

The photographs show the configuration that generates the maximum emission.

1024 x 768, 69K/85Hz

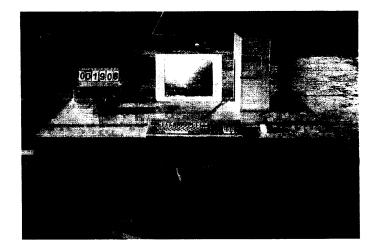

FRONT VIEW

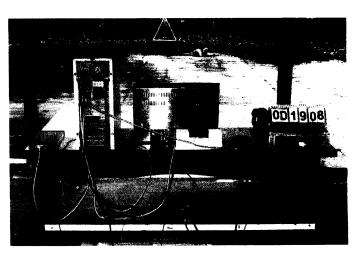

REAR VIEW


SPORTON International Inc. TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number : 23 of 61

Issued Date : May 3, 2001




AV INPUT

FRONT VIEW

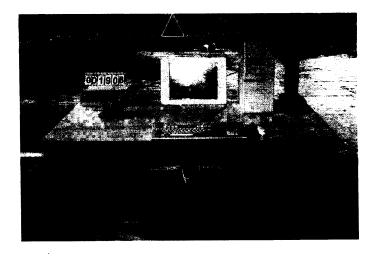

REAR VIEW

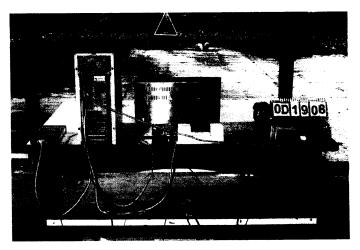

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number

: 24 of 61

Issued Date

: May 3, 2001



#### 7. Harmonics Test

#### 7.1 Standard

• Standard : EN 61000-3-2:1995/A12:1996/A13:1997/A1:1998/A2:1998

#### 7.2 Test Procedure

The measured values of the harmonics components of the input current, including line current and neutral current, shall be compared with the limits given in Clause 7 of EN 61000-3-2.

#### 7.3 Test Equipment Settings

Line Voltage : 230 V

Line Frequency : 50 Hz

Device Class : D


Current Measurement Range : High

Measurement Delay: 10.0 seconds

Test Duration : 2.00 minutes

Class determination Pre-test Duration: 10.00 seconds

#### 7.4 Test Setup

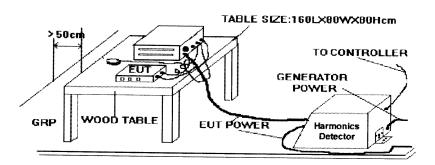

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number : 25 of 61

Issued Date : May 3, 2001



#### 7.5 Current Harmonics Test

#### 7.5.1 Test Data Of Current Harmonics

FINAL TEST RESULT : PASS
 Fundamental Current : 0.169 A
 Real Power : 36.9 W
 Power Factor : 0.427
 Percent in Envelope : 100.0 %
 Temperature : 27 °C
 Relative Humidity : 49% RH
 Test Date : Apr. 30, 2001


Harmonic Number	Standard Limit (A Ems)	Cursor Value (A rms)	Cursor Value (%% Limit)	Mean Value (A rms)	Mean Value (%% Limit)	Mas. Span Value (A rms) ('
Bana.	ver ver men men en en engelsen ste oggeste st	0.1682	20 20 Tr (0.00) (0.00) (0.00) (0.00) (0.00)	0.1698	91 915 907 709 140 915 906 706 107 981 88K	0.1697
3		0.0012		0.0012		6.0019
3	8.3000	0.1488	€.5	0.1494	6.5	0.1501
4		0.0011		0.0009	***	0.0016
5	1.1400	0.1419	12.4	0.1424	12,5	0.1430
6		0.0006		0.0004		0.0009
?	9.7960	0.1324	17.2	0.1324	17.2	0.1332
9		0.0005		0.0006		0.0010
9	9.4999	0.1204	30.1	0.1262	36.0	0.1206
#0		0.0007		9.0065		0.0008
21	9.3360	0.1071	32.4	9.1073	32.5	0.1076
12		0.0005		0.0003		0.6007
13	0.2100	0.0926	44.1	0.0927	44.1	0.0931
1.4		0.0005		0.0003		0.0008
15	0.1500	0.0780	52.0	0.0778	51.9	0.0783
1.5		0.0005		0.0004		0.0000
4.7	0.1324	0.0638	48.2	0.0635	48.0	0.0640
1.9		0.0005		0.0005		0.0009
1.9	0.1184	0.0507	42.8	0.0503	42.5	0.0509
20		0.0006		0.0065		0.0009
2	0.1671	0.0392	36.6	0.0390	36.4	0.0397
22		0.0007		0.0005		0.0009
2.3	0.3978	0.0302	30.8	9.0360	30.7	0.0306
2:4		0.0006		9.0096		0.0010
25	6.0900	0.0240	26.6	0.0237	26.4	0.0241
36		0.0005		0.0005		0.0009
27	0.0833	0.0201	24.1	0.0199	23.9	0.0202
8.8		0.0006		0.0005		0.8608
3.9	6.0776	0.0160	23.1	0.0178	22.9	0.0161
5.0		0.0005		0.0005		0.0008
5.1	0.0736	0.0165	22.7	0.0164	22.6	0.0166
32		0.0004		0.0004		0.0006
30	0.0682	0.0149	21.9	0.0149	21.8	0.0151
3.4		0.0003		0.0003		0.0005
35	0.0643	0.0132	20.5	0.0131	20.3	0.0133
36		0.0003		0.0002		0.0004
30	0.5609	0.0110	18.1	0.0109	17.9	0.0111
3.6		0.0002		0.0001		0.0004
3.9	00577	0.0008	15.3	0.0087	15.0	0.0089
40		0.0001		0.0001		0.8003

Test Engineer : Bruce
Bruce Huang

**SPORTON International Inc.**TEL: 886-2-2696-2468
FAX: 886-2-2696-2255

Page Number Issued Date

: 26 of 61 : May 3, 2001



#### 8. Voltage Fluctuations Test

#### 8.1 Standard

Standard : EN 61000-3-3:1995/A1:1998

#### 8.2 Test Procedure

The equipment shall be tested under the conditions of Clause 5.


The total impedance of the test circuit, excluding the appliance under test, but including the internal impedance of the supply source, shall be equal to the reference impedance. The stability and tolerance of the reference impedance shall be adequate to ensure that the overall accuracy of  $\pm 8\%$  is achieved during the whole assessment procedure.

#### 8.3 Test Equipment Settings

Line Voltage: 230 V Line Frequency: 50 Hz

Measurement Delay: 10.0 seconds Pst Integration Time : 10 minutes Pst Integration Periods : 1 Test Duration: 00:10:00 minutes

#### 8.4 Test Setup

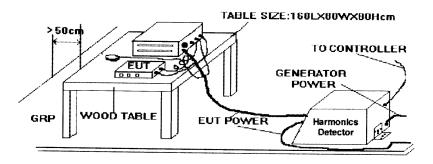

SPORTON International Inc.

TEL: 886-2-2696-2468

FAX : 886-2-2696-2255

Page Number

27 of 61

Report No. : C0D1908

Issued Date

May 3, 2001



#### 8.5 Test Result Of Voltage Fluctuation And Flicker Test

#### 8.5.1 Test Data Of Voltage Fluctuation And Flicker

FINAL TEST RESULT : PASS • Temperature : 27 ℃ • Relative Humidity : 49% RH Test Date : Apr. 30, 2001

	Pst	Plt	Dc (%)	Dmax (%)	Dt (%)
Reading	0.070	0.00	0.00	0.00	0.00
Limit	0.65	1.0	3.0	4.0	3.0

Test Engineer : Sruce
Bruce Huang

SPORTON International Inc.

TEL: 886-2-2696-2468

FAX: 886-2-2696-2255

Page Number

28 of 61


Issued Date

May 3, 2001



#### 8.5.2 Test Graph Of Voltage Fluctuation And Flicker

#### Pst Histogram

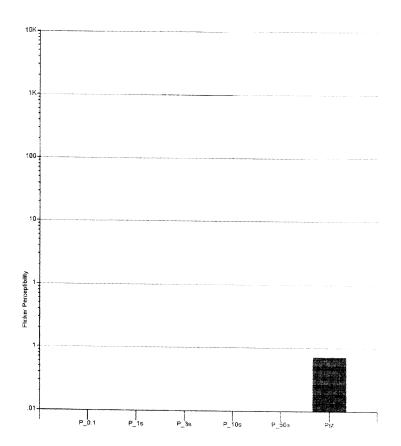

SPORTON International Inc.


TEL: 886-2-2696-2468 FAX: 886-2-2696-2255

Page Number

Issued Date


May 3, 2001

: 29 of 61






#### 8.6 Photographs Of Harmonics Test, Voltage Fluctuation And Flicker Test

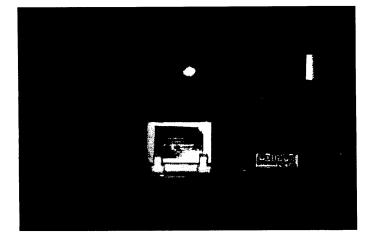

FRONT VIEW

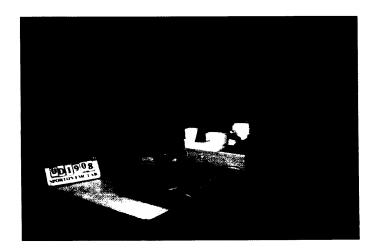


REAR VIEW

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number Issued Date

umber : 30 of 61

d Date : May 3, 2001



9. Electrostatic Discharge Immunity Test (ESD)

Pass Performance Criteria : B

Basic Standard : EN61000-4-2:1995 Product Standard : EN55024:1998 : 3 for air discharge,


: 2 for contact discharge

Tested voltage :  $\pm 2 / \pm 4 / \pm 8$  KV for air discharge,

: ±2 / ±4 KV for contact discharge

Temperature : 25 °C Relative Humidity : 48 % Test Date : Apr. 30, 2001

#### 9.1 Test setup

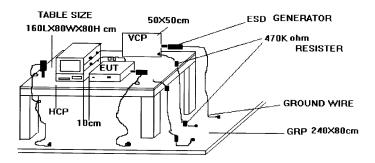

The test setup consists of the test generator, EUT and auxiliary instrumentation necessary to perform  $\label{eq:discrete_policy} \textbf{DIRECT and INDIRECT application of discharges to the EUT as applicable, in the follow manner:}$ 

- a. CONTACT DISCHARGE to the conductive surfaces and to coupling plane;
- b. AIR DISCHARGE at insulating surfaces.

The preferred test method is that of type tests performed in laboratories and the only accepted method of demonstrating conformance with this standard. The EUT was arranged as closely as possible to arrangement in final installed conditions.

SPORTON International Inc.

TEL: 886-2-2696-2468

FAX: 886-2-2696-2255

Page Number

Issued Date

31 of 61 : May 3, 2001



#### 9.2 Test Setup for Tests Performed in Laboratory

A ground reference plane was provided on the floor of the test site. It was a metallic sheet (copper or aluminum) of 0.25 mm, minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. In the SPORTON EMC LAB., we provided 1 mm thickness aluminum ground reference plane or 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 1 m x 1 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system.

The EUT was arranged and connected according to its functional requirements. A distance of 1m minimum was provided between the EUT and the wall of the lab. and any other metallic structure. In cases where this length exceeds the length necessary to apply the discharges to the selected points, the excess length shall, where possible, be placed non-inductively off the ground reference plane and shall not come closer than 0.2m to other conductive parts in the test setup.

Where the EUT is installed on a metal table, the table was connected to the reference plane via a cable with a 470k ohm resister located at each end, to prevent a build-up of charge. The test setup was consist a wooden table, 0.8m high, standing on the ground reference plane. A HCP, 1.6 m x 0.8 m, was placed on the table. The EUT and cables was isolated from the HCP by an insulating support 0.5 mm thick. The VCP size, 0.5 m x 0.5 m.

SPORTON International Inc.

TEL: 886-2-2696-2468

FAX: 886-2-2696-2255

Page Number

32 of 61

Issued Date

May 3, 2001

Report No.: C0D1908



#### 9.3 ESD Test Procedure

- a. In the case of air discharge testing the climatic conditions shall be within the following ranges:
  - ambient temperature: 15℃ to 35℃;
  - relative humidity: 30% to 60%;
  - atmospheric pressure: 68 KPa (680 mbar) to 106 KPa (1060 mbar).
- b. Test programs and software shall be chosen so as to exercise all normal modes of operation of the EUT. The use of special exercising software is encouraged, but permitted only where it can be shown that the EUT is being comprehensively exercised.
- c. The test voltage shall be increased from the minimum to the selected test severity level, in order to determine any threshold of failure. The final severity level should not exceed the product specification value in order to avoid damage to the equipment.
- d. The test shall be performed with single discharges. On preselected points at least ten single discharges (in the most sensitive polarity) shall be applied.
- e. For the time interval between successive single discharges an initial value of one second is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.
- f. In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.
- g. In the case of painted surface covering a conducting substrate, the following procedure shall be adopted :
  - If the coating is not declared to be an insulating coating by the equipment manufacturer, then the
    pointed tip of the generator shall penetrate the coating so as to make contact with the conducting
    substrate.
  - Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
  - The contact discharge test shall not be applied to such surfaces.
- h. In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then retriggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.



#### 9.4 Test Severity Levels

#### 9.4.1 Contact Discharge

Level	Test Voltage (KV) of Contact discharge
1	±2
2	± <b>4</b>
3	±6
4	±8
X	Specified

Remark : "X" is an open level.

#### 9.4.2 Air Discharge

Level	Test Voltage (KV) of Air Discharge
1	±2
2	± <b>4</b>
3	±8
4	±15
Х	Specified

Remark: "X" is an open level.

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number

: 34 of 61

Issued Date

May 3, 2001



#### 9.5 Test Points

#### 9.5.1 Test Result of Air Discharge


Test Point	Voltage	Tested No.	Observation	Result
Case	±2 / ±4 / ±8 KV	BY 10	NORMAL	PASS
DC Input jack	±2 / ±4 / ±8 KV	BY 10	NORMAL	PASS
AV port	±2 / ±4 / ±8 KV	BY 10	NORMAL	PASS
LCD	±2 / ±4 / ±8 KV	BY 10	NORMAL	PASS
Com1 Port	±2 / ±4 / ±8 KV	BY 10	NOR <b>M</b> AL	PASS
LED	±2 / ±4 / ±8 KV	BY 10	NORMAL	PASS
VGA port	±2 / ±4 / ±8 KV	BY 10	NORMAL	PASS



#### 9.5.2 Test Result of Contact Discharge


Polarity	Voltage	Tested No.	Observation	Result
Horizontal(At Front)	±2 / ±4 KV	BY 25	NORMAL	PASS
Horizontal (At Left)	±2 / ±4 KV	BY 25	NORMAL	PASS
Horizontal (At Right)	±2 / ±4 KV	BY 25	NORMAL	PASS
Horizontal (At Rear)	±2 / ±4 KV	BY 25	NORMAL	PASS
Vertical (At Front)	±2 / ±4 KV	BY 25	NORMAL	PASS
Vertical (At Left)	±2 / ±4 KV	BY 25	NORMAL	PASS
Vertical (At Right)	±2 / ±4 KV	BY 25	NORMAL	PASS
Vertical (At Rear)	±2 / ±4 KV	BY 25	NORMAL	PASS

Test Engineer : Bruce
BRUCE HUANG






#### 9.6 Photographs of Electrostatic Discharge Immunity Test

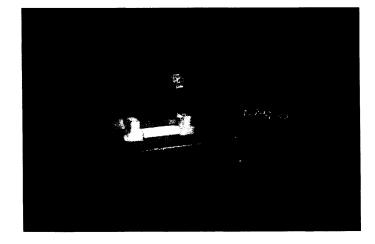

FRONT VIEW

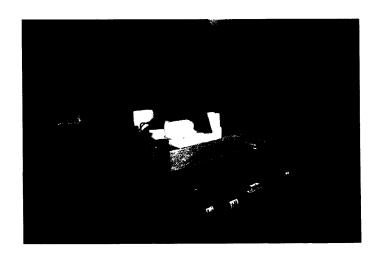

REAR VIEW

SPORTON International Inc. TEL: 886-2-2696-2468 FAX: 886-2-2696-2255

Page Number Issued Date

: 37 of 61 : May 3, 2001



#### 10. Radio Frequency Electromagnetic Field Immunity Test (RS)

· Pass Performance Criteria : A

Basic Standard
 Product Standard
 EN61000-4-3:1996
 EN55024:1998


Level

Frequency Range : 80-1000 MHz

Field Strength : 3 V/m (Modulated 80% AM)

Temperature : 22 °C
Relative Humidity : 49 %
Test Date : Apr. 30, 2001

#### 10.1 Test setup



NOTE: The SPORTON 7m  $\times$  4m  $\times$  4m semichoic chamber is compliance with the sixteen points uniform field requirement as stated in IEC 1000-4-3 Section 6.2.

The procedure defined in this part requires the generation of electromagnetic fields within which the test sample is placed and its operation observed. To generate fields that are useful for simulation of actual (field conditions may require significant antenna drive power and the resultant high field strength levels. To comply with local regulations and to prevent biological hazards to the testing personnel, it is recommended that these tests be carried out in a shielded enclosure or semichoic chamber.

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number

: 38 of 61

Issued Date

: May 3, 2001



#### 10.2 Test Procedure

- a. The equipment to be tested is placed in the center of the enclosure on a wooden table. The equipment is then connected to power and signal leads according to pertinent installation instructions.
- b. The bilog antenna which is enabling the complete frequency range of 80-1000 MHz is placed 3m away from the equipment. The required field strength is determined by placing the field strength meter(s) on top of or directly alongside the equipment under test and monitoring the field strength meter via a remote field strength indicator outside the enclosure while adjusting the continuous-wave to the applicable
- c. The test is normally performed with the antenna facing the most sensitive side of the EUT. The polarization of the field generated by the biconical antenna necessitates testing each position twice once with the antenna positioned vertically and again with the antenna positioned horizontally. The circular polarization of the field from the log-spiral antenna makes a change of position of the antenna unnecessary.
- d. At each of the above conditions, the frequency range is swept 80-1000 MHz, pausing to adjust the R.F. signal level or to switch oscillators and antenna. The rate of sweep is in the order of 1.5\*10-3 decades/s. The sensitive frequencies or frequencies of dominant interest may be discretely analyzed.

#### 10.3 Test Severity Levels

Frequency Band: 80-1000 MHz

Level	Test field strength (V/m)	
1	1	
2	3	
3	10	
x	Specified	

Remark: "X" is an open class.

Test Engineer : \_

**BRUCE HUANG** 

SPORTON International Inc.

TEL: 886-2-2696-2468


FAX: 886-2-2696-2255

Page Number

39 of 61


Issued Date

May 3, 2001






#### 10.4 Photographs of Radio Frequency Electromagnetic Field Immunity Test

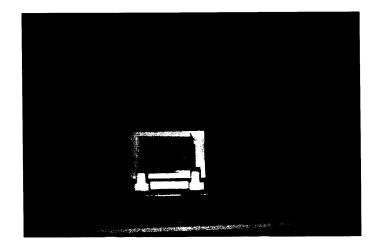

FRONT VIEW

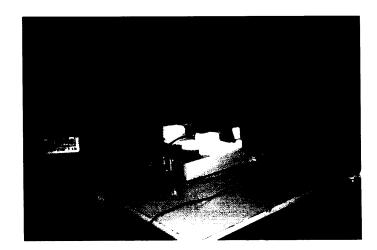

REAR VIEW


SPORTON International Inc. TEL: 886-2-2696-2468 FAX: 886-2-2696-2255

Page Number

40 of 61

Issued Date

: May 3, 2001




#### 11. Electrical Fast Transient/Burst Immunity Test (EFT/BURST)

· Pass Performance Criteria : B

 Basic Standard : EN61000-4-4:1995 Product Standard
 EN55024:1998
 Level
 Tested voltage
 Temperature
 Relative Humidity
 EN55024:1998
 on Power Supply -- 2
 on Power Supply -- 0.5/1.0 KV
 49%

: Apr. 30, 2001 Test Date

#### 11.1 Test setup

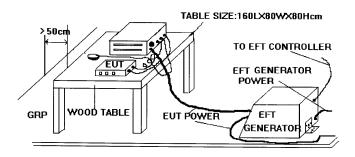

SPORTON International Inc. TEL: 886-2-2696-2468

FAX: 886-2-2696-2255

Page Number

41 of 61

Issued Date

May 3, 2001



The EUT was placed on a ground reference plane and was insulated from it by an insulating support about

0.1m thick. If the EUT is table-top equipment, it was located approximately 0.8m above the GRP. The GRP was a metallic sheet (copper or aluminum) of 0.25 mm ,minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. It shall project beyond the EUT by at least 0.1m on all sides and connected to the protective earth. In the SPORTON EMC LAB, we provided 1 mm thickness aluminum ground reference plane or 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 1 m x 1 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system. The EUT was arranged and connected according to its functional requirements. The minimum distance between the EUT and other conductive structures, except the GRP. beneath the EUT, was more than 0.5 m. Using the coupling clamp, the minimum distance between the coupling plates and all other conductive structures, except the GRP, beneath the EUT, was

more than 0.5 m. The length of the signal and power lines between the coupling device and the EUT was 1m or less.

11.2 Test on Power Line

a. The EFT/B-generator was located on the GRP.. The length from the EFT/B-generator to the EUT as not

b. The EFT/B-generator provides the ability to apply the test voltage in a non-symmetrical condition to the power supply input terminals of the EUT.

11.3 Test on Communication Lines

a. The coupling clamp is composed of a clamp unit for housing the cable (length more than 3 m), and was placed on the GRP..

b. The coupling clamp provides the ability of coupling the fast transient/bursts to the cable under test.

SPORTON International Inc.

TEL: 886-2-2696-2468

FAX: 886-2-2696-2255

Page Number

42 of 61

Issued Date

May 3, 2001

Report No.: C0D1908



#### 11.4 Test Procedure

a. In order to minimize the effect of environmental parameters on test results, the climatic conditions when test is carrying out shall comply with the following requirements:

- relative humidity: 45% to 75%;

- atmospheric pressure : 68 KPa (680 mbar) to 106 KPa (1060 mbar).

- b. In order to minimize the effect of environmental parameters on test results, the electromagnetic environment of the laboratory shall not influence the test results.
- c. The variety and diversity of equipment and systems to be tested make it difficult to establish general criteria for the evaluation of the effects of fast transients/bursts on equipment and systems.
- d. The test results may be classified on the basic of the operating conditions and the functional specification of the equipment under test, according to the following performance criteria:
  - Normal performance within the specification limits.
  - Temporary degradation or loss of function or performance which is self-recoverable.
  - Temporary degradation or loss of function or performance which requires operator intervention or system reset.
  - Degradation or loss of function which is not recoverable due to damage of equipment (components).

SPORTON International Inc.

TEL: 886-2-2696-2468

FAX: 886-2-2696-2255

Page Number Issued Date

43 of 61

May 3, 2001



#### 11.5 Test Severity Levels

The following test severity levels are recommended for the fast transient/burst test :

	Open circuit output test voltage $\pm~10\%$				
Level	On Power Supply	On I/O signal, data and control line			
1	0.5 KV	0.25 KV			
2	1.0 KV	0.50 KV			
3	2.0 KV	1.00 KV			
4	4.0 KV	2.00 KV			
X	Specified	Specified			


Remark: "X" is an open level. The level is subject to negotiation between the user and the manufacturer or is specified by the manufacturer.

Test Engineer: Bruce


BRUCE HUANG



#### 11.6 Photographs of Electrical Fast Transient/BURST Immunity Test

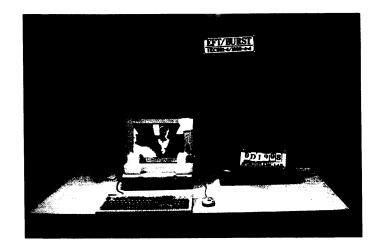

FRONT VIEW

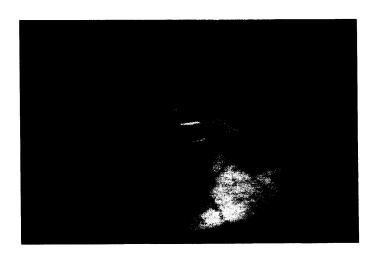

REAR VIEW

SPORTON International Inc.
TEL: 886-2-2696-2468
FAX: 886-2-2696-2255

Page Number : 45 of 61 Issued Date : May 3, 2001



#### 12. SURGE IMMUNITY TEST

Pass performance Criteria : A

Basic Standard
 EN61000-4-5 (1995)
 Product Standard
 Input Voltage, Frequency
 Surge wave form (Tr/Th)
 1, 2/50 (8/20) µs

• Level : 3

• Test Voltage :  $\pm 1.0 / \pm 2.0 \text{ KV}$ 

Temperature : 27 °C
 Relative Humidity : 48 %
 Test Date : Apr. 30, 2001

#### 12.1 TEST RECORD

			Phase Angle		Test		
Voltage (KV)	Test Location	Polarity	0°	90°	180°	270°	Result
1 KV	L - N	+	Α	Α	А	Α	PASS
		-	Α	Α	Α	Α	<u>PASS</u>
2 KV	L - PE	+	Α	Α	А	Α	PASS
			Α	Α	Α	Α	<u>PASS</u>
	N - PE	+	Α	Α	Α	Α	<u>PASS</u>
		_	Α	Α	Α	Α	<u>PASS</u>

<sup>#</sup> Remark : PE = DC output GND

SPORTON International Inc.

TEL: 886-2-2696-2468

FAX: 886-2-2696-2255

Page Number

46 of 61

Issued Date

May 3, 2001



#### 12.2 TEST LEVEL

Level	Open-circuit test voltage, ± 10%, KV
1	0.5
2	1.0
3	2.0
4	4.0
×	Specified
NOTE wis as asset of	

NOTE - x is an open class.

This level can be specified in the product specification.

#### **12.3 TEST PROCEDURE**

a. Climatic conditions

The climatic conditions shall comply with the following requirements :

-- ambient temperature : 15  $^{\circ}\mathrm{C}$  to 35  $^{\circ}\mathrm{C}$ 

-- relative humidity : 10 % to 75 %

-- atmospheric pressure : 86 kPa to 106 kPa ( 860 mbar to 1060 mbar )

b. Electromagnetic conditions

The electromagnetic environment of the laboratory shall not influence the test results.

- c. The test shall be performed according the test plan that shall specify the test set-up with
  - -- generator and other equipment utilized;
  - test level ( voltage/current );
  - -- generator source impedance;
  - internal or external generator trigger;
  - -- number of tests: at least five positive and five negative at the selected points;
  - -- repetition rate : maximum 1/min.
  - -- inputs and outputs to be tested;
  - -- representative operating conditions of the EUT;
  - -- sequence of application of the surge to the circuit;

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number Issued Date 47 of 61

issued Dati

: May 3, 2001

Report No. : C0D1908



phase angle in the case of a.c. power supply;

actual installation conditions, for example :

AC: neutral earthed,

DC: (+) or (-) earthed to simulated the actual earthing conditions.

- If not otherwise specified the surges have to be applied synchronized to the voltage phase at the zero-crossing and the peak value of the a.c. voltage wave ( positive and negative ).
- e. The surges have to be applied line to line and line(s) and earth. When testing line to earth, the test voltage has to be applied successively between each of the lines and earth, if there is no other specification.
- The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore the test voltage has to be increased by steps up to the test level specified  $\varepsilon$ the product standard or test plan.
- g. All lower levels including the selected test level shall be satisfied. For testing the secondary protection, the output voltage of the generator shall be increased up to the worstcase voltage breakdown level ( let-through level ) of the primary protection.
- h. If the actual operating signal sources are not available, the may be simulated. Under  $r\varepsilon$ circumstances may the test level exceed the product specification. The test shall be carried our according the a test plan.
- To find all critical points of the duty cycle of the equipment, a sufficient number of positive arc negative test pulses shall be applied. For acceptance test a previously unstressed equipment shall be used to the protection devices shall be replaced.

Page Number

Issued Date


48 of 61

May 3, 2001

#### 12.4 OPERATING CONDITION


Full system

Test Engineer: Bruce
Bruce Huang






#### 12.5 Photographs of SURGE IMMUNITY TEST

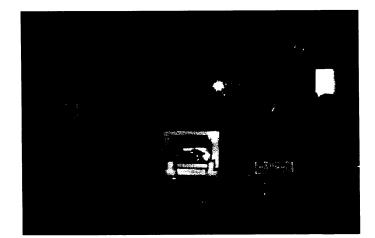

FRONT VIEW

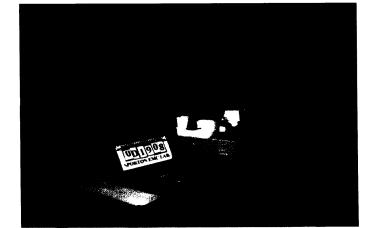

REAR VIEW

SPORTON International Inc. TEL: 886-2-2696-2468 FAX: 886-2-2696-2255

: 49 of 61 Page Number

Issued Date : May 3, 2001



13.CONDUCTED DISTURBANCES INDUCED BY RADIO-FREQUENCY FIELD IMMUNITY TEST (CS)

Pass performance Criteria : A

Basic Standard : EN61000-4-6 (1996) Product Standard : EN55024 :1998 Input Voltage, Frequency : AC 230V, 50Hz

Level

Test Voltage : 3 V/rms ( Modulated, 1KHz, 80%, AM )

Frequency Range : 0.15 MHz to 80 MHz

Temperature : 26° C Relative Humidity : 48 % Test Date : Apr. 30, 2001

#### 13.1 TEST LEVEL

Level	Voltage Level ( EMF ),			
1	1 V			
2	3 V			
3	10 V			
x	Specified			
NOTE - x is an open class.				
This level can be specified in the product specification.				

#### 13.2 OPERATING CONDITION

Full system

Bruce Test Engineer:

BRUCE HUANG

SPORTON International Inc.

TEL: 886-2-2696-2468

FAX: 886-2-2696-2255

Page Number

50 of 61

Report No. : C0D1908

Issued Date

May 3, 2001



#### 13.3 TEST PROCEDURE

- The EUT shall be operated within its intended climatic conditions. The temperature and relative humidity should be recorded.
- b. This test method test can be performed without using a sell shielded enclosure. This is because the disturbance levels applied and the geometry of the setups are not likely to radiated a high amount of energy, especially at the lower frequencies. If under certain circumstances the radiated energy is too high, a shielded enclosure has to be used.
- c. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF-input ports of the coupling devices are terminated by a 50 ohm load resistor.
- d. Filters shall be used to prevent ( higher order or sub- ) harmonics form disturbing the EUT. A High-Pass Filter. 100KHz, ( HPF ) may be required with the test generator. The band stop characteristics of the Low-Pass Filters (LPF) shall be sufficient to suppress the harmonics down to the immunity level required within that band. These filters shall be inserted with the test generator before setting the test level.
- e. The frequency range is swept from 150 KHz to 230 MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1KHz sinewave pausing to adjust the RF-signal level or to switch coupling devices as necessary. The rate of sweep shall no exceed 1.5 x 10<sup>-3</sup> decades/s. Where the frequency is swept incrementally, the step size shall no exceed 1% of the start and thereafter 1% of the preceding frequency value.
- f. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies e.g. clock frequency(ies) and harmonics or frequencies of dominant interest shall be analyzed separately.
- g. An alternative test procedure may be adopted, wherein the frequency range is swept incrementally with a step size not exceeding 4% of the start ad thereafter 4% of the preceding frequency value. The test level should be at least twice the value of the specified test level.
- In cases of dispute, the test procedure using a step size not exceeding 1% of the start and thereafter
   of preceding frequency value shall take precedence.
- Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.
- j. The use of special exercising programs is recommended.
- k. Testing shall be performed according to a Test Plan, which shall be included in the test report.
- it may be necessary to carry out some investigatory testing in order to establish some aspects of the test plan.



## 14. Power Frequency Magnetic Field immunity tests

Pass performance Criteria : A


: EN61000-4-8 (1993) Basic Standard Product Standard : EN55024 :1998 • Input Voltage, Frequency : AC 230V, 50Hz

 Temperature : 27 °C 48 % Relative Humidity Test Date : Apr. 30, 2001

#### 14.1 TEST RECORD

Power Frequency Magnetic Field	Testing duration	Coil Orientation	Results	Remark
50Hz, 1A/m	1.0 Min	X-axis	Pass	Normal
50Hz, 1A/m	1.0 Min	Y-axis	Pass	Normal
50Hz, 1A/m	1.0 Min	Z-axis	Pass	Normal

#### 14.2 TEST SETUP

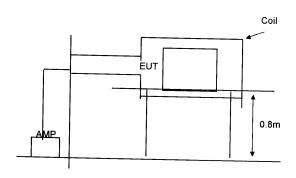

#### **14.3 OPERATING CONDITION**

Full system

Test Engineer : Bruce Huang

SPORTON International Inc.

TEL: 886-2-2696-2468


FAX : 886-2-2696-2255

Page Number


52 of 61 May 3, 2001



#### 14.4 Photographs of Power Frequency Magnetic Field immunity tests

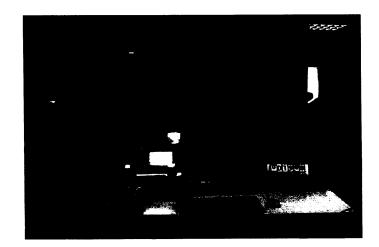

FRONT VIEW

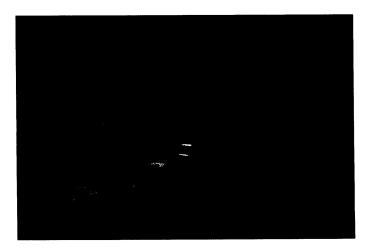

REAR VIEW

SPORTON International Inc. TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number : :

per : 53 of 61 e : May 3, 2001



#### 15. VOLTAGE DIPS AND VOLTAGE INTERRUPTIONS IMMUNITY TESTS

Pass performance Criteria : C for voltage interruption, A for voltage dips

Basic Standard : EN61000-4-11 (1994)

Product Standard

Product Standard : EN55024 :1998
 Input Voltage, Frequency : AC 230V, 50Hz

Temperature : 27 °C
 Relative Humidity : 48 %
 Test Date : Apr. 30, 2001

#### 15.1 TEST RECORD OF VOLTAGE INTERRUPTION

Voltage	Phase Angle		% Reduction	periods (s)
(V)	0 °	180 °		
230	С	С	>95%	250

#### 15.2 TEST RECORD OF VOLTAGE DIPS

Voltage	Phase Angle		% Reduction	periods (s)
(V)	0 °	180 °		
230	Α	Α	30	25
<b>23</b> 0	А	А	>95 %	0.5

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page Number

54 of 61 May 3, 200

Report No. : C0D1908

Issued Date

: May 3, 2001



#### 15.3 TESTING REQUIREMENT AND PROCEDURE

The test was based on EN 61 000-4-11 (1994)

#### **15.4 TEST CONDITIONS**

- 1. Source voltage and frequency : 230V / 50Hz, Single phase.
- 2. Test of interval : 10 sec.
- 3. Level and duration : Sequency of 3 dips/interrupts.
- 4. Voltage rise (and fall) time : 1 ~ 5  $\mu s.$
- 5. Test severity:

Voltage dip and Interrupt reduction (%)	Test Duration (ms)
30	500
60	100
100	10
100	80
100	5000

#### **15.5 OPERATING CONDITION**

Full system

Test Engineer : \_\_\_\_\_\_\_ Bruce Huang



## 15.6 Photographs of VOLTAGE DIPS AND VOLTAGE INTERRUPTIONS IMMUNITY TESTS



FRONT VIEW



REAR VIEW

SPORTON International Inc. TEL: 886-2-2696-2468 FAX: 886-2-2696-2255

Page Number

: 56 of 61

Issued Date

: May 3, 2001



#### Report No. : C0D1908 16. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	17.3	0.7
35	15.9	0.8
40	14.4	0.8
45	12.6	0.8
50	10.1	0.8
55	8.5	0.9
60	6.8	0.9
65	6.6	1.0
70	6.4	0.9
75	6.7	1.1
80	7.0	1.1
85	8.3	1.1
90	9.6	1.2
95	10.0	1.1
100	10.4	1.2
110	11.6	1.2
120	12.8	1.3
130	13.0	1.4
140	12.6	1.5
150	11.4	1.5
160	9.9	1.5
170	9.4	1.6
180	9.5	1.6
190	9.5	1.7
200	9.4	1.7
220	10.7	
240	11.9	1.7 1.8
260	12.9	2.0
280	13.5	
300	14.2	1.9
320	14.4	2.0
340	14.6	2.0
360	14.9	2.1
380	15.2	2.2
400	15.6	2.3
450		2.4
500	16.8	2.5
550	17.8	2.7
600	19.4	2.8
650	18.3	2.9
700	18.6	3.1
750	19.9	3.2
800	20.4	3.3
850	20.5	3.4
900	20.0	3.8
950	21.1	3.9
	21.6	3.8
1000	21.2	3.8

NHOP3

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255

Page Number

Issued Date

57 of 61 : May 3, 2001



## 17. List of Measuring Equipment Used <EMI>

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Test Receiver	R&S	ESH3	893495/013	9KHz – 30MHz	Jun. 19, 2000	Conduction
Spectrum Monitor	R&S	EZM	894987/011	-	Jun. 19, 2000	Conduction
LISN	EMCO	3810/2	9703-1838	50uH / 50 ohm	Sep. 01, 2000	Conduction
LISN	KYORITSU	KNW-407	8-1010-15	50uH / 50 ohm	Nov. 13, 2000	Conduction
Power Filter	CORCOM	MR12030	N/A	30A*2	N/A	Conduction
Spectrum Analyzer (site 3)	Advantest	R3261C	71720471	9KHz - 2.6GHz	Jan. 08, 2001	Radiation
Amplifier (Site 3)	HP	8447D	2944A08290	0.1MHz -1.3GHz	Nov. 21, 2000	Radiation
Bilog Antenna (Site 3)	CHASE	CBL6112A	2218	30MHz - 2GHz	Jan. 30, 2001	Radiation
Half-wave dipole antenna (Site 3)	EMCO	3121C	8912-1285	20MHz - 1GHz	Aug. 06, 2000	Radiation
Turn Table	EMCO	2080	9508-1805	0 ~ 360 degree	N/A	Radiation
Antenna Mast	EMCO	2075	9804-2151	1 m - 4 m	N/A	Radiation

**SPORTON International Inc.**TEL: 886-2-2696-2468
FAX: 886-2-2696-2255

Page Number Issued Date

58 of 61

Report No. : C0D1908

: May 3, 2001



(EMS)								
Instrument	Manufacturer	Model No.	Characteristics	Calibration Date	Remark			
ESD Simulator	KEYTEK	DN-10	N/A	May 30, 2000	ESD			
ESD Simulator KEYTEK		ESD-1	0 KV - 25 KV	May 30, 2000	ESD			
OMNI-Tip	KEYTEK	TPC-2	0 KV - 15 KV	Jul. 23, 2000	ESD			
Amplifier	AR	100W 1000M3	80 MHz - 1 GHz	N/A	RS			
Isotropic Field Probe	AR	FP3000A	10 KHz - 1 GHz	Jun. 19, 2000	RS			
IEEE-488 Interface AR		CP3000	N/A	N/A	RS			
System Interface EMC Automation		200	HP-IB INTERFACE	N/A	RS			
Power Meter EMC Automation		438A	100 KHz -4.2 GHz	N/A	RS			
Video Camera EMC Automatio		VCC-01	N/A	N/A	RS			
Signal Generator	НР	8648A	100 KHz - 1 GHz	Sep. 10, 2000	RS			
Signal Generator	R&S	SMX	100 KHz - 1 GHz	Nov. 06, 2000	RS			
Antenna	CHASE	CBL6121A	26 MHz - 1 GHz	Jun. 12, 2000	RS			
Amplifier	AR	75W 75A220	25MHz - 300MHz	Jun. 14, 2000	RS			
EFT Generator KEYTEK		CE-40	0 KV - 4.4 KV	Jul. 09, 2000	EFT			
Capacitive Clamp KEYTEK		CE-40-CCL	0 KV - 2 KV	Jun. 22, 2000	EFT			
Harmonic/Flicker HP		6843A	4800VA 90A / 48A PEAK	Nov. 14, 2000	Harmonics Flicker			
Combination Wave EMC PARTNER AG Generator Switzerland		MIG0603IN2	6 KV, 3 KA	Feb. 04, 2001	SURGE			
Conducted Immunity Test System FRANKONIA		CIT-10/W	100KHz ~ 266MHz	Jan. 09, 2001	cs			
agnetic field Antenna EMC PARTNER		MF-1000	0.5 up to 150A / m	Feb. 01. 2001	Magnetic			
MC Immunity Tester	EMC PARTNER AG Switzerland	TRANSIENT 1000	0 ~ 260 rms, 16A	Feb. 01, 2001	DIP			

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255

Page Number

59 of 61

issued Date

May 3, 2001



#### 18. Notice for Class A Product

Class A ITE is a category of all other ITE which satisfies the class A ITE limits but not the class B ITE limits Such equipment should not be restricted in its sale but the following warning shall be included in the instructions for use:

#### Warning

This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

SPORTON International Inc. TEL: 886-2-2696-2468 FAX: 886-2-2696-2255

Page Number

60 of 61 May 3, 2001

Issued Date

Report No. : C0D1908



19. Declaration of Conformity and the CE Mark

There are three possible procedures pertaining to the declaration of conformity:

- 19.1 Conformity Testing and Declaration of Conformity by the Manufacturer or His Authorized Representative Established within the Community or by an Importer.
  - Article 10 (1) of the EMC Directive,
  - § 3 (1) no. 2a of the EMC Act.
- 19.2 Declaration of Conformity Issued by the Manufacturer or His Authorized Representative Established within the Community or by an Importer Following Testing of the Product and Issued of an EC certificate of conformity by a competent body.
  - Article 10 (2) of the EMC Directive,
  - § 3 (1) no. 2b of the EMC Act.
- 19.3 Declaration of Conformity Issued by the Manufacturer or His Authorized Representative Established within the Community or by an Importer Following Testing and Certification of the Product by a Notified Body.
  - Article 10 (5) of the EMC Directive,
  - $\S$  3 (1) no. 2b of the EMC Act (radio transmitting installations).
- 19.4 Specimen For The CE Marking Of Electrical / Electronical Equipment

The components of the CE marking shall have substantially the same vertical dimension, which may not be



SPORTON International Inc.

TEL: 886-2-2696-2468

FAX: 886-2-2696-2255

Page Number


61 of 61 May 3, 2001

Issued Date

Report No. : C0D1908



### APPENDIX A. Photographs of EUT

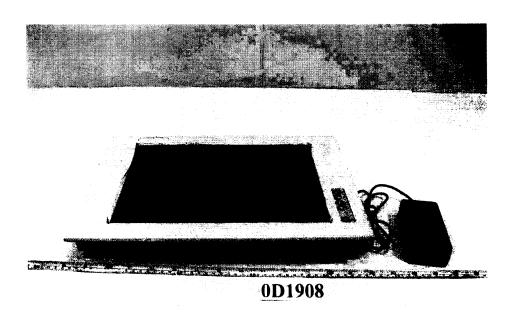


0D1908-01.jpg

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A1 OF A20 ISSUED DATE : May 25, 01



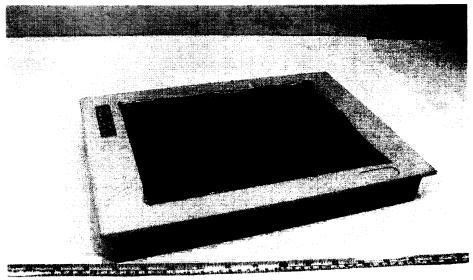

<u>0D1908</u>

0D1908-02.jpg

SPORTON International Inc.


TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A2 OF A20



0D1908-03.jpg

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A3 OF A20

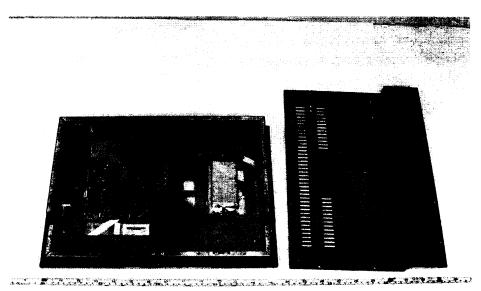

0D1908


0D1908-04.jpg

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A4 OF A20

# **0D1908**






0D1908-05.jpg


SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A5 OF A20

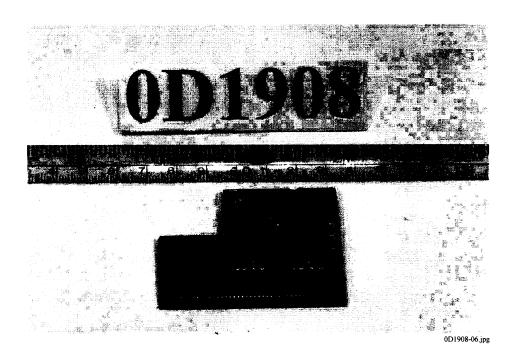

SPORTON International Inc. TEL: 886-2-2696-2468

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A6 OF A20

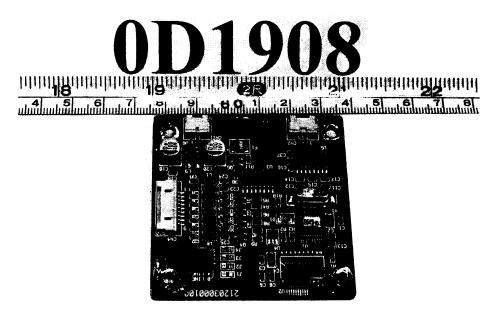

0D1908-07.jpg

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A7 OF A20






0D1908-08.jpg

SPORTON International Inc. TEL: 886-2-2696-2468

FAX: 886-2-2696-2255

PAGE NUMBER : A8 OF A20

## 0D1908

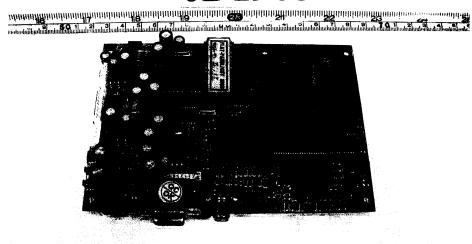


0D1908-09.jpg

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A9 OF A20


## 0D1908

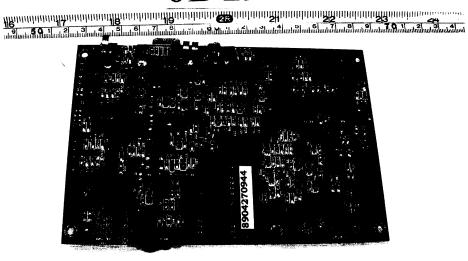

0D1908-10.jpg


SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A10 OF A20

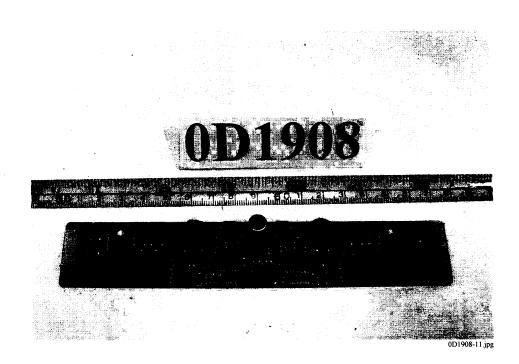

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A11 OF A20

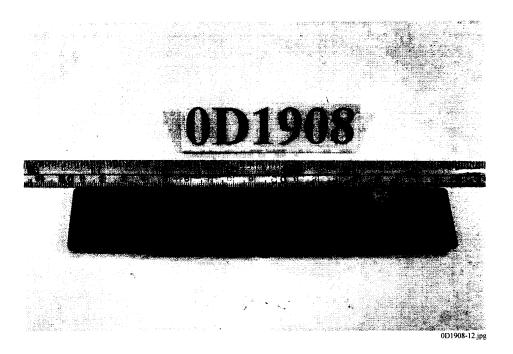

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A12 OF A20



SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A13 OF A20 ISSUED DATE : May 25, 01








0D1908-14.jpg

SPORTON International Inc.

TEL: 886-2-2696-2468

FAX: 886-2-2696-2255


PAGE NUMBER : A14 OF A20

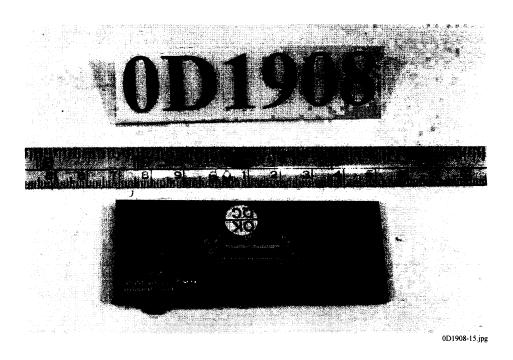

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A15 OF A20



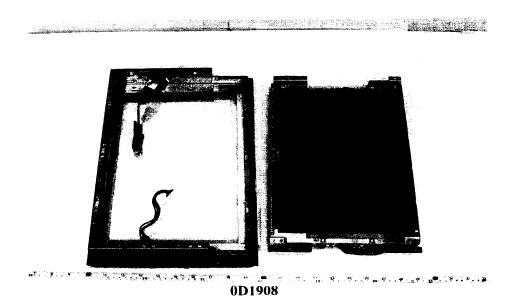


0D1908-16.jpg

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A16 OF A20



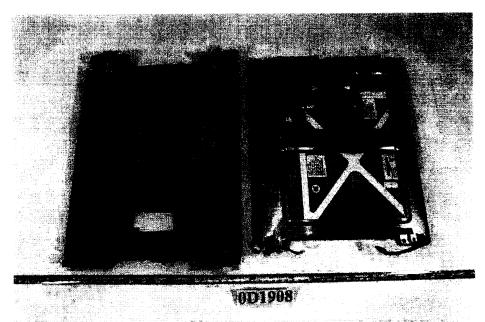


0D1908-17.jpg

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A17 OF A20




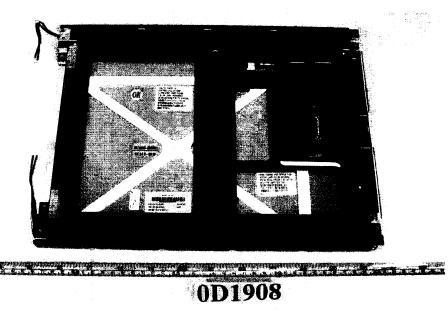

0D1908-18.jpg

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A18 OF A20

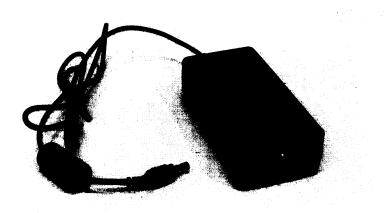

aguaragan pangangan pangan panga

0D1908-19.jpg

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A19 OF A20



0D1908

0D1908-20.jpg

SPORTON International Inc.

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 PAGE NUMBER : A20 OF A20