



HomeTek Technology Inc.

ADDRESS: No.85-5, Shir Men Road, Tu Cheng City,
Taipei Hsien, TAIWAN, R. O. C.

PHONE : 886-2-22608375 FAX : 886-2-22748013

E - mail : hometek@ms15.hinet.net

CERTIFICATE OF COMPLIANCE

EUT : Industrial PCs
 MODEL NO. : AMB-655 (PMI-4000)
 Final Test Date : 7/9/99 REPORT #: EA8G011
 APPLICANT : ASTECH TECHNOLOGY CO., LTD.
 ADDRESS : 6F-4, No. 351, Chung-Shan Rd.,
Sec. 2, Chung-Ho City, Taipei,
Taiwan, R. O. C.

MEASUREMENT PROCEDURE USED :

- | | |
|--|--|
| <input checked="" type="checkbox"/> EN50081-1 (1992) | <input checked="" type="checkbox"/> EN50082-1 (1992) |
| <input type="checkbox"/> EN50081-2 (1992) | <input type="checkbox"/> EN50082-2 (1992) |
| <input type="checkbox"/> EN55011 (1994) | <input checked="" type="checkbox"/> IEC 801-2 (1984) |
| <input checked="" type="checkbox"/> EN55022 (1994) | <input checked="" type="checkbox"/> IEC 801-3 (1984) |
| <input type="checkbox"/> EN60555-2 (1987) | <input checked="" type="checkbox"/> IEC 801-4 (1988) |
| <input type="checkbox"/> EN60555-3 (1987) | |

WE HEREBY SHOW THAT :

THE MEASUREMENT SHOWN IN THE ATTACHMENT WERE MADE IN ACCORDANCE WITH THE PROCEDURES INDICATED, AND THE ENERGY EMITTED BY THE EQUIPMENT WAS FOUND TO BE WITHIN THE LIMITS APPLICABLE.

THIS TEST RESULTS OF THIS REPORT APPLIES TO ABOVE TESTED SAMPLE ONLY.

THIS TEST REPORT SHALL NOT BE REPRODUCE IN PART WITHOUT WRITTEN APPROVAL OF HOMETEK TECHNOLOGY INC.

PREPARED BY : angel DATE : 7/9/99
ANGEL CHEN

CHECK BY : Susan DATE : 7/9/99
SUSAN HUANG

APPROVED BY : Grant Huang DATE : 7/10/99
GRANT HUANG/Manager

(Handwritten mark)

Declaration of Conformity

We(Manufacturer/Importer)

ASTECH TECHNOLOGY CO., LTD.

(company name)

6F-4, No. 351, Chung-Shan Rd., Sec. 2, Chung-Ho City, Taipei,
Taiwan, R. O. C.

(address)

declares under our sole responsibility that the product

Product name : Industrial PCs

Model No. : AMB-655 (PMI-4000)

to which this declaration relates is in conformity with the following standard(s) or other normative document(s)

- | | |
|--|--|
| <input checked="" type="checkbox"/> EN50081-1 (1992) | <input checked="" type="checkbox"/> EN50082-1 (1992) |
| <input type="checkbox"/> EN50081-2 (1992) | <input type="checkbox"/> EN50082-2 (1992) |
| <input type="checkbox"/> EN55011 (1994) | <input checked="" type="checkbox"/> IEC 801-2 (1984) |
| <input checked="" type="checkbox"/> EN55022 (1994) | <input checked="" type="checkbox"/> IEC 801-3 (1984) |
| <input type="checkbox"/> EN60555-2 (1987) | <input checked="" type="checkbox"/> IEC 801-4 (1988) |
| <input type="checkbox"/> EN60555-3 (1987) | <input type="checkbox"/> IEC 1000-4-5 |
| | <input type="checkbox"/> IEC 1000-4-6 |
| | <input type="checkbox"/> IEC 1000-4-8 |
| | <input type="checkbox"/> IEC 1000-4-11 |

following the provisions of 89/336/EEC Directive

Place: _____ Signature: _____

Date : _____ Full name: _____



Title: _____

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
MODIFICATION LIST.....	5
CONDUCTED POWER LINE TEST.....	6
1 TEST INSTRUMENTS & FACILITIES	6
2 TEST PROCEDURE.....	6
3 TEST SETUP	7
4 CONFIGURATION OF THE EUT.....	9
5 EUT OPERATING CONDITION.....	12
6 LIMIT OF CONDUCTED POWER LINE EMISSION CLASS B :	12
7 RESULT OF CONDUCTED POWER LINE TEST (1)	13
8 PHOTO OF CONDUCTED POWER LINE TEST	14
9 RESULT OF CONDUCTED POWER LINE TEST (2)	15
10 PHOTO OF CONDUCTED POWER LINE TEST.....	16
11 RESULT OF CONDUCTED POWER LINE TEST (3)	17
12 PHOTO OF CONDUCTED POWER LINE TEST	18
RADIATED EMISSION TEST.....	19
1 TEST INSTRUMENTS & FACILITIES	19
2 TEST PROCEDURE.....	20
3 TEST SETUP	20
4 CONFIGURATION OF THE EUT.....	21
5 EUT OPERATING CONDITION.....	21
6 LIMIT OF RADIATED EMISSION CLASS B :	21
7 RESULT OF RADIATED EMISSION TEST (1).....	22
8 PHOTO OF RADIATED EMISSION TEST	24
9 RESULT OF RADIATED EMISSION TEST (2).....	25
10 PHOTO OF RADIATED EMISSION TEST	27
11 RESULT OF RADIATED EMISSION TEST (3).....	28
12 PHOTO OF RADIATED EMISSION TEST	30
ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD).....	31
1 TEST INSTRUMENTS & FACILITIES	31
2 TEST PROCEDURE.....	31
3 TEST SETUP	31
4 CONFIGURATION OF THE EUT	32
5 EUT OPERATION CONDITION.....	32
6 TEST CONDITION	32
7 PERFORMANCE CRITERIA.....	32
8 TEST RESULT	33



9 PHOTO OF ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD).....	34
RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST (RF).....	35
1 TEST INSTRUMENTS & FACILITIES	35
2 TEST PROCEDURE.....	35
3 TEST SETUP	36
4 CONFIGURATION OF THE EUT	37
5 OPERATION CONDITION OF EUT.....	37
6 TEST CONDITION	37
7 PERFORMANCE CRITERIA.....	37
8 TEST RESULT	38
9 PHOTO OF RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST (RF).....	39
ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT).....	40
1 TEST INSTRUMENTS & FACILITIES	40
2 TEST PROCEDURE.....	40
3 TEST SETUP	40
4 CONFIGURATION OF THE EUT.....	41
5 OPERATION CONDITION OF EUT.....	41
6 TEST CONDITION	41
7 PERFORMANCE CRITERIA.....	41
8 TEST RESULT	42
9 PHOTO OF ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT).....	43
PHOTOS OF EUT.....	44



GENERAL INFORMATION

- 1 APPLICANT : ASTECH TECHNOLOGY CO., LTD.
- 2 ADDRESS : 6F-4, No. 351, Chung-Shan Rd.,
Sec. 2, Chung-Ho City, Taipei,
Taiwan, R. O. C.
- 3 MANUFACTURER : ASTECH TECHNOLOGY CO., LTD.
- 4 ADDRESS : 6F-4, No. 351, Chung-Shan Rd.,
Sec. 2, Chung-Ho City, Taipei,
Taiwan, R. O. C.
- 5 DESCRIPTION OF EUT :
- EUT : Industrial PCs
- Model : AMB-655 (PMI-4000)
- Serial # : N/A
- Data Cable : SHIELDED
- Power Cord : UN-SHIELDED
- Power Supply Type : SWITCHING

5.1 PMI-4000 for OEM Model.



6 FEATURES OF EUT :

- 6.1 NEMA 4/12 painted aluminum alloy front panel
- 6.2 15" XGA color TFT LCD display
- 6.3 10-slot ISA/PCI-Bus passive backplane or motherboard
- 6.4 EIA RS-310C 19" rackmount, 8U height
- 6.5 Two sealed membrane keyboards (59 data-entry key and 24 function-key)
- 6.6 Two-screw-on door on the front panel covering the brightness and contrast controllers, power switch, slot for a 3.5" FDD, a 5.25" FDD or CD-ROM drive and keyboard connector
- 6.7 Disk drive housing: a 3.5" FDD and 3.5" HDD, a 5.25" FDD or CD-ROM drive
- 6.8 A 64 CFM cooling fan
- 6.9 Hold-down clamp protecting cards from vibration
- 6.10 Universal 250W switching power supply or other options (refer to supply selection table)
- 6.11 AMB-655A
 - Analog RGB signals directly input offering multi-scan function
 - Using standard VGA card



HomeTek Technology Inc.

MODIFICATION LIST

THE FOLLOWING ACCESSORIES WERE ADDED TO THE EUT DURING TESTING :

NO MODIFICATION BY HOMETEK TECHNOLOGY INC.

CONDUCTED POWER LINE TEST

1 TEST INSTRUMENTS & FACILITIES

The following test Instruments was used during the conducted test :


Item	Instruments/ Facilities	Specification	Manufacturer	Model #	Date Of Cal.
1	EMI Receiver	9KHz ~ 30MHz	ROHDE & SCHWARZ	ESHS 30	FEB/99
2	LISN	50 Ω /50uH/100A 9KHz ~ 30MHz	SCHWARZ BECK	NNLK 8121	FEB/99
3	LISN	9KHz ~ 30MHz	ROHDE & SCHWARZ	ESH3-Z5	FEB/99
4	ESXS-K1	Version 2.03b	ROHDE & SCHWARZ	1082.9678.02 840.913/246	FEB/99
5	Cables	10KHz ~ 30MHz		NO : 10	JUL/99
6	Pulse Limiter	9KHz ~ 30MHz	ROHDE & SCHWARZ	ESH3Z2 357.8810.52	JUL/99

2 TEST PROCEDURE


- 2.1 The EUT was tested according to **EN55022 Class A**.
- 2.2 The EUT was placed 0.4 meter from the conducting wall of shielding room and kept at least 0.8 meter from any other grounded conducting surface.
- 2.3 The frequency range form 0.15 MHz to 30 MHz was investigated.
- 2.4 The LISN used was 50 Ohm / 50 uHenry as specified by **EN55022 Class A**.
- 2.5 All the support peripherals are connect to the other LISN.
- 2.6 Cables and peripherals were moved to find the maximum emission levels for each frequency.

3 TEST SETUP

3.1 Typical : Setup Of Conducted Test

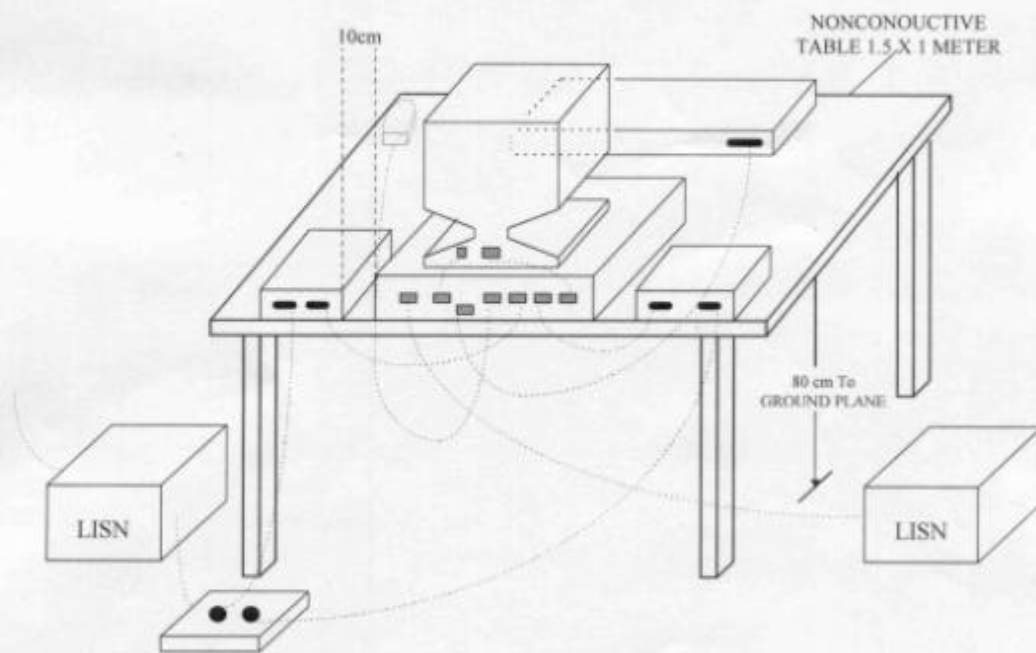

3.2 Block Diagram Of Conducted Test

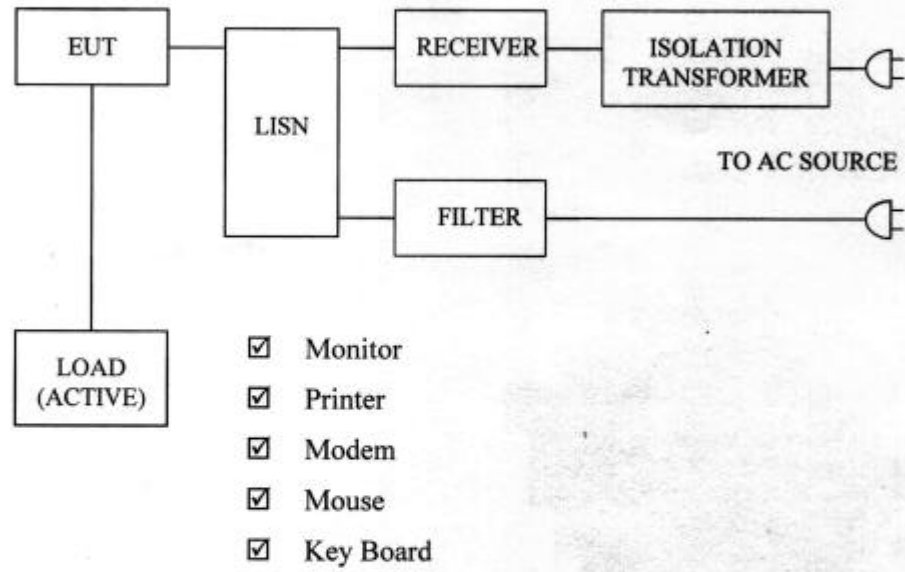

4 CONFIGURATION OF THE EUT

The EUT was configured according to **EN55022 Class A**. All I/O ports were connected to the appropriate peripherals. All peripherals and cables are listed below (including internal device) :

4.1 EUT

EUT Type : Proto Type Engineer Type Mass Production
Condition when received : Good Damage : _____
Connector Type : Metal Type Plastic Type
Device : Industrial PCs
Manufacturer : ASTECH
Model Number : AMB-655 (PMI-4000)
Serial Number : N/A
FCC ID : N/A
Data Cable : Shielded
Power Cord : Un-Shielded, 1.8 m

4.2 PERIPHERALS

Monitor
Manufacturer : GVC
Model Number : M1448P
Serial Number : 4PTA730020050
FCC ID : DK4M1448
Data Cable : Shielded, 1.5 m, Connected to the VGA port
Power Cord : Un-Shielded, 1.8 m

Printer

Manufacturer : HP
Model Number : DJ400
Serial Number : MY77V1C0DD
FCC ID : B94C2642X
Data Cable : Shielded, 1.5 m, Connected to the Printer port
Power Cord & Adaptor : Un-Shielded, 1.8 m

Modem I

Manufacturer : DATATRONIC
Model Number : 2814CX
Serial Number : 1150541132
FCC ID : FCC DoC
Data Cable : Shielded, 1.5 m, Connected to the COM port
Power Cord & Adaptor : Un-Shielded, 1.8 m

Modem II

Manufacturer : DATATRONIC
Model Number : 2814CX
Serial Number : 1150541132
FCC ID : FCC DoC
Data Cable : Shielded, 1.5 m, Connected to the COM port
Power Cord & Adaptor : Un-Shielded, 1.8 m

Mouse (PSII)

Manufacturer : HP
Model Number : M-S34
Serial Number : LZA72270791
FCC ID : DZL211029
Data Cable : Shielded, 1.8 m, Connected to the PSII port
Power Cord : N/A

KeyBoard (PSII)

Manufacturer : AST
Model Number : SK-2000REW
Serial Number : C9612097279
FCC ID : GYUR34SK
Data Cable : Shielded, 1.5 m, Connected to the PSII port
Power Cord : N/A

KeyBoard (PSII)

Manufacturer : SILITEK
Model Number : SK-2300
Serial Number : N/A
FCC ID : GYUR53SK
Data Cable : Shielded, 1.5 m, Connected to the PSII port
Power Cord : N/A

4.3 REMARK :



5 EUT OPERATING CONDITION

5.1 Operating condition is according to **EN55022 Class A**.

5.2 CPU : Pentium - MMX - 200 MHz

CPU Clock : 66 MHz

5.3 Turn on the power of all equipments.

5.4 Test program sent "H" pattern to peripherals as following :

5.4.1 Printer

5.4.2 Monitor

5.4.3 Modem

5.4.4 Keyboard

6 LIMIT OF CONDUCTED POWER LINE EMISSION CLASS B :

Frequency Range	Quasi Peak	Average
0.15 ~ 0.5 MHz	79 dBuV	66 dBuV
0.5 ~ 5 MHz	73 dBuV	60 dBuV
5 ~ 30 MHz	73 dBuV	60 dBuV

7 RESULT OF CONDUCTED POWER LINE TEST (1)

7.1 The frequency range from 0.15 MHz to 30 MHz was investigated. All readings are quasi-peak values and average.

7.2 IF bandwidth : 9 kHz, Meas Time : 1 sec.

7.3 Temperature : 27 °C, Humidity : 75 % RH.

7.4 Deviations from the specifications : None

7.5 Quasi-Peak :

Frequency (MHz)	Line 1 (dBuV)	Line 2 (dBuV)	Limit (dBuV)
0.150	52.97	53.34	79
0.274	41.12	41.60	79
0.500	31.05	31.37	73
2.810	37.14	37.55	73
9.680	33.72	33.58	73
22.430	37.19	41.40	73

7.6 Average :

Frequency (MHz)	Line 1 (dBuV)	Line 2 (dBuV)	Limit (dBuV)
0.236	34.48	34.01	66
0.422	28.86	24.65	66
0.885	25.04	23.20	60
2.320	30.24	30.49	60
6.200	32.19	33.00	60
18.790	33.71	23.19	60


REMARK :

1. Model : AMB-655 (PMI-4000)
2. Measuring mode : 1024 x 768
3. Uncertainty in conduction emission measured : < ± 2.0dB.
4. “ * ”, means this data is worse case emission level.
5. Result : **PASSED**

8 PHOTO OF CONDUCTED POWER LINE TEST
Test Mode : 1024 x 768



Front View

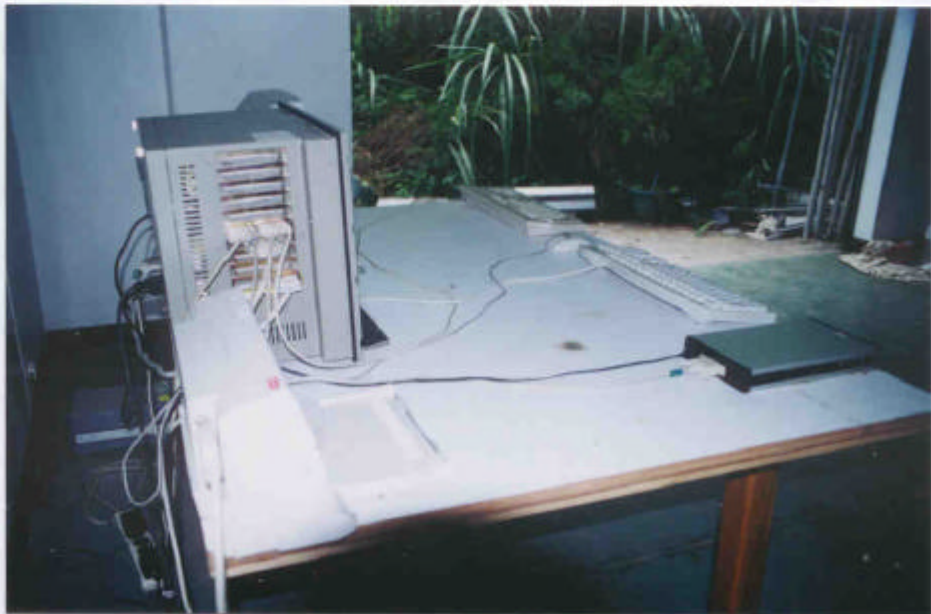

Rear View

9 RESULT OF CONDUCTED POWER LINE TEST (2)

9.1 The frequency range from 0.15 MHz to 30 MHz was investigated. All readings are quasi-peak values and average.

9.2 IF bandwidth : 9 kHz, Meas Time : 1 sec.

9.3 Temperature : 27 °C, Humidity : 75 % RH.

9.4 Deviations from the specifications : None

9.5 Quasi-Peak :

Frequency (MHz)	Line 1 (dBuV)	Line 2 (dBuV)	Limit (dBuV)
0.152	51.90	53.15	79
0.295	41.00	41.83	79
0.885	25.36	23.73	73
2.705	30.19	22.64	73
8.300	24.00	30.58	73
20.540	27.62	24.73	73

9.6 Average :

Frequency (MHz)	Line 1 (dBuV)	Line 2 (dBuV)	Limit (dBuV)
0.174	37.28	37.51	66
0.420	28.42	24.39	66
0.885	24.38	22.77	60
2.880	28.86	21.00	60
8.300	20.46	28.19	60
20.540	26.20	20.83	60

REMARK :

1. Model : AMB-655 (PMI-4000)
2. Measuring mode : 800 x 600
3. Uncertainty in conduction emission measured : $< \pm 2.0\text{dB}$.
4. “ * ”, means this data is worse case emission level.
5. Result : **PASSED**

10 PHOTO OF CONDUCTED POWER LINE TEST
Test Mode : 800 x 600



Front View



Rear View

11 RESULT OF CONDUCTED POWER LINE TEST (3)

11.1 The frequency range from 0.15 MHz to 30 MHz was investigated. All readings are quasi-peak values and average.

11.2 IF bandwidth : 9 kHz, Meas Time : 1 sec.

11.3 Temperature : 27 °C, Humidity : 75 % RH.

11.4 Deviations from the specifications : None

11.5 Quasi-Peak :

Frequency (MHz)	Line 1 (dBuV)	Line 2 (dBuV)	Limit (dBuV)
0.150	53.27	53.96	79
0.274	41.83	41.81	79
0.885	25.30	23.47	73
2.705	30.21	23.30	73
11.300	25.73	23.45	73
23.620	29.89	35.82	73

11.6 Average :

Frequency (MHz)	Line 1 (dBuV)	Line 2 (dBuV)	Limit (dBuV)
0.232	33.92	33.91	66
0.422	28.82	24.39	66
0.885	24.42	22.51	60
0.705	29.87	22.55	60
8.300	21.62	25.54	60
20.190	23.98	22.85	60


REMARK :

1. Model : AMB-655 (PMI-4000)
2. Measuring mode : 640 x 480
3. Uncertainty in conduction emission measured : $< \pm 2.0\text{dB}$.
4. " * ", means this data is worse case emission level.
5. Result : **PASSED**

12 PHOTO OF CONDUCTED POWER LINE TEST
Test Mode : 640 x 480



Front View

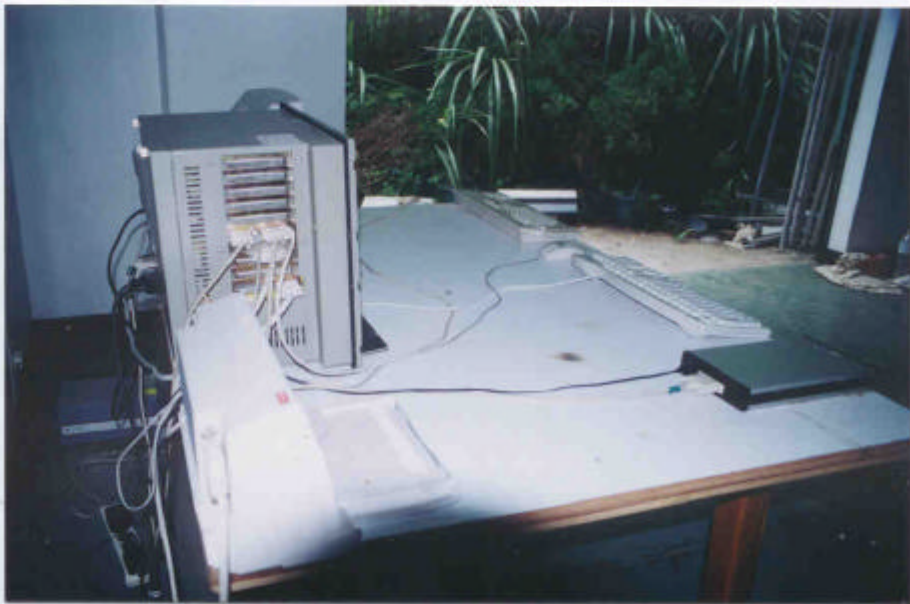

Rear View

RADIATED EMISSION TEST

1 TEST INSTRUMENTS & FACILITIES

The following test Instruments was used during the radiated emission test :

Item	Instruments /facilities	Specification	Manufacturer	Model # / S/N#	Location	Date of Cal.
1	OPEN AREA TEST SITE	<input type="checkbox"/> OATS 1 <input checked="" type="checkbox"/> OATS 2				JUN/99 JUN/99
2	SPECTRUM ANALYZER	9KHz ~ 1.8GHz	HP	HP8591 3710A06158	Open Site I	APR/99
3	EMI TEST RECEIVER	20MHz ~ 1GHz	ROHDE & SCHWARZ	ESVS10 845165/017	Open Site I	FEB/99
4	PRE-AMPLIFIER	0.1MHz ~ 1.3 GHz	HP	8447D 1937A02095	Open Site I	MAY/99
5	EMI TEST RECEIVER	20Hz ~ 26.5GHz	ROHDE & SCHWARZ	ESMI 845442/006	Open Site II	FEB/99
6	PRE-AMPLIFIER	20MHz ~ 7GHz	ROHDE & SCHWARZ	ESMI-Z7 846363/001	Open Site II	FEB/99
7	ANTENNA (BI-LOG)	25MHz ~ 2GHz	ARA	LPB2520 S/N:1096	Open Site II	MAR/99
8	ANTENNA (BI-LOG)	25MHz ~ 2GHz	ARA	LPB2520 S/N:1095	Open Site I	MAR/99
9	CABLES	30MHz ~ 1GHz		No. 2, No. 4 No. 1, No. 3	OATS 1 OATS 2	JUL/99 JUL/99
10	ANTENNA (DIPOLE)	30 ~ 300MHz	ROHDE & SCHWARZ	HZ-12 842899/08		JAN/99
11	ANTENNA (DIPOLE)	300 ~ 1000MHz	ROHDE & SCHWARZ	HZ-13 842007/0004		JAN/99
12	EMIVM	30 ~ 1000MHz	AUDIX	A582445 A582443	OATS 1 OATS 2	N/A


Note : 1. Items 1 ~ 9 upon which need to calibrated are with period of 1 year, except item 10-11.

2. Items 5 is used for the final measurement.

2 TEST PROCEDURE

- 2.1 The EUT was test according to **EN55022 Class A**.
- 2.2 The radiated test was performed at HomeTek Lab's Open Site II.
- 2.3 The frequency range from 30 MHz to 1 GHz, the measurement were made at 10 meters, with a BI-log antenna.

3 TEST SETUP

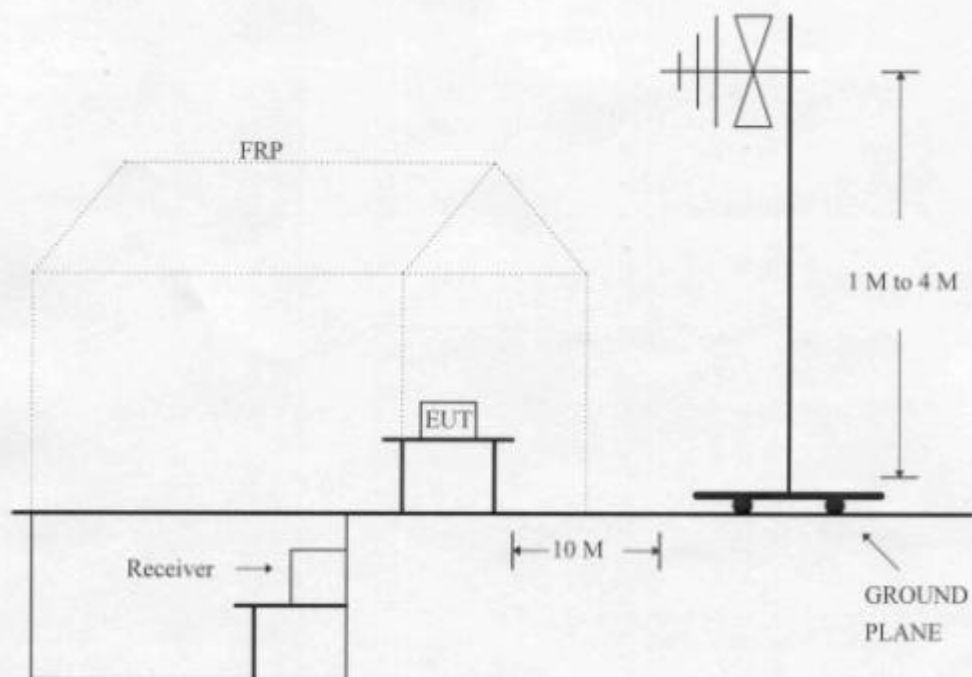

4 CONFIGURATION OF THE EUT

Same as "Conducted Power Line test", section 4

5 EUT OPERATING CONDITION

5.1 Same as "Conducted Power Line test", section 5

5.2 The radiated emission in the frequency range from 30 MHz - 1000 MHz was test in a horizontal and vertical polarization at HomeTek Lab's open site II.

6 LIMIT OF RADIATED EMISSION CLASS B :

Frequency (MHz)	Measurement Distance	Limit (dBuV/m)
30 - 230	10 (M)	40
230 - 1000	10 (M)	47

7 RESULT OF RADIATED EMISSION TEST (1)

- 7.1 The frequency range from 30 MHz to 1 GHz was investigated. All readings are quasi-peak values with resolution bandwidth of 120 kHz.
- 7.2 The measurements above 1 GHz with a resolution bandwidth of 1 MHz are peak reading at 10 meters.
- 7.3 The measurements were made at 10 meters of HomeTek Lab's open site II.
- 7.4 Temperature : 27 °C, Humidity : 75 % RH.
- 7.5 Radiated Emission data : **Horizontal**

Frequency (MHz)	Reading Level (dBuV)	ANT factor (dB/m)	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)
48.01	14.79	11.99	0.69	27.47	40
72.92	26.61	4.93	0.84	32.38	40
130.18	17.43	9.18	0.96	27.57	40
167.10	23.17	9.41	1.12	33.70	40
233.21	18.71	12.81	1.32	32.84	47
434.47	23.79	16.34	1.83	41.96	47
568.15	12.48	20.22	2.08	34.78	47
668.08	10.35	24.91	2.39	37.65	47

- Emission Level = Reading Level + ANT Factor + Cable Loss.
- Sample Calculation for 668.08 MHz .
- Corrected Reading : (10.35) + (24.91) + (2.39) = 37.65 . (Emission Level)

7.6 Radiated Emission data : **Vertical**

Frequency (MHz)	Reading Level (dBuV)	ANT factor (dB/m)	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)
47.91	20.43	13.05	0.71	34.19	40
130.16	19.67	12.07	0.96	32.70	40
167.11	20.61	9.47	1.12	31.20	40
233.94	23.15	12.13	1.32	36.60	47
260.34	19.82	13.00	1.35	34.17	47
367.60	17.82	14.60	1.63	34.05	47
568.13	12.07	19.65	2.08	33.80	47
667.18	12.19	22.00	2.39	36.58	47

- Emission Level = Reading Level + ANT Factor + Cable Loss.
- Sample Calculation for 667.18 MHz .
- Corrected Reading : (12.19) + (22.00) + (2.39) = 36.58 . (Emission Level)

REMARK :


1. Model : AMB-655 (PMI-4000)
2. Measuring mode : 1024 x 768
3. Uncertainty in radiated emission measured : $< \pm 4.0\text{dB}$.
4. " * ", means this data is worse case emission level.
5. Result : **PASSED**

8 PHOTO OF RADIATED EMISSION TEST

Test Mode : 1024 x 768



Front View

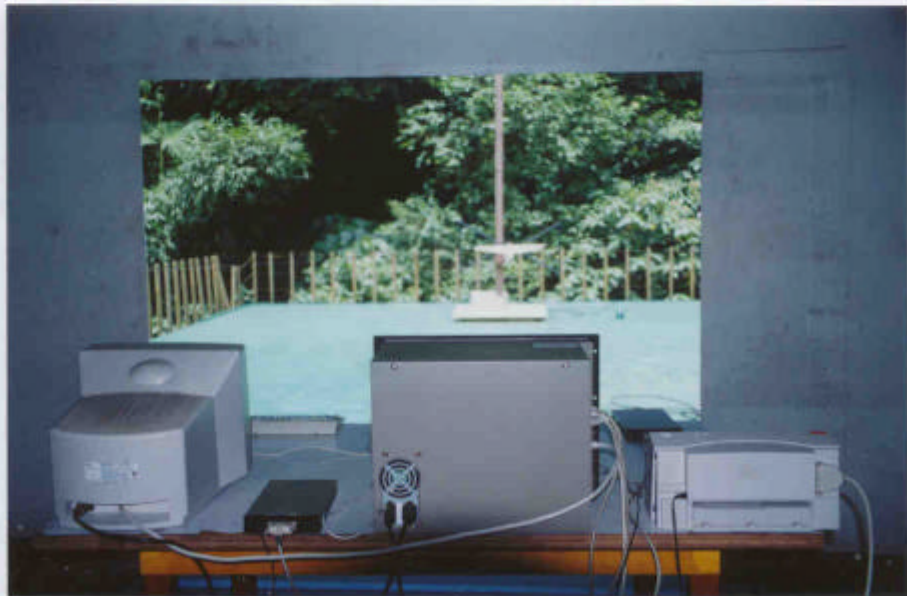

Rear View

9 RESULT OF RADIATED EMISSION TEST (2)

- 9.1 The frequency range from 30 MHz to 1 GHz was investigated. All readings are quasi-peak values with resolution bandwidth of 120 kHz.
- 9.2 The measurements above 1 GHz with a resolution bandwidth of 1 MHz are peak reading at 10 meters.
- 9.3 The measurements were made at 10 meters of HomeTek Lab's open site II.
- 9.4 Temperature : 27 °C, Humidity : 75 % RH.
- 9.5 Radiated Emission data : **Horizontal**

Frequency (MHz)	Reading Level (dBuV)	ANT factor (dB/m)	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)
46.36	14.95	13.05	0.66	28.66	40
58.88	21.88	7.87	0.71	30.46	40
136.02	20.16	7.51	1.02	28.69	40
189.65	21.17	9.23	1.17	31.57	40
207.47	23.06	10.27	1.22	34.55	40
232.34	22.16	12.74	1.24	36.14	47
322.02	22.08	15.84	1.52	39.44	47
730.24	8.32	25.49	2.54	36.35	47

- Emission Level = Reading Level + ANT Factor + Cable Loss.
- Sample Calculation for 730.24 MHz .
- Corrected Reading : (8.32) + (25.49) + (2.54) = 36.35 . (Emission Level)

9.6 Radiated Emission data : **Vertical**

Frequency (MHz)	Reading Level (dBuV)	ANT factor (dB/m)	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)
45.66	19.77	13.41	0.63	33.81	40
161.07	26.36	8.66	1.07	36.09	40
225.26	21.20	11.69	1.27	34.16	40
232.44	23.53	12.04	1.24	36.81	47
339.76	22.72	13.98	1.57	38.27	47
357.66	18.06	14.37	1.60	34.03	47
428.93	20.26	16.02	1.80	38.08	47
630.66	12.17	21.20	2.21	35.58	47

- Emission Level = Reading Level + ANT Factor + Cable Loss.
- Sample Calculation for 630.66 MHz .
- Corrected Reading : (12.17) + (21.20) + (2.21) = 35.58 . (Emission Level)

REMARK :

1. Model : AMB-655 (PMI-4000)
2. Measuring mode : 800 x 600
3. Uncertainty in radiated emission measured : $\pm 4.0\text{dB}$.
4. " * ", means this data is worse case emission level.
5. Result : **PASSED**

10 PHOTO OF RADIATED EMISSION TEST
Test Mode : 800 x 600



Front View



Rear View

11 RESULT OF RADIATED EMISSION TEST (3)

- 11.1 The frequency range from 30 MHz to 1 GHz was investigated. All readings are quasi-peak values with resolution bandwidth of 120 kHz.
- 11.2 The measurements above 1 GHz with a resolution bandwidth of 1 MHz are peak reading at 10 meters.
- 11.3 The measurements were made at 10 meters of HomeTek Lab's open site II.
- 11.4 Temperature : 27 °C, Humidity : 75 % RH.
- 11.5 Radiated Emission data : **Horizontal**

Frequency (MHz)	Reading Level (dBuV)	ANT factor (dB/m)	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)
66.32	24.29	5.97	0.76	31.02	40
120.26	24.04	10.40	0.96	35.40	40
136.99	22.88	7.25	1.02	31.15	40
168.04	19.73	9.62	1.12	30.47	40
250.58	24.63	14.43	1.40	40.46	47
332.38	23.93	15.79	1.55	41.27	47
457.74	20.77	16.89	1.88	39.54	47
681.60	11.16	25.63	2.41	39.20	47

- Emission Level = Reading Level + ANT Factor + Cable Loss.
- Sample Calculation for 681.60 MHz .
- Corrected Reading : (11.16) + (25.63) + (2.41) = 39.20 . (Emission Level)

11.6 Radiated Emission data : **Vertical**

Frequency (MHz)	Reading Level (dBuV)	ANT factor (dB/m)	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)
40.48	11.29	17.94	0.56	29.79	40
64.09	23.68	9.74	0.76	34.18	40
112.26	23.06	10.92	0.94	34.92	40
132.30	21.52	12.09	1.00	34.61	40
160.40	21.94	8.50	1.04	31.48	40
172.41	21.28	10.12	1.12	32.52	40
252.60	13.92	13.00	1.35	28.27	47
681.61	4.85	22.29	2.41	29.55	47

- Emission Level = Reading Level + ANT Factor + Cable Loss.
- Sample Calculation for 681.61 MHz .
- Corrected Reading : (4.85) + (22.29) + (2.41) = 29.55 . (Emission Level)

REMARK :

1. Model : AMB-655 (PMI-4000)
2. Measuring mode : 640 x 480
3. Uncertainty in radiated emission measured : $< \pm 4.0\text{dB}$.
4. " * ", means this data is worse case emission level.
5. Result : **PASSED**



12 PHOTO OF RADIATED EMISSION TEST

Test Mode : 640 x 480



Front View



Rear View

ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)


1 TEST INSTRUMENTS & FACILITIES

Instruments/ Facilities	Manufacturer	Model # Serial #	Data Of Cal.
ESD TESTER	HAEFELY	PESD 1600	MAR/99
VCP	HOMETEK	--	--

2 TEST PROCEDURE

According to IEC 801-2

3 TEST SETUP

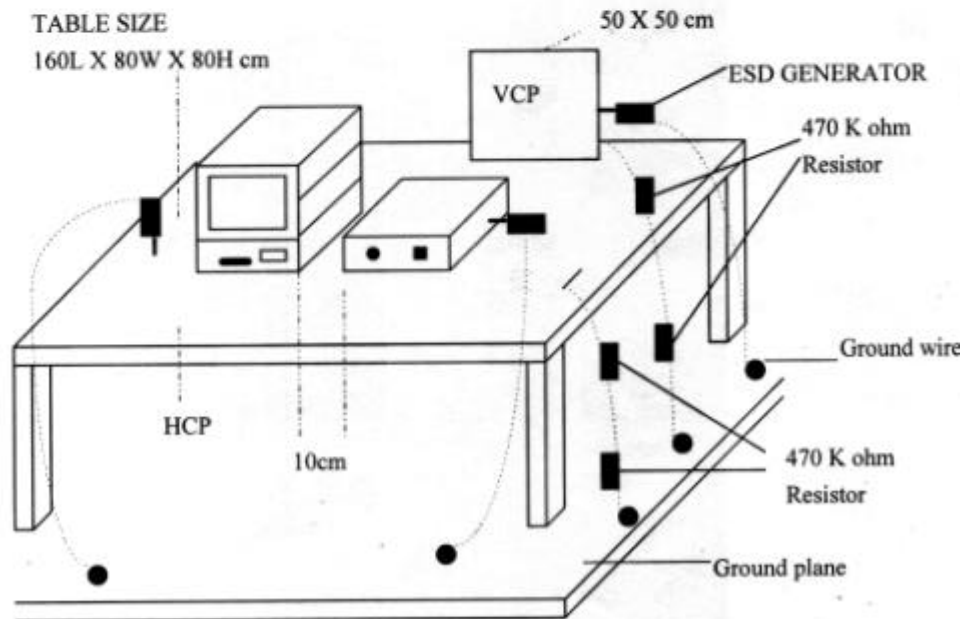

4 CONFIGURATION OF THE EUT

Same as "Conducted Power Line test", section 4

5 EUT OPERATION CONDITION

Same as "Conducted Power Line test", section 5

6 TEST CONDITION

6.1 Test Level :

(A) ± 8 KV for air discharge.

(B) ± 4 KV for contact discharge.

6.2 Number of test : 10 Discharge / Level

6.3 Time between test : 1 sec.

6.4 Temperature : 27 °C

6.5 Humidity : 58 % RH.

7 PERFORMANCE CRITERIA

- A. Normal performance within the specification.
- B. Temporary degradation or loss function or performance which is self-recoverable.
- C. Temporary degradation or loss function or performance which requires operator intervention system reset.
- D. Degradation or loss function which is not recoverable due to damage of EUT or software, or loss of data.



8 TEST RESULT

Test Point	Air Discharge	Contact Discharge	Performance Criteria	Result
VCP	--	± 4KV	B	PASSED
HCP	--	± 4KV	B	PASSED
CASE	± 8KV	± 4KV	B	PASSED
LED	± 8KV	± 4KV	B	PASSED
LCD	± 8KV	± 4KV	B	PASSED
I/O PORTS	± 8KV	± 4KV	B	PASSED
SCREWS	± 8KV	± 4KV	B	PASSED
FDD BUTTON	± 8KV	± 4KV	B	PASSED
COVER PLATE	± 8KV	± 4KV	B	PASSED
AC SOCKET	± 8KV	± 4KV	B	PASSED
Power Switch	± 8KV	± 4KV	B	PASSED
LINE IN	± 8KV	± 4KV	B	PASSED

9 PHOTO OF ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

Test Mode : 1024 x 768



RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST

(RS)


1 TEST INSTRUMENTS & FACILITIES

Instruments Facilities	Manufacturer	Model # Serial #	Data Of Cal.
SIGNAL GENERATOR	ROHDE & SCHWARZ	SMY02	FEB/99
AMPLIFIER	AMPLIFIER RESEACH	100W1000M1A	MAR/99
FIELD SENSOR	AMPLIFIER RESEACH	FP2000	MAR/99
FIELD MONITOR	AMPLIFIER RESEACH	FM2000	MAR/99
ANTENNA (BI-LOG)	ARA	LPB2520	MAR/99
CONTROL PC	KB TECH	KB P586/133	--

2 TEST PROCEDURE

According to **IEC 801-3**

3 TEST SETUP

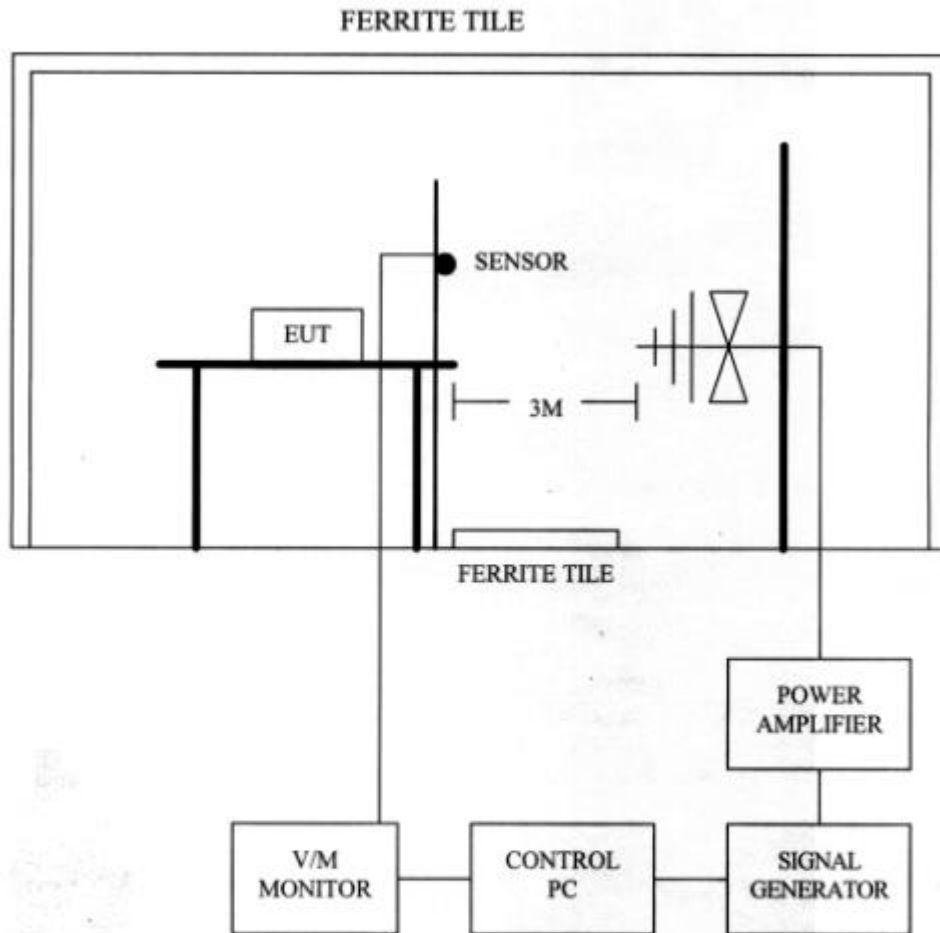

3.1 Chamber Size :

8M x 4M x 3M

4 CONFIGURATION OF THE EUT

Same as "Conducted Power Line test", section 4

5 OPERATION CONDITION OF EUT

Same as "Conducted Power Line test", section 5

6 TEST CONDITION

6.1 Frequency Range : 27 MHz ~ 500 MHz

6.2 Field Strength : 3 V / M

6.3 Frequency Step : 1 %

6.4 Antenna Polarity : HORIZONTAL & VERTICAL

6.5 The four sides of EUT are tested
(FRONT, REAR, RIGHT, LEFT)

6.6 Temperature : 27 °C

6.7 Humidity : 75 % RH

7 PERFORMANCE CRITERIA

- A. Normal performance within the specification.
- B. Temporary degradation or loss function or performance which is self-recoverable.
- C. Temporary degradation or loss function or performance which requires operator intervention system reset.
- D. Degradation or loss function which is not recoverable due to damage of EUT or software, or loss of data.

8 TEST RESULT


ANT SIDE	HORIZONTAL	VERTICAL	RESULT
FRONT	A	A	PASSED
REAR	A	A	PASSED
RIGHT	A	A	PASSED
LEFT	A	A	PASSED

9 PHOTO OF RADIO FREQUENCY ELECTROMAGNETIC FILE
IMMUNITY TEST (RS)

Test Mode : 1024 x 768



Front View

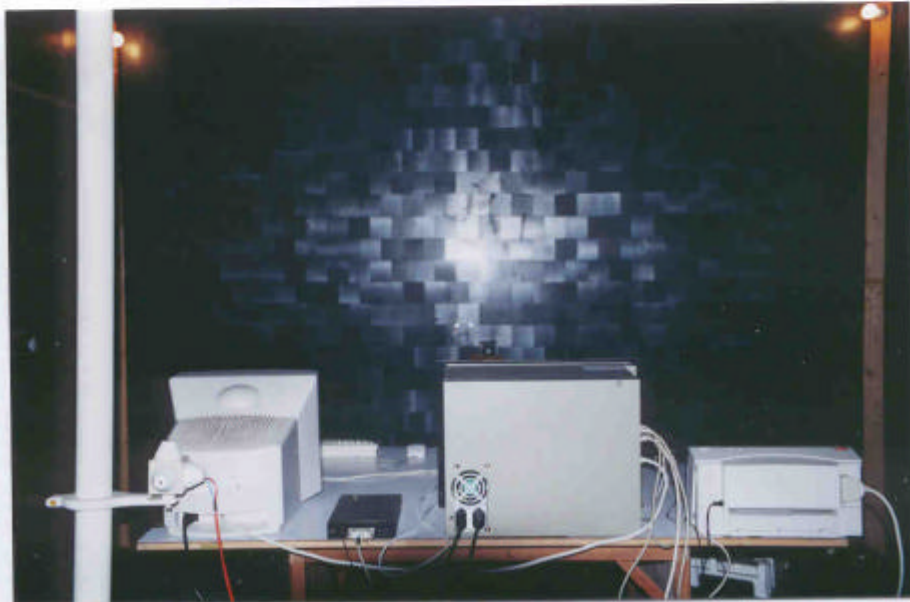

Rear View

ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)


1 TEST INSTRUMENTS & FACILITIES

Instruments/ Facilities	Manufacturer	Model # Serial #	Data Of Cal.
BURST-TESTER	HAEFELY	PEFT/JUNIOR	MAR/99
CONTROL PC	KB TECH	KB P586/133	--

2 TEST PROCEDURE

According to IEC 801-4

3 TEST SETUP

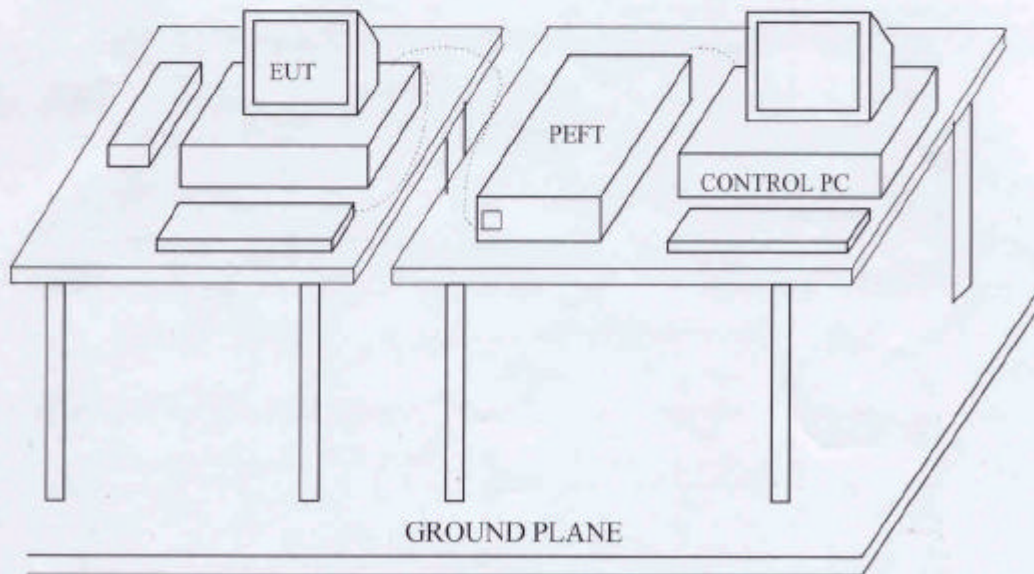

4 CONFIGURATION OF THE EUT

Same as "Conducted Power Line test", section 4

5 OPERATION CONDITION OF EUT

Same as "Conducted Power Line test", section 5

6 TEST CONDITION6.1 Pulse Rise time & Duration : 5 nS / 50 nS6.2 Pulse Repetition : 5 kHz

6.3 Polarity : POSITIVE / NEGATIVE

6.4 Test Voltage : $\pm 0.5KV$, $\pm 1KV$ 6.5 Coupling of power line :
L, N, PE, L+N, L+PE, N+PE, L+N+PE6.6 Temperature : 27 °C6.7 Humidity : 75 % RH**7 PERFORMANCE CRITERIA**

- A. Normal performance within the specification.
- B. Temporary degradation or loss function or performance which is self-recoverable.
- C. Temporary degradation or loss function or performance which requires operator intervention system reset.
- D. Degradation or loss function which is not recoverable due to damage of EUT or software, or loss of data.

8 TEST RESULT

TEST VOLTAGE	L	N	PE	L+N	L+PE	N+PE	L+N+PE
± 0.5KV	B	B	B	B	B	B	B
± 1KV	B	B	B	B	B	B	B

8.1 Test Mode : 1024 x 768

8.2 Final Result : PASSED

8.3 Remark :

9 PHOTO OF ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)

Test Mode : 1024 x 768



PHOTOS OF EUT



EUT Front View



EUT Rear View