

# FCC TEST REPORT

for

CISPR PUB. 22 Class A

Equipment : Industrial Display Panel  
Model No. : AMB-232A, AMB-232AT  
FCC ID : N/A  
Filing Type : Verification  
Applicant : **Astech Technology Co., Ltd.**  
6F-4, No. 351, Chung-Shan Rd., Sec. 2,  
Chung-Ho City, Taipei, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

## ***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

---

***SPORTON International Inc.***

TEL : 886-2-2696-2468  
FAX : 886-2-2696-2255

FCC ID : N/A  
Page No. : 1 of 24  
Issued Date : Jul. 7, 2000

6F, No 106, Sec.1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien Taiwan, R.O.C. TEL:886-2-26962468 FAX:886-2-26962255

Scope of NVLAP Accreditation : IEC/CISPR 22, FCC Method - 47 CFR Part 15 - Digital Devices AS-354R



# CERTIFICATE OF COMPLIANCE

for

## CISPR PUB. 22 Class A

Equipment : Industrial Display Panel  
Model No. : AMB-232A, AMB-232AT  
FCC ID : N/A  
Applicant : **Astech Technology Co., Ltd.**  
6F-4, No. 351, Chung-Shan Rd., Sec. 2,  
Chung-Ho City, Taipei, Taiwan, R.O.C.

**HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed CISPR PUB. 22** both radiated and conducted emission class A limits. Testing was carried out on Jun. 23, 2000 at **SPORTON International Inc.** LAB. in Lin Kou.

  
Lenore Chang  
President

**SPORTON International Inc.**

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

**SPORTON International Inc.**  
TEL : 886-2-2696-2468  
FAX : 886-2-2696-2255

FCC ID : N/A  
Page No. : 3 of 24  
Issued Date : Jul. 7, 2000

6F, No 106, Sec.1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien Taiwan, R.O.C. TEL:886-2-26962468 FAX:886-2-26962255



## Table of Contents

<b>CERTIFICATE OF COMPLIANCE .....</b>	<b>3</b>
<b>1. General Description of Equipment under Test .....</b>	<b>4</b>
1.1. Applicant.....	4
1.2. Manufacturer.....	4
1.3. Basic Description of Equipment under Test.....	4
1.4. Feature of Equipment under Test.....	4
<b>2. Test Configuration of Equipment under Test.....</b>	<b>5</b>
2.1. Test Manner.....	5
2.2. Description of Test System .....	5
2.3. Connection Diagram of Test System.....	7
<b>3. Test Software.....</b>	<b>8</b>
<b>4. General Information of Test .....</b>	<b>9</b>
4.1. Test Facility.....	9
4.2. Standard for Methods of Measurement .....	9
4.3. Test in Compliance with .....	9
4.4. Frequency Range Investigated.....	9
4.5. Test Distance.....	9
<b>5. Test of Conducted Powerline.....</b>	<b>10</b>
5.1. Major Measuring Instruments.....	10
5.2. Test Procedures.....	11
5.3. Typical Test Setup Layout of Conducted Powerline.....	12
5.4. Test Result of AC Powerline Conducted Emission .....	13
5.5. Photographs of Conducted Powerline Test Configuration.....	15
<b>6. Test of Radiated Emission .....</b>	<b>17</b>
6.1. Major Measuring Instruments.....	17
6.2. Test Procedures.....	18
6.3. Typical Test Setup Layout of Radiated Emission.....	19
6.4. Test Result of Radiated Emission .....	20
6.5. Photographs of Radiated Emission Test Configuration.....	22
<b>7. Antenna Factor &amp; Cable Loss .....</b>	<b>23</b>
<b>8. List of Measuring Equipment Used .....</b>	<b>24</b>
<b>Appendix A. Photographs of EUT .....</b>	<b>A1 ~ A3</b>

**1. General Description of Equipment under Test**

**1.1. Applicant**

Astech Technology Co., Ltd.  
6F-4, No. 351, Chung-Shan Rd., Sec. 2,  
Chung-Ho City, Taipei, Taiwan, R.O.C.



**1.2. Manufacturer**

Same as 1.1.

**1.3. Basic Description of Equipment under Test**

Equipment : Industrial Display Panel  
Model No. : AMB-232A, AMB-232AT  
FCC ID : N/A  
Trade Name : Astech  
VGA data cable : Shielded, 1 m  
RS232 data cable : Non-Shielded, 2 m  
AV cable : Non-shielded, 1.6m  
Power Supply Type : Switching  
AC Power Cord : Non-Shielded, 1.8m, 3 pin  
DC power cable : Shielded, 0.7m, 2 pin

**1.4. Feature of Equipment under Test**

- Construction: Heavy-duty stainless chassis & Aluminum alloy front panel meets NEMA4/IP65
- Mounting: Panel mount
- I/O port: RGB, RCA
- Control: OSD (On Screen Manual) on front panel
- Power Supply: DC/12V external power adapter
- Resolution: VGA 800\*600 38K; RCA 640\*480 31K



## 2. Test Configuration of Equipment under Test

### 2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The DELL PS/2 Keyboard, PRIMAX PS/2 Mouse, HP Printer, ACEEX Modem, PANASONIC VIDEO PLAY and EUT were connected to the FIC PC for EMI test.
- c. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 1000MHz.

### 2.2. Description of Test System

#### Support Unit 1. -- Personal Computer (FIC)

FCC ID : N/A  
Model No. : P2L97  
Power Supply Type : Switching  
Power Cord : Non-Shielded  
Serial No. : SP0037  
Data Cable : Shielded, 360 degree via metal backshells  
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

#### Support Unit 2. -- PS/2 Keyboard (DELL)

FCC ID : GYUM92SK  
Model No. : AT101(DE8M)  
Serial No. : SP0054  
Data Cable : Shielded, 360 degree via metal backshells, 1.9m

#### Support Unit 3. -- PS/2 Mouse (PRIMAX)

FCC ID : EMJMUSJQ  
Model No. : MUS9J  
Serial No. : SP0045  
Data Cable : Shielded, 360 degree via metal backshells, 1.7m

**Support Unit 4. -- Printer (HP)**

FCC ID : B94C2642X  
Model No. : DeskJet 400  
Power Supply Type : Linear  
Power Cord : Non-Shielded  
Serial No. : SP0048  
Data Cable : Braided-Shielded, 360 degree via metal backshells, 1.35m


**Support Unit 5. -- Modem (ACEEX)**

FCC ID : IFAXDM1414  
Model No. : DM1414  
Power Supply Type : Linear  
Power Cord : Non-Shielded  
Serial No. : SP0015  
Data Cable : Shielded, 360 degree via metal backshells, 1.15m

**Support Unit 6. -- VIDEO PLAY (Panasonic)**

FCC ID : N/A  
Model No. : PV-S7670  
Power Supply Type : From PC  
Serial No. : SP0115  
Data Cable : Non-Shielded, 1.6m  
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

### 2.3. Connection Diagram of Test System

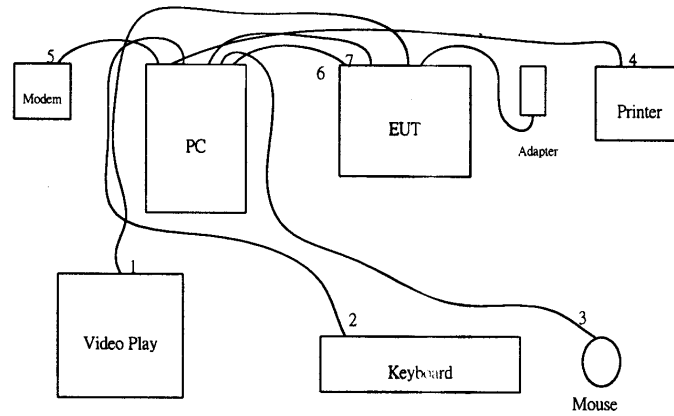

1. The I/O cable is connected from EUT to the support unit 6.
2. The I/O cable is connected from PC to the support unit 2.
3. The I/O cable is connected from PC to the support unit 3.
4. The I/O cable is connected from PC to the support unit 4.
5. The I/O cable is connected from PC to the support unit 5.
6. The VGA cable is connected from PC to the EUT.
7. The RS232 cable is connected from PC to the EUT.

**3. Test Software**

Two executive programs, EMITEST.EXE & WINFCC.EXE under WIN 98, which generate a complete line of continuously repeating " H " pattern were used as the test software.

The programs were executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.



## **4. General Information of Test**

### **4.1. Test Facility**

This test was carried out by SPORTON International Inc.

Test Site Location : No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,  
Taipei Hsien, Taiwan, R.O.C.  
TEL : 886-2-2601-1640  
FAX : 886-2-2601-1695

### **4.2. Standard for Methods of Measurement**

ANSI C63.4-1992

### **4.3. Test in Compliance with**

CISPR PUB. 22 Class A

### **4.4. Frequency Range Investigated**

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation : from 30 MHz to 1,000 MHz

### **4.5. Test Distance**

The test distance of radiated emission from antenna to EUT is 10 M.

## 5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


### 5.1. Major Measuring Instruments

Test Receiver	HP 8591EM
Attenuation	0 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 kHz

**5.2. Test Procedures**

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Conducted Powerline

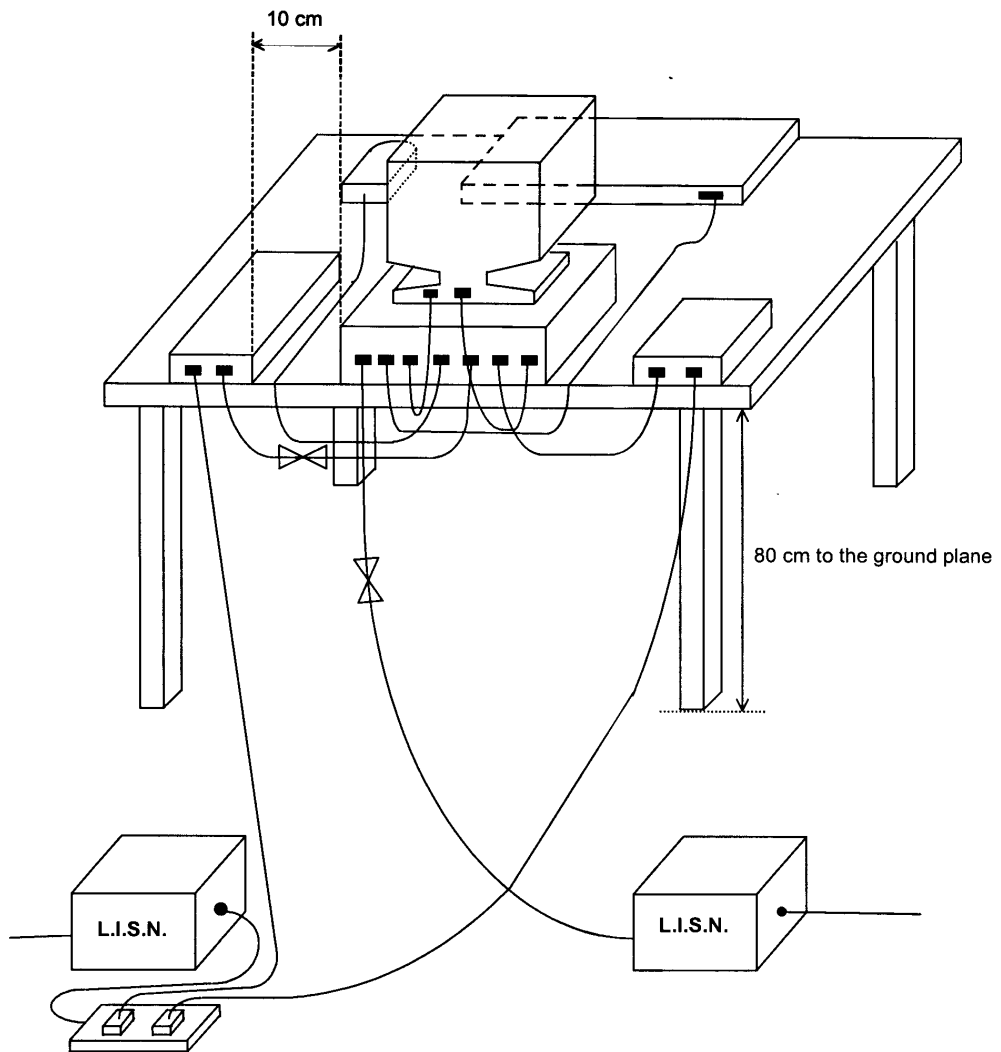

**5.4. Test Result of AC Powerline Conducted Emission**

5.4.1. Test mode : 648\*480 RCA mode

- Temperature : 26°C
- Relative Humidity : 44 %
- Test Date : Jun. 23, 2000

The Conducted Emission test was passed at minimum margin

**NEUTRAL 26.998 MHz / 56.70 dBuV.**

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.186	L	52.10	35.30	402.72	58.21	79.00	66.00	8912.51	1995.26	-26.9	-30.7
2.350	L	46.50	45.70	211.35	192.75	73.00	60.00	4466.84	1000.00	-26.5	-14.3
26.994	L	58.30	55.80	822.24	616.60	73.00	60.00	4466.84	1000.00	-14.7	-4.2
0.186	N	48.80	36.20	275.42	64.57	79.00	66.00	8912.51	1995.26	-30.2	-29.8
2.351	N	46.50	45.80	211.35	194.98	73.00	60.00	4466.84	1000.00	-26.5	-14.2
26.998	N	59.80	56.70	977.24	683.91	73.00	60.00	4466.84	1000.00	-13.2	-3.3

Test Engineer :   
Aldrich Hong

5.4.2. Test mode : 800\*600 VGA mode

- Temperature : 26°C
- Relative Humidity : 44 %
- Test Date : Jun. 23, 2000

The Conducted Emission test was passed at minimum margin

**NEUTRAL 26.998 MHz / 55.80 dBuV.**

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.186	L	52.90	36.70	441.57	68.39	79.00	66.00	8912.51	1995.26	-26.1	-29.3
2.407	L	46.50	46.10	211.35	201.84	73.00	60.00	4466.84	1000.00	-26.5	-13.9
26.998	L	55.60	55.60	602.56	602.56	73.00	60.00	4466.84	1000.00	-17.4	-4.4
0.185	N	49.80	37.50	309.03	74.99	79.00	66.00	8912.51	1995.26	-29.2	-28.5
2.653	N	46.50	45.50	211.35	188.36	73.00	60.00	4466.84	1000.00	-26.5	-14.5
26.998	N	55.80	55.80	616.60	616.60	73.00	60.00	4466.84	1000.00	-17.2	-4.2

Test Engineer : *Aldrich*  
Aldrich Hong


5.5. Photographs of Conducted Powerline Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW

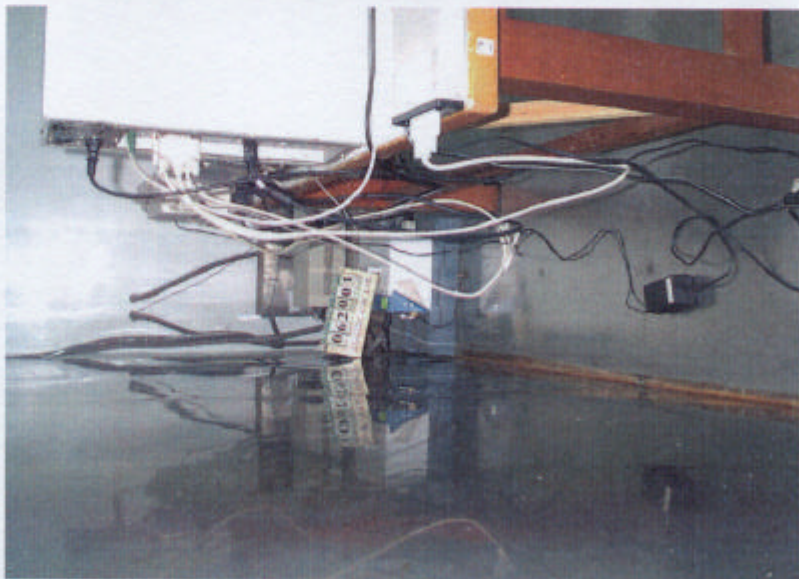

SIDE VIEW





## 6. Test of Radiated Emission

Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.



### 6.1. Major Measuring Instruments

Amplifier	(HP 8447D)
Attenuation	0 dB
RF Gain	25 dB
Signal Input	0.1 MHz to 1.3 GHz
Spectrum Analyzer	(ADVANTEST R3261A)
Attenuation	0 dB
Start Frequency	30 MHz
Stop Frequency	1,000 MHz
Resolution Bandwidth	1 MHz
Video Bandwidth	1 MHz
Signal Input	9 KHz to 2.6 GHz

**6.2. Test Procedures**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. Typical Test Setup Layout of Radiated Emission

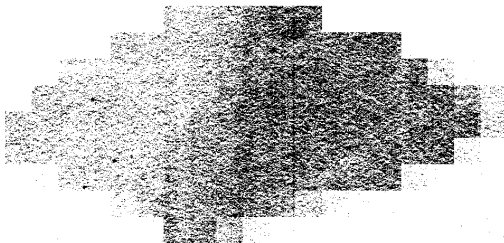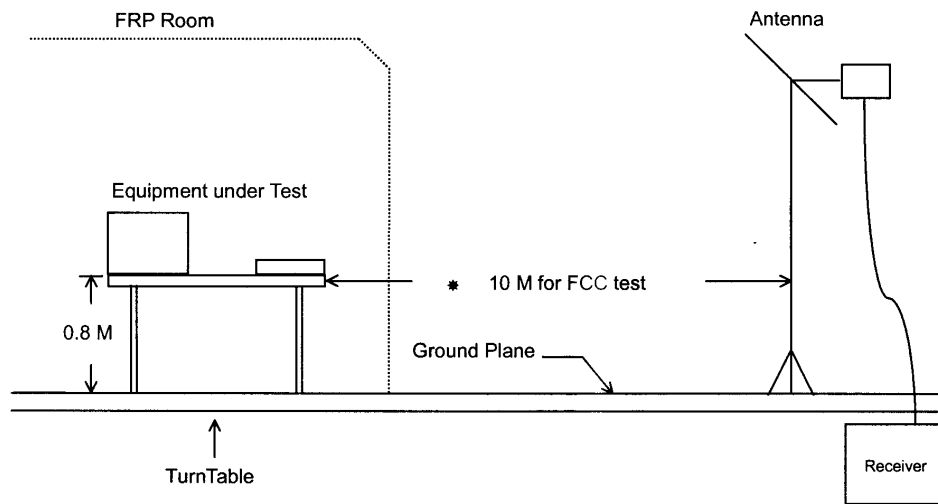

**6.4. Test Result of Radiated Emission**

6.4.1. Test mode : 648\*480 RCA mode

- Test Distance : 10 M
- Temperature : 28°C
- Relative Humidity : 60 %
- Test Date : Jun. 20, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

**The Radiated Emission test was passed at minimum margin**

**220.800 MHz / 33.41 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 30 °.**

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
185.700	V	9.01	1.83	20.84	40.00	100.00	31.68	38.37	-8.32
197.100	V	8.95	1.83	20.84	40.00	100.00	31.62	38.11	-8.38
220.800	V	10.42	2.15	20.84	40.00	100.00	33.41	46.83	-6.59
372.000	V	14.90	2.50	21.35	47.00	223.87	38.75	86.60	-8.25
416.800	V	15.70	2.66	20.56	47.00	223.87	38.92	88.31	-8.08
394.400	H	15.40	2.62	20.53	47.00	223.87	38.55	84.63	-8.45

Test Engineer :



Benny Lee

6.4.2. Test mode : 800\*600 VGA mode

- Test Distance : 10 M
- Temperature : 28°C
- Relative Humidity : 60 %
- Test Date : Jun. 23, 2000
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

**The Radiated Emission test was passed at minimum margin**

**220.600 MHz / 38.57 dBuV (VERTICAL) Antenna Height 1 Meter, Turntable Degree 180 °.**

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
216.100	V	10.08	2.11	24.70	40.00	100.00	36.89	69.90	-3.11
220.600	V	10.42	2.15	26.00	40.00	100.00	38.57	84.82	-1.43
185.700	H	9.01	1.83	25.67	40.00	100.00	36.51	66.91	-3.49
197.100	H	8.95	1.83	26.00	40.00	100.00	36.78	69.02	-3.22
216.000	H	10.08	2.11	24.24	40.00	100.00	36.43	66.30	-3.57
220.800	H	10.42	2.15	23.67	40.00	100.00	36.24	64.86	-3.76

Test Engineer : *Benny*  
 Benny Lee



6.5. Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW



## 7. Antenna Factor &amp; Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	17.3	0.2
35	15.5	0.5
40	13.9	0.8
45	10.4	0.9
50	8.3	1.0
55	7.4	1.0
60	6.4	1.0
65	6.1	1.0
70	5.8	1.0
75	6.2	1.0
80	6.8	1.0
85	7.7	1.1
90	8.6	1.2
95	10.0	1.2
100	11.3	1.3
110	11.8	1.4
120	12.3	1.5
130	11.7	1.3
140	11.3	1.5
150	10.6	1.5
160	9.6	1.7
170	8.8	1.7
180	9.1	1.8
190	9.0	1.8
200	8.9	1.8
220	10.4	2.2
240	11.7	1.8
260	12.8	2.0
280	13.5	2.2
300	14.2	2.3
320	14.3	2.3
340	14.4	2.3
360	14.6	2.5
380	15.1	2.5
400	15.5	2.7
450	16.3	2.9
500	16.6	3.0
550	17.7	3.3
600	17.9	3.5
650	17.8	3.7
700	16.9	3.8
750	17.4	4.2
800	18.2	4.0
850	18.6	4.3
900	20.1	4.2
950	19.8	4.5
1000	19.3	4.7

LKOP6

## 8. List of Measuring Equipment Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver (site 2)	HP	8591EM	3710A01187	9 KHz - 18 GHz	Sep. 06. 1999	Conduction
LISN (Support Unit) (site 2)	Telemeter	NNB-2/16Z	98009	50 ohm / 50 uH	Dec. 06. 1999	Conduction
LISN (EUT) (site 2)	Telemeter	NNB-2/16Z	98087	50 ohm / 50 uH	Dec. 06. 1999	Conduction
Spectrum Analyzer (Site 6)	ADVANTEST	R3261C	71720760	9 KHz - 2.6GHz	Mar. 08. 2000	Radiation
Amplifier (Site 6)	HP	8447D	2944A08291	0.1MHz -1.3GHz	Oct. 20. 1999	Radiation
Bilog Antenna (Site 6)	CHASE	CBL6112A	2442	30MHz -2GHz	Jan. 18. 2000	Radiation
Half-wave dipole antenna (Site 6)	EMCO	3121C	9705-1285	28 M - 1GHz	May 17. 2000	Radiation
Turn Table (site 6)	EMCO	2080	9711-2021	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 6)	EMCO	2075	9711-2115	1 m- 4 m	N/A	Radiation



APPENDIX A. Photographs of EUT



062001-01.jpg



062001-02.jpg



062001-03.jpg



062001-04.jpg



062001-05.jpg