

KING DESIGN INDUSTRIAL CO., LTD.

VIBRATION TEST LABORATORY

5F,NO. 3, Lane 270, Pei Shen Road Sec. 3,

<http://www.kdi.tw>

Shen Keng Dist., New Taipei City, 222, Taiwan, R.O.C

<http://www.vibration.com.tw>

TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

E-mail:service@kdi.tw

TESTING / INSPECTION REPORT

REPORT NO : ST-130308-3

COMPANY : AAEON Technology Inc.

ADDRESS : 5F, No.135, Lane 235, Pao Chiao Rd.

Hsin-Tien City, Taipei, Taiwan, R. O. C.

TEL : 886-2-8919-1234

FAX : 886-2-8919-1049

SPECIMEN : AEC-6401 with mSATA




DATE OF RECEIVED : 2013/02/27

DATE OF TESTED : 2013/02/27

TEST / INSPECTION ITEMS : Shock Test

REMARKS :

- The laboratory is accredited by ISO/IEC 17025 General Requirements for the Competence of Calibration and Testing Laboratory.
- The results only apply to the device under test.
- This report is 10 pages, and no part of it may be abstracted or reproduced.

Test Engineer :		
Approval Signatory :		Laboratory Head :
		

KING DESIGN INDUSTRIAL CO., LTD.

5F,NO. 3, Lane 270, Pei Shen Road Sec. 3,

Shen Keng Dist., New Taipei City, 222, Taiwan, R.O.C

TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

VIBRATION TEST LABORATORY
<http://www.kdi.tw>
<http://www.vibration.com.tw>

E-mail:service@kdi.tw

TESTING / INSPECTION REPORT

TESTING EQUIPMENT :

- | | |
|-------------------------|---|
| 1.Vibration Tester | : KING DESIGN KD-9363EM-600F2K-50N120,
S/N : KDS11054986 |
| 2.Controller | : DACTRON Front-End Box, S/N:4529465 |
| 3.Control Accelerometer | : Wilcoxon Research WR-777, S/N:4208 |

TEST ENVIRONMENT :

- | | |
|-------------------|---------------------|
| Temperature | : 22.5°C (25±10°C) |
| Relative Humidity | : 54%RH (50±25% RH) |

SPECIMEN :

- | | |
|----------|-----------------------|
| Model | : AEC-6401 with mSATA |
| Quantity | : 1 unit |

TEST SPECIFICATION :

As per applicant's requirement

- | | |
|-----------------|------------------------------|
| Wave Form | : Half Sine wave (Operating) |
| Acceleration | : 20 g |
| Duration Time | : 11 mS |
| No. of Shock | : Each axis 3 times |
| Shock Direction | : ±X, ±Y, ±Z axis |


TEST RESULT :

Describe	PASS	FAIL	Non-Judgment
Function judgment ⁽¹⁾	√	---	---
Appearance check ⁽²⁾	√	---	---
(1)—Bootng function was normal after the test. (2)—No visible damages were found.			


TESTING / INSPECTION REPORT

Testing photos

AXIS +X

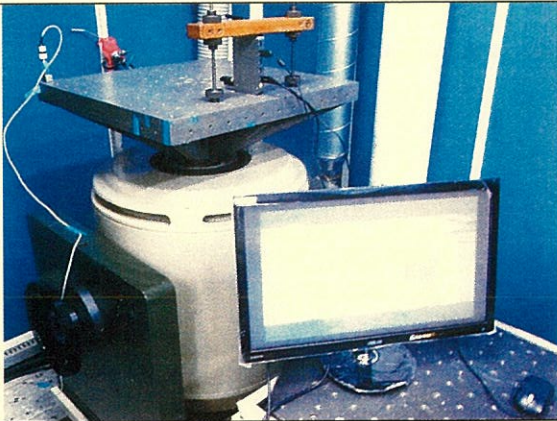


AXIS -X

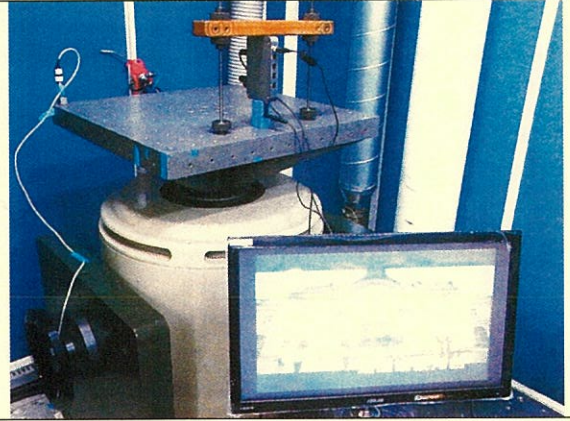


AXIS +Y



AXIS -Y

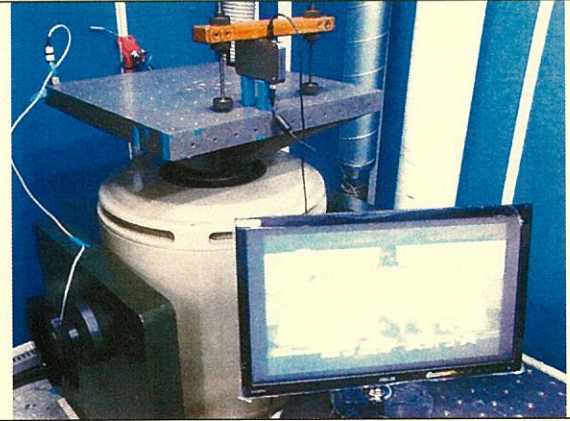

AXIS +Z

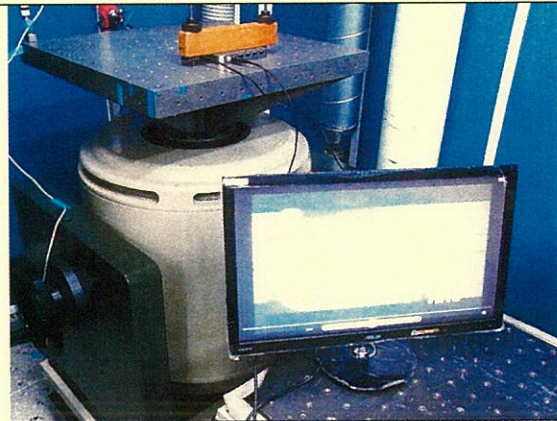

AXIS -Z




實驗

TESTING / INSPECTION REPORT

Testing photos

After test

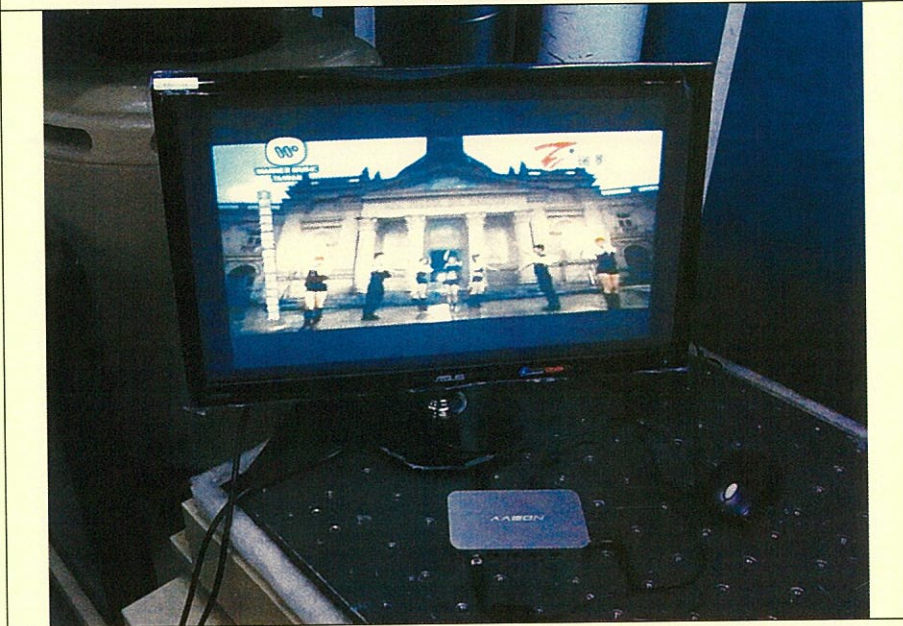


室騎維

Axis X

Project File Name: 20g 11mS.prj

Profile Name: 20G 11mSec Test Type: Classical Shock Run Folder: .\Run Feb 27, 2013 13-30-18

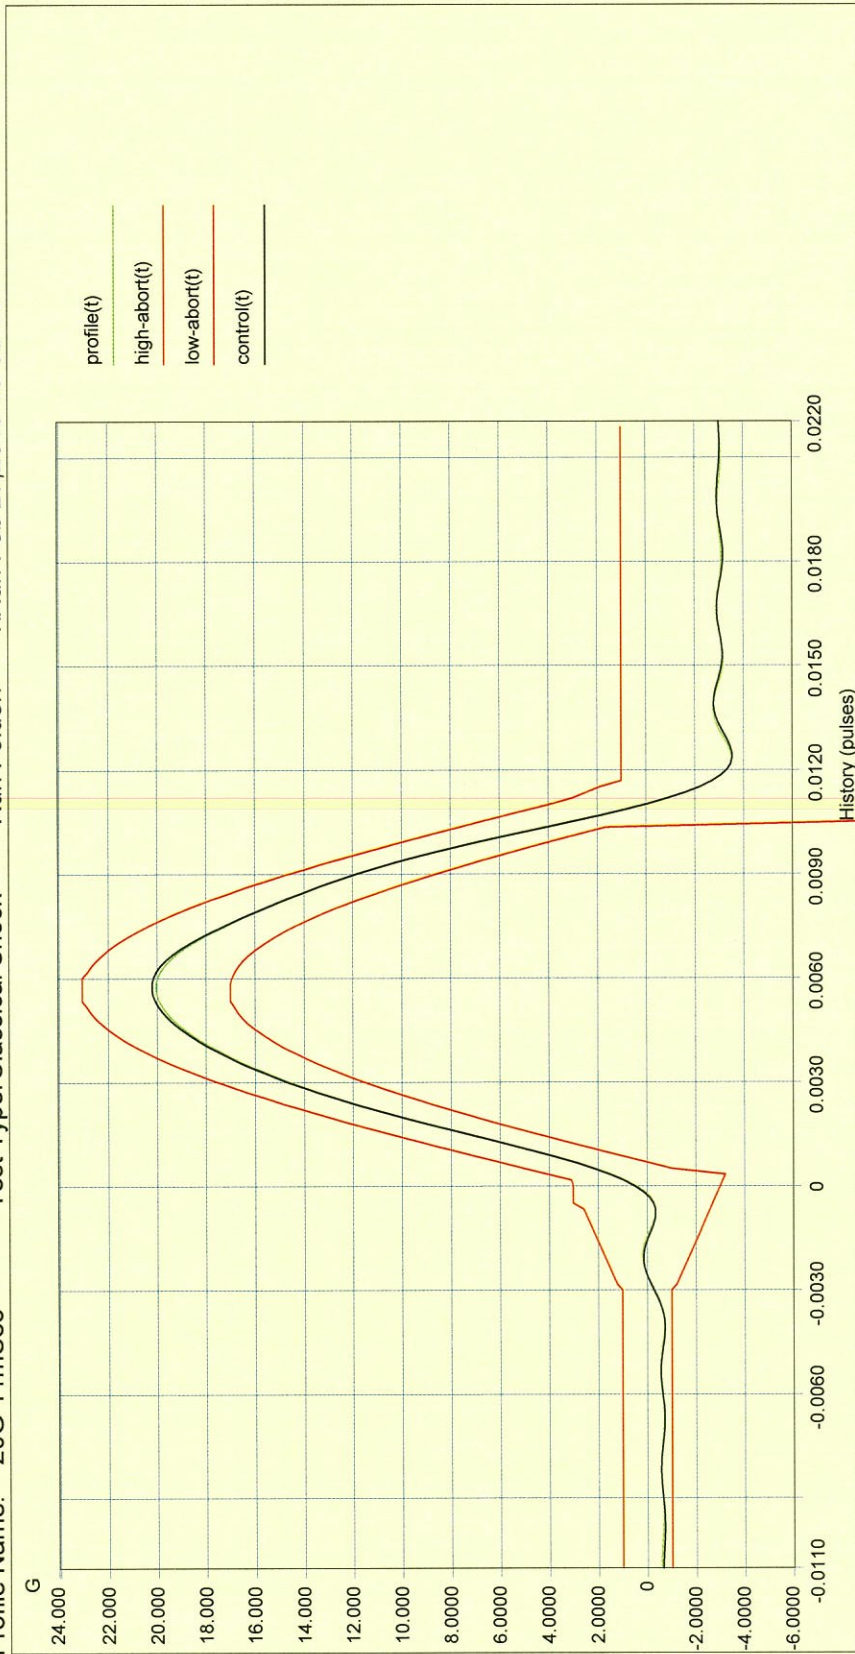

Level: 100 % Block Size: 4096 Elapsed Pulses: 13
 Frame Time: 0.682667 Seconds Control Peak: 20.177588 G Control RMS: 2.012926 G Full Level Elapsed Pulses: 3
 dT: 0.000167 Seconds Demand Peak: 20.000000 G Demand RMS: 1.988153 G Remaining Pulses: 0
 Pulse Type: Half Sine Amplitude: 20.000000 G Pulse Width: 11.000001 ms
 Data saved at 01:30:50 PM, Wednesday, February 27, 2013 Report created at 01:30:53 PM, Wednesday, February 27, 2013



Axis -X

Project File Name: 20g 11mS.prj

Profile Name: 20G 11mSec Test Type: Classical Shock Run Folder: \Run Feb 27, 2013 13-34-18




Level: 100 % Block Size: 4096 Elapsed Pulses: 13
 Frame Time: 0.682667 Seconds Control Peak: 20.213524 G Control RMS: 2.011574 G Full Level Elapsed Pulses: 3
 dT: 0.000167 Seconds Demand Peak: 20.000000 G Demand RMS: 1.988153 G Remaining Pulses: 0
 Pulse Type: Half Sine Amplitude: 20.000000 G Pulse Width: 11.000001 ms
 Data saved at 01:34:51 PM, Wednesday, February 27, 2013 Report created at 01:34:54 PM, Wednesday, February 27, 2013

Axis Y

Project File Name: 20g 11mS.prj


Profile Name: 20G 11mSec Test Type: Classical Shock Run Folder: .\Run Feb 27, 2013 13-40-17

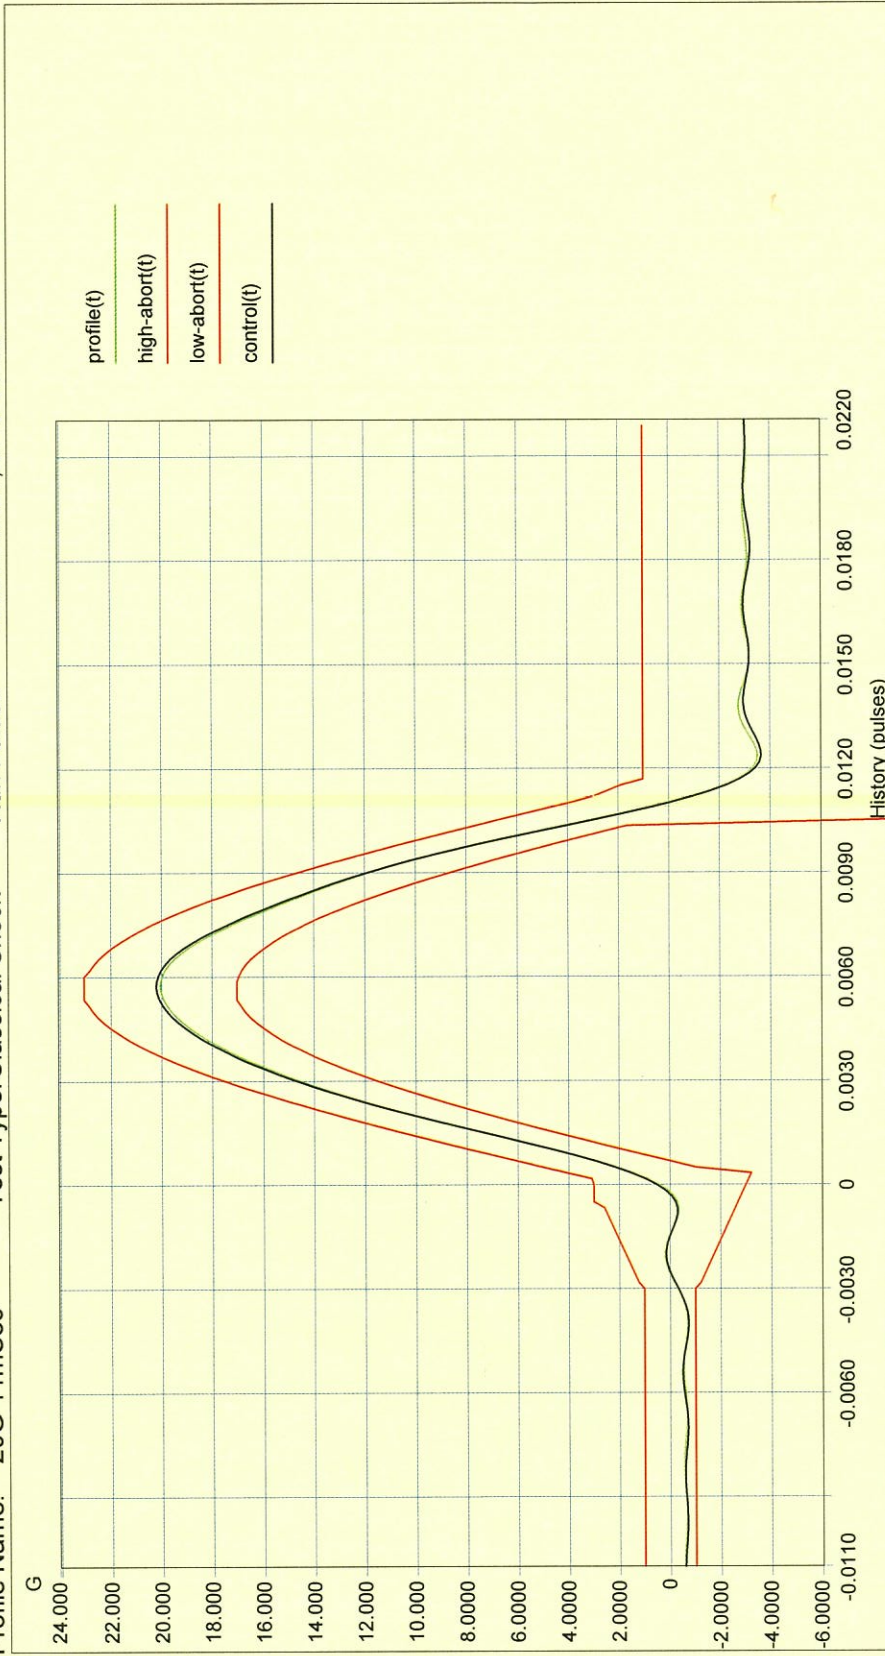

Level: 100 % Block Size: 4096 Elapsed Pulses: 13
 Frame Time: 0.682667 Seconds Control Peak: 20.161655 G Control RMS: 2.017318 G Full Level Elapsed Pulses: 3
 dT: 0.000167 Seconds Demand Peak: 20.000000 G Demand RMS: 1.988153 G Remaining Pulses: 0
 Pulse Type: Half Sine Amplitude: 20.000000 G Pulse Width: 11.000001 ms
 Data saved at 01:40:49 PM, Wednesday, February 27, 2013 Report created at 01:40:50 PM, Wednesday, February 27, 2013



Axis - Y
 Project File Name: 20g 11mS.prj
 Profile Name: 20G 11mSec Test Type: Classical Shock Run Folder: .\Run Feb 27, 2013 13-42-23

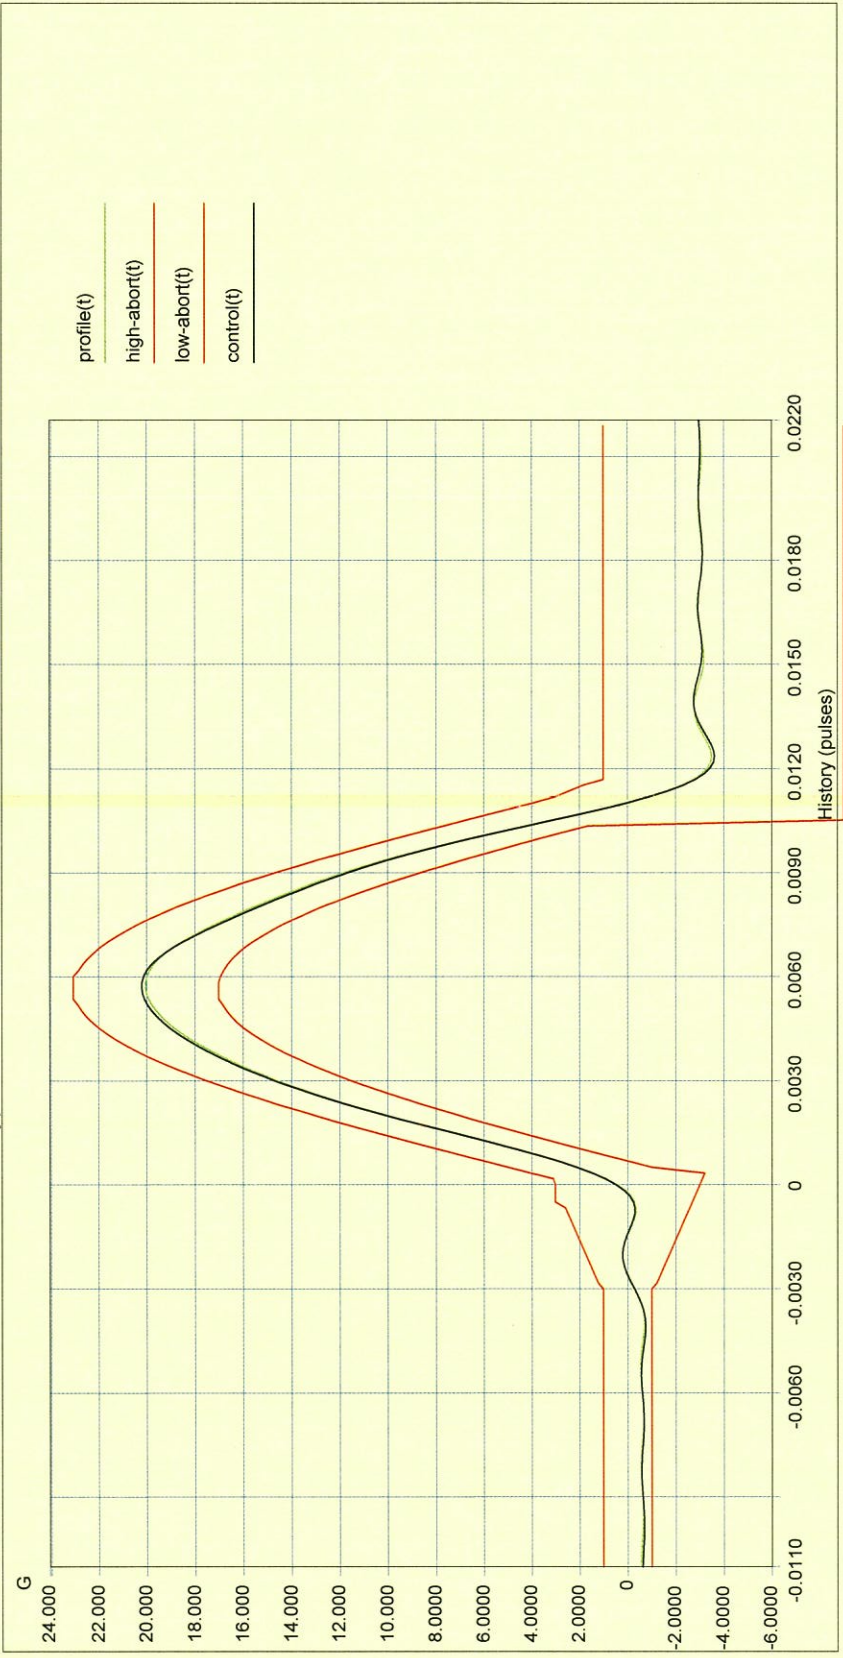


Level: 100 % Block Size: 4096 Elapsed Pulses: 13
 Frame Time: 0.682667 Seconds Control Peak: 20.162731 G Control RMS: 2.005370 G Full Level Elapsed Pulses: 3
 dT: 0.000167 Seconds Demand Peak: 20.000000 G Demand RMS: 1.988153 G Remaining Pulses: 0
 Pulse Type: Half Sine Amplitude: 20.000000 G Pulse Width: 11.000001 ms
 Data saved at 01:42:55 PM, Wednesday, February 27, 2013 Report created at 01:43:15 PM, Wednesday, February 27, 2013



Axis Z

Project File Name: 20g 11mS.prj

Profile Name: 20G 11mSec Test Type: Classical Shock Run Folder: .\Run Feb 27, 2013 13-44-38

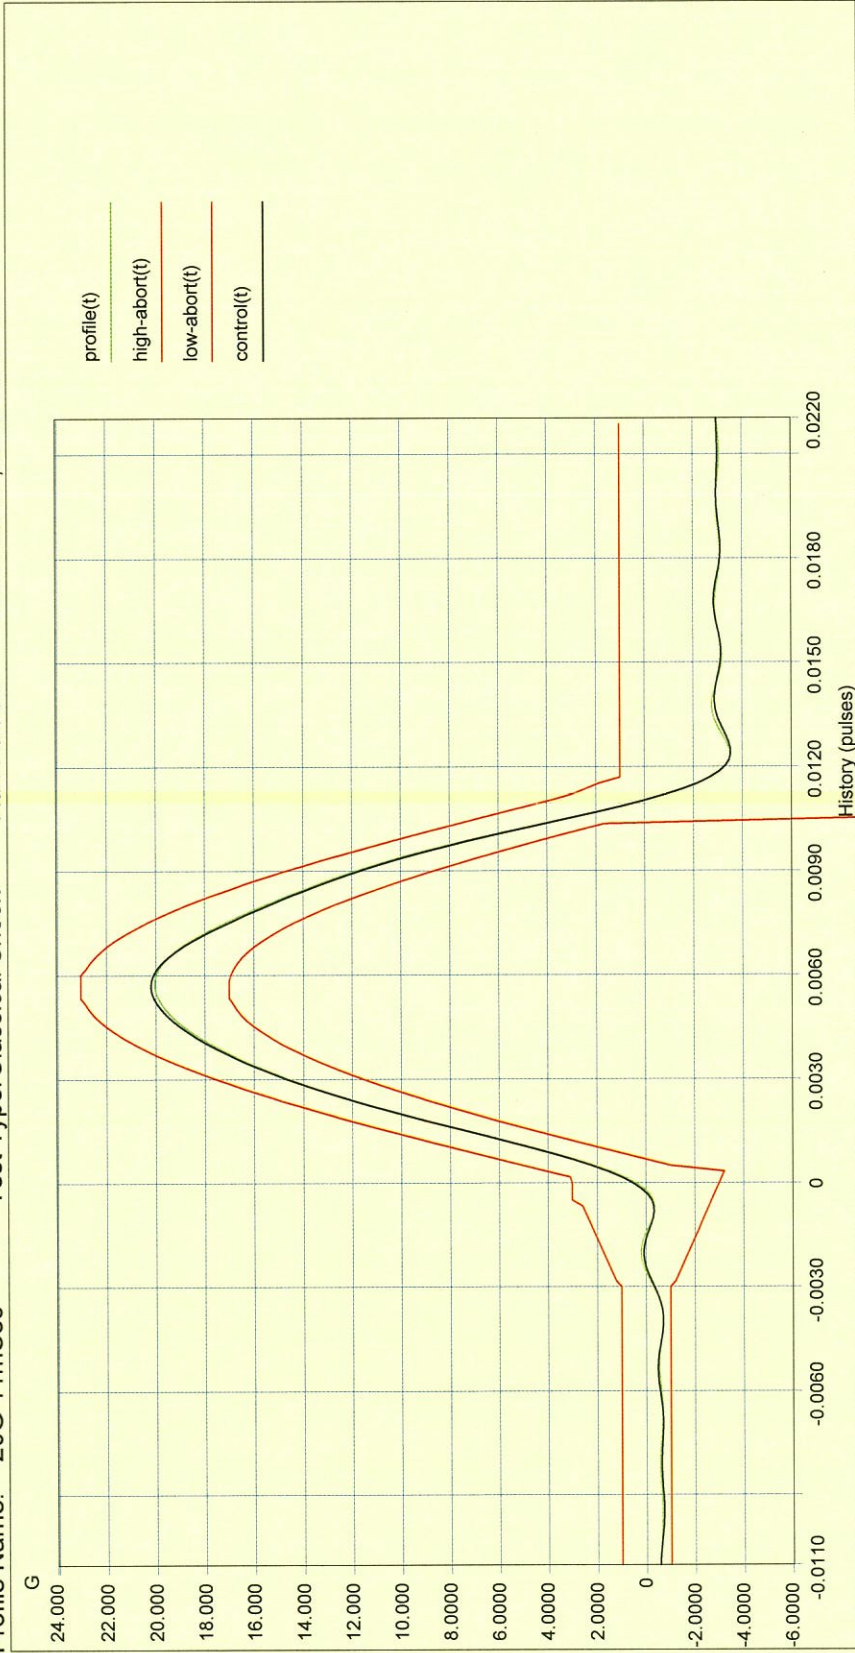


Level: 100 % Block Size: 4096 Elapsed Pulses: 13 Full Level Elapsed Pulses: 3
 Frame Time: 0.682667 Seconds Control Peak: 20.159903 G Control RMS: 2.003684 G
 dT: 0.000167 Seconds Demand Peak: 20.000000 G Demand RMS: 1.988153 G Remaining Pulses: 0
 Pulse Type: Half Sine Amplitude: 20.000000 G Pulse Width: 11.000001 ms
 Data saved at 01:45:08 PM, Wednesday, February 27, 2013 Report created at 01:45:09 PM, Wednesday, February 27, 2013



Axis -Z

Project File Name: 20g 11mS.prj

Profile Name: 20G 11mSec Test Type: Classical Shock Run Folder: .\Run Feb 27, 2013 13-46-36

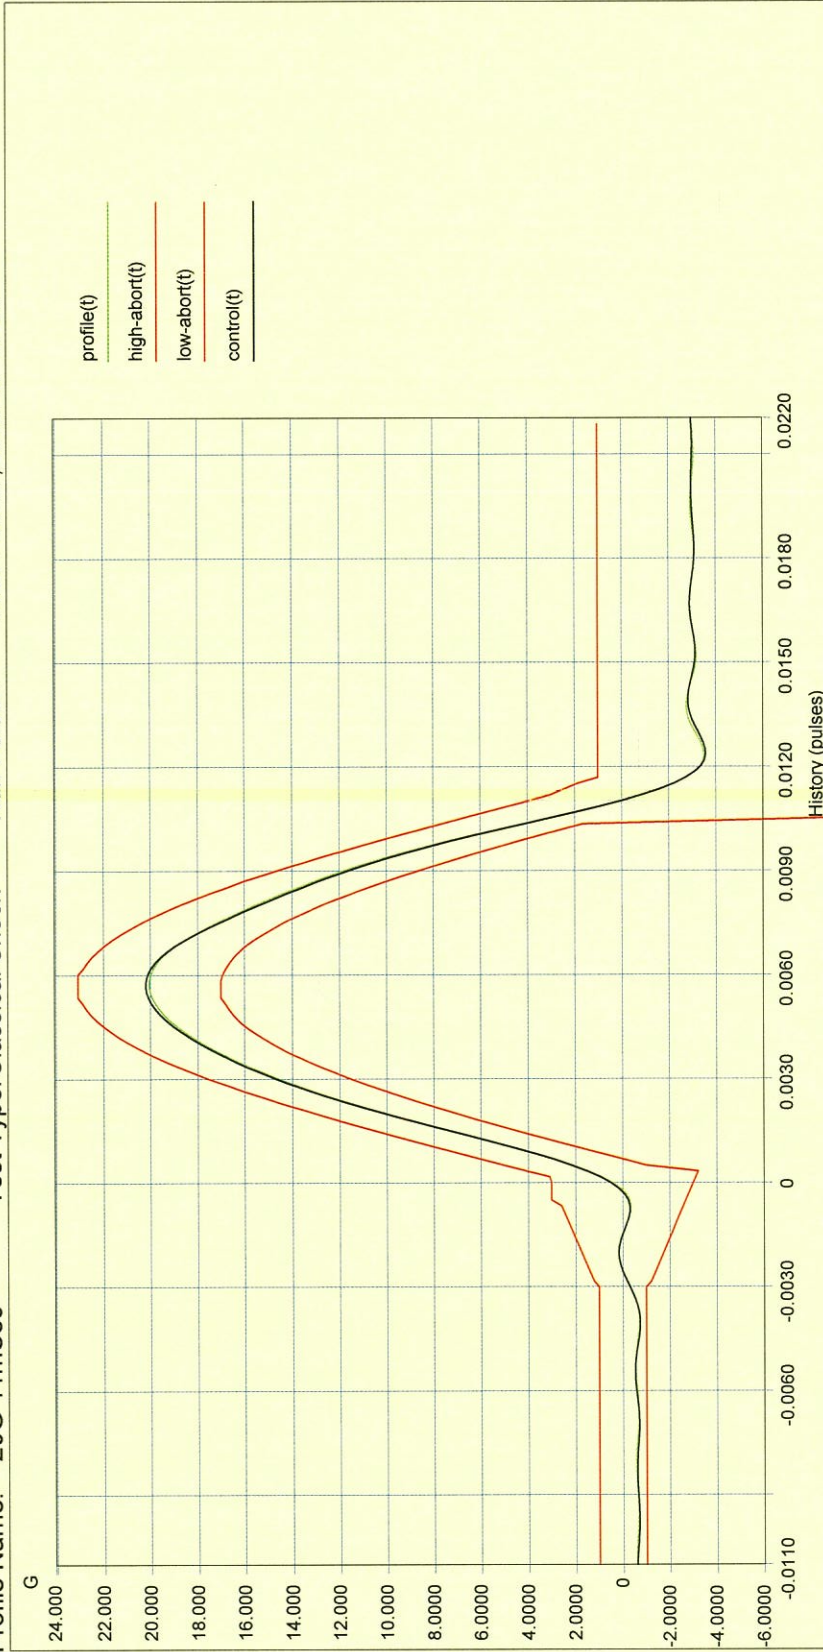

Level: 100 % Block Size: 4096 Elapsed Pulses: 13 Full Level Elapsed Pulses: 3
 Frame Time: 0.682667 Seconds Control Peak: 20.154171 G Control RMS: 2.006059 G
 dT: 0.000167 Seconds Demand Peak: 20.000000 G Demand RMS: 1.988153 G Remaining Pulses: 0
 Pulse Type: Half Sine Amplitude: 20.000000 G Pulse Width: 11.000001 ms
 Data saved at 01:47:10 PM, Wednesday, February 27, 2013 Report created at 01:47:10 PM, Wednesday, February 27, 2013

-END-





Certificate No. : L0424-110728

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

King Design Industrial Co., Ltd.

Vibration Laboratory

4F., No.3, Ln. 270, Sec. 3, Beishen Rd., Shenkeng Dist., New Taipei City 22206, Taiwan
(R.O.C.)

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 0424
Originally Accredited : May 01, 1998
Effective Period : July 28, 2011 to July 27, 2014
Accredited Scope : Testing Field, see described in the Appendix

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : July 28, 2011

Pl, total 4 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix



Certificate No. : L0424-110728

財團法人全國認證基金會
Taiwan Accreditation Foundation

Accreditation Number : 0424

Laboratory Head : CHANG, Hsin Tai

▼ 16.99 Machine and Equipment

Vibration Tester

A002 Vibration

CNS 3629

CNS 5424

Frequency:5 Hz to 3000 Hz

Acceleration:(0 to 100) Gpk

Approval Signatory: LEE, David;CHANG, Hsin Tai

▼ 16.99 Machine and Equipment

Shock Test Equipment

A002 Vibration

IEST-RP-DTE 012.1

Shock Acceleration

Max. G:250 Gpk

Time Duration:0.1 ms to 50 ms

Approval Signatory: LEE, David;CHANG, Hsin Tai

▼ 19.01 Electronic and Electric

Electrical Machine & Equipment

Electronic Device

A002 Vibration

CNS 5424

CNS 3629

IEC 60068-2-35 : 1973

Frequency:5 Hz to 2000 Hz

Acceleration:(0 to 50) Gpk

Approval Signatory: LEE, David;CHANG, Hsin Tai

P2, total 4 pages



Certificate No. : L0424-110728

財團法人全國認證基金會
Taiwan Accreditation Foundation

19.01 Electronic and Electric
Electrical Machine & Equipment
Electronic Device
A002 Vibration
IEC 60068-2-27
Acceleration: 5 Gpk to 200 Gpk
Time Duration: 2 ms to 16 ms

Approval Signatory: LEE, David; CHANG, Hsin Tai

19.99 Electronic and Electric
Electric & Electronic Products
E003 Environmental Reliability
IEC 60068-2-1
Temperature Range: $\geq -25^{\circ}\text{C}$

Approval Signatory: LEE, David; CHANG, Hsin Tai

19.99 Electronic and Electric
Electric & Electronic Products
E003 Environmental Reliability
IEC 60068-2-2
Temperature Range: $\leq 100^{\circ}\text{C}$

Approval Signatory: LEE, David; CHANG, Hsin Tai

19.99 Electronic and Electric
Electric & Electronic Products
E003 Environmental Reliability
IEC 60068-2-30
Temperature Range: -40°C to 120°C
Temperature Change Rate: rise $2^{\circ}\text{C}/\text{min}$, fall $1^{\circ}\text{C}/\text{min}$

Approval Signatory: LEE, David; CHANG, Hsin Tai

E003 Environmental Reliability
IEC 60068-2-38
Temperature Range: -40°C to 120°C

P3, total 4 pages



Certificate No. : E0424-110728

財團法人全國認證基金會
Taiwan Accreditation Foundation

Humidity Range:15 %RH to 95 %RH
Temperature Change Rate:rise 2 ℃/min、fall 1 ℃/min

Approval Signatory: LEE, David;CHANG, Hsin Tai

E003 Environmental Reliability
MIL-STD-810F Method 501.4、502.4、503.4、514.5(Procedure I、III、IV)、
516.5(Procedure I、II、III、IV、V、VI、VIII)
Temperature Range:-40 ℃ to 120 ℃
Temperature Change Rate:rise 2 ℃/min、fall 1 ℃/min
Frequency:3 Hz to 2000 Hz
Displacement:(0 to 4) mm (peak to peak)
Acceleration:(0 to 10) Gpk

Approval Signatory: LEE, David;CHANG, Hsin Tai

(Null below)

P4, total 4 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix