

**TESTING / INSPECTION REPORT**

REPORT NO : ST-160115-1

COMPANY : AAEON Technology Inc.  
ADDRESS : 5F, No.135, Lane 235, Pao Chiao Rd.  
Hsin-Tien City, Taipei, Taiwan, R. O. C.  
TEL : 886-2-8919-1234  
FAX : 886-2-8919-1049  
SPECIMEN : BOXER-6951 (With 2.5" SATA HDD)  
DATE OF RECEIVED : 2016/01/15  
DATE OF TESTED : 2016/01/15

TEST / INSPECTION ITEMS : Shock Test

## REMARKS :

- The laboratory is accredited by ISO/IEC 17025 General Requirements for the Competence of Calibration and Testing Laboratory.
- The results only apply to the device under test.
- This report is 11 pages, and no part of it may be abstracted or reproduced.

Test Engineer :

Approval Signatory

2016.1.19 David Lee


Laboratory Head :

Hsin Tai







金頓科技




## TESTING / INSPECTION REPORT

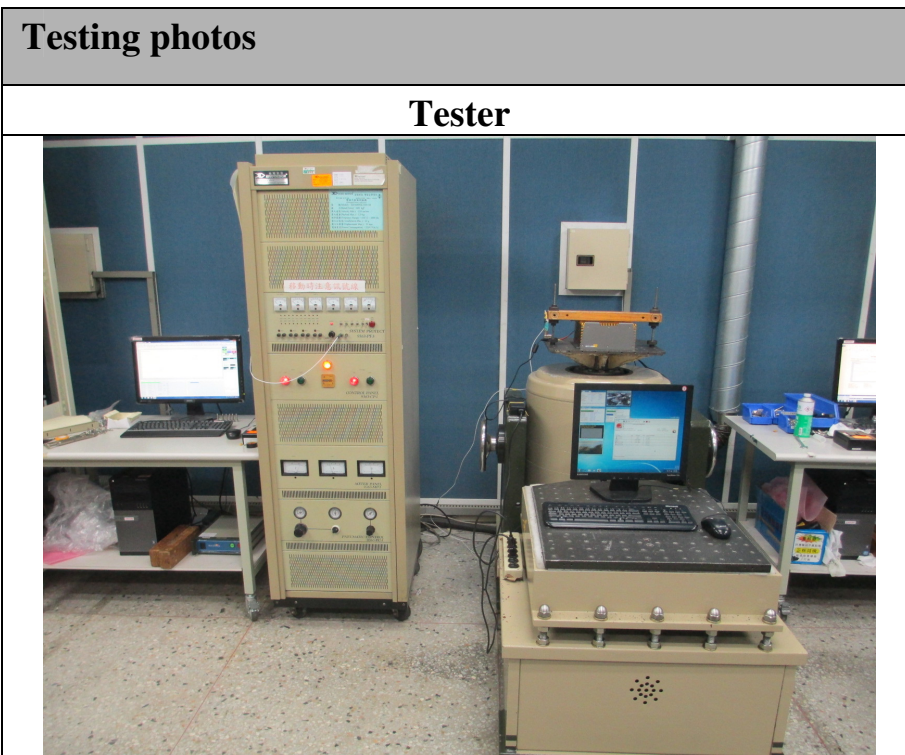


## TESTING / INSPECTION REPORT

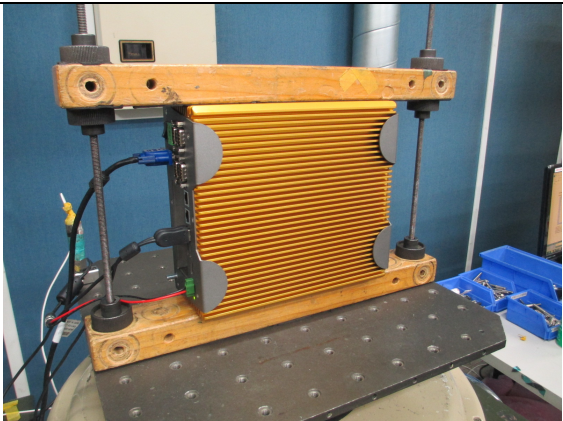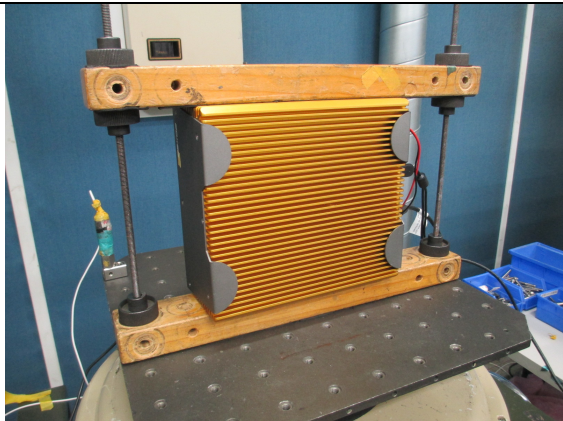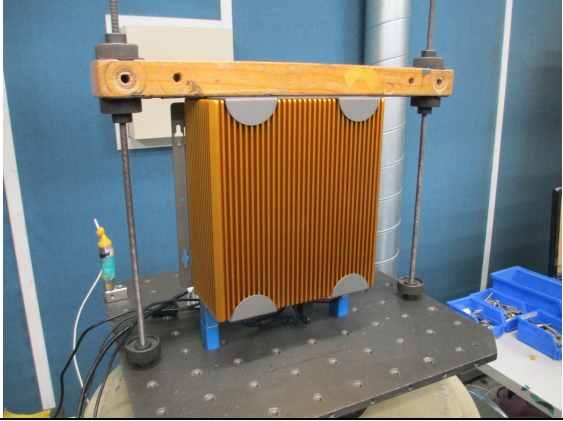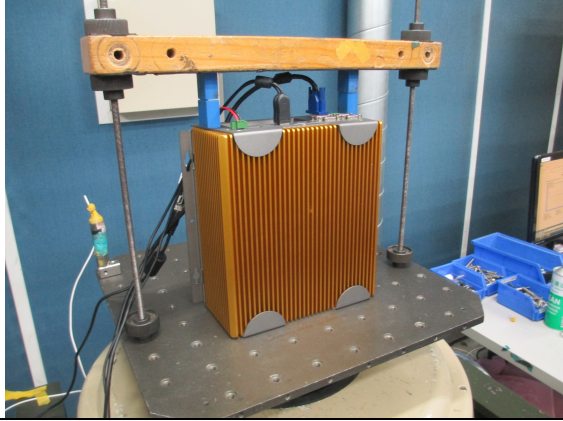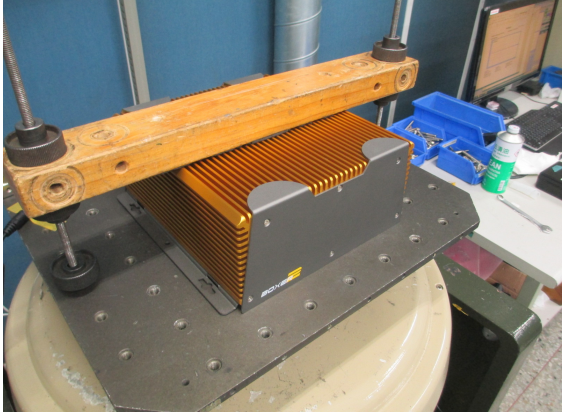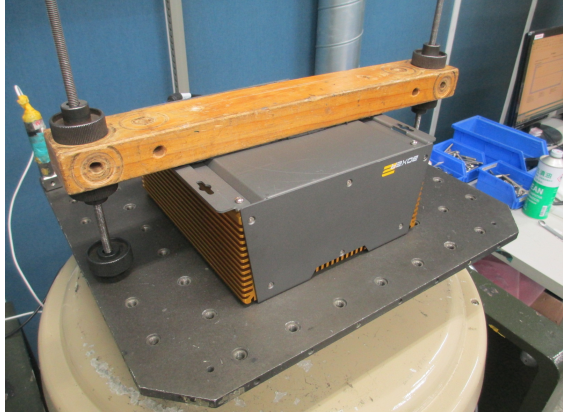Testing photos	
<b>+X axis</b>	<b>-X axis</b>
	
<b>+Y axis</b>	<b>-Y axis</b>
	
<b>+Z axis</b>	<b>-Z axis</b>
	

## TESTING / INSPECTION REPORT

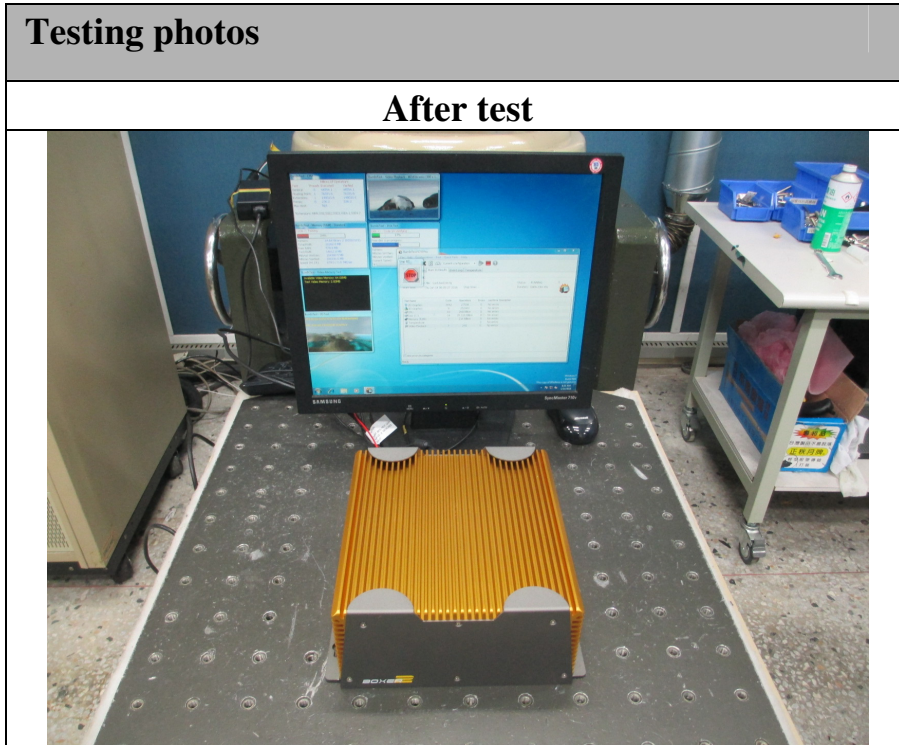

+X axis

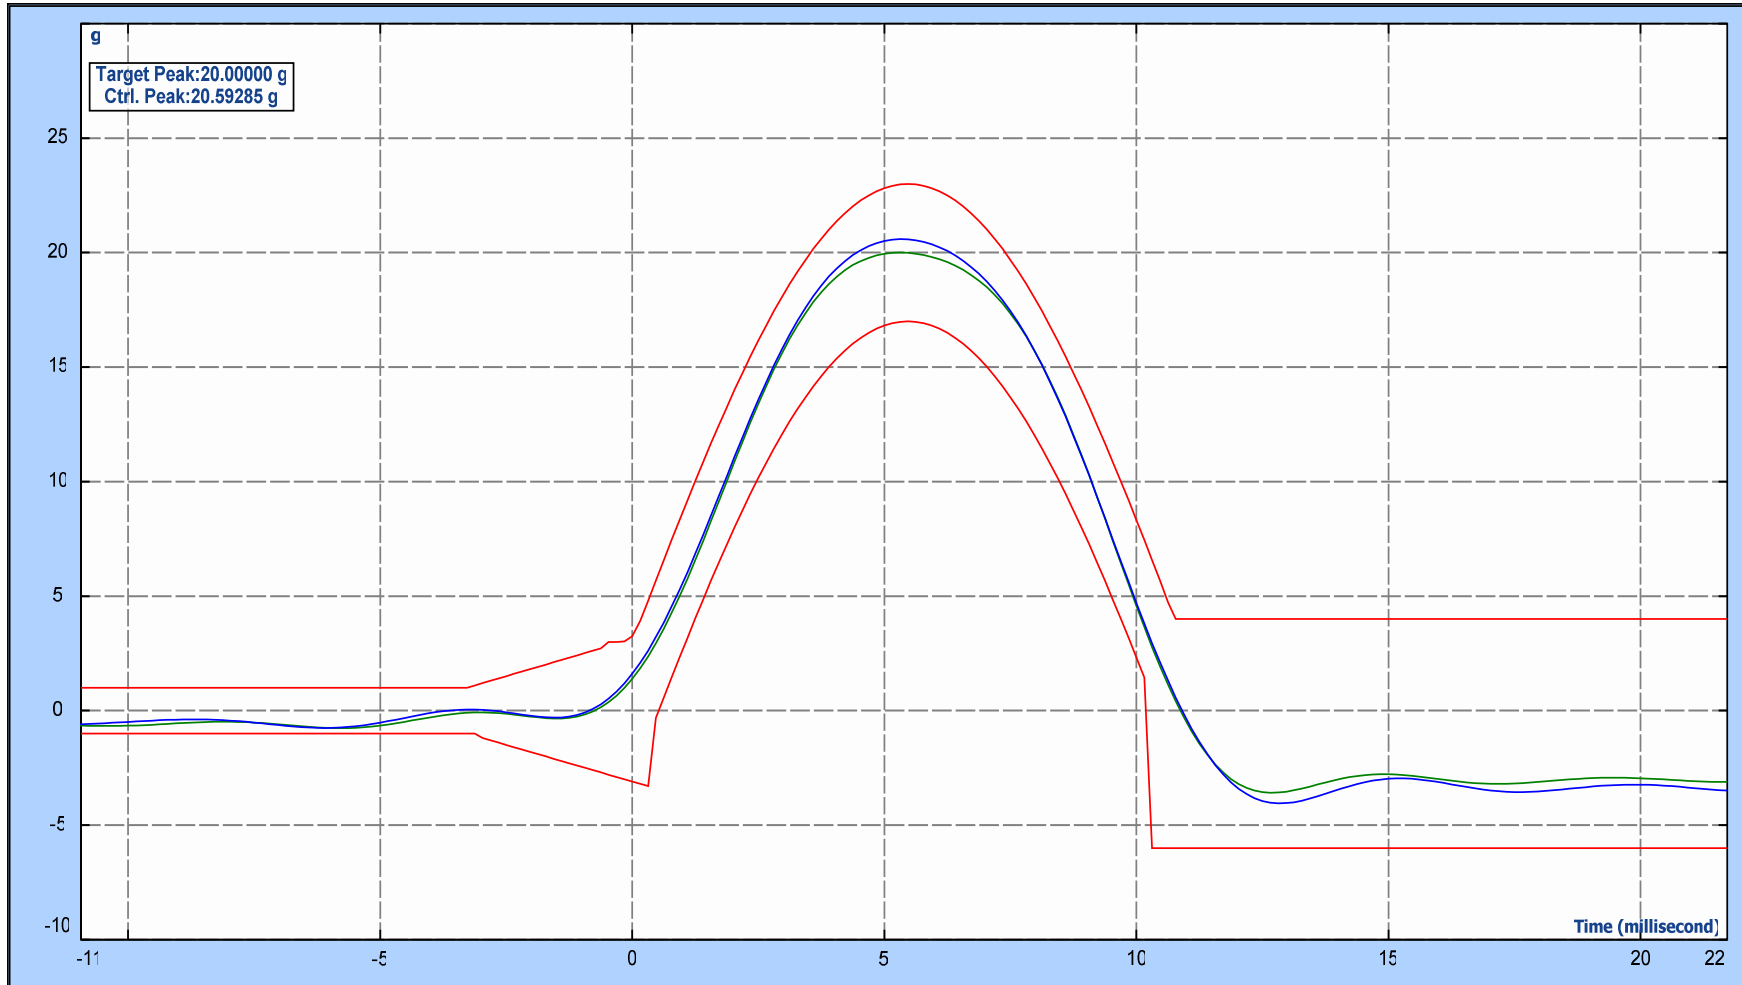


Level: 100.00 %  
 Velocity Pk: 673.2 mm/s  
 Control RMS: 1.941 g  
 Full Level Elapsed: 3.0

Drive Pk: 1.784V  
 Control Pk: 20.59 g  
 Remaining: 0.0  
 Pulse width: 11.00 ms

Est. Disp. : 17.64 mm Pk-Pk  
 Target Pk: 20.00 g  
 Total Elapsed: 17.0  
 Measured Pulse width: 11.76335(ms)

-X axis

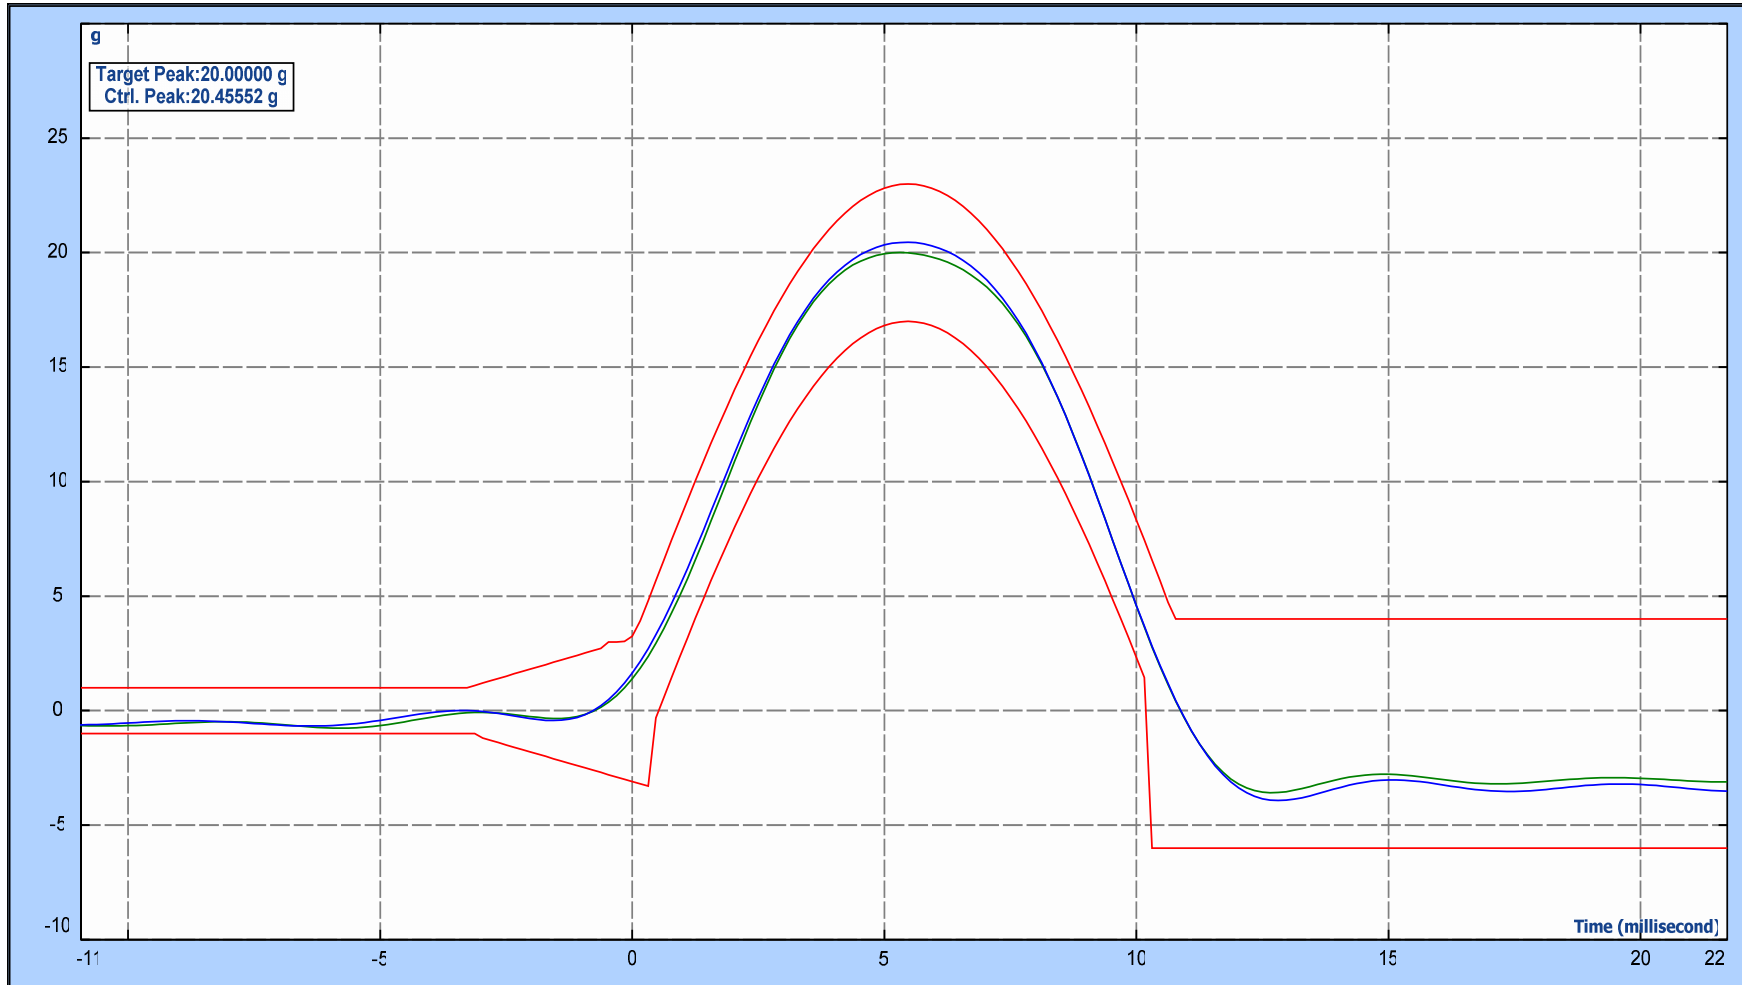


Level: 100.00 %  
 Velocity Pk: 672.2 mm/s  
 Control RMS: 1.940 g  
 Full Level Elapsed: 3.0

Drive Pk: 1.784V  
 Control Pk: 20.46 g  
 Remaining: 0.0  
 Pulse width: 11.00 ms

Est. Disp. : 17.47 mm Pk-Pk  
 Target Pk: 20.00 g  
 Total Elapsed: 17.0  
 Measured Pulse width: 11.65892(ms)

+Y axis

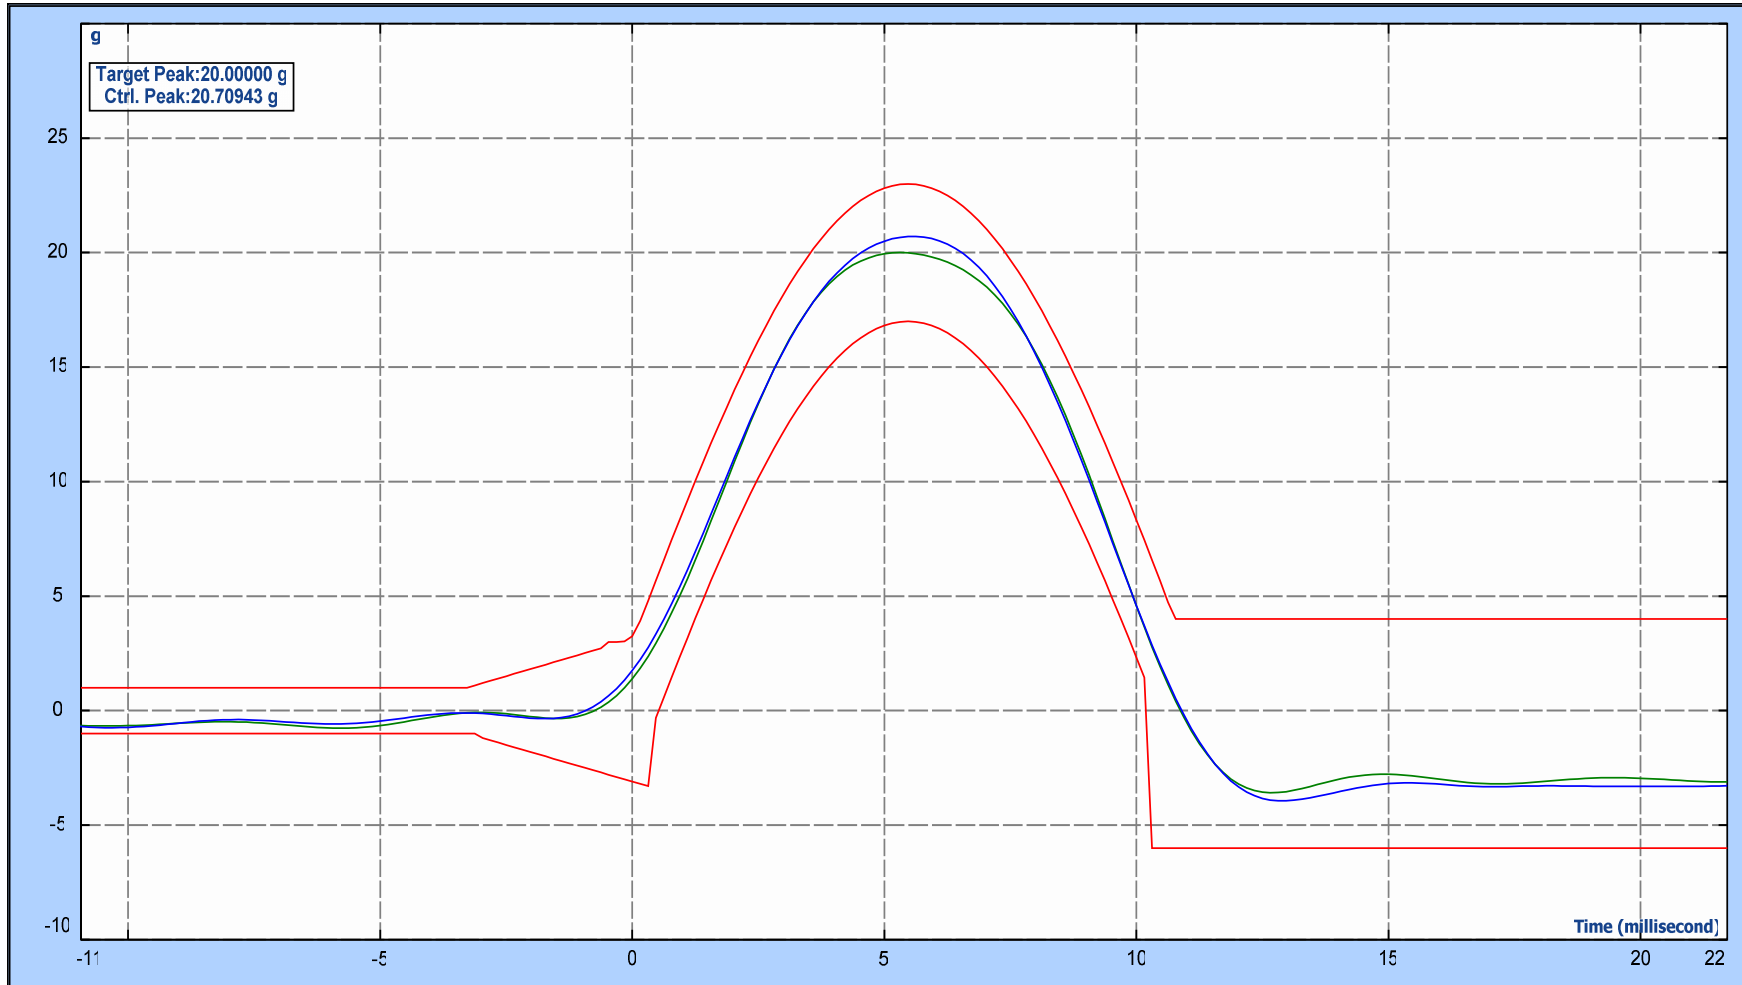

Level: 100.00 %

Velocity Pk: 675.1 mm/s

Control RMS: 1.952 g

Full Level Elapsed: 3.0

Drive Pk: 1.774V

Control Pk: 20.71 g

Remaining: 0.0

Pulse width: 11.00 ms

Est. Disp. : 17.45 mm Pk-Pk


Target Pk: 20.00 g

Total Elapsed: 17.0

Measured Pulse width: 11.82423(ms)



-Y axis

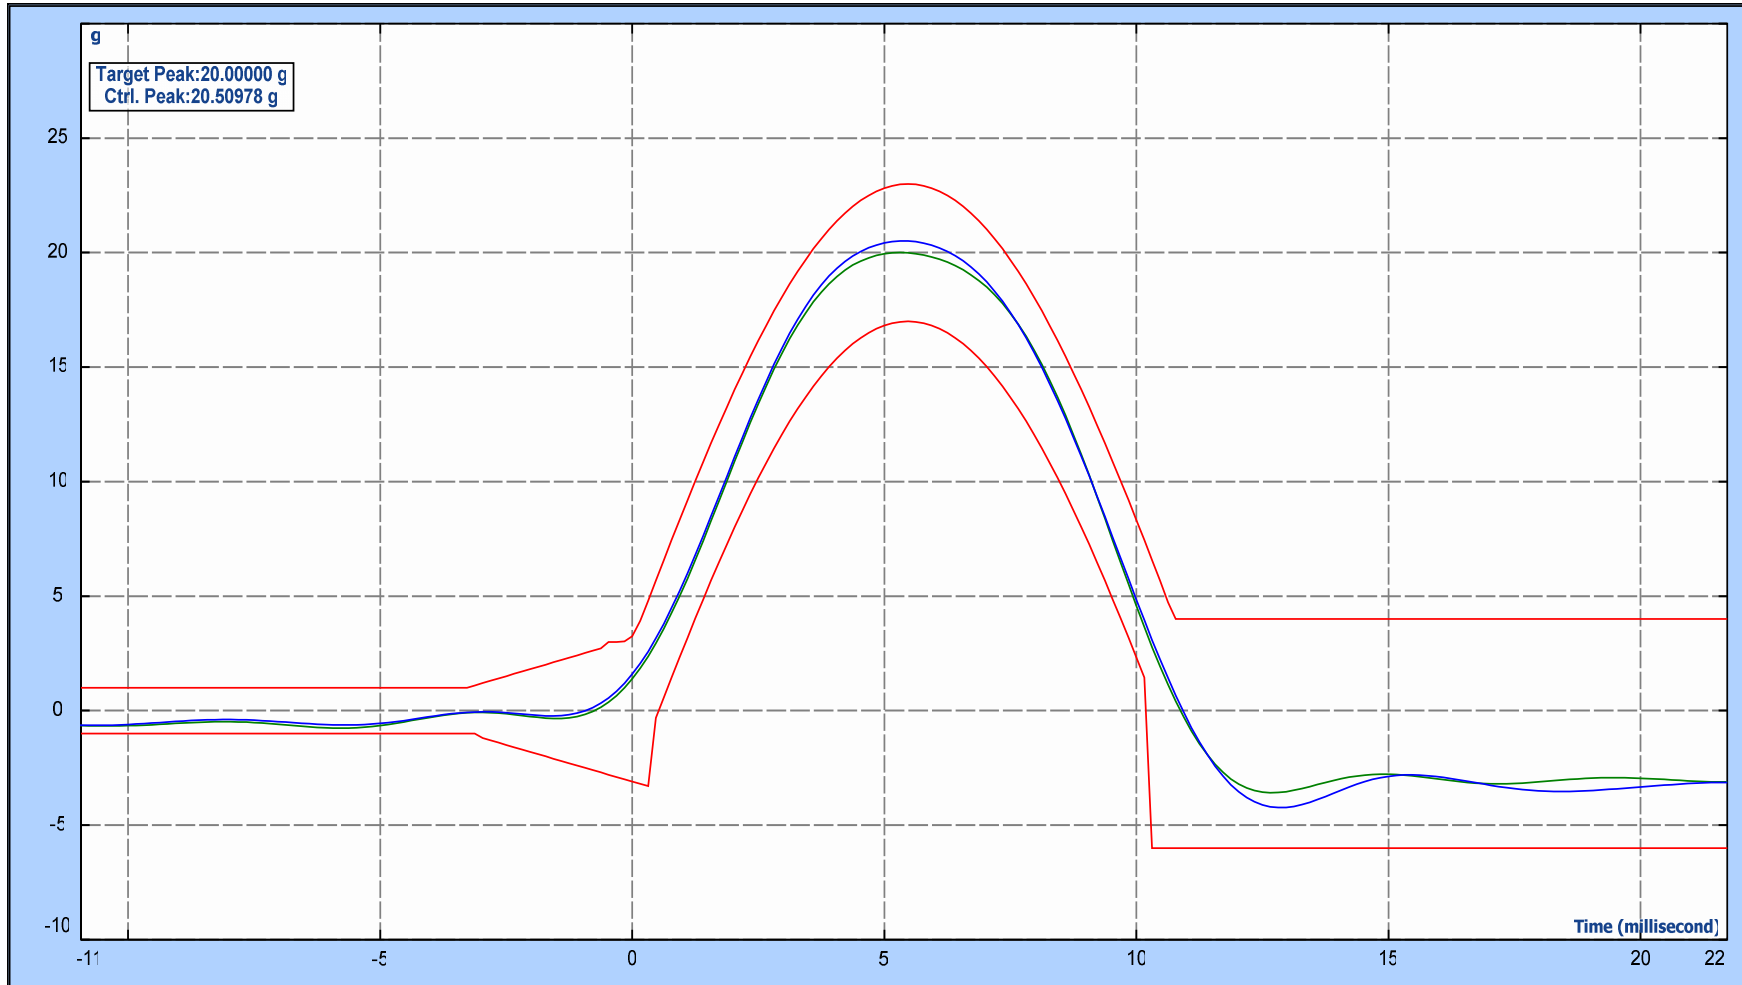


Level: 100.00 %  
 Velocity Pk: 678.8 mm/s  
 Control RMS: 1.948 g  
 Full Level Elapsed: 3.0

Drive Pk: 1.769V  
 Control Pk: 20.51 g  
 Remaining: 0.0  
 Pulse width: 11.00 ms

Est. Disp. : 17.49 mm Pk-Pk  
 Target Pk: 20.00 g  
 Total Elapsed: 17.0  
 Measured Pulse width: 11.84945(ms)

+Z axis

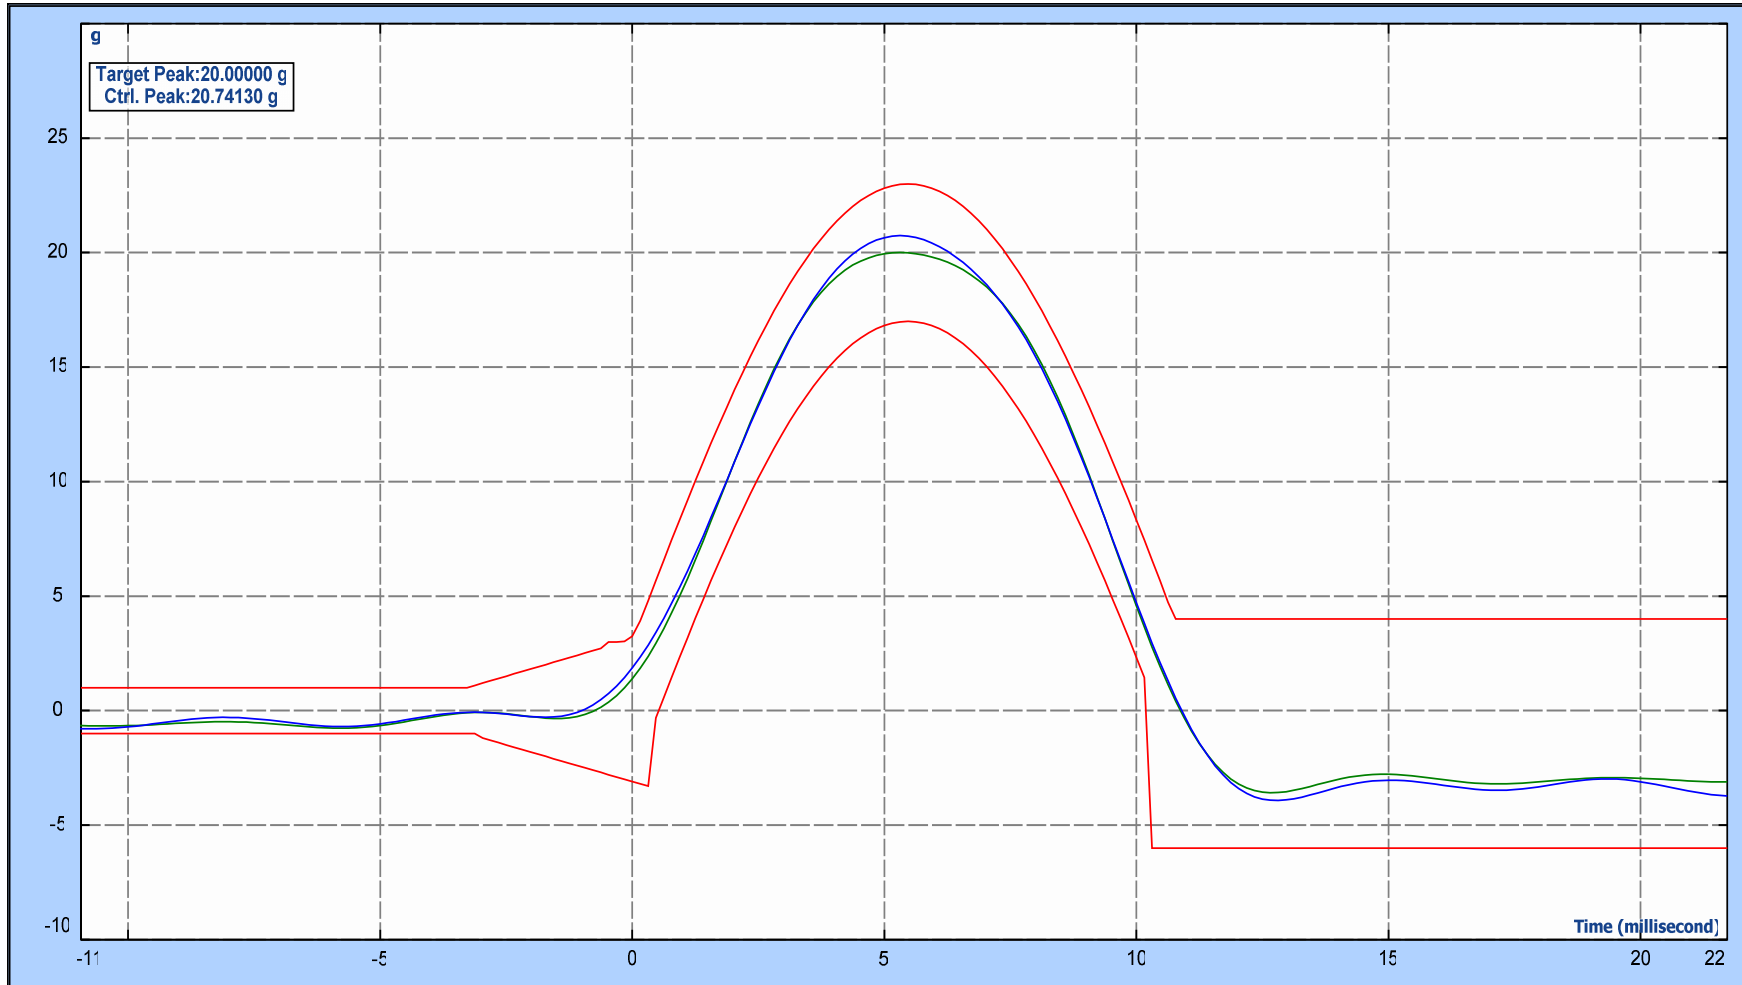


Level: 100.00 %  
 Velocity Pk: 672.5 mm/s  
 Control RMS: 1.941 g  
 Full Level Elapsed: 3.0

Drive Pk: 1.786V  
 Control Pk: 20.74 g  
 Remaining: 0.0  
 Pulse width: 11.00 ms

Est. Disp. : 17.45 mm Pk-Pk  
 Target Pk: 20.00 g  
 Total Elapsed: 17.0  
 Measured Pulse width: 11.91027(ms)



-Z axis

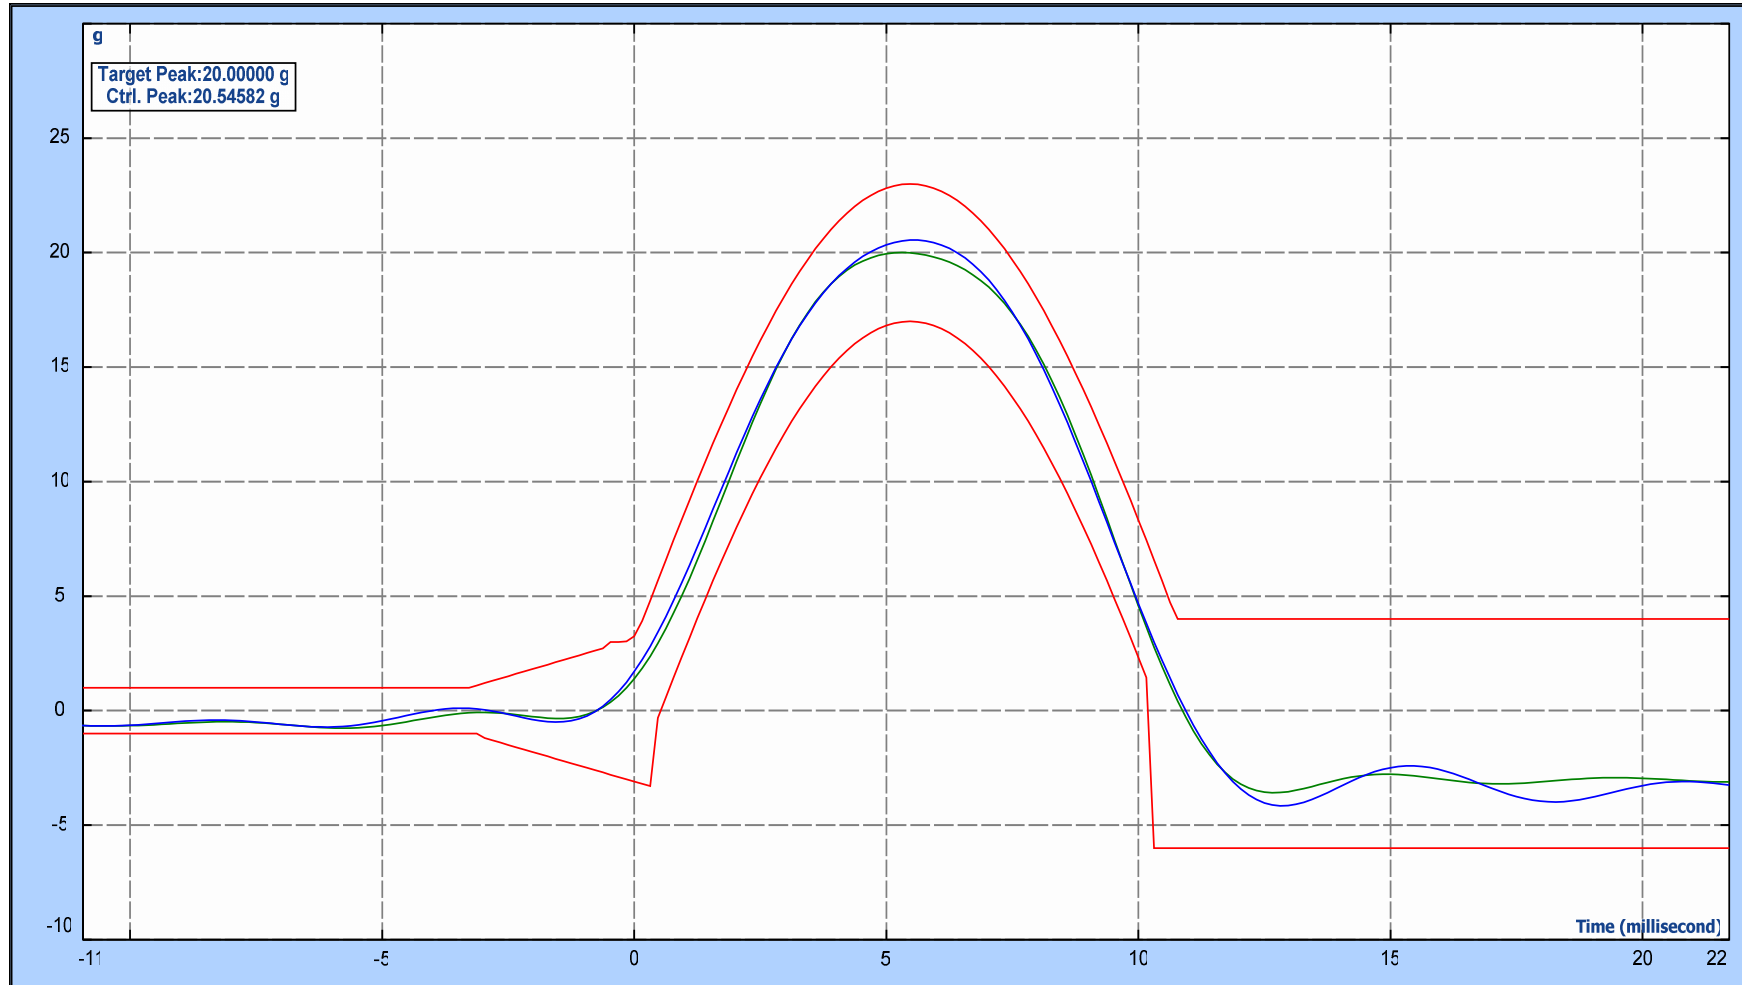

Level: 100.00 %

Velocity Pk: 674.4 mm/s

Control RMS: 1.938 g

Full Level Elapsed: 3.0

-END-

Drive Pk: 1.794V

Control Pk: 20.55 g

Remaining: 0.0

Pulse width: 11.00 ms

Est. Disp. : 17.49 mm Pk-Pk

Target Pk: 20.00 g

Total Elapsed: 17.0

Measured Pulse width: 11.68914(ms)