

1. Test item list -----	2
2. Random Vibration Operation Test -----	3

Test Configuration:

Num	Item	Spec
1.	Control Box:	AOP-8070HT / 7", WinCE, Linux, Ethernet Operator Panel
	1. Main Board	AAEON GENE-1270 Rev. B1.0
	2. 7" [16:9] LCD	DATA IMAGE FG070060DNCWAG02.480X234 18Bits TFT
	3. Inverter	HWA YOUN QF38V6.60I(S)
	4. 7" Touch Screen	3G International 3G070-164105-W4 .4-Wire Analog Resistive Type
	5. CPU	Onboard Intel XSCALE PXA270 / 520MHz
	6. Memory	Onboard 128MB SAMSUNG.K4S51163PF-PF75 (PC-133)
	7. Adapter	EDAC 100/240V.12V.5A.60W.DC.With Lock EA1050A (13)

Test Date: 11-24-2006

Test Product: AOP-8070HT (GENE-1270 B1.0)

Test Site: AAEON QA Internal Lab.

Performed By: Rex Chang


Test Standard: Reference IEC68-2-64 Testing procedures
Test Fh: Vibration boardband random test

Test Equipment:

Vibration Simulator System
KING DESIGN Co. LTD.
Model: KD 9363-EM-600F2K-40N20
Serial Number: UU110099090
Date of Calibration: 10/17/2006

Test Condition:

1. Operation
2. Test Acceleration: 1.0 G Random
3. Test Frequency: 5-500Hz
4. Test Axis: X, Y, Z axes
5. Test Time: 60min each axis
6. Test Software: Windows CE / Run one Microsoft media player simultaneously.
7. Test Vibration Curve:

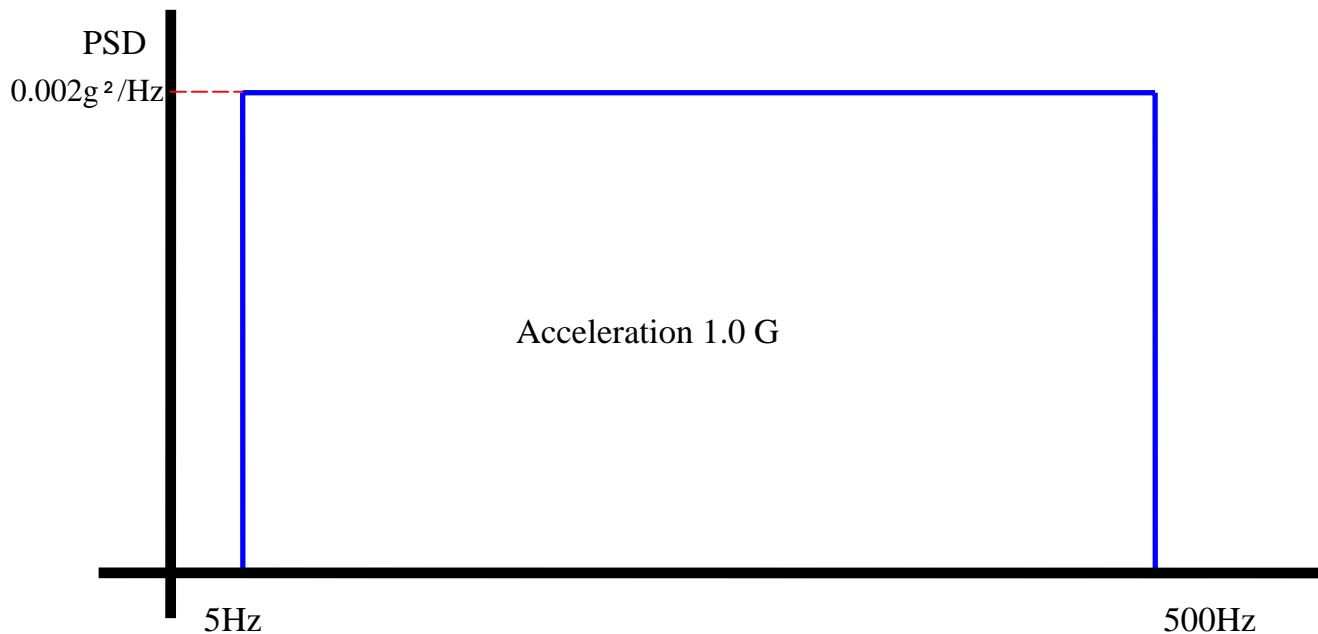

Test Result:

No problem was found during the random vibration operation test.