

- 1. *Test item list* ----- 2
- 2. *Configuration of EUT* ----- 3
- 3. *Random Vibration Operation Test* ----- 4


Testing Result

Num	Test item list	Result	Remark
1	5~500Hz / 1.0Grms Random Vibration Operation Test	Pass	

Configuration of EUT

Num	Item	Spec
1.	Rack Mount Chassis:	GCS-1100I
	1. Main Board	AAEON EMB-9459T Rev. B1.0 (BIOS Ver: 1100i 0.1)
	2. CPU	Intel Atom N270 / 1.6GHz
	3. Memory	DSL 1GB * 1 / DDR2 533 / ELPIDA E5108AGBG-6E-E
	4. 2.5" SATA SSD	Transcend TS32GSSD25S-S / 32GB
	5. Test Software	Windows XP / Run one Microsoft media player simultaneously.
	6. DC Power	CSC MPD-807H
2.	Power Adapter	FSP FSP084-DMAA1

HDD Kit

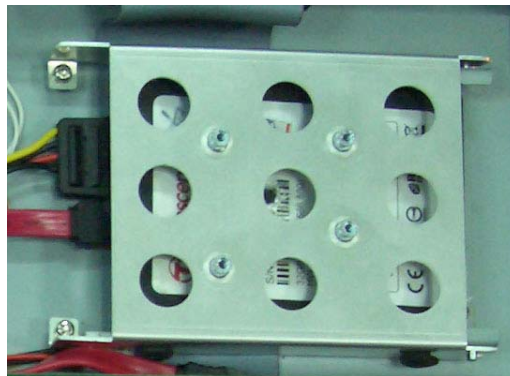

Test Date: 08-16~17-2010

Test Product: GCS-1100i

Test Site: AAEON QE Internal Lab.


Test Standard: Reference IEC68-2-64 Testing procedures
Test Fh: Vibration boardband random test

Test Equipment:

Vibration Simulator System
KING DESIGN Co. LTD.
Model: KD 9363-EM-600F2K-40N20
Serial Number: UU110099090
Date of Calibration: 10/19/2009

Test Condition:

1. Operation
2. Test Acceleration: 1.0Grms Random
3. Test Frequency: 5-500Hz
4. Test Axis: X, Y, Z axes
5. Test Time: 60min each axis
6. Test Software: Windows XP / Run one Microsoft media player simultaneously.
7. Test Vibration Curve:

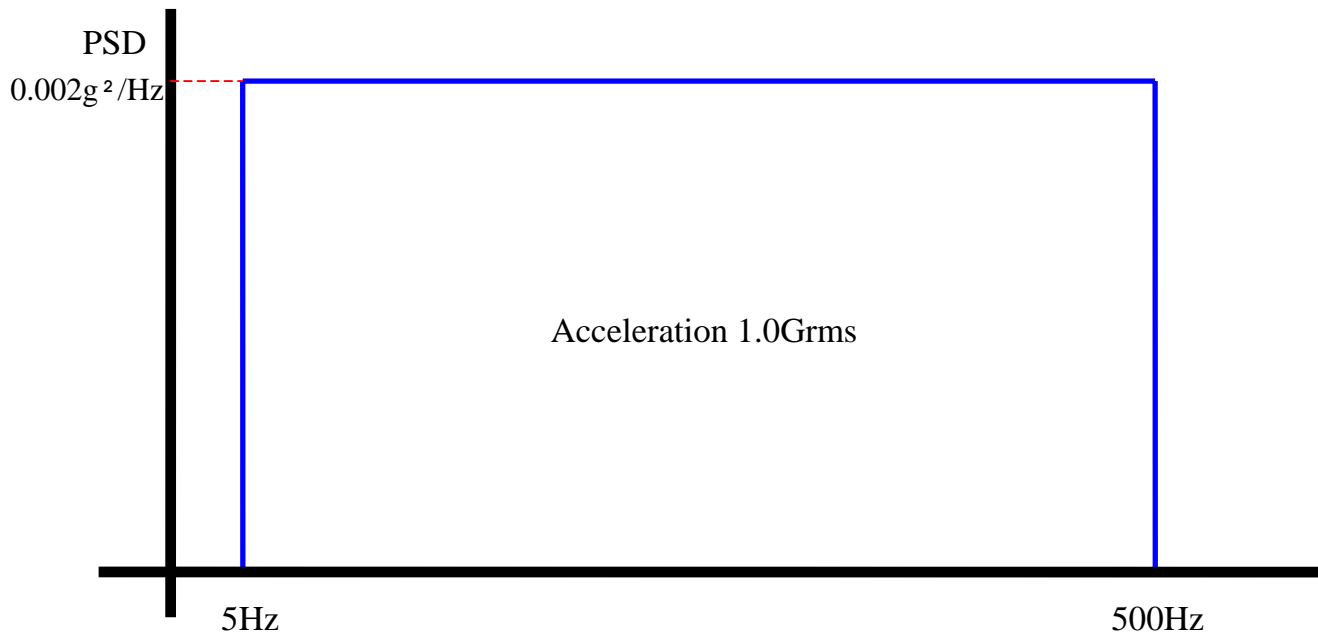

Test Result:

No structure deformation was found, and function was working normally.