


Modules



PER-T650 PRELIMINARY

I/O Module with 12V~24V Input, PoE x 1, CANBus x 2, USB 2.0 x 2

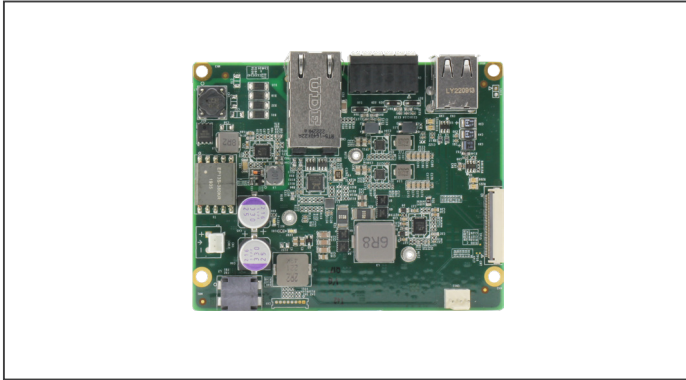


Features

- POE: Supports 802.3at
- CANBus x 2 (For RICO-3568 x 1)
- Wide-Voltage Input: 12V~24V
- USB 2.0 x 2
- Battery Charger (Reserved)
- Small Size: 3.9" x 3.1" (100mm x 80mm)

Dimension

Unit: mm

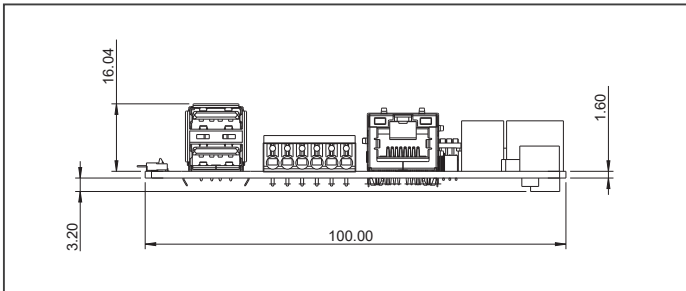

Ordering Information

- **PER-T650-A10**
12V~24V Input, PoE x 1, CANBus x 2, USB 2.0 x 2