


uCOM-ADN



SMARC Module with Intel Atom® Processor X Series, Intel® Processor N-series, & Intel® Core™ i3-N305 Processor

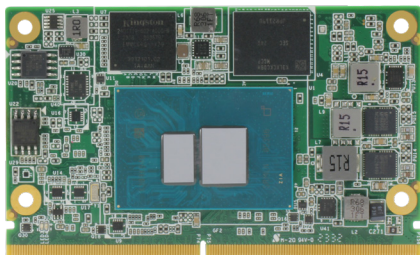

Features

- LPDDR5x x 1, up to 8GB
- eMMC, up to 64GB
- DP++ x 2, eDP x 1
- USB 3.2 Gen 2 x 2, USB 2.0 x 6
- PCIe Gen 3 [x1] x 3, max 1x PCIe[x2]
- Intel® Ethernet Controller I226-V/IT x 2
- 5V input
- SMARC Module size 82mm x 50mm



1000



USB 3.2



USB 2.0



DDR 5



Specifications

System	
Form Factor	SMARC Module
CPU	Intel® Core™ i3-N305 Processor (8C/8T, 1.8 GHz, 15W) Intel Atom® x7425E Processor (4C, up to 1.5 GHz, 12W) Intel® Processor N97 (4C, up to 2.0 GHz, 12W)
Chipset	Integrated with Intel® SoC
Memory	Onboard LPDDR5x 4800MHz, up to 8GB
Storage	eMMC, up to 64GB
BIOS	AMI UEFI
MTBF (Hours)	2,614,335
Wake On LAN	Yes
Watchdog Timer	255 Levels
Real Time Clock	RTC x 1
Boot Select	Module eMMC Flash
Security	TPM 2.0
Display	
Graphics Controller	Intel® UHD Graphics
Video Output	Display: DP++ x 2, up to 3840 x 2160 eDP x 1, up to 3840 x 2160
I/O Interfaces	
Ethernet	Intel® Ethernet Controller I226-V/IT 2.5GbE x 2
USB	USB 2.0 x 6, USB 3.2 x 2
Serial Port	2-Wire UART x 2 (Tx/Rx) 4-Wire UART x 2 (Tx/Rx/RTS/CTS)
Audio	High Definition Audio Interface
PCIe	PCIe Gen 3 [x1] x 3 (Max PCIe [x2] x 1)
CANBus	—
MIPI-CSI	MIPI CSI x 2
GPIO	7-bit (up to 14-bit by customization)
Other Interfaces	SATA 6Gb/s x 1 GP_I2C x 1 SMBus x 1
Power	
Power Requirement	+5V for ATX / AT
Power Consumption	Intel® Core™ i3-N305, 4.23A @+5V

Environmental And Mechanical

Dimensions	3.23" x 1.97" (82mm x 50mm)
Weight	0.14 lb. (0.06Kg)
Operating Temperature	-4°F ~ 158°F (-20°C ~ 70°C) -40°F ~ 185°F (-40°C ~ 85°C)
Storage Temperature	-40°F ~ 185°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
Certification	CE/FCC Class A
OS Support	Windows® 10 (64-bit) / Windows 11(enterprise) Linux Ubuntu 22.04.2/Kernel 5.19
Support Protocol	—

Packing List


- uCOM-ADN

Optional Accessories

Part Number	Description
uCOM-ADN-FAN01	Cooler.82*42*16mm.4pin
ECB-960T-A15-0001 SMARC	Carrier.2DP.LCD.2LAN.6USB.SATA.4COM.PCIe.HDA.12V.A1.5 for x86
UCOM-ADN-HSP01 Heat	Spreader.82x42x6mm.Black




Block Diagram

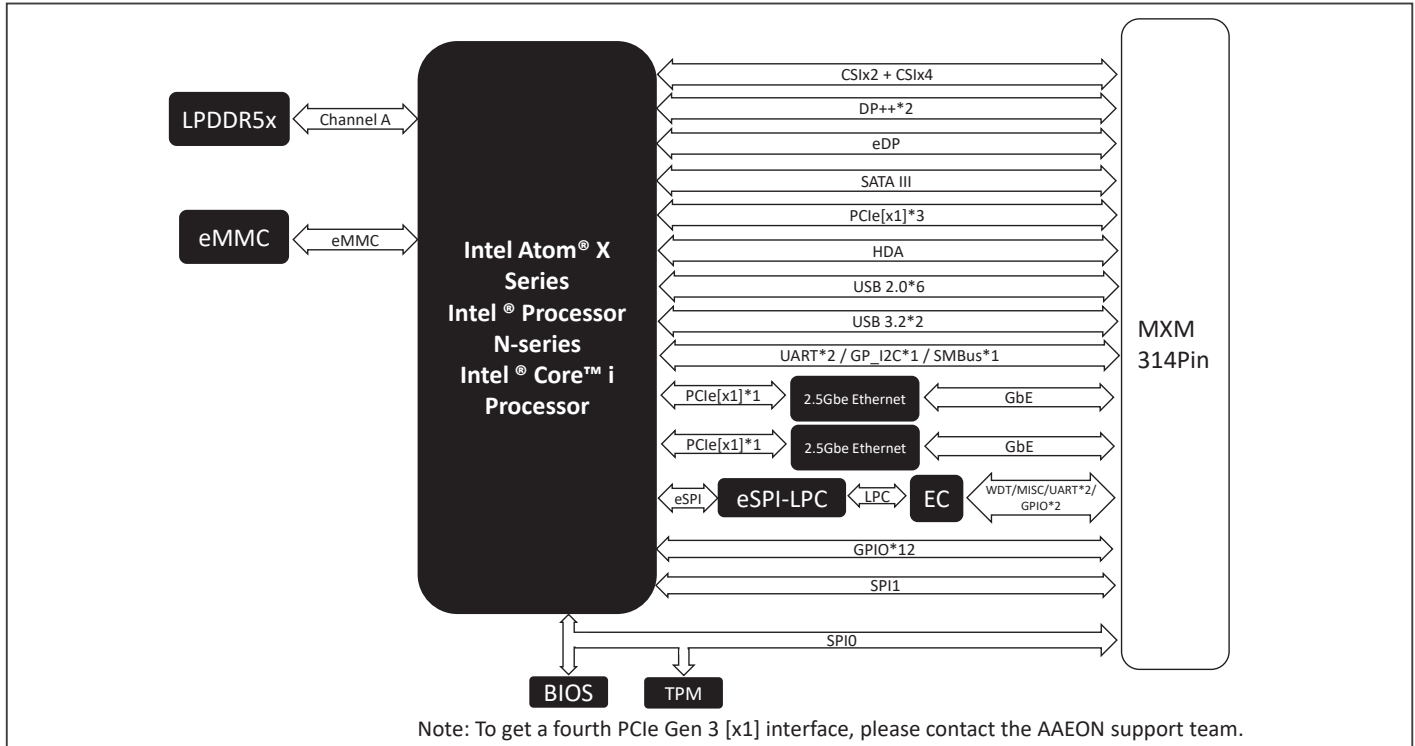

Dimension

Unit: mm

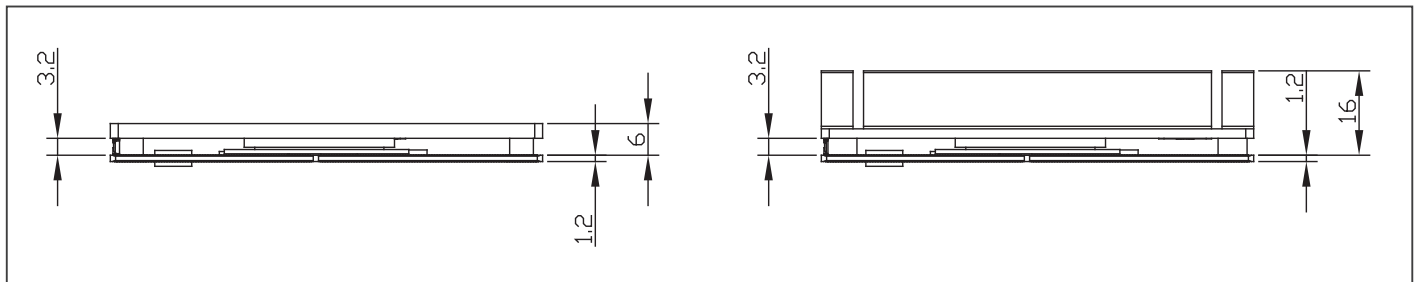

Ordering Information

Part Number	Form Factor	CPU	Memory	ECC support	Display	Storage	LAN	USB	UART	Expansion	Power	Temperature	Others
uCOM-ADN-B10-0001	SMARC	Intel Core™ Processor i3-N305	8GB LPDDR5x	—	eDP x 1 DP++ x 2	64GB eMMC	Intel® Ethernet Controller I226-V x 2	USB 3.2 x 2 USB 2.0 x 6	4-wire UART x 2, 2-Wire UART x 2	PCIe [x1] x 3	+5V	-20°C ~ 70°C	LPC, GPIO 7-bit, I2C, SMBus
uCOM-ADN-B10-0002	SMARC	Intel® Processor N97	8GB LPDDR5x	—	eDP x 1 DP++ x 2	32GB eMMC	Intel® Ethernet Controller I226-V x 2	USB 3.2 x 2 USB 2.0 x 6	4-wire UART x 2, 2-Wire UART x 2	PCIe [x1] x 3	+5V	-20°C ~ 70°C	LPC, GPIO 7-bit, I2C, SMBus
uCOM-ADNW2-B10-0003	SMARC	Intel Atom® Processor x7425E	8GB LPDDR5x	—	eDP x 1 DP++ x 2	64GB eMMC	Intel® Ethernet Controller I226-IT x 2	USB 3.2 x 2 USB 2.0 x 6	4-wire UART x 2, 2-Wire UART x 2	PCIe [x1] x 3	+5V	-40°C ~ 85°C	LPC, GPIO 7-bit, I2C, SMBus