


BOXER-RK3568 PRELIMINARY

Fanless Embedded Box PC with Rockchip RK3568

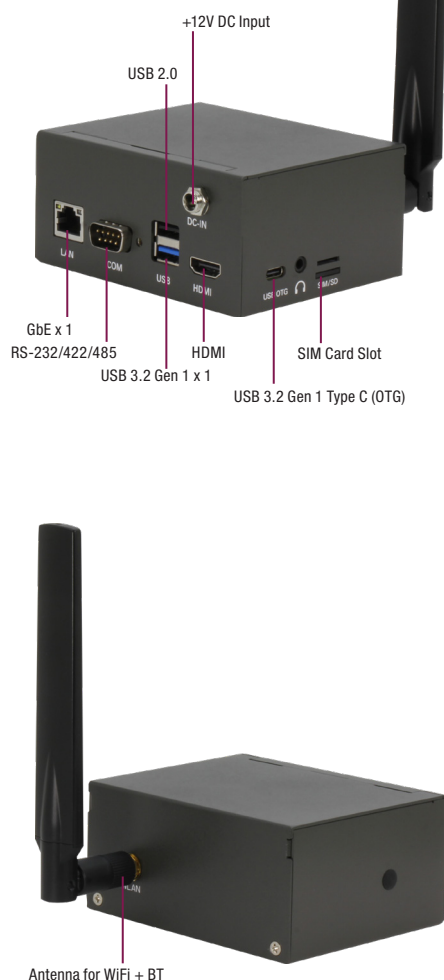

Features

- Rockchip RK3568
- LPDDR4 2GB/4GB/8GB (Optional)
- eMMC 16GB and Micro-SD Card Slot
- HDMI 2.0 Port x 1
- WiFi 802.11 b/g/n, BT V5.0
- GbE: RJ45 x 1
- USB 3.2 Gen 1: Type C OTG x 1, Type A x 1
- USB 2.0: Type A x 1
- RS-232/422/485 x 1, RS-232 x 1 (Optional)
- mPCIe Slot x 1 (mSATA / USB)
- +12V DC Input
- OS Support: Android 12, Debian 10 (Optional)
- Compact Size (W x D x H): 106.5 mm x 85.6 mm x 50 mm


Specifications

System	
CPU	Rockchip RK3568 ARM Cortex™-A55 Quad-core
GPU	Mali-G52
Chipset	NPU: 0.8 TOPS
Graphics	Video Encode: 1080P@60fps H.264/H.265 Video Decode: 4K@60fps H.264/H.265/AV1 4KP60 AVS2/VP9 1080P MPEG1/VP8
System Memory	LPDDR4 2GB/4GB/8GB (Optional)
Display Interface	HDMI (2.0)
Storage/SSD	16GB eMMC and Micro-SD card
I/O	Micro-SD Card Slot x 1 HDMI (2.0) Port x 1 Antenna Connector for WiFi 802.11 b/g/n, BT V5.0 Antenna Connector for LTE (Optional) GbE: RJ45 x 1 USB 3.2 Gen 1: Type C OTG x 1, Type A x 1 USB 2.0: Type A x 1 RS-232/422/485 x 1, RS-232 x 1 (Optional) SIM Card Slot x 1
Expansion	mPCIe Slot x 1 (mSATA / USB) for LTE module
Indicator	Power LED x 1
OS Support	Android 12, Debian 10 (Optional)
Power Supply	
Power Requirement	+12V DC input
Mechanical	
Mounting	VESA mount, 75mm x 75mm
Dimension (W x D x H)	4.2" x 3.37" x 1.97" (106.5 mm x 85.6 mm x 50 mm)
Gross Weight	1.1 lb (0.5 Kg)
Net Weight	0.66 lb (0.3 Kg)
Environmental	
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Storage Humidity	0% ~ 90% relative humidity, non-condensing
Anti-Vibration	—
Certification	CE/FCC



Dimension

Unit: mm

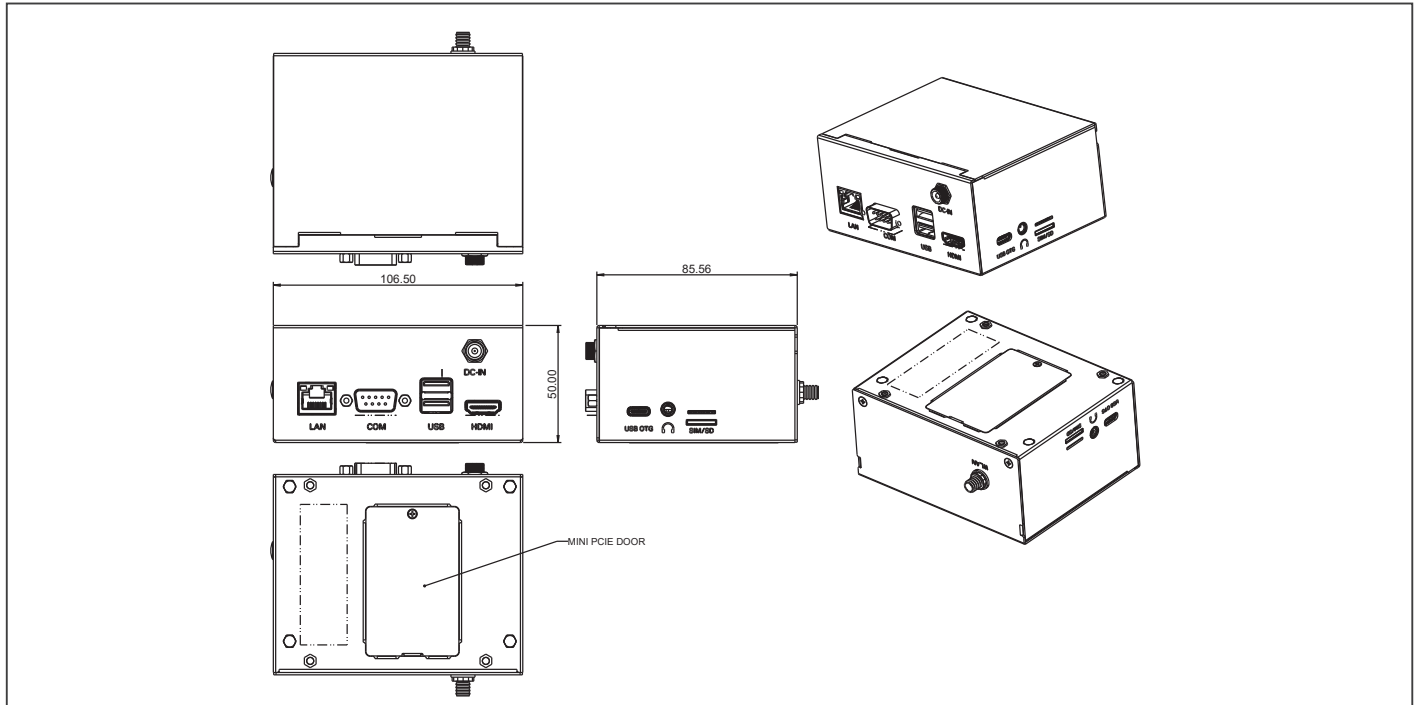

Packing List

- BOXER-RK3568
- 125530060Y
12V / 60W Power Adapter

Optional Accessories

- 170X000399
WiFi 6, 2.4GHz/5GHz/6GHz, External Antenna
- M04BIBX000
Wall-mount Plate
- 9741EG2560
EG25-G, W/ SIM Card Holder, RF Cable, External Antenna

Ordering Information

Part Number	CPU	OS	RAM	Storage	LAN	RS-232	USB	Display	WiFi & BT	3G/LTE Slot
BOXER-RK3568-A10-0001	ARM Cortex-A17 1.6GHz 144RK32882	Android 12	2GB LPDDR4	16GB eMMC	GbE x 1	1 (RS-232/422/485)	3	1 (HDMI)	802.11 b/g/n BT 5.0 + EDR	1 (mPCIe Slot)
BOXER-RK3568-A10-0002	ARM Cortex-A17 1.6GHz 144RK32882	Android 12	4GB LPDDR4	16GB eMMC	GbE x 1	1 (RS-232/422/485)	3	1 (HDMI)	802.11 b/g/n BT 5.0 + EDR	1 (mPCIe Slot)