



BOXER-6645-ADS

Fanless Embedded Box PC

User's Manual 2nd Ed

Copyright Notice

This document is copyrighted, 2025. All rights are reserved. The original manufacturer reserves the right to make improvements to the products described in this manual at any time without notice.

No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without the prior written permission of the original manufacturer. Information provided in this manual is intended to be accurate and reliable. However, the original manufacturer assumes no responsibility for its use, or for any infringements upon the rights of third parties that may result from its use.

The material in this document is for product information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, AAEON assumes no liabilities resulting from errors or omissions in this document, or from the use of the information contained herein.

AAEON reserves the right to make changes in the product design without notice to its users.

Acknowledgement

All other product name or trademarks are properties of their respective owners.

- Microsoft Windows® is a registered trademark of Microsoft Corp.
- Intel® Celeron® is a registered trademark of Intel Corporation.
- Intel Core™ is a trademark of Intel Corporation.
- Linux® is a registered trademark of Linus Torvalds in the U.S. and other countries.
- Ubuntu and Canonical are registered trademarks of Canonical Ltd.

All other product names or trademarks are properties of their respective owners. The publisher of this document does not assume nor imply ownership of any trademarked product not listed herein.

Packing List

Before setting up your product, please make sure the following items have been shipped:

Item		Quantity
●	BOXER-6645-ADS	1
●	Wallmount bracket	2
●	3 Pin DC-In Power Connector	1
●	Remote On/Off Connector	1
●	Screw Package	1

If any of these items are missing or damaged, please contact your distributor or sales representative immediately.

About this Document

This User's Manual contains all the essential information, such as detailed descriptions and explanations on the product's hardware and software features (if any), its specifications, dimensions, jumper/connector settings/definitions, and driver installation instructions (if any), to facilitate users in setting up their product.

Users may refer to the product page at AAEON.com for the latest version of this document.

Safety Precautions

Please read the following safety instructions carefully. It is advised that you keep this manual for future references

1. All cautions and warnings on the device should be noted.
2. Make sure the power source matches the power rating of the device.
3. Position the power cord so that people cannot step on it. Do not place anything over the power cord.
4. Always completely disconnect the power before working on the system's hardware.
5. No connections should be made when the system is powered as a sudden rush of power may damage sensitive electronic components.
6. If the device is not to be used for a long time, disconnect it from the power supply to avoid damage by transient over-voltage.
7. Always disconnect this device from any power supply before cleaning.
8. While cleaning, use a damp cloth instead of liquid or spray detergents.
9. Make sure the device is installed near a power outlet and is easily accessible.
10. Keep this device away from humidity.
11. Place the device on a solid surface during installation to prevent falls.
12. Do not cover the openings on the device to ensure optimal heat dissipation.
13. Watch out for high temperatures when the system is running.
14. Do not touch the heat sink or heat spreader when the system is running
15. Never pour any liquid into the openings. This could cause fire or electric shock.
16. As most electronic components are sensitive to static electrical charge, be sure to ground yourself to prevent static charge when installing the internal components. Use a grounding wrist strap and contain all electronic components in any static-shielded containers.

17. If any of the following situations arises, please the contact our service personnel:
 - i. Damaged power cord or plug
 - ii. Liquid intrusion to the device
 - iii. Exposure to moisture
 - iv. Device is not working as expected or in a manner as described in this manual
 - v. The device is dropped or damaged
 - vi. Any obvious signs of damage displayed on the device
18. Do not leave this device in an uncontrolled environment with temperatures beyond the device's permitted storage temperatures (see chapter 1) to prevent damage.
19. Do NOT disassemble the motherboard so as not to damage the system or void your warranty.
20. If the thermal pad had been damaged, please contact AAEON's salesperson to purchase a new one. Do NOT use those of other brands.
21. The Hex Cylinder Coppers on the front panel are not removable.
22. Repeatedly assemble and disassemble the system may cause damages to the exterior paint and surface and screw holes.
23. Use the right size screwdriver.
24. Use the screwdriver correctly to remove screws from the system.

FCC Statement

Warning!



This device complies with Part 15 FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation.

Caution:

There is a danger of explosion if the battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions and your local government's recycling or disposal directives.

Attention:

Il y a un risque d'explosion si la batterie est remplacée de façon incorrecte. Ne la remplacer qu'avec le même modèle ou équivalent recommandé par le constructeur. Recycler les batteries usées en accord avec les instructions du fabricant et les directives gouvernementales de recyclage.

产品中有毒有害物质或元素名称及含量

AAEON System

QO4-381 Rev.A2

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
印刷电路板 及其电子组件	×	○	○	○	○	○
外部信号 连接器及线材	×	○	○	○	○	○
外壳	○	○	○	○	○	○
中央处理器 与内存	×	○	○	○	○	○
硬盘	×	○	○	○	○	○
液晶模块	×	○	○	○	○	○
光驱	×	○	○	○	○	○
触控模块	×	○	○	○	○	○
电源	×	○	○	○	○	○
电池	×	○	○	○	○	○

本表格依据 SJ/T 11364 的规定编制。
○：表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T 26572 标准规定的限量要求以下。
×：表示该有害物质的某一均质材料超出了 GB/T 26572 的限量要求，然而该部件仍符合欧盟指令 2011/65/EU 的规范。
环保使用期限(EFUP (Environmental Friendly Use Period))：10 年
备注：
一、此产品所标示之环保使用期限，系指在一般正常使用状况下。
二、上述部件物质中央处理器、内存、硬盘、光驱、电源为选购品。
三、上述部件物质液晶模块、触控模块仅一体机产品适用。

China RoHS Requirement (EN)

Name and content of hazardous substances in product

AAEON System

QO4-381 Rev.A2

Part Name	Hazardous Substances					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
PCB Assemblies	×	○	○	○	○	○
Connector and Cable	×	○	○	○	○	○
Chassis	○	○	○	○	○	○
CPU and Memory	×	○	○	○	○	○
Hard Disk	×	○	○	○	○	○
LCD Modules	×	○	○	○	○	○
CD-ROM/DVD-ROM	×	○	○	○	○	○
Touch Modules	×	○	○	○	○	○
Power	×	○	○	○	○	○
Battery	×	○	○	○	○	○

The table is prepared in accordance with the provisions of SJ/T 11364.

○ : Indicates that said hazardous substance contained in all of the homogenous materials for this product is below the limit requirement of GB/T 26572.

× : Indicates that said hazardous substance contained in at least one of the homogenous materials used for this part is above the limit requirement of GB/T 26572. But this product still be compliance with 2011/65/EU Directive (allowed with 2011/65/EU Annex III of RoHS exemption with number 6(c),7(a),7(c)-1).

EFUP (Environment Friendly Use Period) value: 10 years.

Notes:

1. This product defined period of use is under normal condition.
2. In above part, CPU/Memory/ Hard Disk/CD-ROM/DVD-ROM/ Power are optional.
3. In above part, LCD Modules/ Touch Modules are for all-in-one product model.

Table of Contents

Chapter 1 - Product Specifications	1
1.1 Specifications.....	2
Chapter 2 – Hardware Information	4
2.1 Dimensions	5
2.2 Jumpers and Connectors	6
2.3 List of Jumpers	9
2.3.1 Setting Jumpers	9
2.3.2 Clear CMOS Jumper (JP1)	10
2.3.3 ATX/AT Mode Selection (JP3)	10
2.4 List of Connectors	11
2.4.1 PCIe [x4] Slot (CN1)	13
2.4.2 Dual HDMI Port (CN3).....	15
2.4.3 Dual DP Port (CN4)	17
2.4.4 LAN (RJ-45)+Dual USB 3.2 (CN5)	19
2.4.5 LAN (RJ-45)+DUAL USB 3.2 (CN6).....	20
2.4.6 LAN (RJ-45)+DUAL USB 3.2 (CN7)	22
2.4.7 LAN (RJ-45)+DUAL USB 3.2 (CN8).....	23
2.4.8 M.2 3052 B-Key Slot (CN9).....	25
2.4.9 SIM Slot (CN10)	27
2.4.10 M.2 2230 E-Key Slot (CN11)	28
2.4.11 Remote Button Connector (CN13).....	28
2.4.12 SPI Flash Port (CN14)	29
2.4.13 Debug Card Connector (CN15)	29
2.4.14 SATA Port (CN16, CN17).....	30
2.4.15 SATA PWR Connector (CN18, CN19).....	31
2.4.16 Digital IO Port (CN20).....	31
2.4.17 Dual COM Connector (RS-232/422/485) (CN22, CN23)	32

2.4.18	USB 2.0 Wafer Box (CN24, CN25, CN26, CN27).....	33
2.4.19	Audio Connector (CN28).....	34
2.4.20	Audio I/O Port (10P pitch:1.25mm) (CN29)	35
2.4.21	DC-IN Connector (CN30)	36
2.4.22	M.2 2280 M-Key Slot (CN31).....	36
2.4.23	Fan Connector (CN32).....	38
2.4.24	COM Port 5 (Wafer Box, Optional) (CN33)	39
2.4.25	COM Port 6 (Wafer Box, Optional) (CN34)	40
2.5	CPU Installation.....	41
2.6	Memory RAM Module Installation	43
2.7	2.5" SATA Drive Installation.....	46
Chapter 3	- AMI BIOS Setup.....	49
3.1	System Test and Initialization	50
3.2	AMI BIOS Setup	51
3.3	Setup Submenu: Main.....	52
3.4	Setup Submenu: Advanced	53
3.4.1	CPU Configuration	54
3.4.2	Memory Configuration	55
3.4.3	PCH-FW Configuration	56
3.4.3.1	Firmware Update Configuration.....	57
3.4.4	Hardware Monitor	58
3.4.5	Smart Fan Mode Configuration.....	59
3.4.5.1	Fan 1 Smart Fan Control (Auto RPM Mode).....	61
3.4.5.2	Fan 1 Smart Fan Control (Manual Duty Mode).....	62
3.4.5.3	Fan 1 Smart Fan Control (Manual RPM Mode).....	63
3.4.6	Power Management.....	64
3.4.7	AAEON BIOS Robot.....	65
3.4.7.1	Device Detecting Configuration.....	66

3.5	Setup Submenu: System I/O.....	73
3.5.1	Storage Configuration.....	74
3.5.2	HD Audio Configuration.....	75
3.5.3	Digital IO Port Configuration.....	76
3.5.4	Legacy Logical Devices Configuration.....	78
3.5.4.1	Serial Port 1	79
3.5.4.2	Serial Port 2	80
3.5.4.3	Serial Port 3	81
3.5.4.4	Serial Port 4	82
3.5.4.5	Serial Port 5	83
3.5.4.6	Serial Port 6	84
3.5.5	Serial Port Console Redirection.....	85
3.5.5.1	Console Redirection Settings (COM0)	86
3.5.5.2	Console Redirection Settings (Out-of-Band Mgmt Port).....	89
3.6	Setup Submenu: Security.....	91
3.6.1	Trusted Computing.....	92
3.6.2	Secure Boot	93
3.6.2.1	Key Management	94
3.7	Setup Submenu: Boot.....	96
3.7.1	UEFI BBS Priorities	97
3.8	Setup Submenu: Save & Exit	98
3.9	Setup Submenu: MEBx.....	99
Chapter 4	– Drivers Installation	100
4.1	Drivers Download and Installation.....	101
Appendix A	– I/O Information	102
A.1	I/O Address Map.....	103
A.2	Memory Address Map	105
A.3	IRQ Mapping Chart	106

Chapter 1

Product Specifications

1.1 Specifications

System

CPU	12th Generation Intel® Core™ Processor SoC Intel® Core™ i9-12900E Processor Intel® Core™ i7-12700TE Processor Intel® Core™ i7-12700E Processor Intel® Core™ i5-12500TE Processor Intel® Core™ i3-12100TE Processor Intel® Celeron® Processor G6900TE
Chipset	Intel® H610E/Q670E Chipset
System Memory	DDR5 4800MHz Slot x 2, up to 64GB
Display Interface	HDMI 1.4b x 2 DP 1.4a x 2
Storage	SATA 6Gb/s x 2 (A2 SKU supports RAID 0/1) M.2 2280 M-Key for NVMe SSD x 1 (A2 SKU only)
Ethernet	Intel® Ethernet Controller I210-AT, 1GbE x 2 Intel® Ethernet Connection I219-LM, 1GbE x 1 Intel® Ethernet Controller I225-LM, 2.5GbE x 1
I/O	USB 3.2 Gen 2 x 4 (A1 SKU, 5Gbps) USB 3.2 Gen 2 x 8 (A2 SKU, 10Gbps) USB 2.0 x 4 (A1 SKU) Audio x 1 (Mic-in, Line-out) DB-9 x 6 for RS-232/422/485 SMA Antenna Hole x 6 DIO x 8
Expansion	M.2 2230 E-Key x 1 (Wi-Fi) M.2 3052 B-Key x 1 (4G/5G)

System

Indicator	System LED x 1
	HDD
	LED x 1
OS support	Windows® 10 IoT Ent LTSC 64-bit
	Windows® 11 Pro
	Linux Ubuntu 20.04 (Kernel 15.5 or above)

Power Supply

Power Requirement	3-pin 12V - 24V DC Input
-------------------	--------------------------

Mechanical

Mounting	Wall Mount
Dimensions (W x H x D)	10.39" x 3.8" x 7.33" (264mm x 80.92mm x 186.2mm)
Gross Weight	11.6 lb (5.3 kg)
Net Weight	9.4 lb (4.3 kg)

Environmental

Operating Temperature	-4 F -122°F (-20°C - 50°C), IEC68-2 with 0.5 m/s
	AirFlow, with Wide Temperature Memory/Storage.
Storage Temperature	-40 °F - 176°F (-40°C - 80°C)
Storage Humidity	5 - 95% @ 40°C, non-condensing
Anti-Vibration	3 Grms/ 5 - 500Hz/ operation – SSD 1 Grms/ 5 ~
	500Hz/ operation – HDD
Anti-Shock	50G, IEC68-2-27, half sine, 11ms duration (with SSD)
Certification	CE/FCC Class A

Chapter 2

Hardware Information


Chapter 2 – Hardware Information




2.2 Jumpers and Connectors

Note: Board dimensions are 8.85" x 7.14" x 0.07" (225mm x 181.5mm x 1.8mm).


Top:

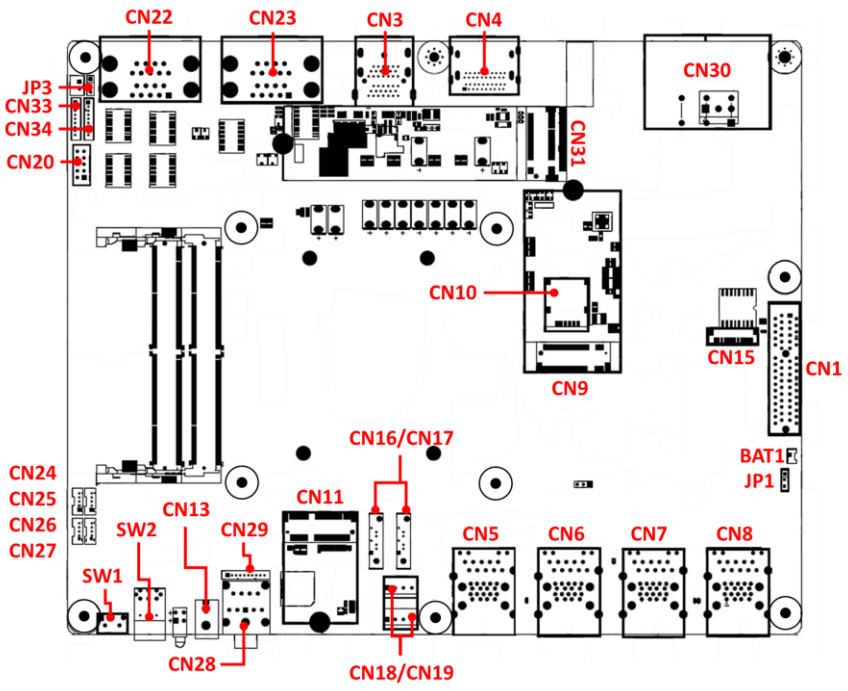

Bottom:

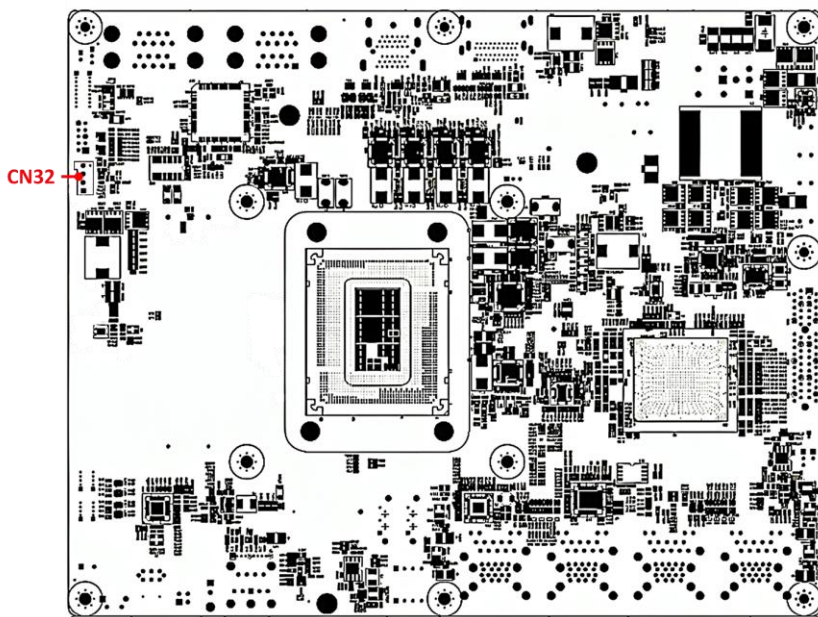

M.2 Key Location

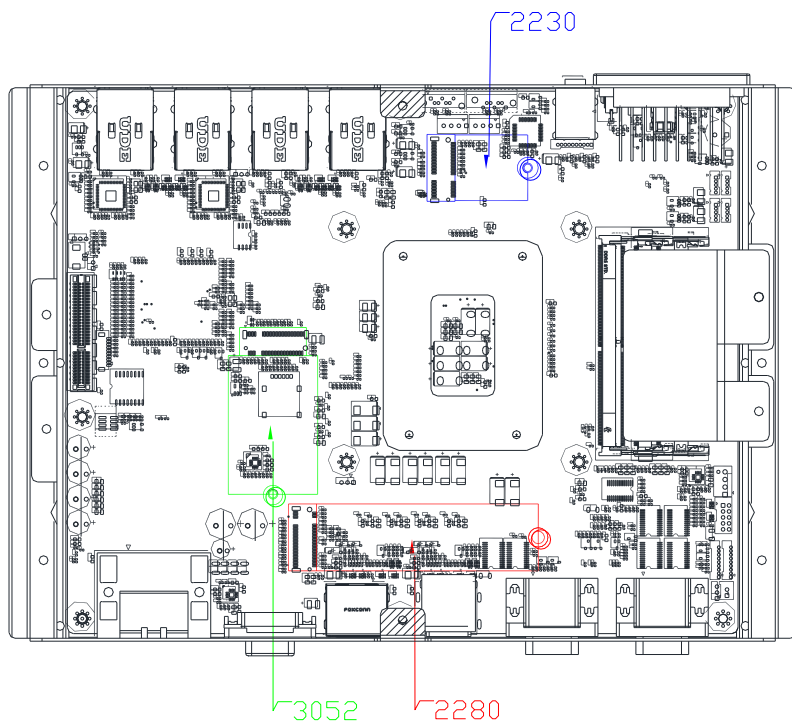

2.3 List of Jumpers


Please refer to the table below for all of the system's jumpers that you can configure for your application.

Label	Function
JP1	CMOS Control Selection
JP3	ATX/AT Mode Selection

2.3.1 Setting Jumpers

The BOXER-6645-ADS comes with several jumpers which allow you to configure the system by either setting the jumper to "open" or "closed"; or by selecting certain pins. A closed jumper has two pins connected with a jumper clip, while an open jumper has no pins connected.



For jumpers with multiple pins, this guide uses "pins A-B" to notate which pins should be connected by a jumper clip. For example, "pins 1-2" means you should connect pins 1 and 2, while "pins 2-3" means you should connect pins 2 and 3.

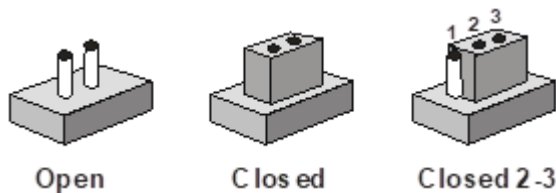



A pair of needle-nose pliers may be helpful when working with jumpers.

If you have any questions about how best to configure the system for your application, contact your AAEON representative or visit our website to talk with our support team.

2.3.2 Clear CMOS Jumper (JP1)



2.3.3 ATX/AT Mode Selection (JP3)



Note: 1-2 for ATX Mode, 2-3 for AT Mode.


2.4 List of Connectors

Please refer to the table below for all of the system's connectors that you can configure for your application

Label	Function
CN1	PCIe [x4] Slot
CN3	Dual HDMI Port
CN4	Dual DP Port
CN5	LAN + USB 3.2 x 2 Connector
CN6	LAN + USB 3.2 x 2 Connector
CN7	LAN + USB 3.2 x 2 Connector
CN8	LAN + USB 3.2 x 2 Connector
CN9	M.2 3052 B-Key Slot
CN10	SIM Slot
CN11	M.2 2230 E-Key Slot
CN13	Remote Button
CN14	SPI Flash Port
CN15	eSPI Port
CN16	SATA 1
CN17	SATA 2
CN18	SATA Power Connector
CN19	SATA Power Connector
CN20	DIO (Wafer Box)
CN22	COM 1 + COM 2 Connector (RS-232/422/485)
CN23	COM 3 + COM 4 Connector (RS-232/422/485)
CN24	USB 2.0 (Header, Optional)
CN25	USB 2.0 (Header, Optional)
CN26	USB 2.0 (Header, Optional)
CN27	USB 2.0 (Header, Optional)
CN28	Audio Connector
CN29	Audio Wafer (Optional)
CN30	Phoenix Connector Power Input
CN31	M.2 2280 M-Key Slot
CN32	Fan Connector
CN33	COM 5 Header (RS-232/422/485)
CN34	COM 6 Header (RS-232/422/485)
BAT1	RTC Battery
SW1	Reset Switch

Label	Function
SW2	Power Button

2.4.1 PCIe [x4] Slot (CN1)

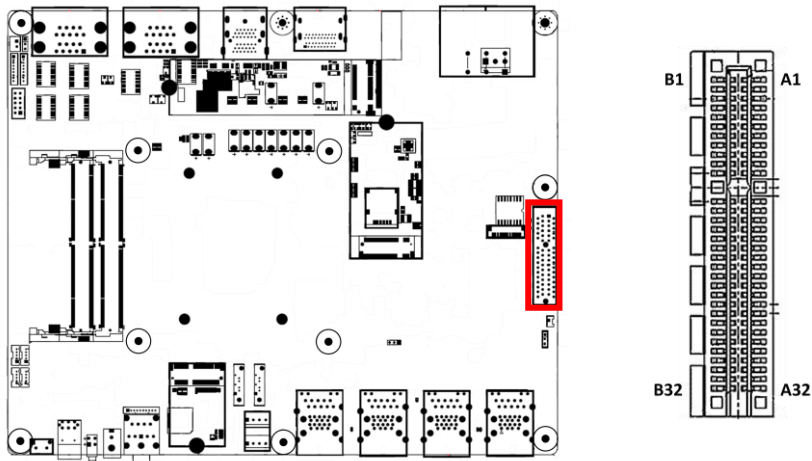



Pin	Signal	Signal Type	Signal level
A1	PRSNT1#	I/O	
A2	+12V	PWR	+V12S
A3	+12V	PWR	+V12S
A4	GND	GND	
A5	PCIE_TXN5	DIFF	
A6	PCIE_TXP5	DIFF	
A7	PCIE_RXN5	DIFF	
A8	PCIE_RXP5	DIFF	
A9	+3.3V	PWR	+V3.3S
A10	+3.3V	PWR	+V3.3S
A11	PERST#	I/O	
A12	GND	GND	
A13	PCIE_x4SLOT_CLK	DIFF	
A14	PCIE_x4SLOT_CLK#	DIFF	
A15	GND	GND	
A16	PCIE_RXP24	DIFF	
A17	PCIE_RXN24	DIFF	
A18	GND	GND	
A19	NC		
A20	GND	GND	
A21	PCIE_RXP23	DIFF	
A22	PCIE_RXN23	DIFF	

Pin	Signal	Signal Type	Signal level
A23	GND	GND	
A24	GND	GND	
A25	PCIE_RXP22	DIFF	
A26	PCIE_RXP22	DIFF	
A27	GND	GND	
A28	GND	GND	
A29	PCIE_RXP21	DIFF	
A30	PCIE_RXN21	DIFF	
A31	GND	GND	
A32	NC		
B1	+12V	PWR	+V12S
B2	+12V	PWR	+V12S
B3	+12V	PWR	+V12S
B4	GND	GND	
B5	SMB_CLK	I/O	
B6	SMB_DATA	I/O	
B7	GND	GND	
B8	+V3.3S	PWR	+V3.3S
B9	NC		
B10	3.3Vaux	PWR	+V3.3A
B11	WAKE#	I/O	
B12	NC		
B13	GND	GND	
B14	PCIE_TXP24	DIFF	
B15	PCIE_TXN24	DIFF	
B16	GND	GND	
B17	PRSNT	I/O	
B18	GND	GND	
B19	PCIE_TXP23	DIFF	
B20	PCIE_TXN23	DIFF	
B21	GND	GND	
B22	GND	GND	
B23	PCIE_TXP22	DIFF	
B24	PCIE_TXN22	DIFF	
B25	GND	GND	
B26	GND	GND	
B27	PCIE_TXP21	DIFF	
B28	PCIE_TXN21	DIFF	
B29	GND	GND	

Pin	Signal	Signal Type	Signal level
B30	NC		
B31	PRSNT	I/O	
B32	GND	GND	

2.4.2 Dual HDMI Port (CN3)

Standard specification.

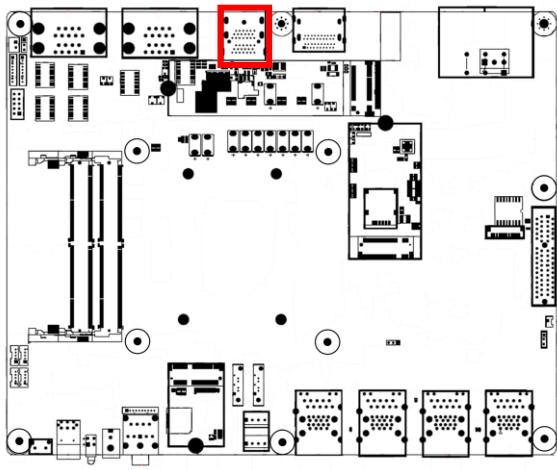


Pin	Signal	Signal Type	Signal level
P1	HDMI1_DATA2_P	DIFF	
P2	GND	GND	
P3	HDMI1_DATA2_N	DIFF	
P4	HDMI1_DATA1_P	DIFF	
P5	GND	GND	
P6	HDMI1_DATA1_N	DIFF	
P7	HDMI1_DATA0_P		
P8	GND	GND	
P9	HDMI1_DATA0_n		
P10	HDMI1_CLK_P	DIFF	
P11	GND	GND	
P12	HDMI1_CLK_N	DIFF	
P13	CEC		3.3V
P14	NC		

Pin	Signal	Signal Type	Signal level
P15	HDMI1_SCL		
P16	HDMI1_SDA		
P17	GND	GND	
P18	+V5S_HDMI_CON	PWR	5V
P19	HDMI1_HPD		5V
P20	HDMI2_DATA2_P		
P21	GND	GND	
P22	HDMI2_DATA2_N		
P23	HDMI2_DATA1_P		
P24	GND	GND	
P25	HDMI2_DATA1_N		
P26	HDMI2_DATA0_P		
P27	GND	GND	
P28	HDMI2_DATA0_N		
P29	HDMI2_CLK_P		
P30	GND	GND	
P31	HDMI2_CLK_N		
P32	CEC		3.3V
P33	NC		
P34	HDMI2_SCL		
P35	HDMI2_SDA		
P36	GND	GND	
P37	+V5S_HDMI_CON		5V
P38	HDMI2_HPD		5V

2.4.3 Dual DP Port (CN4)


Standard specification.

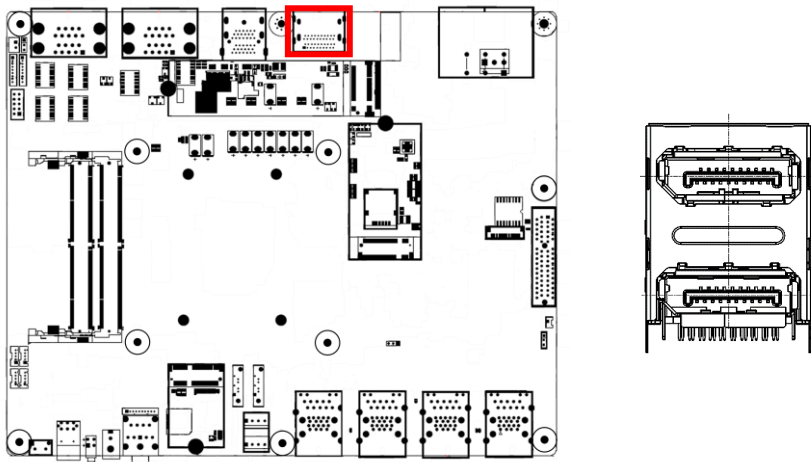

Pin	Signal	Signal Type	Signal level
P1	DP1_DATA0_P	DIFF	
P2	GND	GND	
P3	DP1_DATA0_N	DIFF	
P4	DP1_DATA1_P	DIFF	
P5	GND	GND	
P6	DP1_DATA1_N	DIFF	
P7	DP1_DATA2_P	DIFF	
P8	GND	GND	
P9	DP1_DATA1_N	DIFF	
P10	DP1_DATA3_P	DIFF	
P11	GND	GND	
P12	DP1_DATA3_N	DIFF	
P13	CONFIG1		
P14	CONFIG2		
P15	DP1_AUX_P	DIFF	
P16	GND	GND	
P17	DP1_AUX_N	DIFF	
P18	DP1_HPD		
P19	RETURN		
P20	DP1_PWR	PWR	+3.3V

Pin	Signal	Signal Type	Signal level
P21	DP2_DATA0 _P	DIFF	
P22	GND	GND	
P23	DP2_DATA0 _N	DIFF	
P24	DP2_DATA1 _P	DIFF	
P25	GND	GND	
P26	DP2_DATA1 _N	DIFF	
P27	DP2_DATA2 _P	DIFF	
P28	GND	GND	
P29	DP2_DATA1 _N	DIFF	
P30	DP2_DATA3 _P	DIFF	
P31	GND	GND	
P32	DP2_DATA3 _N	DIFF	
P33	CONFIG1		
P34	CONFIG2		
P35	DP2_AUX _P	DIFF	
P36	GND	GND	
P37	DP2_AUX _N	DIFF	
P38	DP2_HPD		
P39	RETURN		
P40	DP2_PWR	PWR	+3.3V

2.4.4 LAN (RJ-45)+Dual USB 3.2 (CN5)

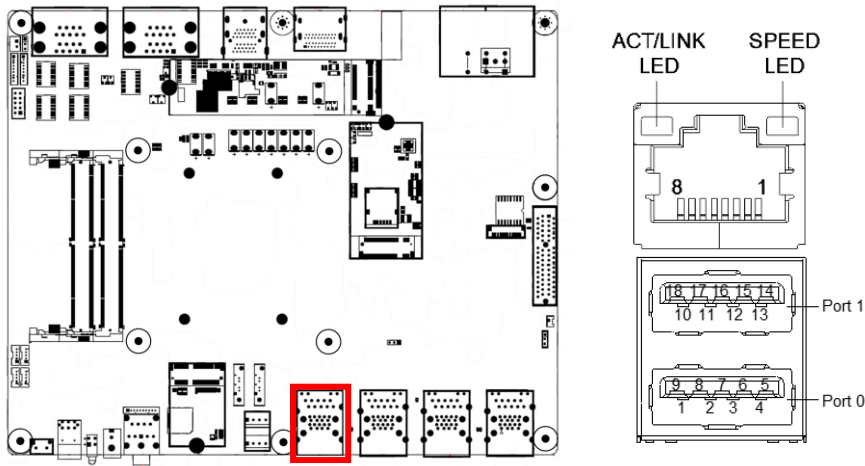


LAN		
Pin	Signal	Signal Type
1	MDI0+	DIFF
2	MDI0-	DIFF
3	MDI1+	DIFF
4	MDI2+	DIFF
5	MDI2-	DIFF
6	MDI1-	DIFF
7	MDI3+	DIFF
8	MDI3-	DIFF

USB			
Pin	Signal	Signal Type	Signal level
1	+5VSB	PWR	+5V
2	USB1_D-	DIFF	
3	USB1_D+	DIFF	
4	GND	GND	
5	USB1_SSRX-	DIFF	
6	USB1_SSRX+	DIFF	
7	GND	GND	
8	USB1_SSTX-	DIFF	
9	USB1_SSTX+	DIFF	
10	+5VSB	PWR	+5V

USB			
Pin	Signal	Signal Type	Signal level
11	USB2_D-	DIFF	
12	USB2_D+	DIFF	
13	GND	GND	
14	USB2_SSRX-	DIFF	
15	USB2_SSRX+	DIFF	
16	GND	GND	
17	USB2_SSTX-	DIFF	
18	USB2_SSTX+	DIFF	


2.4.5 LAN (RJ-45)+DUAL USB 3.2 (CN6)

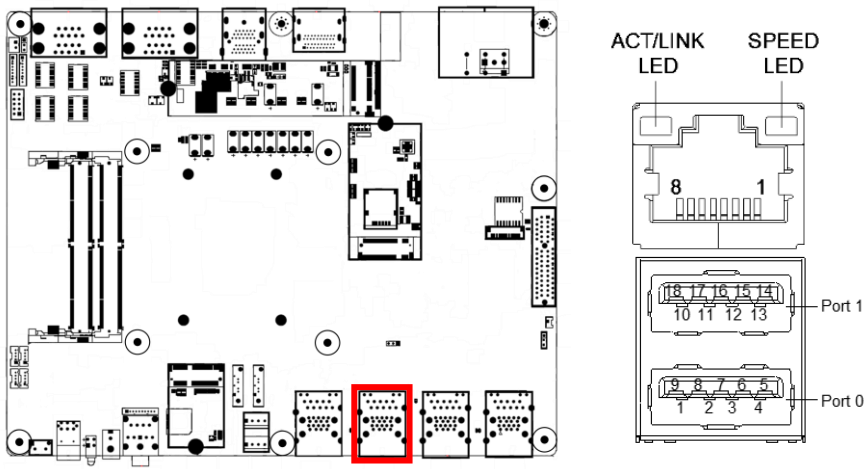

LAN		
Pin	Signal	Signal Type
1	MDI0+	DIFF
2	MDI0-	DIFF
3	MDI1+	DIFF
4	MDI2+	DIFF
5	MDI2-	DIFF
6	MDI1-	DIFF
7	MDI3+	DIFF
8	MDI3-	DIFF

USB			
Pin	Signal	Signal Type	Signal level
1	+5VSB	PWR	+5V
2	USB3_D-	DIFF	
3	USB3_D+	DIFF	
4	GND	GND	
5	USB3_SSRX-	DIFF	
6	USB3_SSRX+	DIFF	
7	GND	GND	
8	USB3_SSTX-	DIFF	
9	USB3_SSTX+	DIFF	
10	+5VSB	PWR	+5V
11	USB4_D-	DIFF	
12	USB4_D+	DIFF	
13	GND	GND	
14	USB4_SSRX-	DIFF	
15	USB4_SSRX+	DIFF	
16	GND	GND	
17	USB4_SSTX-	DIFF	
18	USB4_SSTX+	DIFF	

2.4.6 LAN (RJ-45)+DUAL USB 3.2 (CN7)

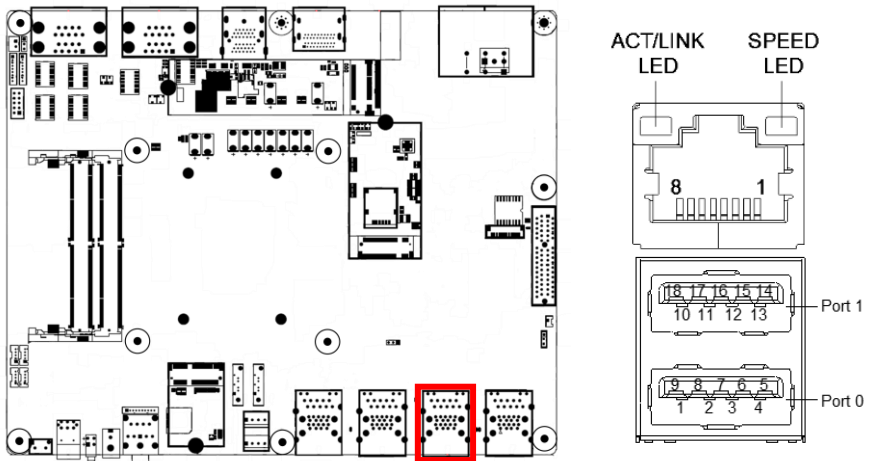


LAN		
Pin	Signal	Signal Type
1	MDI0+	DIFF
2	MDI0-	DIFF
3	MDI1+	DIFF
4	MDI2+	DIFF
5	MDI2-	DIFF
6	MDI1-	DIFF
7	MDI3+	DIFF
8	MDI3-	DIFF

USB			
Pin	Signal	Signal Type	Signal level
1	+5VSB	PWR	+5V
2	USB5_D-	DIFF	
3	USB5_D+	DIFF	
4	GND	GND	
5	USB5_SSRX-	DIFF	
6	USB5_SSRX+	DIFF	
7	GND	GND	
8	USB5_SSTX-	DIFF	
9	USB5_SSTX+	DIFF	

USB			
Pin	Signal	Signal Type	Signal level
10	+5VSB	PWR	+5V
11	USB6_D-	DIFF	
12	USB6_D+	DIFF	
13	GND	GND	
14	USB6_SSRX-	DIFF	
15	USB6_SSRX+	DIFF	
16	GND	GND	
17	USB6_SSTX-	DIFF	
18	USB6_SSTX+	DIFF	


2.4.7 LAN (RJ-45)+DUAL USB 3.2 (CN8)

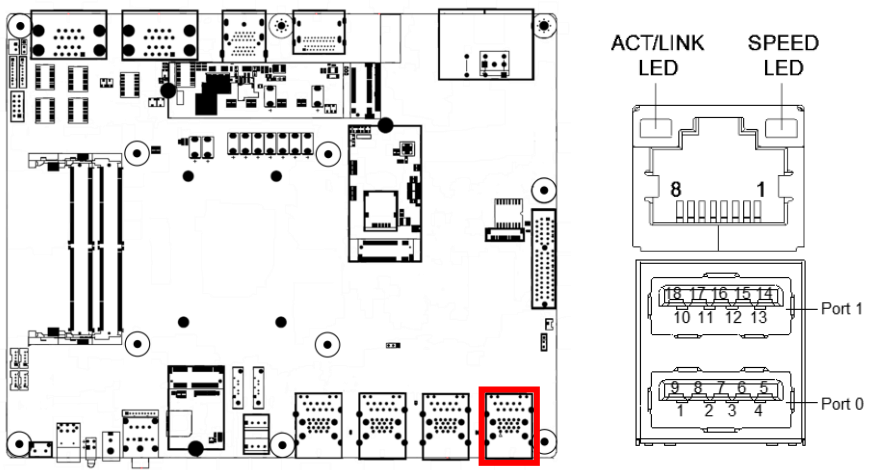

LAN		
Pin	Signal	Signal Type
1	MDI0+	DIFF
2	MDI0-	DIFF
3	MDI1+	DIFF
4	MDI2+	DIFF
5	MDI2-	DIFF
6	MDI1-	DIFF
7	MDI3+	DIFF
8	MDI3-	DIFF

USB			
Pin	Signal	Signal Type	Signal level
1	+5VSB	PWR	+5V
2	USB7_D-	DIFF	
3	USB7_D+	DIFF	
4	GND	GND	
5	USB7_SSRX-	DIFF	
6	USB7_SSRX+	DIFF	
7	GND	GND	
8	USB7_SSTX-	DIFF	
9	USB7_SSTX+	DIFF	
10	+5VSB	PWR	+5V
11	USB8_D-	DIFF	
12	USB8_D+	DIFF	
13	GND	GND	
14	USB8_SSRX-	DIFF	
15	USB8_SSRX+	DIFF	
16	GND	GND	
17	USB8_SSTX-	DIFF	
18	USB8_SSTX+	DIFF	


2.4.8 M.2 3052 B-Key Slot (CN9)

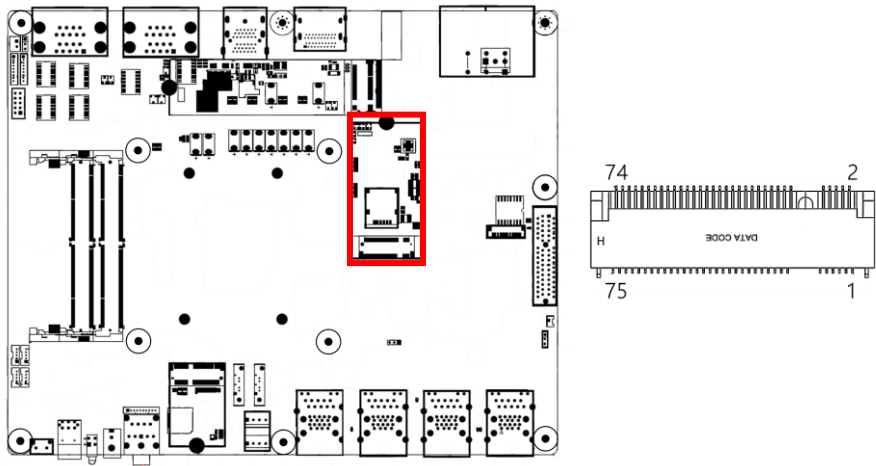

Pin	Pin Name	Signal Type	Pin	Pin Name	Signal Type	Signal level
1	NC		2	+3.3V	PWR	+3.3V
3	GND	GND	4	+3.3V	PWR	+3.3V
5	GND	GND	6	CARD_PWR_OFF_N	OUT	+3.3V
7	USB_2.0_P		8	W_DISABLE	IN	+3.3V
9	USB_2.0_N		10	NC		
11	GND	GND	12			
			20	NC		
21	NC		22	NC		
23	NC		24	NC		
25	NC		26	NC		
27	GND	GND	28	NC		
29	USB3_RXN		30	UIM_RST		
31	USB3_RXP		32	UIM_CLK		
33	GND	GND	34	UIM_DATA		
35	USB3_TXN		36	UIM_PWR		
37	USB3_TXP		38	NC		
39	GND	GND	40	NC		
41	PCIE_RXN		42	NC		


Pin	Pin Name	Signal Type	Pin	Pin Name	Signal Type	Signal level
43	PCIE_RXP		44	NC		
45	GND	GND	46	NC		
47	PCIE_TXN		48	NC		
49	PCIE_TXP		50	RESET#	IN	+3.3V
51	GND	PWR	52	CLKREQ#	OUT	+3.3V
53	PCIE_M.2_CLK#	OUT	54	WAKE#	OUT	+3.3V
55	PCIE_M.2_CLK	OUT	56	NC		
57	GND	GND	58	NC		
59	NC		60	NC		
61	NC		62	NC		
63	NC		64	NC		
65	NC		66	NC		
67	RESET#		68	SUSCLK		
69	NC		70	+3.3V	PWR	+3.3V
71	GND	GND	72	+3.3V	PWR	+3.3V
73	GND	GND	74	+3.3V	PWR	+3.3V
75	GND	GND				

2.4.9 SIM Slot (CN10)

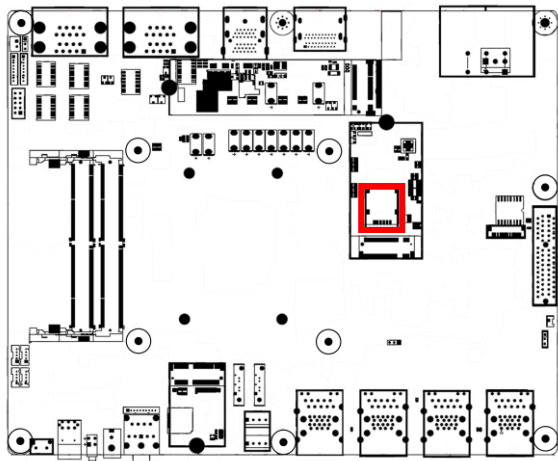


Pin	Signal	Signal Type
1	UIM_PWR	PWR
2	UIM_RST	IN
3	UIM_CLK	IN
4	GND	GND
5	UIM_VPP	PWR
6	UIM_DATA	I/O

2.4.10 M.2 2230 E-Key Slot (CN11)

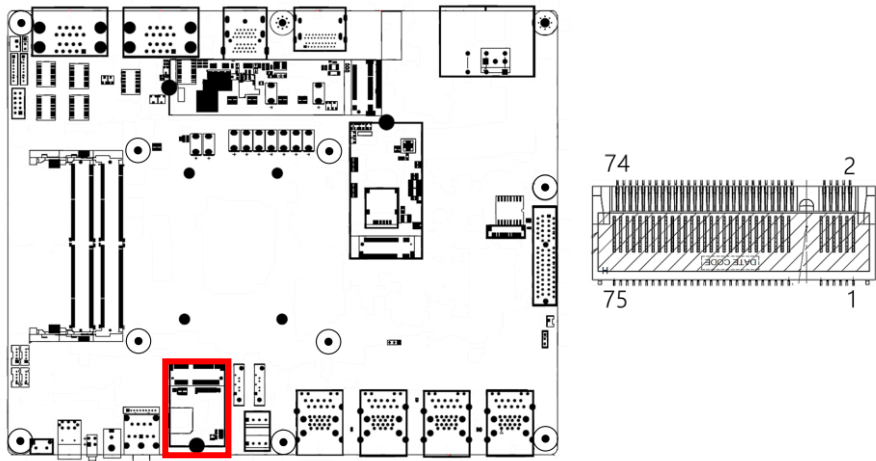

Standard specification.

2.4.11 Remote Button Connector (CN13)

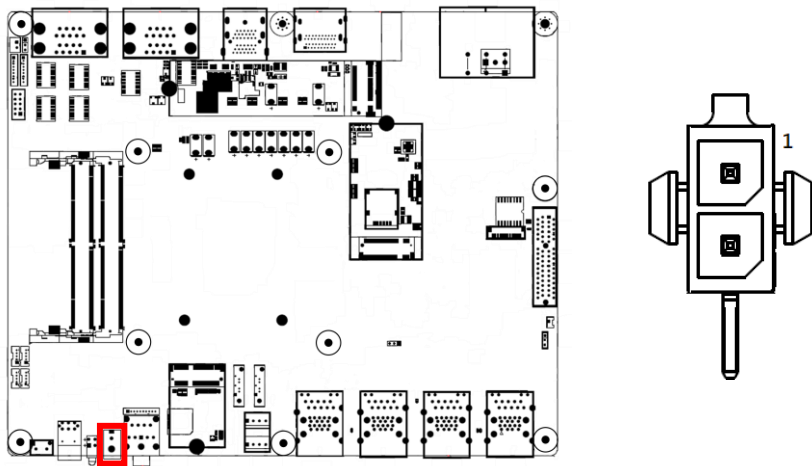


Pin	Signal	Signal Type
1	PWR_BUTTON	IN
2	GND	GND

2.4.12 SPI Flash Port (CN14)

Pin	Signal	Signal Type	Signal level
1	SPI_MISO	OUT	
2	GND	GND	
3	SPI_CLK	IN	
4	+3.3VSB	PWR	+3.3V
5	SPI_MOSI	IN	
6	SPI_CS	IN	
7	NC		
8	NC		


2.4.13 Debug Card Connector (CN15)

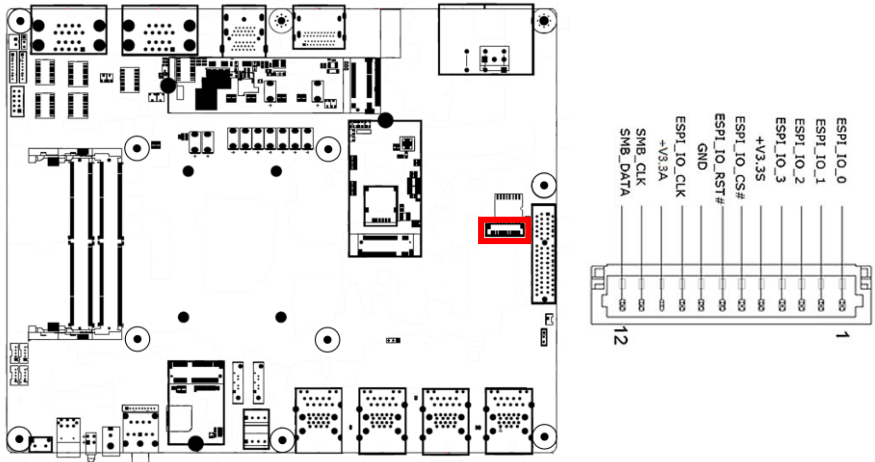

Pin	Signal	Signal Type	Signal level
1	ESPI_IO_0	I/O	+1.8V
2	ESPI_IO_1	I/O	+1.8V
3	ESPI_IO_2	I/O	+1.8V
4	ESPI_IO_3	I/O	+1.8V
5	+3.3V	PWR	+3.3VS
6	ESPI_IO_CS#	IN	
7	ESPI_IO_RST#	IN	
8	GND	GND	
9	EPSI_IO_LCLK	IN	



Pin	Signal	Signal Type	Signal level
10	+3.3V	PWR	+3.3VA
11	SMDAT	I/O	
12	SMCLK	IN	

2.4.14 SATA Port (CN16, CN17)

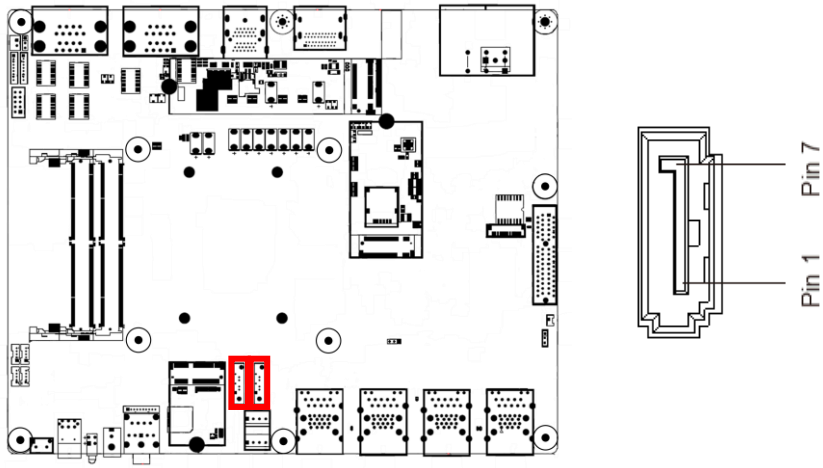



Pin	Signal	Signal Type
1	GND	GND
2	SATA_TX+	DIFF
3	SATA_TX-	DIFF
4	GND	GND
5	SATA_RX-	DIFF
6	SATA_RX+	DIFF
7	GND	GND

2.4.15 SATA PWR Connector (CN18, CN19)

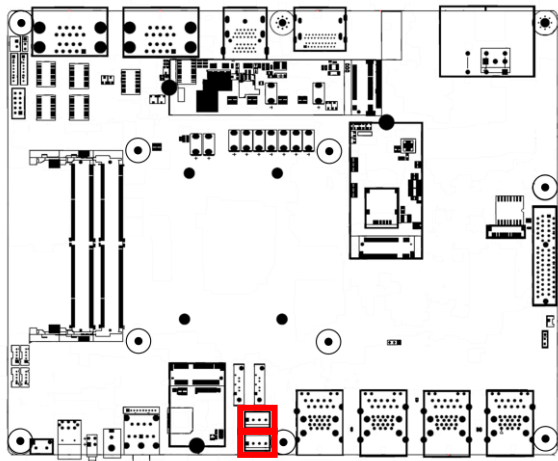


Pin	Signal	Signal Type	Signal level
1	+12V	PWR	+12V
2	GND	GND	
3	GND	GND	
4	+5V	PWR	+5V

2.4.16 Digital IO Port (CN20)

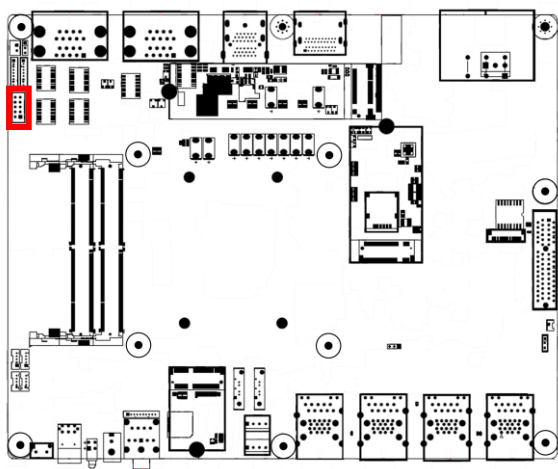



Pin	Signal	Signal Type	Signal level
1	DIO0	I/O	+5V
2	DIO1	I/O	+5V
3	DIO2	I/O	+5V
4	DIO3	I/O	+5V
5	DIO4	I/O	+5V
6	DIO5	I/O	+5V
7	DIO6	I/O	+5V
8	DIO7	I/O	+5V
9	+5V	PWR	+5V
10	GND	GND	

2.4.17 Dual COM Connector (RS-232/422/485) (CN22, CN23)

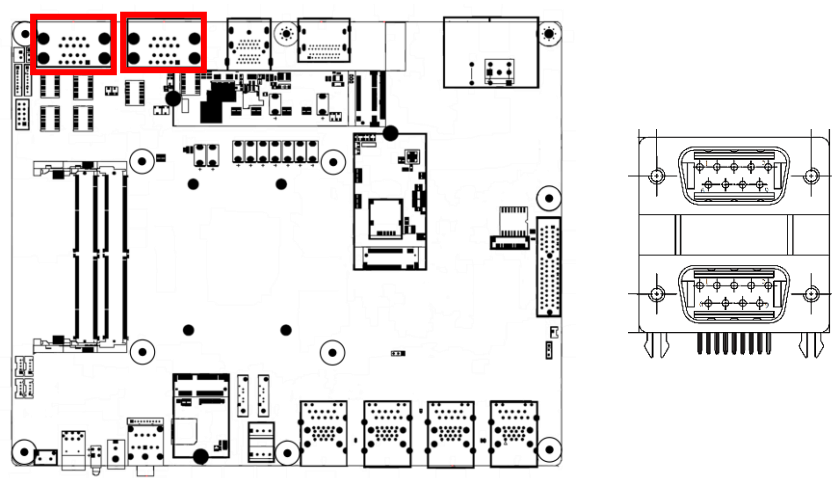



Pin	Pin Name	Signal Type	RS-422	RS-485
1	DCD	IN	RS422_TX-	RS485_D-
2	RX	IN	RS422_TX+	RS485_D+
3	TX	OUT	RS422_RX+	
4	DTR	OUT	RS422_RX-	
5	GND	GND		
6	DSR	IN		
7	RTS	OUT		
8	CTS	IN		
9	RI1	IN		

2.4.18 USB 2.0 Wafer Box (CN24, CN25, CN26, CN27)

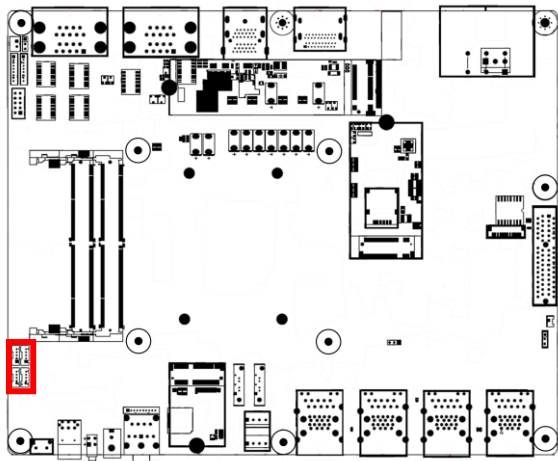


Pin	Signal	Signal Type	Signal level
1	+5V	GND	+5V
2	USBD-	DIFF	
3	USBD+	DIFF	
4	GND	GND	
5	GND	GND	

2.4.19 Audio Connector (CN28)

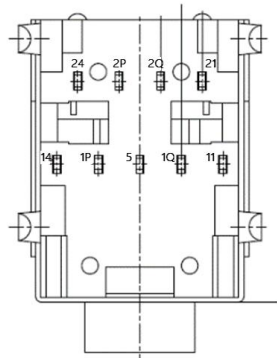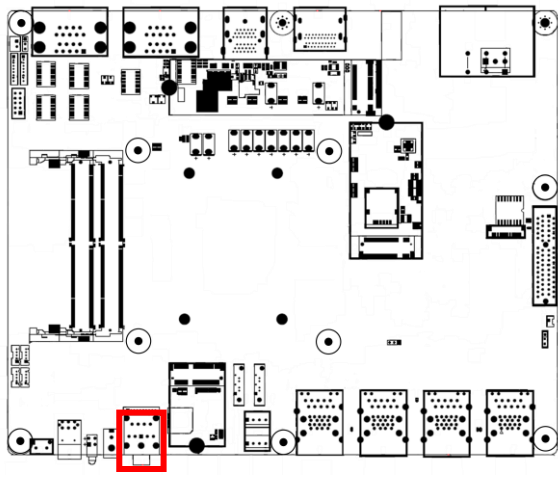


Pin	Signal	Signal Type
5	AUD_GND	GND
24	LOUT_L	OUT
21	LOUT_R	OUT
2P	HP_DET_3	IN
2Q	HP_DET_4	IN
14	MIC_L	IN
11	MIC_R	IN
1P	HP_DET_1	IN
1Q	HP_DET2	IN

2.4.20 Audio I/O Port (10P pitch:1.25mm) (CN29)

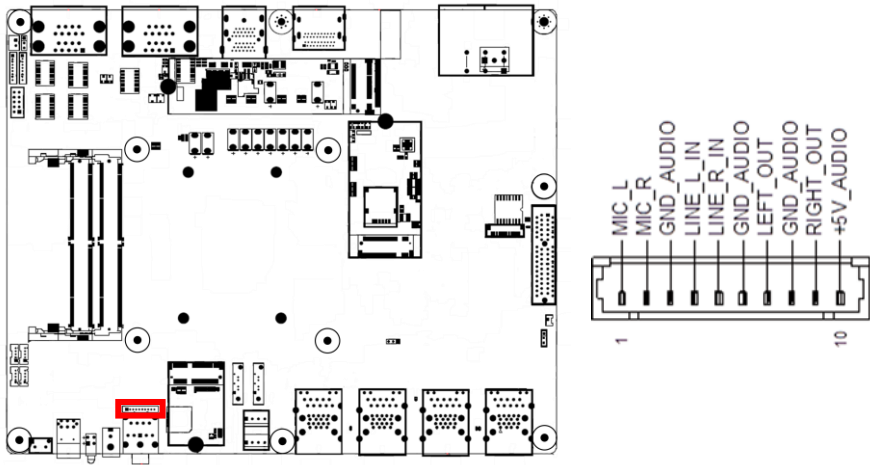

Pin	Signal	Signal Type	Signal level
1	MIC_L	IN	
2	MIC_R	IN	
3	GND_AUDIO	GND	
4	LINE_L_IN	IN	
5	LINE_R_IN	IN	
6	GND_AUDIO	GND	
7	LEFT_OUT	OUT	
8	GND_AUDIO	GND	
9	RIGHT_OUT	OUT	
10	+5V_AUDIO	PWR	+5V



2.4.21 DC-IN Connector (CN30)

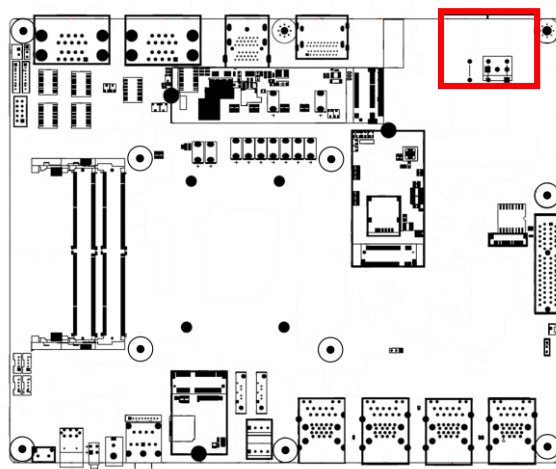

PIN1 PIN2 PIN3



Pin	Signal	Signal Type	Signal level
1	VIN	PWR	+12V ~ +24V
2	GND	GND	
3	GND_EARTH		

2.4.22 M.2 2280 M-Key Slot (CN31)

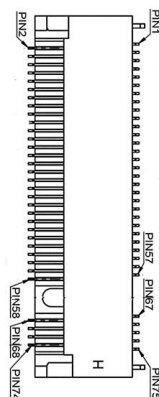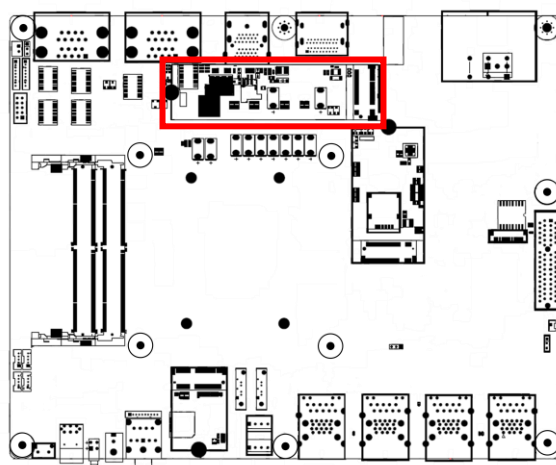


Pin	Pin Name	Signal Type	Pin	Pin Name	Signal Type	Signal level
1	GND	GND	2	+3.3V	PWR	+3.3V
3	GND	GND	4	+3.3V	PWR	+3.3V
5	PCIE_RXN0	IN	6	CARD_PWR_OFF_N	OUT	+3.3V
7	PCIE_RXP0	IN	8	NC		
9	GND	GND	10	NC		
11	PCIE_TXN0	OUT	12	+3.3V	PWR	+3.3V
13	PCIE_TXP0	OUT	14	+3.3V	PWR	+3.3V
15	GND	PWR	16	+3.3V	PWR	+3.3V
17	PCIE_RXN1	IN	18	+3.3V	PWR	+3.3V
19	PCIE_RXP1	IN	20	NC		
21	GND	PWR	22	NC		
23	PCIE_TXN1	OUT	24	NC		
25	PCIE_TXP1	OUT	26	NC		
27	GND	PWR	28	NC		
29	PCIE_RXN2	IN	30	NC		
31	PCIE_RXP2	IN	32	NC		
33	GND	GND	34	NC		
35	PCIE_TXN2	OUT	36	NC		
37	PCIE_TXP2	OUT	38	DEVSLP	IN	+3.3V
39	GND	GND	40	SMB_CLK_M2		+1.8V
41	PCIE_RXP3	IN	42	SMB_DATA_M2		+1.8V
43	PCIE_RXN3	IN	44	NC		
45	GND	GND	46	NC		
47	PCIE_TXN3	OUT	48	NC		
49	PCIE_TXP3	OUT	50	RESET#	IN	+3.3V
51	GND	PWR	52	CLKREQ#	OUT	+3.3V
53	PCIE_M.2_CLK#	OUT	54	WAKE#	OUT	+3.3V
55	PCIE_M.2_CLK	OUT	56	NC		
57	GND	GND	58	NC		
67	NC		68	NC		
69	NC		70	+3.3V	PWR	+3.3V
71	GND	GND	72	+3.3V	PWR	+3.3V
73	GND	GND	74	+3.3V	PWR	+3.3V
75	GND	GND				

2.4.23 Fan Connector (CN32)

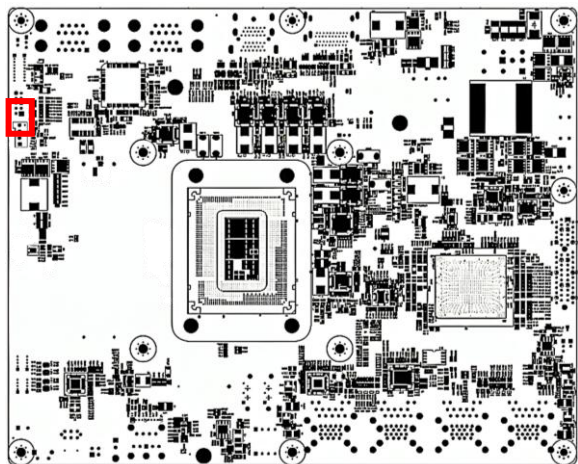


Pin	Signal	Signal Type	Signal level
1	GND	GND	
2	+V12S	PWR	+12V
3	FAN_PWM	OUT	
4	FAN_CTL	OUT	

2.4.24 COM Port 5 (Wafer Box, Optional) (CN33)

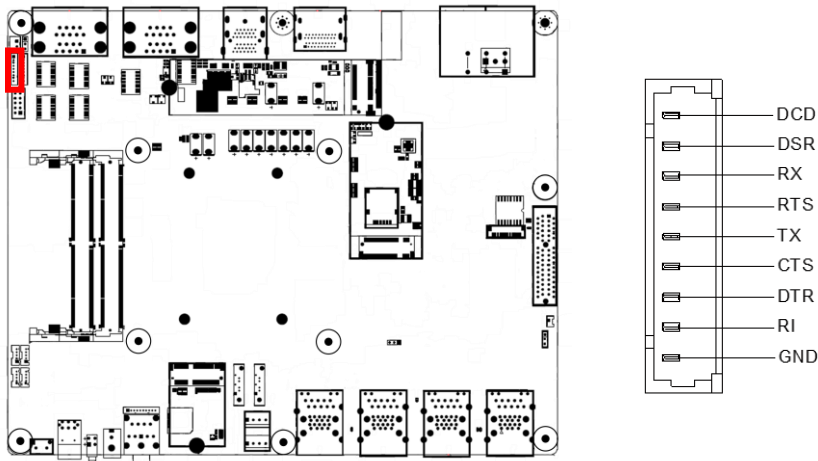

Pin	Pin Name	Signal Type	RS-422	RS-485
1	DCD	IN	RS422_TX-	RS485_D-
2	DSR	IN		
3	RX	IN	RS422_TX+	RS485_D+
4	RTS	OUT		
5	TX	OUT	RS422_RX+	
6	CTS	IN		
7	DTR	OUT	RS422_RX-	
8	RI	IN		
9	GND	GND		

2.4.25 COM Port 6 (Wafer Box, Optional) (CN34)

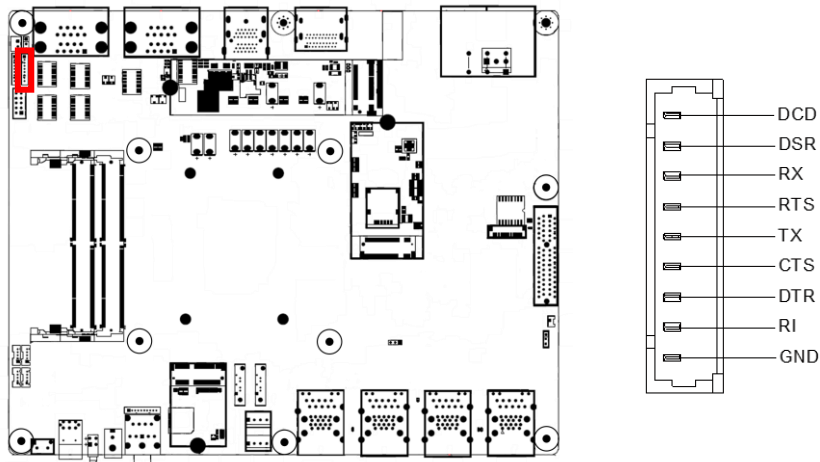


Pin	Pin Name	Signal Type	RS-422	RS-485
1	DCD	IN	RS422_TX-	RS485_D-
2	DSR	IN		
3	RX	IN	RS422_TX+	RS485_D+
4	RTS	OUT		
5	TX	OUT	RS422_RX+	
6	CTS	IN		
7	DTR	OUT	RS422_RX-	
8	RI	IN		
9	GND	GND		


2.5 CPU Installation

Before installing the CPU, ensure the system is powered down and disconnect the power cord from the system. Make sure you have the processor ready to install. See Chapter 1 Specifications for list of compatible CPU/processors.

Step 1: Remove the screws on the front and back of the BOXER-6645-ADS as shown in the figure below (six in total), and remove the top heatsink.

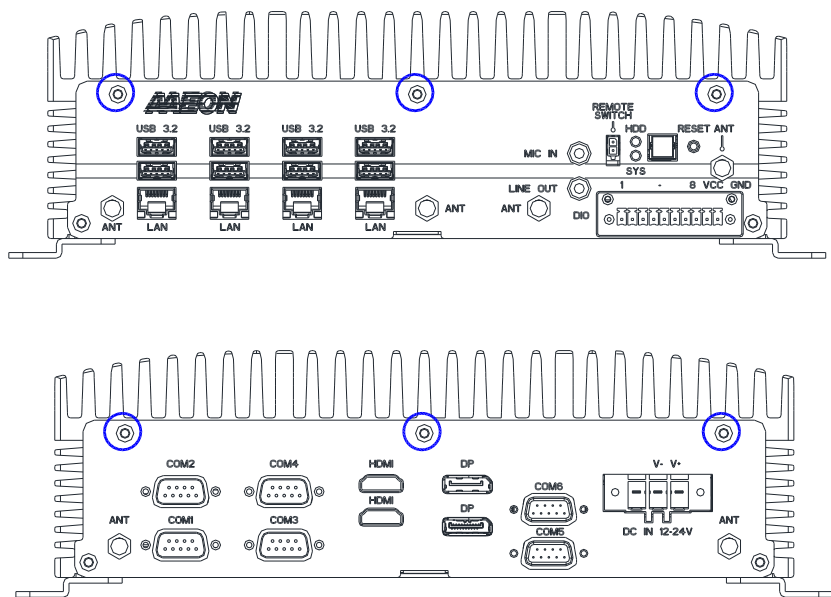


Step 2: Install the CPU into the socket and place the thermal pad on top of the processor.

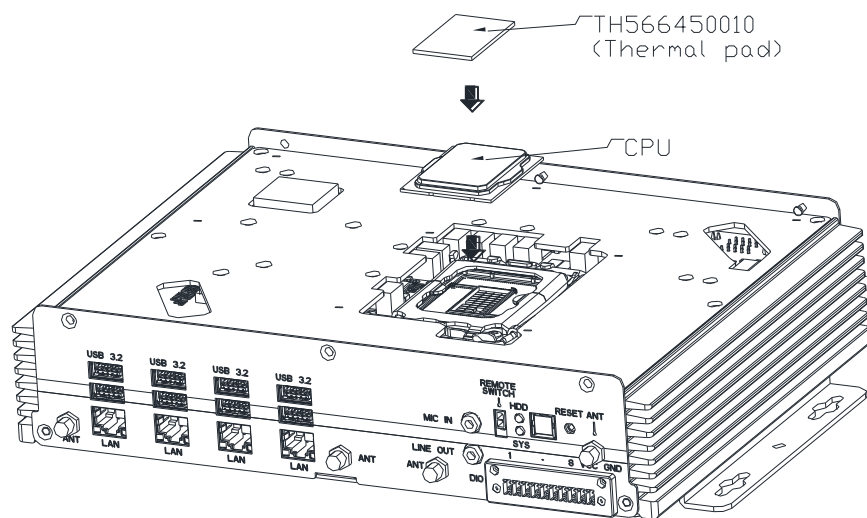

2.6 Memory RAM Module Installation


Before installing the RAM, ensure the system is powered down and disconnect the power cord from the system. Make sure you have the RAM module ready to install. See Chapter 1 for RAM requirements and specifications.

Step 1: Remove the eight (8) screws from the bottom of the BOXER-6645-ADS as shown in the figure below. Remove the bottom panel from the system.

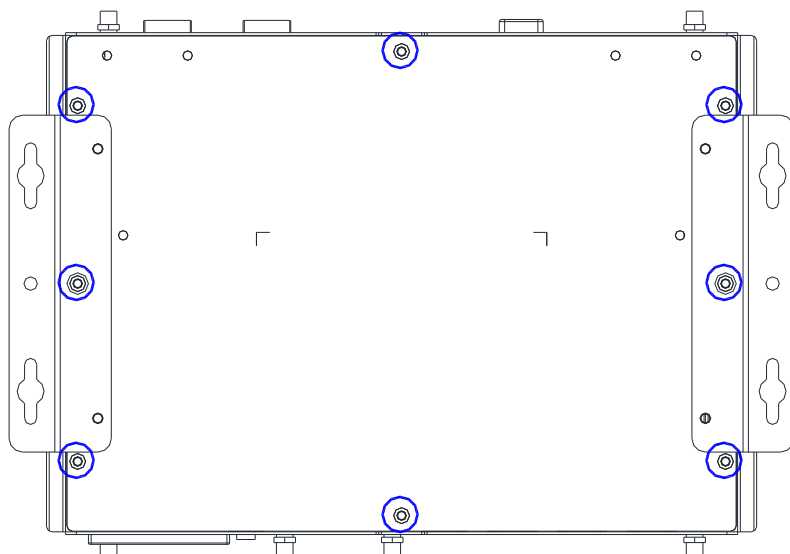


Step 2: Place thermal pads on the RAM modules and insert them into the RAM slots.

Note the figure below for placement of thermal pads. When inserting the modules into the RAM slots, first insert at an angle ($\sim 30^\circ$), then gently push down until secure.

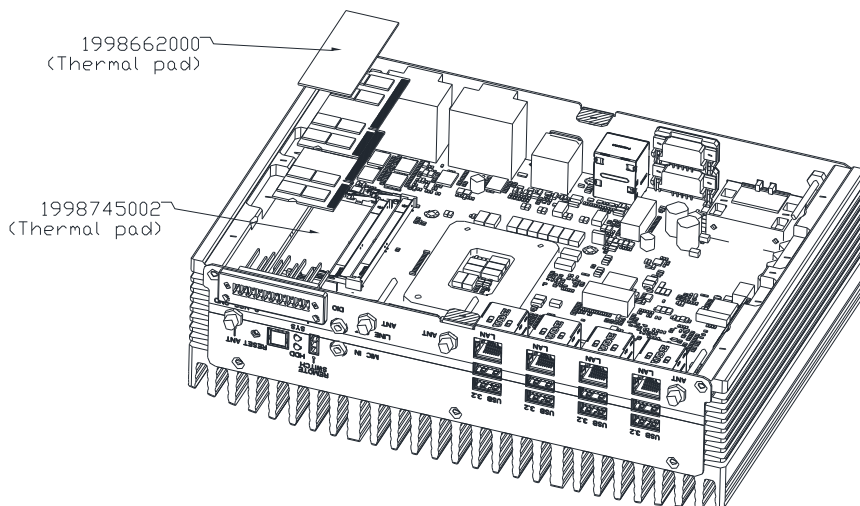

Step 3: Install the RAM bracket. Ensure it is oriented as shown in the figure below.

Attach the bracket to the chassis using two screws.

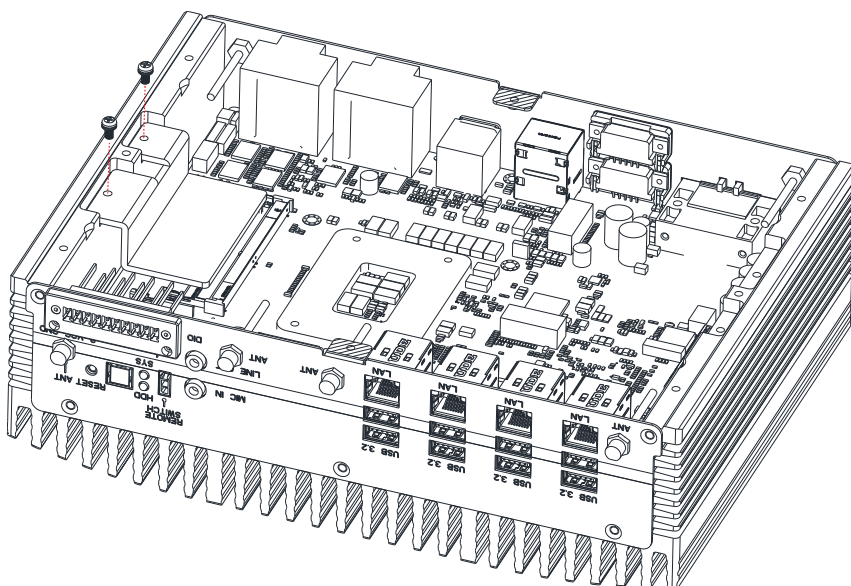


RAM installation is complete. If you also need to install the 2.5" SATA Drive, continue to the next section. If you are done, replace the bottom panel and secure with the eight (8) screws you removed in Step 1 of this section.


2.7 2.5" SATA Drive Installation

Before installing the SATA Drives, ensure the system is powered down and disconnect the power cord from the system. Make sure you have the SATA Drive ready to install. See Chapter 1 for SATA drive specifications for compatibility.


Step 1: If you have not already done so, remove the eight (8) screws from the bottom of the BOXER-6645-ADS as shown in the figure below. Remove the bottom panel from the system.

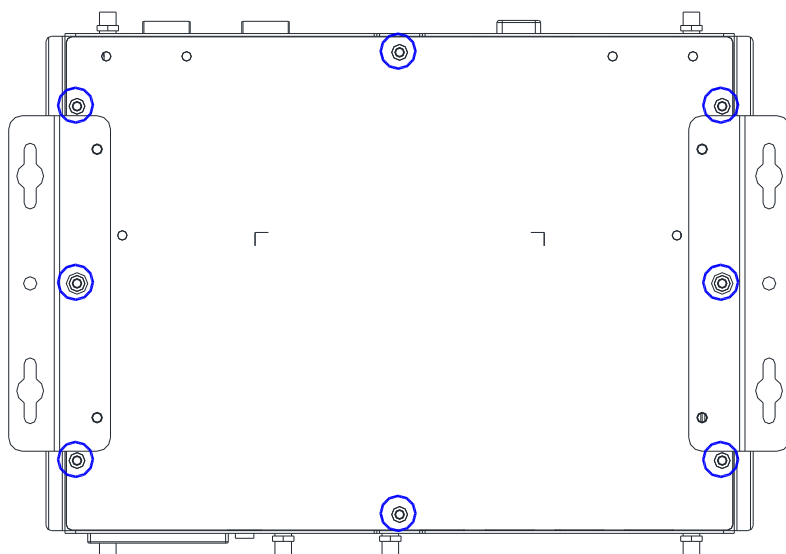



Step 2: Attach each SATA drive to the HDD Brackets using the screws provided.

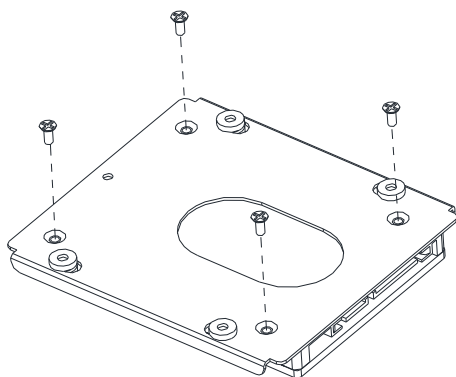

Step 3: Attach the HDD Brackets for each drive to the bottom panel using four (4) screws per drive as shown in the figure below. Attach the SATA and SATA Power cables to the board and the SATA drives.

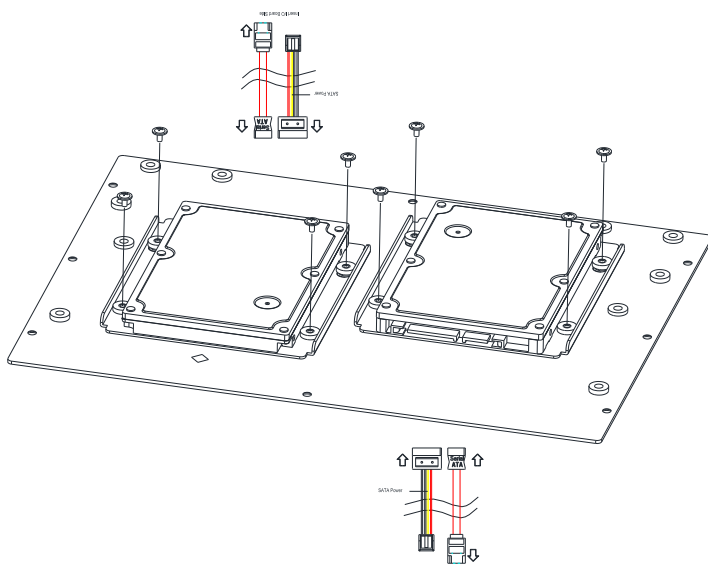

Step 4: Replace the bottom panel and secure with the eight (8) screws you removed in Step 1.

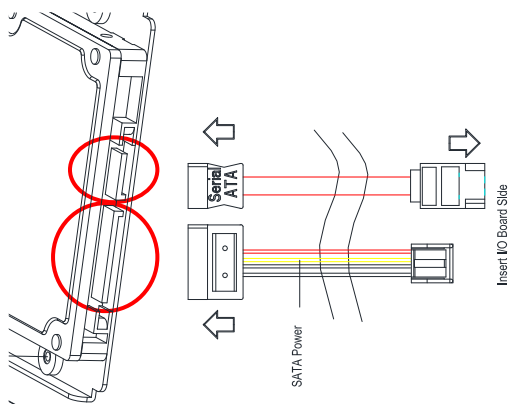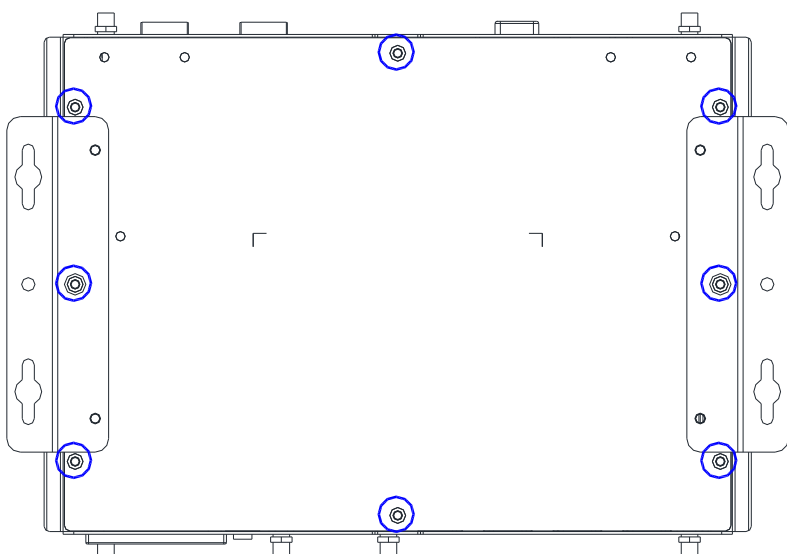

Chapter 3

AMI BIOS Setup

3.1 System Test and Initialization

The system uses certain routines to perform testing and initialization. If an error, fatal or non-fatal, is encountered, a few short beeps or an error message will be outputted. The board can usually continue the boot up sequence with non-fatal errors.

The system configuration verification routines check the current system configuration against the values stored in the CMOS memory. If they do not match, an error message will be outputted, in which case you will need to run the BIOS setup program to set the configuration information in memory.

There are three situations in which you will need to change the CMOS settings:

- You are starting your system for the first time
- You have changed your system's hardware
- The CMOS memory has lost power and the configuration information is erased

The system's CMOS memory uses a backup battery for data retention, which is to be replaced once emptied.

3.2 AMI BIOS Setup

The AMI BIOS ROM has a pre-installed Setup program that allows users to modify basic system configurations, which is stored in the battery-backed CMOS RAM and BIOS NVRAM so that the information is retained when the power is turned off.

To enter BIOS Setup, press or <F2> immediately while your computer is powering up.

The function for each interface can be found below.

Main – Date and time can be set here. Press <Tab> to switch between date elements

Advanced – Enable/ Disable boot option for legacy network devices

System I/O – Enable/ Disable system I/O device


Security – The setup administrator password can be set here

Boot – Enable/ Disable quiet Boot Option


Save & Exit – Save your changes and exit the program

MEBx – Intel® Management Engine BIOS Extension


3.3 Setup Submenu: Main

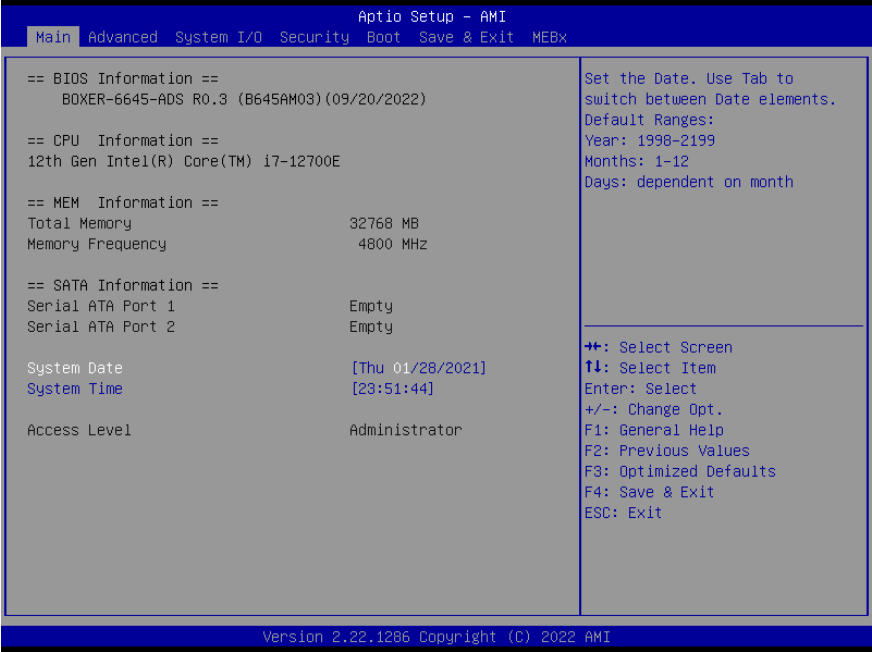

3.4 Setup Submenu: Advanced

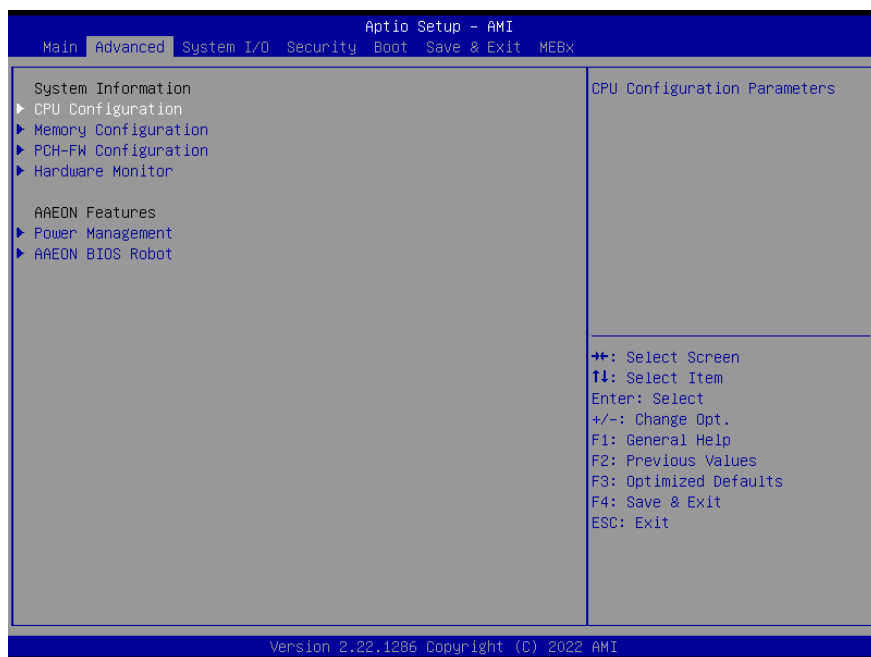

3.4.1 CPU Configuration

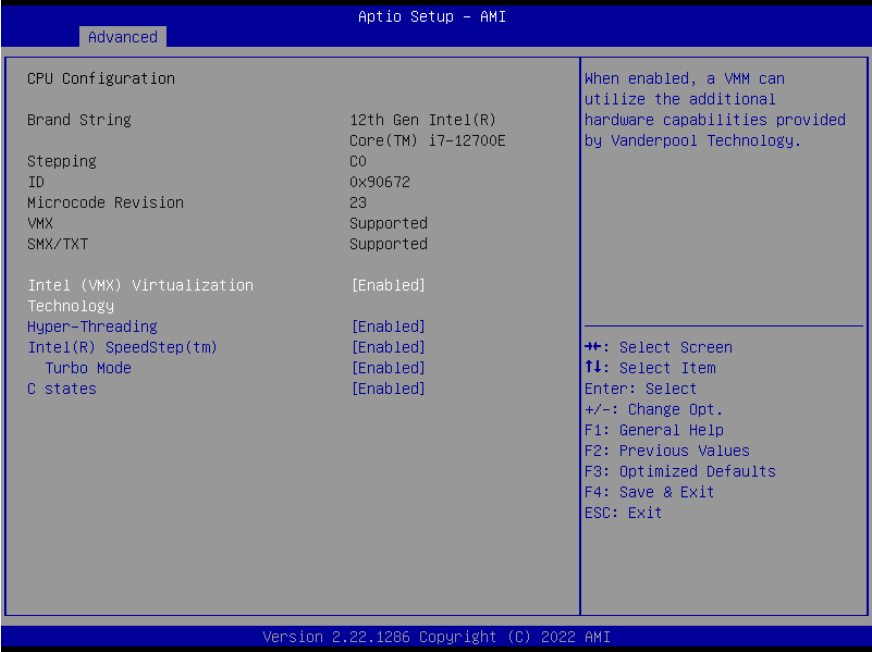

Options Summary		
Intel (VMX) Virtualization Technology	Disabled	
	Enabled	Optimal Default, Failsafe Default
When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology.		
Hyper-Threading	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable Hyper-Threading Technology		
Intel® SpeedStep™	Disabled	
	Enabled	Optimal Default, Failsafe Default
Allows more than two frequency ranges to be supported		
Turbo Mode	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable/Disable processor Turbo Mode (requires EMTTM enabled too). AUTO means enabled.		

Options Summary		
C states	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable/Disable CPU Power Management. Allows CPU to go to C states when it's not 100% utilized.		

3.4.2 Memory Configuration

Aptio Setup - AMI

Advanced

Memory Configuration

Total Memory32768 MB

Memory Frequency4800 MHz

tCL-tRCD-tRP-tRAS40-39-39-77

MC 0 Ch 0 DIMM 0Not Populated / Disabled

MC 0 Ch 1 DIMM 0Not Populated / Disabled

MC 1 Ch 0 DIMM 0Populated & Enabled

Size32768 MB (DDR5)

MC 1 Ch 1 DIMM 0Not Populated / Disabled

++: Select Screen

tl: Select Item

Enter: Select

+/-: Change Opt.

F1: General Help

F2: Previous Values


F3: Optimized Defaults

F4: Save & Exit

ESC: Exit


Version 2.22.1286 Copyright (C) 2022 AMI

3.4.3 PCH-FW Configuration

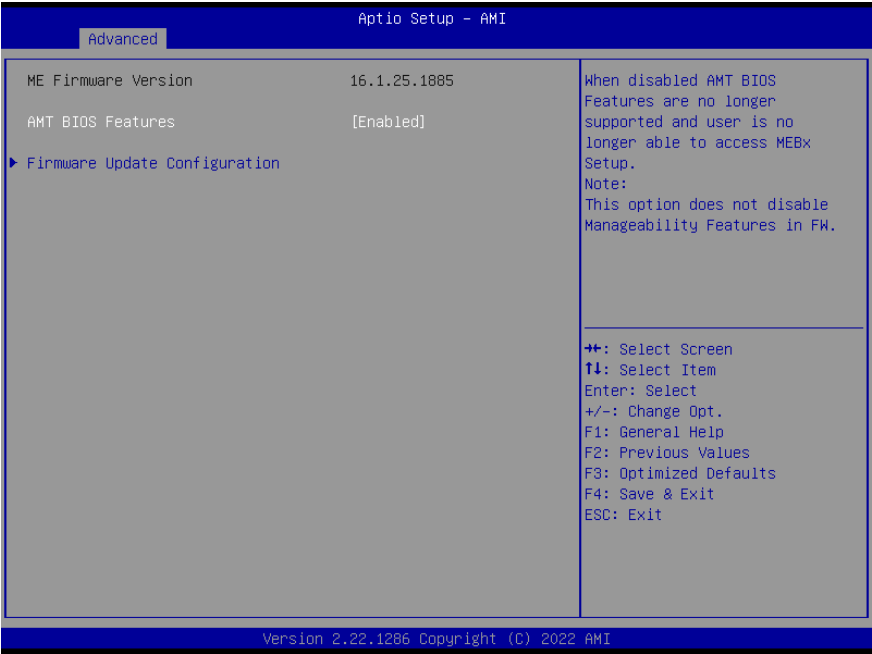


Options Summary		
AMT BIOS Features	Enabled	Optimal Default, Failsafe Default
	Disabled	
When disabled AMT BIOS Features are no longer supported and user is no longer able to access MEBx Setup. Note: This option does not disable Manageability Features in FW.		

3.4.3.1 Firmware Update Configuration

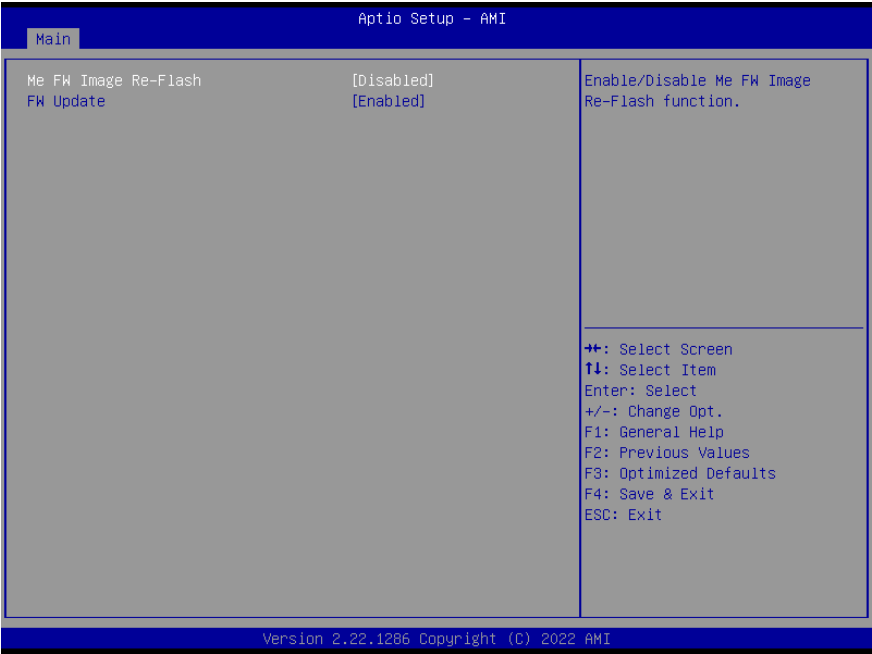


Options Summary		
Me FW Image Re-Flash	Enabled	
	Disabled	Optimal Default, Failsafe Default
Enabled/ Disable Me FW Image Re-Flash function.		
FW Update	Enabled	
	Disabled	Optimal Default, Failsafe Default
Enabled/ Disable Me FW Update function.		

3.4.4 Hardware Monitor

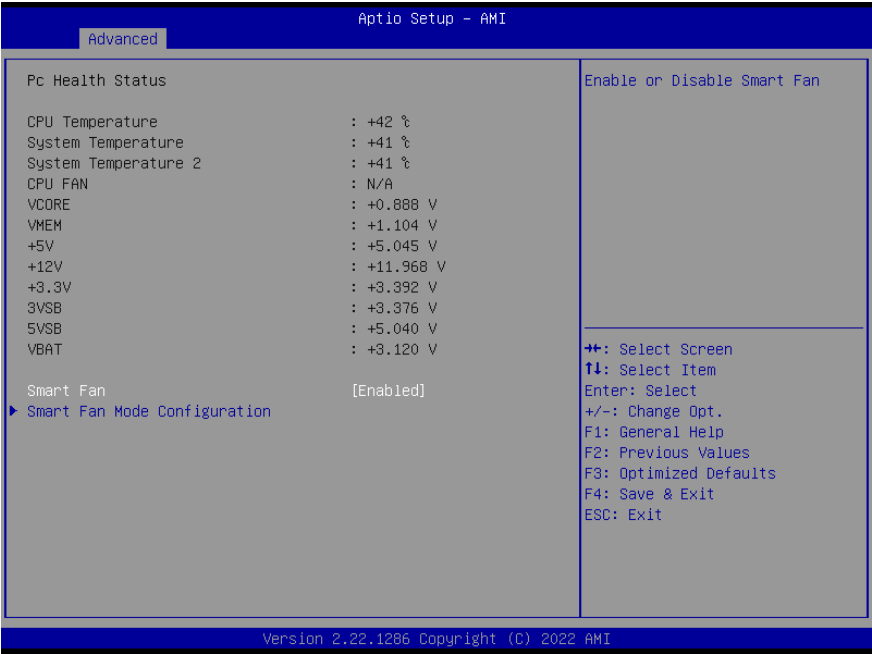

Options Summary		
Smart Fan	Enabled	Optimal Default, Failsafe Default
	Disabled	
Enable or Disable Smart Fan		


3.4.5 Smart Fan Mode Configuration

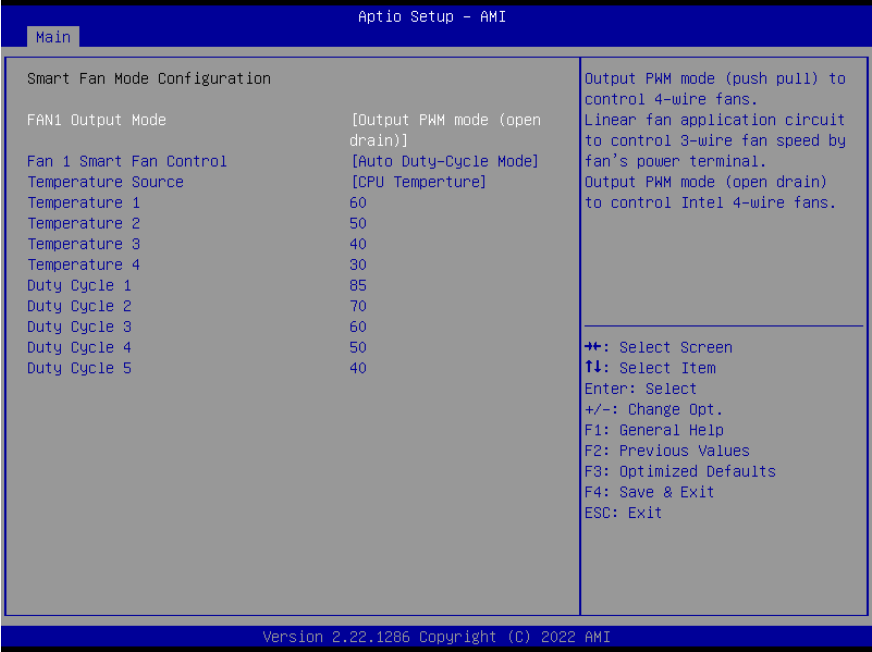

Options Summary		
FAN1 Output Mode	Output PWM mode (open drain)	Optimal Default, Failsafe Default
	Linear Fan Application	
	Output PWM mode (push pull)	
PWM Output Mode (Push-Pull) for 4-Wire Fan Control.		
Linear Fan Control Circuit for 3-Wire Fans via Power Terminal.		
PWM Output Mode (Open-Drain) for Intel 4-Wire Fan Control.		
Fan 1 Smart Fan Control	Manual RPM Mode	
	Manual Duty Mode	
	Auto RPM Mode	
	Auto Duty-Cycle Mode	Optimal Default, Failsafe Default
Smart Fan Mode Selection.		

Options Summary		
Temperature Source	CPU Temperature	Optimal Default, Failsafe Default
	System Temperature	
	System Temperature 2	
Select the monitored temperature source for this fan.		
Temperature 1	60	Optimal Default, Failsafe Default
Temperature 2	50	Optimal Default, Failsafe Default
Temperature 3	40	Optimal Default, Failsafe Default
Temperature 4	30	Optimal Default, Failsafe Default
Temperature 5	20	Optimal Default, Failsafe Default
Duty Cycle 1	85	Optimal Default, Failsafe Default
Duty Cycle 2	70	Optimal Default, Failsafe Default
Duty Cycle 3	60	Optimal Default, Failsafe Default
Duty Cycle 4	50	Optimal Default, Failsafe Default
Duty Cycle 5	40	Optimal Default, Failsafe Default
Automatic Fan Speed Control: Fan speed adjusts according to temperature using a duty cycle range of 1–100%.		


3.4.5.1 Fan 1 Smart Fan Control (Auto RPM Mode)

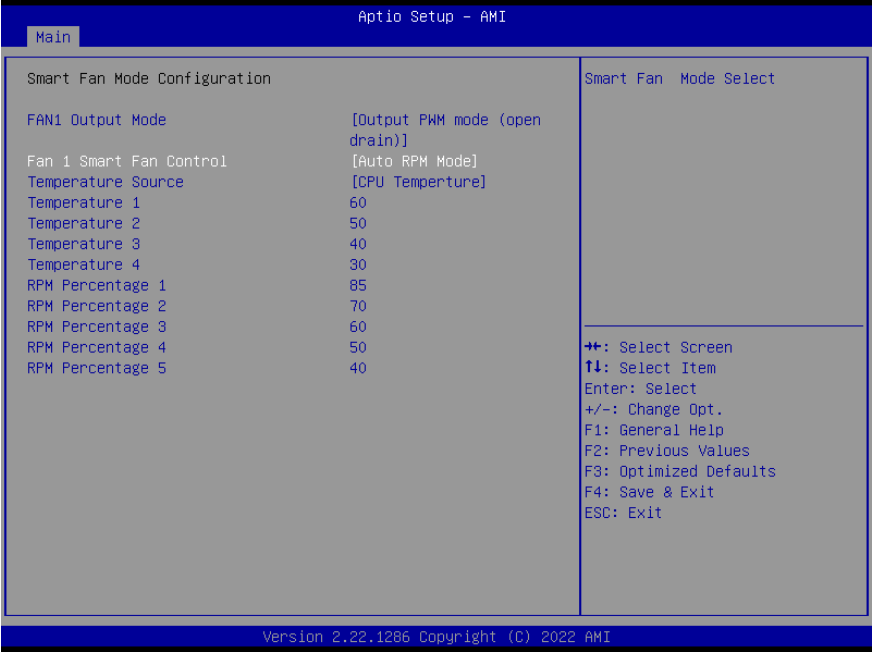

Options Summary		
Fan 1 Smart Fan Control	Auto RPM Mode	
Smart Fan Mode Selection.		
Temperature Source	CPU Temperature	Optimal Default, Failsafe Default
	System Temperature	
	System Temperature 2	
Select the monitored temperature source for this fan.		
Temperature 1	60	Optimal Default, Failsafe Default
Temperature 2	50	Optimal Default, Failsafe Default
Temperature 3	40	Optimal Default, Failsafe Default
Temperature 4	30	Optimal Default, Failsafe Default
Temperature 5	20	Optimal Default, Failsafe Default
RPM Percentage 1	85	Optimal Default, Failsafe Default
RPM Percentage 2	70	Optimal Default, Failsafe Default
RPM Percentage 3	60	Optimal Default, Failsafe Default
RPM Percentage 4	50	Optimal Default, Failsafe Default


Options Summary		
RPM Percentage 5	40	Optimal Default, Failsafe Default
Automatic Fan Speed Control: Fan speed adjusts according to temperature using an RPM range of 1–100.		

3.4.5.2 Fan 1 Smart Fan Control (Manual Duty Mode)

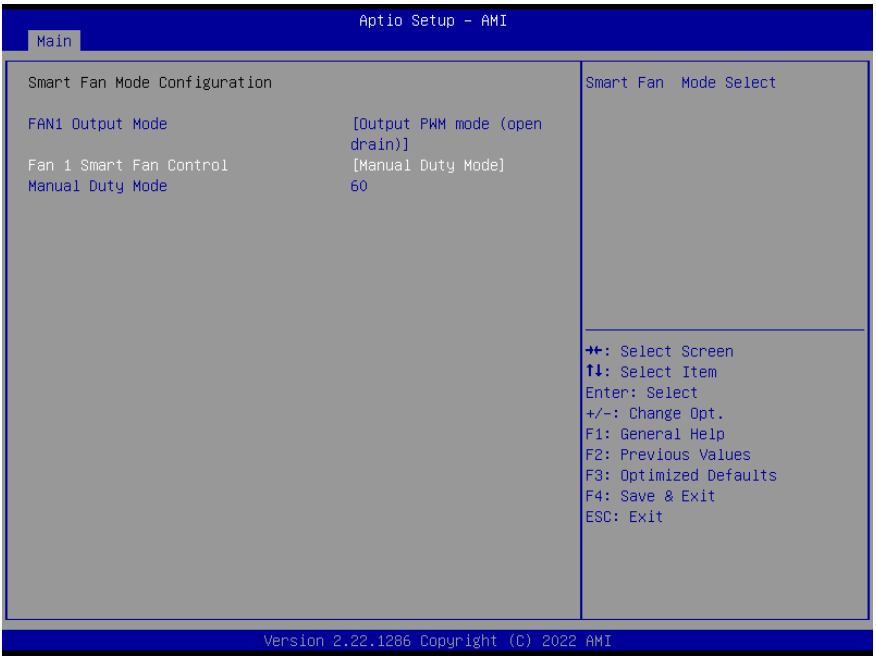


Options Summary		
Fan 1 Smart Fan Control	Manual Duty Mode	
Smart Fan Mode Selection.		
Temperature Source	CPU Temperature	Optimal Default, Failsafe Default
	System Temperature	
	System Temperature 2	
Select the monitored temperature source for this fan.		
Manual Duty Mode	60	Optimal Default, Failsafe Default
Automatic Fan Speed Control: Fan speed adjusts according to temperature using an RPM range of 1–100.		

3.4.5.3 Fan 1 Smart Fan Control (Manual RPM Mode)

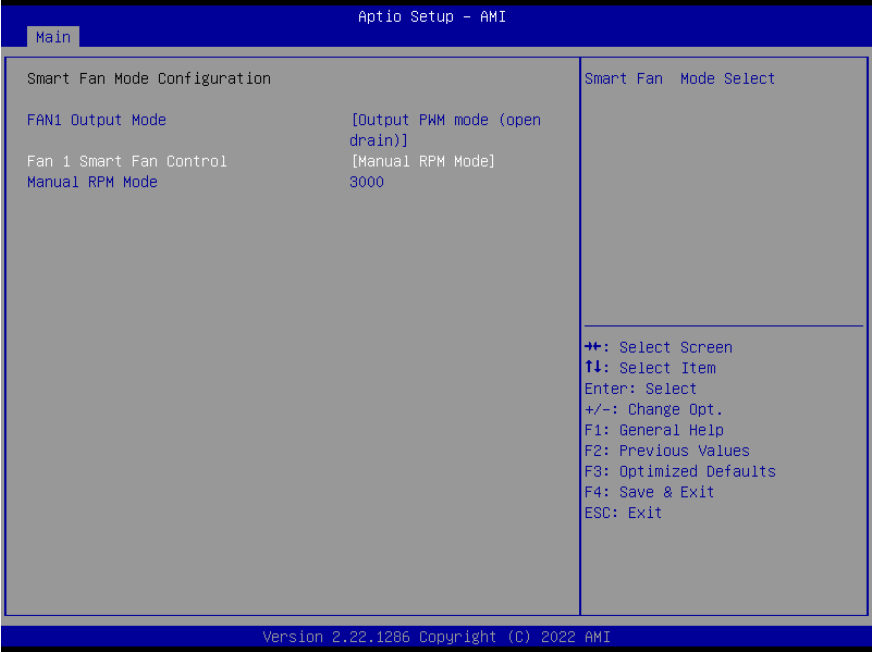

Options Summary		
Fan 1 Smart Fan Control	Manual RPM Mode	
Smart Fan Mode Select.		
Temperature Source	CPU Temperature	Optimal Default, Failsafe Default
	System Temperature	
	System Temperature 2	
Select the monitored temperature source for this fan.		
Manual RPM Mode	3000	Optimal Default, Failsafe Default
Manual Fan Control Mode: User can set desired RPM within the range of 500~10,000.		

3.4.6 Power Management

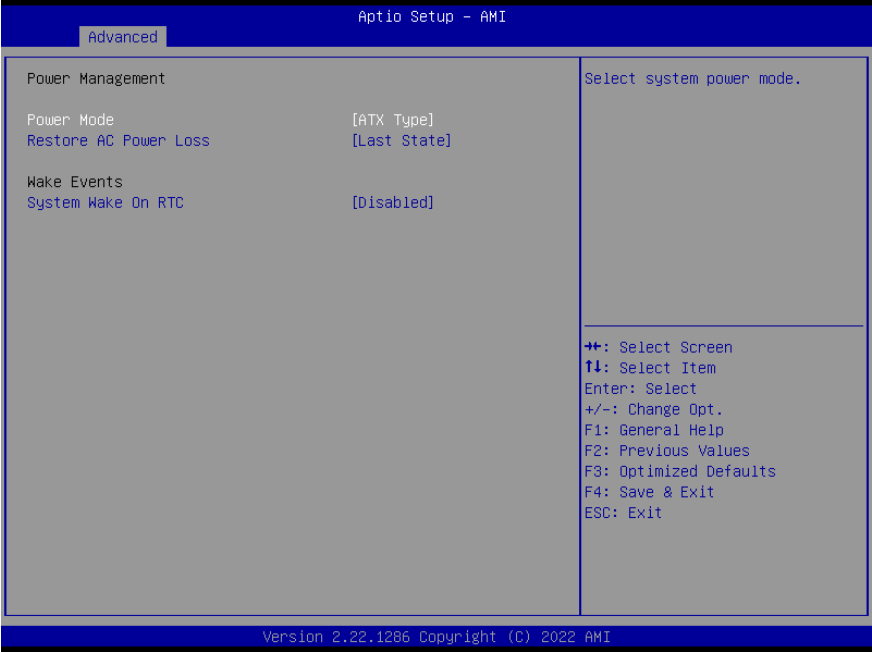

Options Summary		
Power Mode	ATX Type	Optimal Default, Failsafe Default
	AT Type	
Select system power mode.		
Restore AC Power Loss	Last State	Optimal Default, Failsafe Default
	Always On	
	Always Off	
Set GPI [3:0] Output as Hi or Low		
System Wake On RTC	Disabled	Optimal Default, Failsafe Default
	By Date	
	By Weekday	
	Bypass	
By Date: System wakes on the specified day at the given hour, minute, and second.		
By Weekday: System wakes on the enabled weekday at the specified hour, minute, and second.		
Bypass: BIOS does not control the RTC wake function.		


3.4.7 AAEON BIOS Robot



Options Summary		
Sends watch dog before BIOS POST	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enabled: Robot sets the Watch Dog Timer (WDT) immediately after power-on, before the BIOS starts the POST process. The WDT is cleared by the Robot upon completion of POST. If the WDT is not cleared before its timer reaches zero, it will automatically reset the system.		
Sends watch dog before booting OS	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enabled: Robot sets the Watch Dog Timer (WDT) after POST completion, before BIOS transfers control to the OS. Warning: Before enabling this function, an OS program must be responsible for clearing the WDT. This function should be disabled if the OS is going to perform an update.		
Delayed POST (PEI phase)	Disabled	Optimal Default, Failsafe Default
	Enabled	

Options Summary		
Enabled: Robot delays the BIOS from starting POST immediately after power-on. This allows POST to begin with stable power or after the system has physically warmed up. Note: Robot performs this action before sending the Watch Dog Timer (WDT) signal.		
Delayed POST (DXE phase)	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enabled: Robot delays the BIOS until POST completion. This allows POST to start with stable power or after the system has physically warmed up. Note: Robot performs this action after sending the Watch Dog Timer (WDT) signal before POST.		


3.4.7.1 Device Detecting Configuration

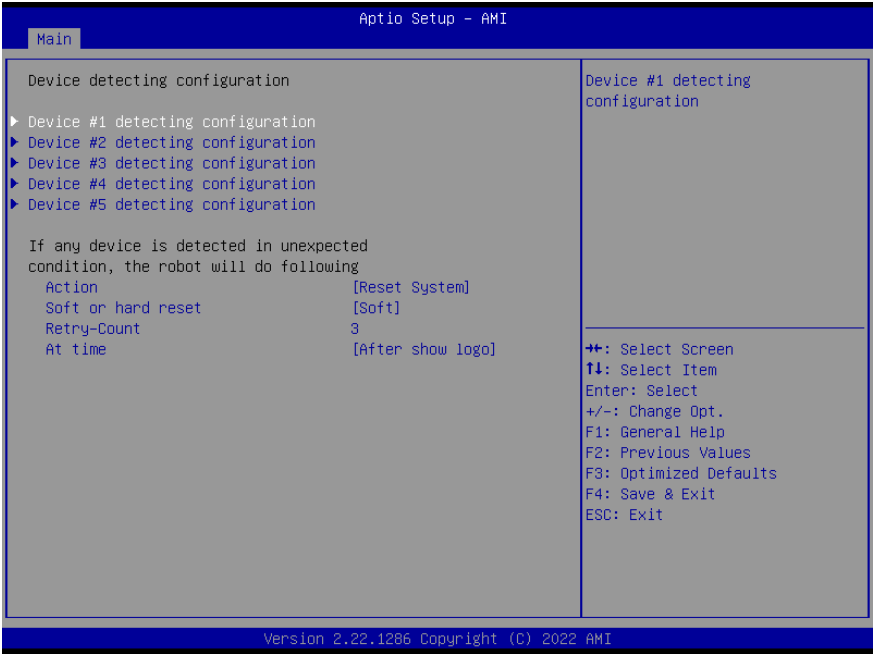

Options Summary		
Action	Reset System	Optimal Default, Failsafe Default
	Hold System	
Select action that robot should do.		


Options Summary		
Soft or hard reset	Soft	Optimal Default, Failsafe Default
	Hard	
Select reset type robot should send on each boot.		
Retry-Count	3	Optimal Default, Failsafe Default
Retry Counter: Specify the number of retries. Robot will reset the system up to this count, then allow the system to continue POST.		
At time	After shoe logo	Optimal Default, Failsafe Default
	Before show logo	
Robot Action Time: After Show Logo – Robot performs the action after the logo is displayed, when system devices are mostly ready. Before Show Logo – Robot performs the action earlier, before the logo is displayed, but some devices may not be ready.		

3.4.7.1.1 Device #1 Detecting Configuration

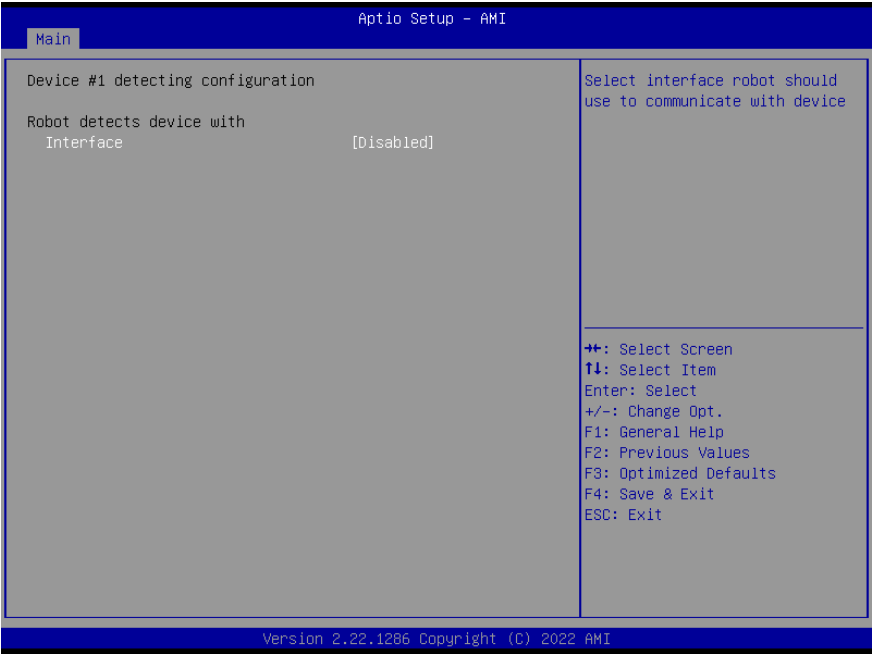


Options Summary		
Interface	Disabled	Optimal Default, Failsafe Default
	PCI	
	DIO	
	SMBUS	
	Legacy I/O	
	Super I/O	
	MMIO	
Select interface robot should use to communicate with device		

3.4.7.1.2 Device #2 Detecting Configuration

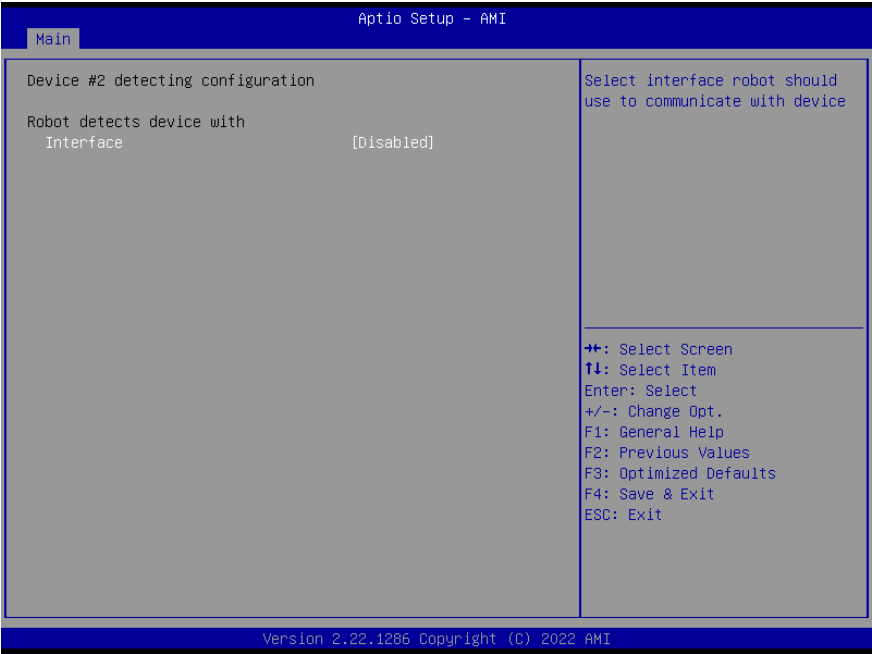


Options Summary		
Interface	Disabled	Optimal Default, Failsafe Default
	PCI	
	DIO	
	SMBUS	
	Legacy I/O	
	Super I/O	
	MMIO	
Select interface robot should use to communicate with device		

3.4.7.1.3 Device #3 Detecting Configuration

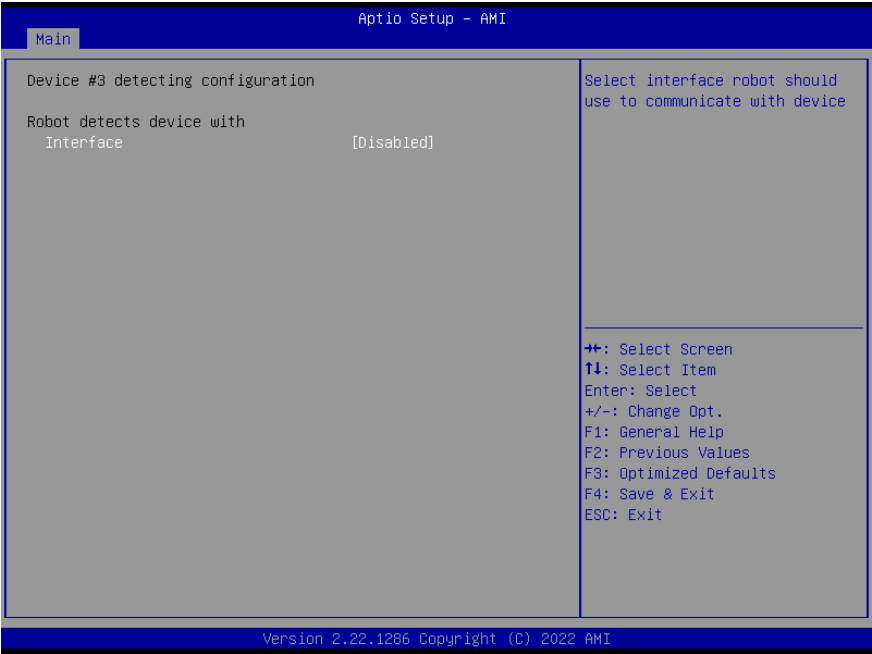


Options Summary		
Interface	Disabled	Optimal Default, Failsafe Default
	PCI	
	DIO	
	SMBUS	
	Legacy I/O	
	Super I/O	
	MMIO	
Select interface robot should use to communicate with device		

3.4.7.1.4 Device #4 Detecting Configuration

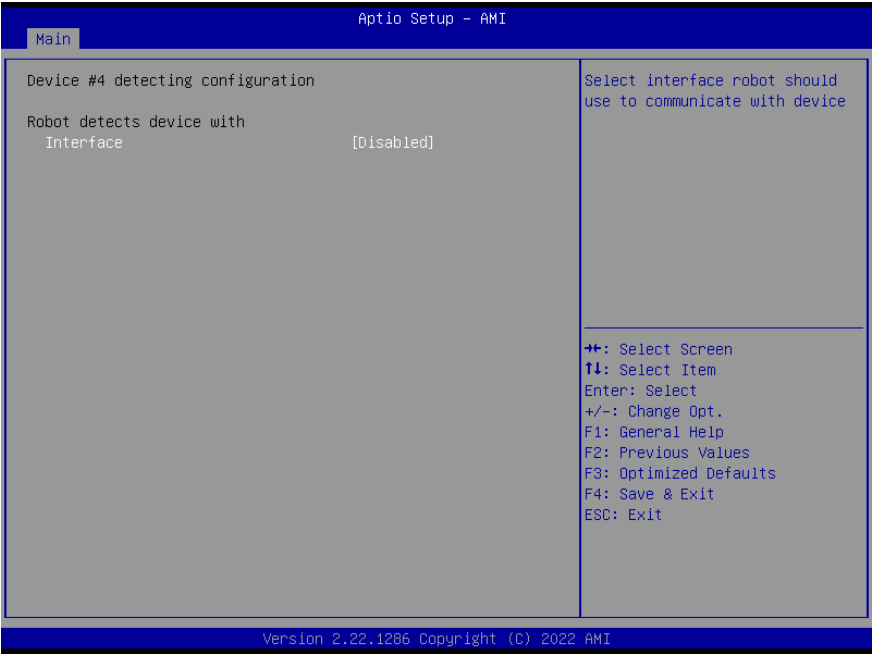

Options Summary		
Interface	Disabled	Optimal Default, Failsafe Default
	PCI	
	DIO	
	SMBUS	
	Legacy I/O	
	Super I/O	
	MMIO	
Select interface robot should use to communicate with device		

3.4.7.1.5 Device #5 Detecting Configuration

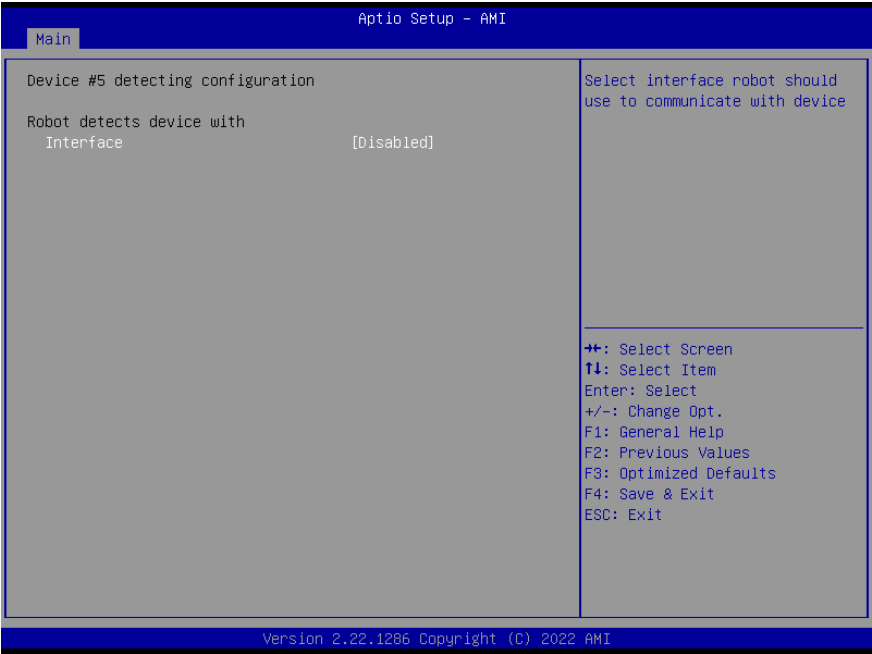


Options Summary		
Interface	Disabled	Optimal Default, Failsafe Default
	PCI	
	DIO	
	SMBUS	
	Legacy I/O	
	Super I/O	
	MMIO	
Select interface robot should use to communicate with device		

3.5 Setup Submenu: System I/O




3.5.1 Storage Configuration

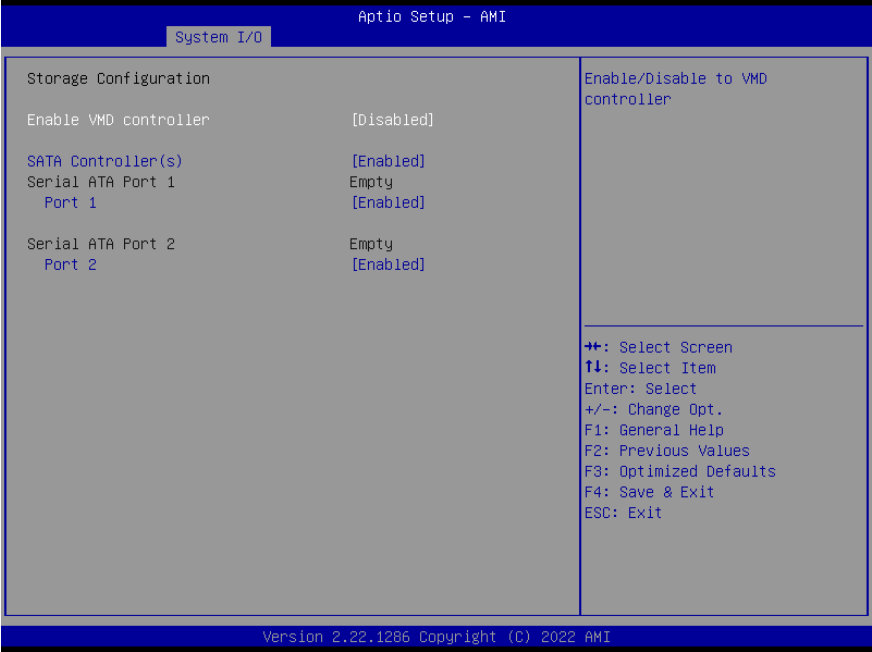

Options Summary		
Enable VMD controller	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enable/Disable to VMD controller		
SATA Controller(s)	Enabled	Optimal Default, Failsafe Default
	Disabled	
Enable/Disable to SATA Device		
Port 1	Enabled	Optimal Default, Failsafe Default
	Disabled	
Enable or Disable SATA Port		
Port 2	Enabled	Optimal Default, Failsafe Default
	Disabled	
Enable or Disable SATA Port		

3.5.2 HD Audio Configuration

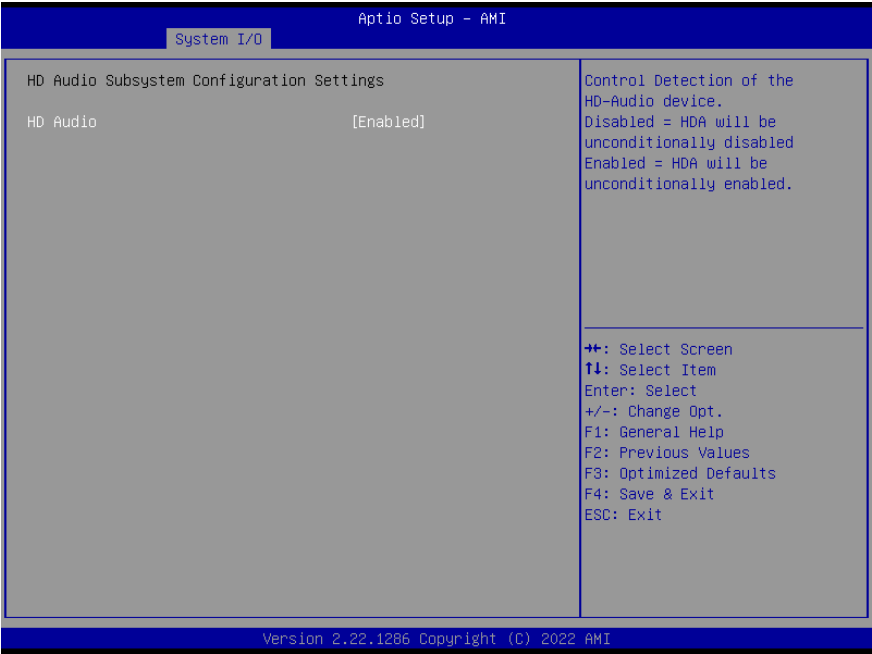

Options Summary		
HD Audio	Disabled	
	Enabled	Optimal Default, Failsafe Default
HD-Audio Device Control: Disabled – HDA is unconditionally disabled. Enabled – HDA is unconditionally enabled.		


3.5.3 Digital IO Port Configuration




Options Summary		
DIO1	Input	
	Output	Optimal Default, Failsafe Default
Set DIO as Input or Output		
Output Level	Low	
	High	Optimal Default, Failsafe Default
Set output level when DIO pin is output		
DIO2	Input	
	Output	Optimal Default, Failsafe Default
Set DIO as Input or Output		
Output Level	Low	
	High	Optimal Default, Failsafe Default
Set output level when DIO pin is output		
DIO3	Input	
	Output	Optimal Default, Failsafe Default
Set DIO as Input or Output		

Options Summary		
Output Level	Low	
	High	Optimal Default, Failsafe Default
Set output level when DIO pin is output		
DIO4	Input	
	Output	Optimal Default, Failsafe Default
Set DIO as Input or Output		
Output Level	Low	
	High	Optimal Default, Failsafe Default
Set output level when DIO pin is output		
DIO5	Input	Optimal Default, Failsafe Default
	Output	
Set DIO as Input or Output		
DIO6	Input	Optimal Default, Failsafe Default
	Output	
Set DIO as Input or Output		
DIO7	Input	Optimal Default, Failsafe Default
	Output	
Set DIO as Input or Output		
DIO8	Input	Optimal Default, Failsafe Default
	Output	
Set DIO as Input or Output		

3.5.4 Legacy Logical Devices Configuration

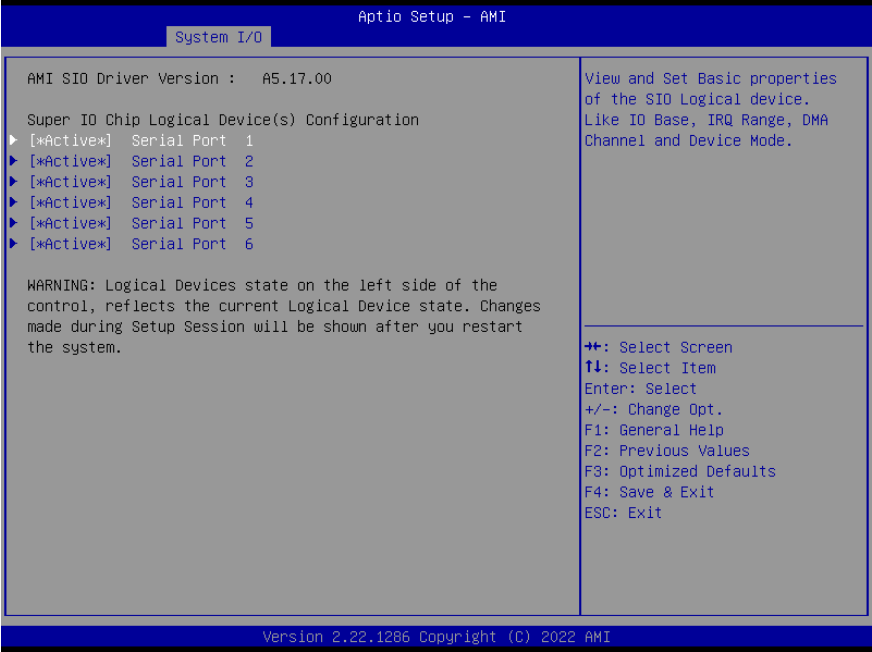


3.5.4.1 Serial Port 1

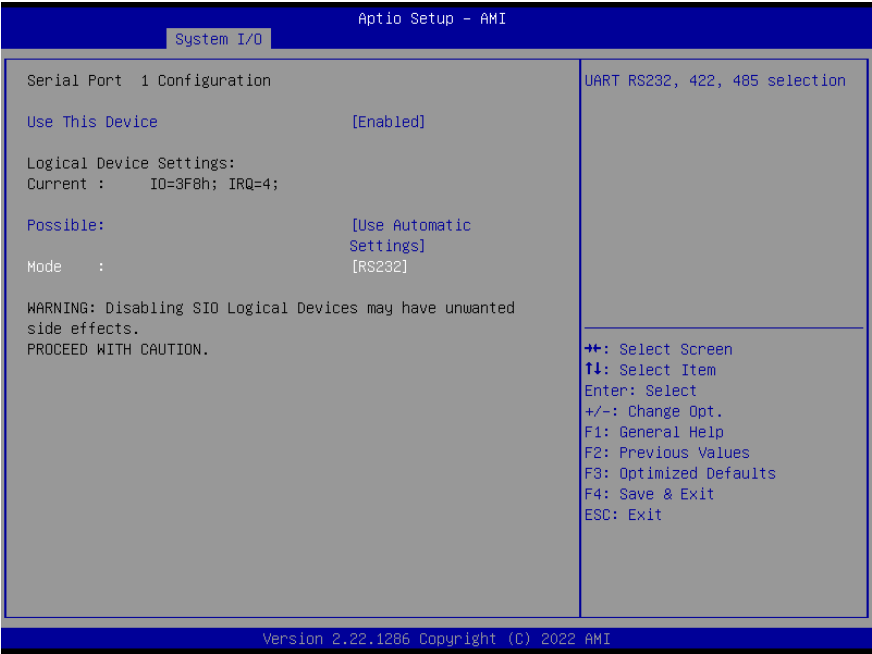


Options Summary		
Use This Device	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable this Logical Device		
Possible:	Use Automatic Settings	Optimal Default, Failsafe Default
	IO=3F8; IRQ=4;	
	IO=2F8; IRQ=3;	
Allows the user to change the device resource settings. New settings will be reflected on this setup page after system restarts.		
Mode	RS232	Optimal Default, Failsafe Default
	RS422	
	RS485	
UART RS232, 422, 485, selection		

3.5.4.2 Serial Port 2

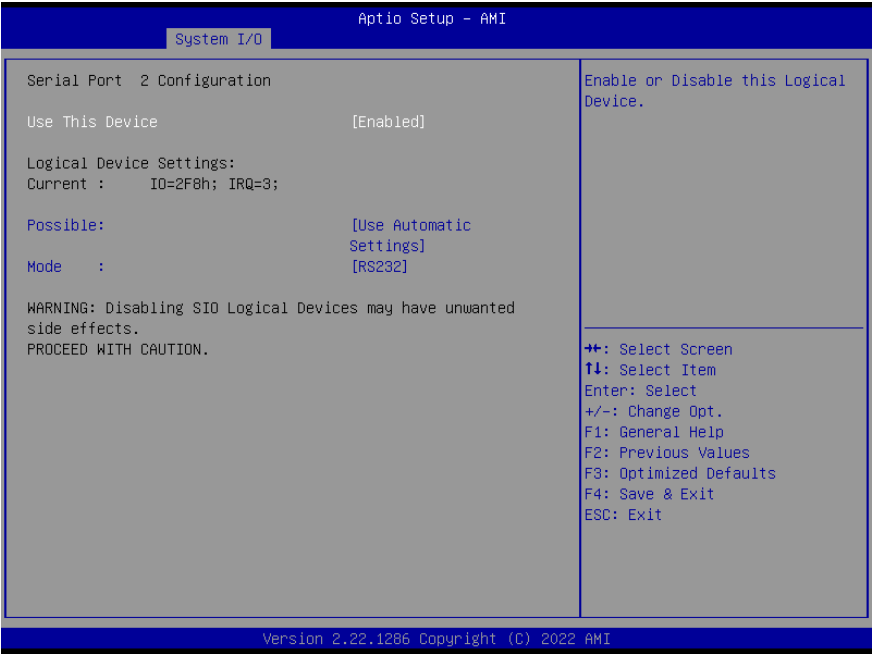


Options Summary		
Use This Device	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable this Logical Device		
Possible:	Use Automatic Settings	Optimal Default, Failsafe Default
	IO=2F8; IRQ=3;	
	IO=3F8; IRQ=4;	
Allows the user to change the device resource settings. New settings will be reflected on this setup page after system restarts.		
Mode	RS232	Optimal Default, Failsafe Default
	RS422	
	RS485	
UART RS232, 422, 485, selection		

3.5.4.3 Serial Port 3

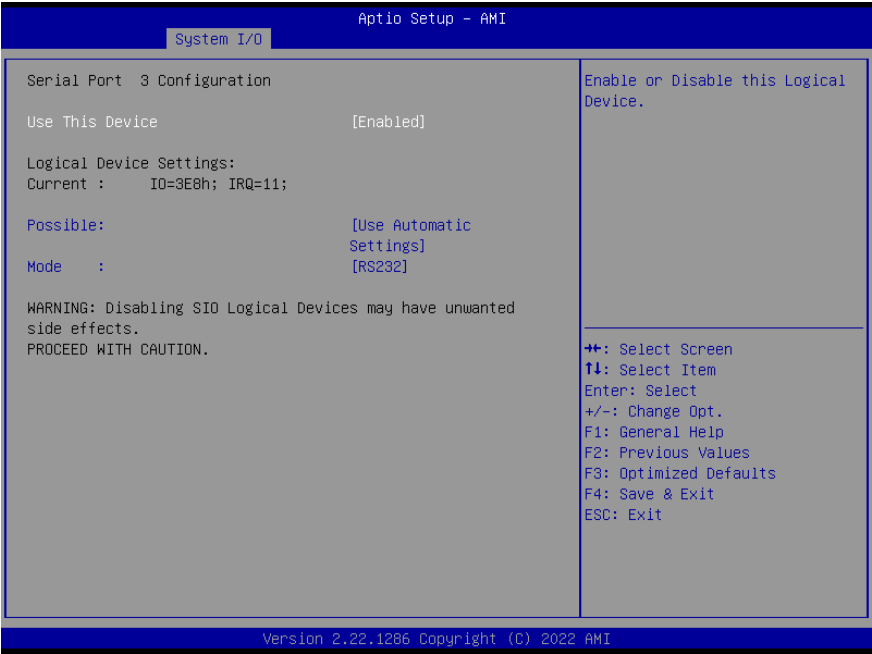


Options Summary		
Use This Device	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable this Logical Device		
Possible:	Use Automatic Settings	Optimal Default, Failsafe Default
	IO=3E8; IRQ=11;	
	IO=2E8; IRQ=11;	
Allows the user to change the device resource settings. New settings will be reflected on this setup page after system restarts.		
Mode	RS232	Optimal Default, Failsafe Default
	RS422	
	RS485	
UART RS232, 422, 485, selection		

3.5.4.4 Serial Port 4

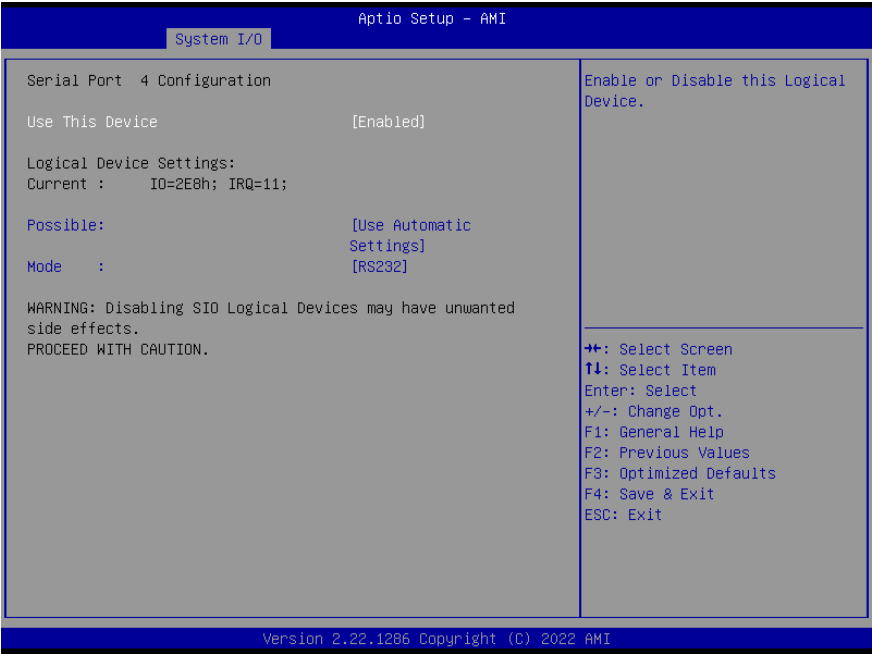


Options Summary		
Use This Device	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable this Logical Device		
Possible:	Use Automatic Settings	Optimal Default, Failsafe Default
	IO=2E8; IRQ=11;	
	IO=3E8; IRQ=11;	
Allows the user to change the device resource settings. New settings will be reflected on this setup page after system restarts.		
Mode	RS232	Optimal Default, Failsafe Default
	RS422	
	RS485	
UART RS232, 422, 485, selection		

3.5.4.5 Serial Port 5

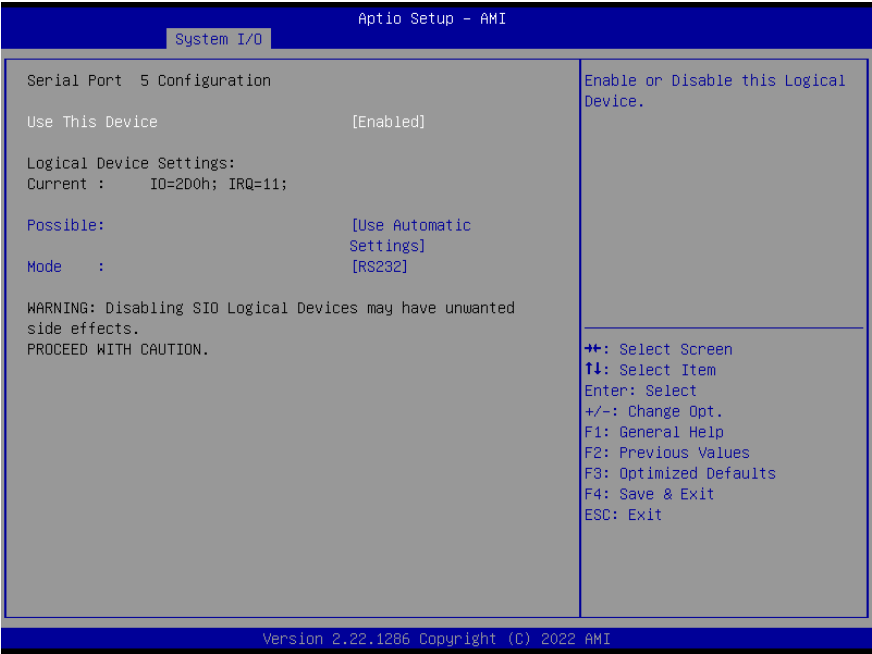

Options Summary		
Use This Device	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable this Logical Device		
Possible:	Use Automatic Settings	Optimal Default, Failsafe Default
	IO=2D0; IRQ=11;	
	IO=2C0; IRQ=11;	
Allows the user to change the device resource settings. New settings will be reflected on this setup page after system restarts.		
Mode	RS232	Optimal Default, Failsafe Default
	RS422	
	RS485	
UART RS232, 422, 485, selection		

3.5.4.6 Serial Port 6

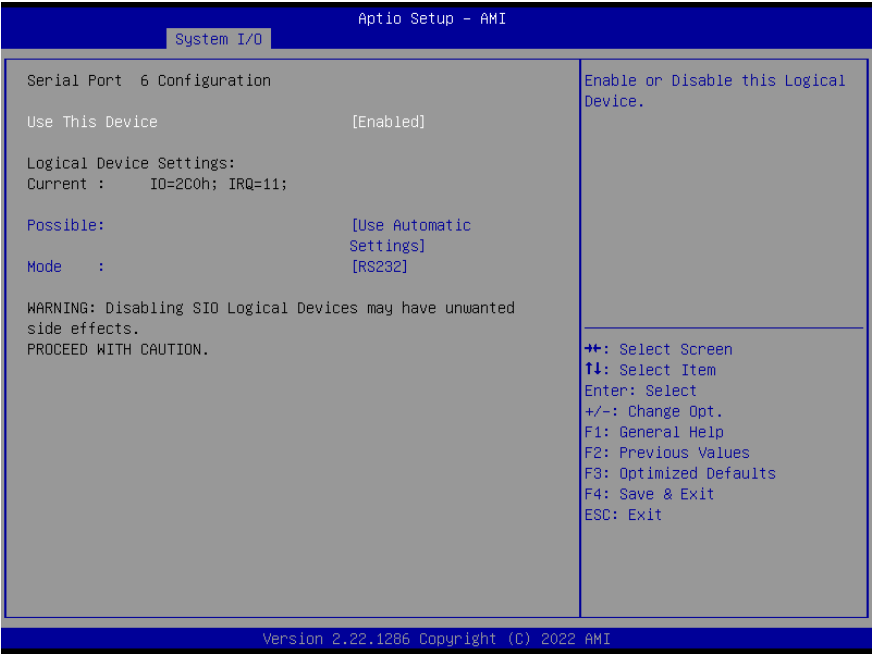


Options Summary		
Use This Device	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable this Logical Device		
Possible:	Use Automatic Settings	Optimal Default, Failsafe Default
	IO=2C0; IRQ=11;	
	IO=2D0; IRQ=11;	
Allows the user to change the device resource settings. New settings will be reflected on this setup page after system restarts.		
Mode	RS232	Optimal Default, Failsafe Default
	RS422	
	RS485	
UART RS232, 422, 485, selection		

3.5.5 Serial Port Console Redirection



Options Summary		
Console Redirection	Disabled	Optimal Default, Failsafe Default
	Enabled	
Console Redirection Enable or Disable		
Console Redirection EMS	Disabled	Optimal Default, Failsafe Default
	Enabled	
Console Redirection Enable or Disable		

3.5.5.1 Console Redirection Settings (COM0)

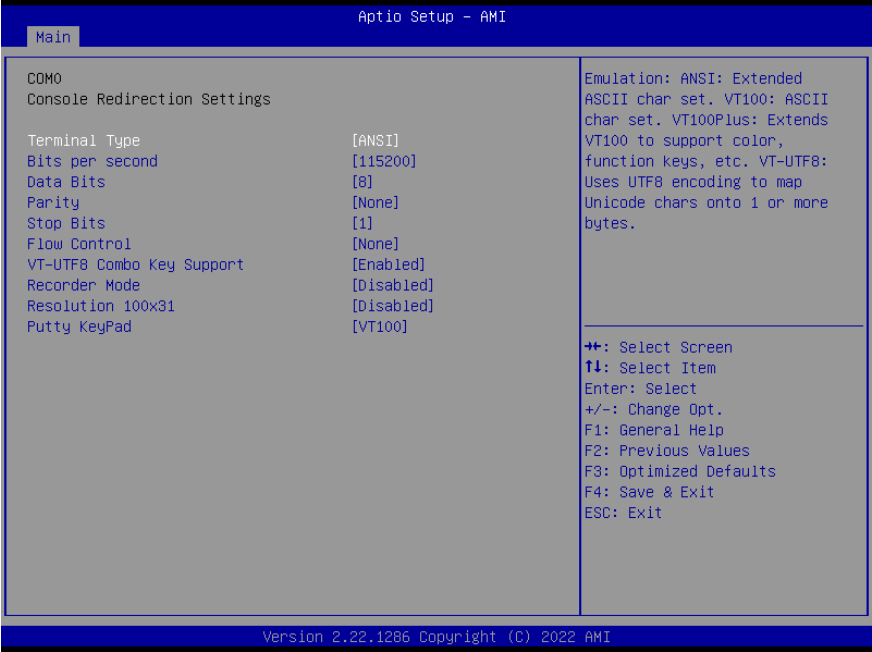


Options Summary		
Terminal Type	VT100	
	VT100Plus	
	VT-UTF8	
	ANSI	Optimal Default, Failsafe Default
Emulation: ANSI – Extended ASCII character set. VT100 – Standard ASCII character set. VT100Plus – Extends VT100 to support color, function keys, and additional features. VT-UTF8 – Uses UTF-8 encoding to map Unicode characters onto one or more bytes.		
Bits per second	9600	
	19200	
	38400	
	57600	
	115200	Optimal Default, Failsafe Default

Options Summary		
Serial Port Speed: Selects the transmission speed of the serial port. The speed must match the connected device. Longer or noisy lines may require lower speeds.		
Data Bits	7	
	8	Optimal Default, Failsafe Default
Data Bits		
Parity	None	Optimal Default, Failsafe Default
	Even	
	Odd	
	Mark	
	Space	
Parity: A parity bit can be sent with data bits to detect some transmission errors.		
Even – Parity bit is 0 if the number of 1's in the data bits is even.		
Odd – Parity bit is 0 if the number of 1's in the data bits is odd.		
Mark – Parity bit is always 1.		
Space – Parity bit is always 0.		
Note: Mark and Space parity do not allow error detection and can be used as an additional data bit.		
Stop Bits	1	Optimal Default, Failsafe Default
	2	
Stop Bits: Indicate the end of a serial data packet (start bit indicates the beginning). Standard setting is 1 stop bit. Slower devices may require more than 1 stop bit.		
Flow Control	None	Optimal Default, Failsafe Default
	Hardware RTS/CTS	
Flow Control: Prevents data loss from buffer overflow.		
When receiving buffers are full, a "stop" signal halts data transmission; a "start" signal resumes it once buffers are empty.		
Hardware flow control uses two wires to transmit start/stop signals.		
VT-UTF8 Combo Key Support	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable VT-UTF8 Combination Key Support for ANSI/VT100 terminals		
Recorder Mode	Disabled	Optimal Default, Failsafe Default
	Enabled	
Recorder Mode:		
When enabled, only text is transmitted. This mode is used to capture terminal data.		
Resolution 100x31	Disabled	Optimal Default, Failsafe Default
	Enabled	

Options Summary		
Enables or disables extended terminal resolution		
Putty KeyPad	VT100	Optimal Default, Failsafe Default
	LINUX	
	XTERMR6	
	SCO	
	ESCN	
	VT400	
Select FunctionKey and KeyPad on Putty.		


3.5.5.2 Console Redirection Settings (Out-of-Band Mgmt Port)

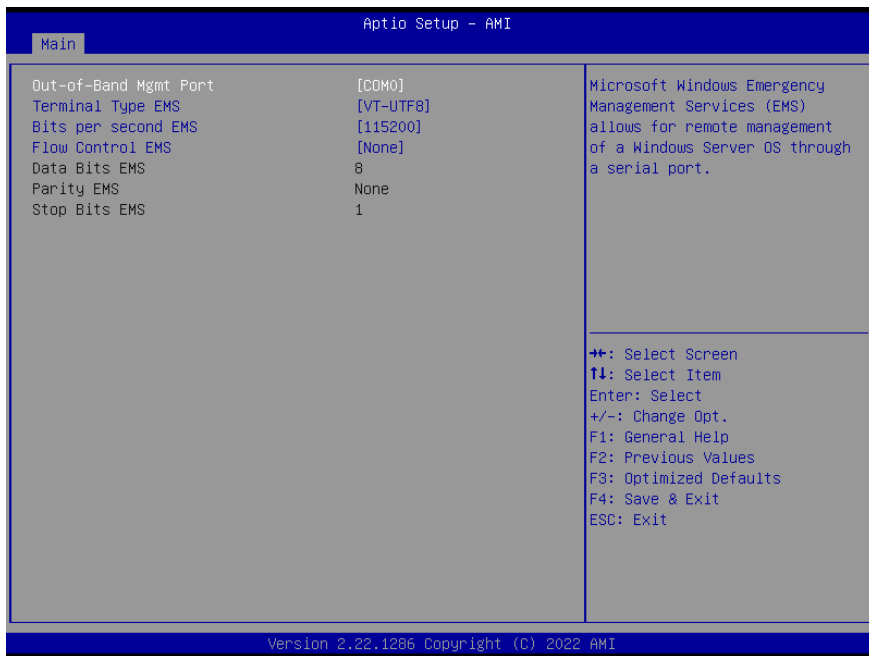

Options Summary		
Out-of-Band Mgmt Port	COM0	Optimal Default, Failsafe Default
	COM1 (Pci Bus0, Dev0, Func0) (Disabled)	
Microsoft Windows Emergency Management Services (EMS):		
Enables remote management of a Windows Server OS via a serial port.		
Terminal Type EMS	VT100	
	VT100Plus	
	VT-UTF8	Optimal Default, Failsafe Default
	ANSI	
Terminal Type: VT-UTF8 is the preferred type for out-of-band management. VT100+ is the next best choice, followed by VT100.		
See the Console Redirection Settings page for more information on Terminal Type/Emulation.		

Options Summary		
Bits per second EMS	9600	
	19200	
	57600	
	115200	Optimal Default, Failsafe Default
Selects serial port transmission speed. The speed must be matched on the other side. Long or noisy lines may require lower speeds.		
Flow Control EMS	None	Optimal Default, Failsafe Default
	Hardware RTS/CTS	
	Software Xon/Xoff	
Flow Control: Prevents data loss from buffer overflow. Sends "stop" when receiving buffers are full and "start" when they are empty. Hardware flow control uses two wires for start/stop signals.		

3.6 Setup Submenu: Security

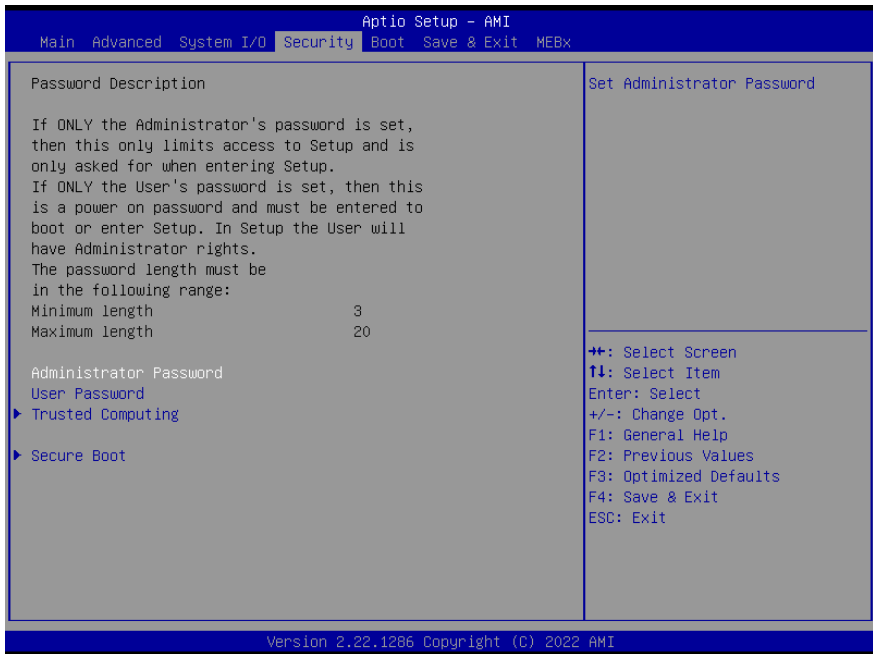


Change User/Administrator Password

You can set a User Password once an Administrator Password. The password will be required during boot up, or when the user enters the Setup utility. Please Note that a User Password does not provide access to many of the features in the Setup utility. Select the password you wish to set, press Enter to open a dialog box to enter your password (you can enter no more than six letters or numbers). Press Enter to confirm your entry, after which you will be prompted to retype your password for a final confirmation. Press Enter again after you have retyped it correctly.

Removing the Password

Highlight this item and type in the current password. At the next dialog box press Enter to disable password protection.

3.6.1 Trusted Computing

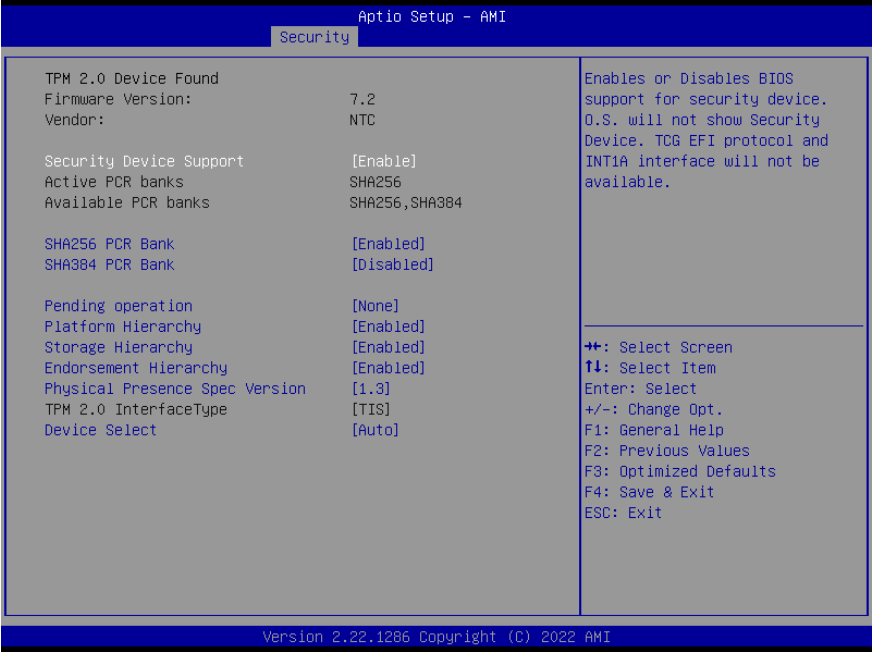

Options Summary		
Security Device Support	Enable	Optimal Default, Failsafe Default
	Disable	
Security Device Support: Enables or disables BIOS support for the security device. When disabled, the OS will not detect the device, and TCG EFI protocol and INT 1Ah interface will be unavailable.		
SHA256 PCR Bank	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable SHA256 PCR Bank		
SHA384 PCR Bank	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enable or Disable SHA384 PCR Bank		
Pending operation	None	Optimal Default, Failsafe Default
	TPM Clear	
Schedule an Operation for the Security Device. NOTE: Your Computer will reboot during restart in order to change State of Security Device.		

3.6.2 Secure Boot



Options Summary		
Secure Boot	Disabled	Optimal Default, Failsafe Default
	Enabled	
Secure Boot: Active when Secure Boot is enabled, the Platform Key (PK) is enrolled, and the system is in User mode. Changing the mode requires a platform reset.		
Secure Boot Mode	Standard	
	Custom	Optimal Default, Failsafe Default
Secure Boot Mode: Options are Standard or Custom. In Custom mode, a physically present user can configure Secure Boot Policy variables without full authentication.		
Restore Factory Keys	Yes	
	No	
Force System to User Mode. Install factory default Secure Boot key databases		


3.6.2.1 Key Management



Options Summary		
Factory Key Provision	Disabled	Optimal Default, Failsafe Default
	Enabled	
Install factory default Secure Boot keys after the platform reset and while the System is in Setup mode		
Restore Factory Keys	Yes	
	No	
Force System to User Mode. Install factory default Secure Boot key databases		
Enroll Efi Image		
Allow Efi image to run in Secure Boot mode. Enroll SHA256 Hash certificate of a PE image into Authorized Signature Database (db)		
Platform Key (PK)	Update	
Key Exchange Keys (KEK)	Update	
	Append	
Authorized Signatures (db)	Update	
	Append	


Options Summary		
Forbidden Signatures (dbx)	Update	
	Append	
Authorized TimeStamps (dbt)	Update	
	Append	
OsRecovery Signatures (dbr)	Update	
	Append	
Enroll Factory Defaults or load certificates from a file: 1. Public Key Certificate: a) EFI_SIGNATURE_LIST b) EFI_CERT_X509 (DER) c) EFI_CERT_RSA2048 (bin) d) EFI_CERT_SHAXXX 2. Authenticated UEFI Variable 3.EFI PE/COFF Image (SHA256) Key Source: Factory, External, Mixed		

3.7 Setup Submenu: Boot

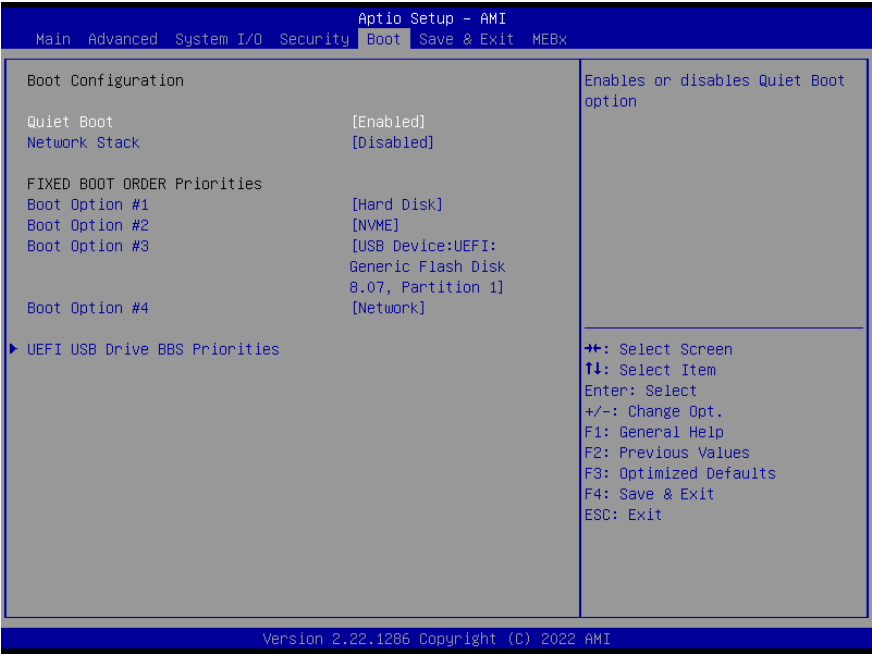


Options Summary		
Quiet Boot	Disabled	
	Enabled	Default
Enables/disables Quiet Boot option.		
Network Stack	Disabled	Default
	Enabled	
Enable/Disable UEFI Network Stack.		
Boot Option #1	Hard Disk	
Boot Option #2	NVME	
Boot Option #3	USB Device	
Boot Option #4	Network	
Sets the system boot order		

3.7.1 UEFI BBS Priorities

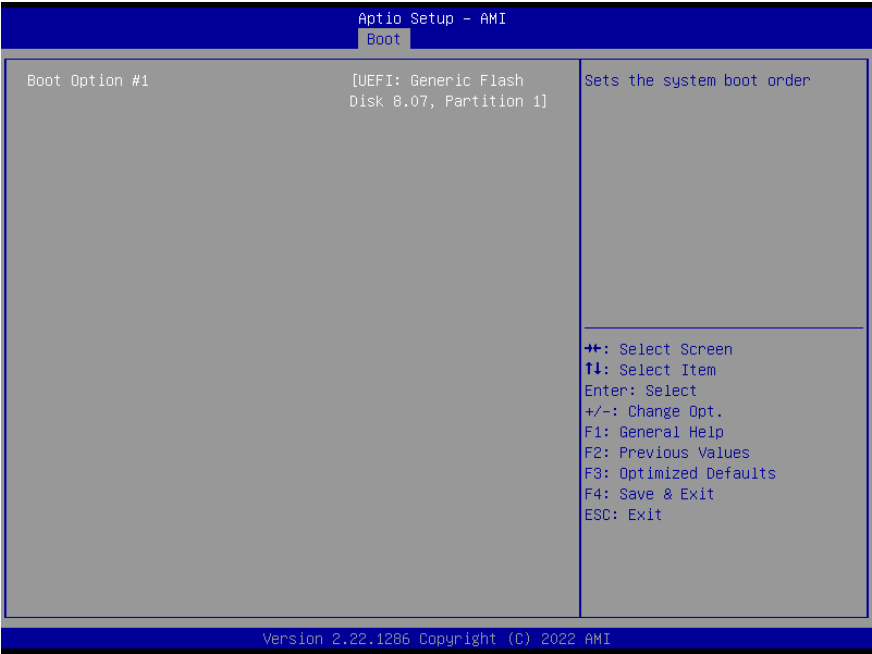

Options Summary		
Quiet Boot	Disabled	
	Enabled	Default
Enables/disables Quiet Boot option.		
Network Stack	Disabled	Default
	Enabled	
Enable/Disable UEFI Network Stack.		
Boot Option #1	Hard Disk	
Boot Option #2	NVME	
Boot Option #3	USB Device	
Boot Option #4	Network	
Sets the system boot order		

3.8 Setup Submenu: Save & Exit

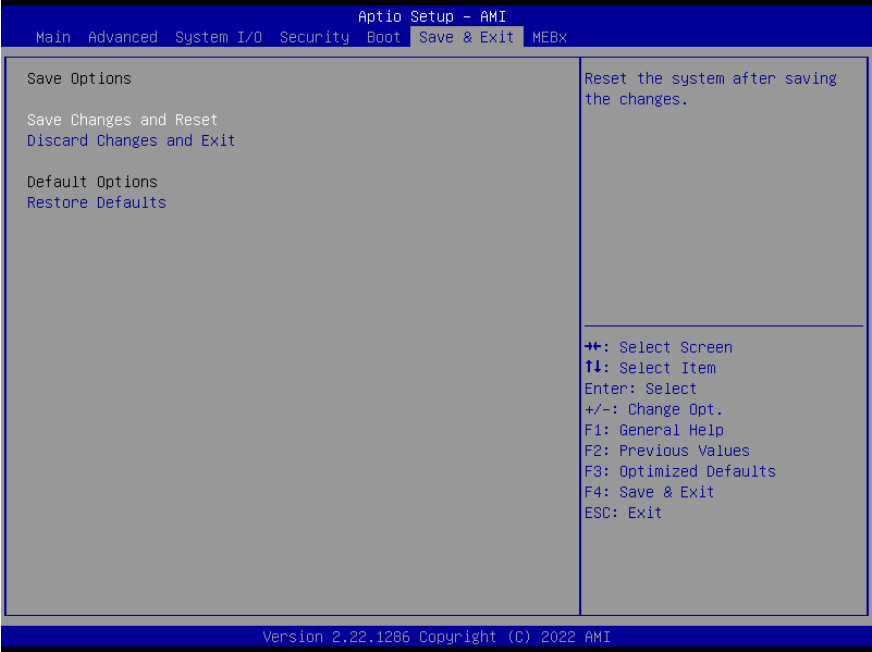

3.9 Setup Submenu: MEBx



Chapter 4

Drivers Installation

4.1 Drivers Download and Installation


Drivers for the BOXER-6645-ADS can be downloaded from the product page on the AAEON website:


<https://www.aaeon.com/en/p/compact-fanless-box-pc-solutions-boxer-6645-ads>

Appendix A


I/O Information

A.1 I/O Address Map

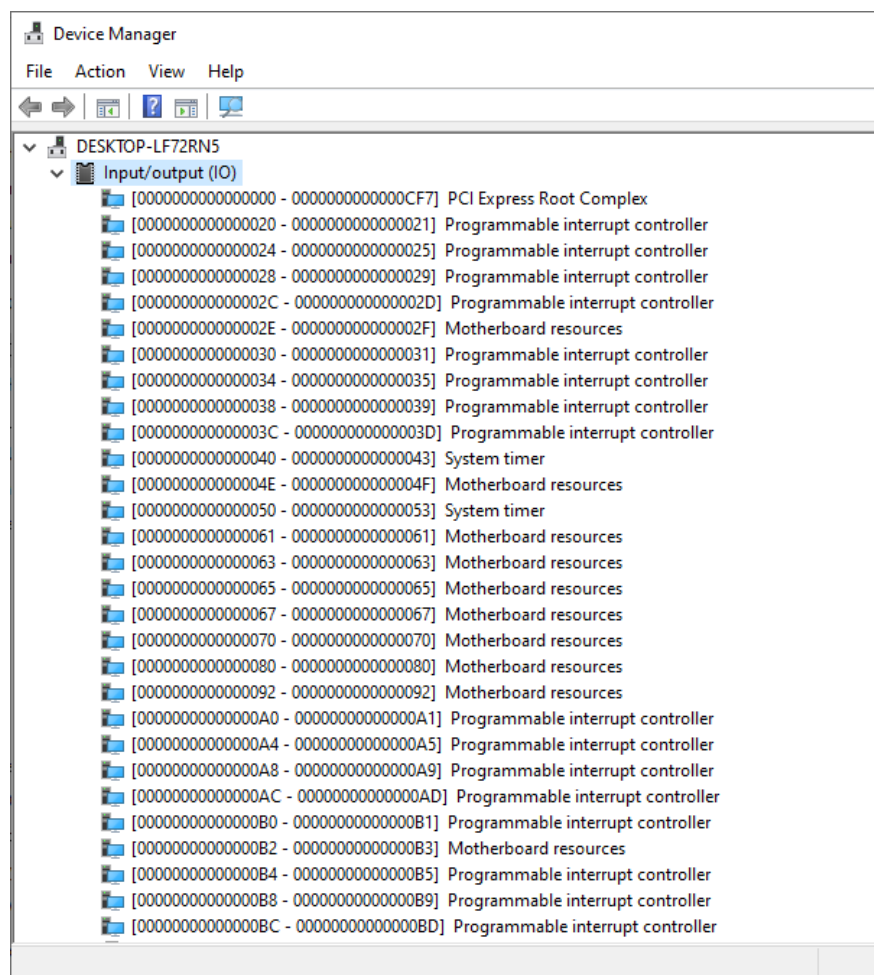

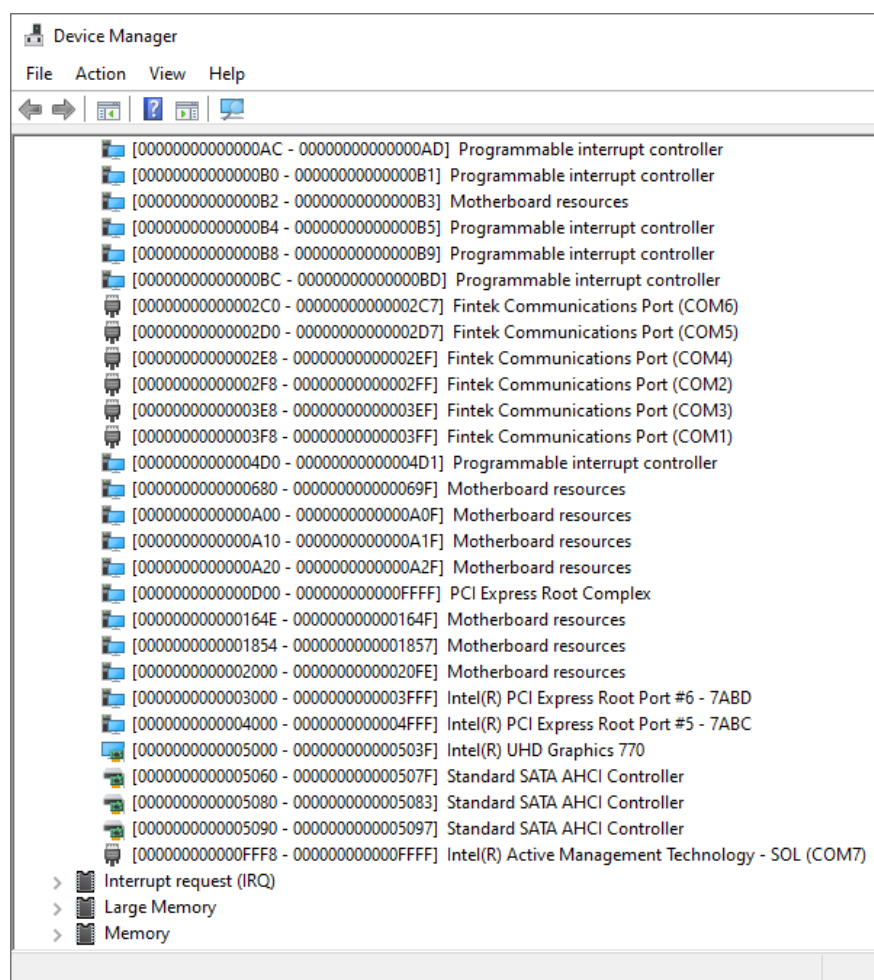

A.2 Memory Address Map

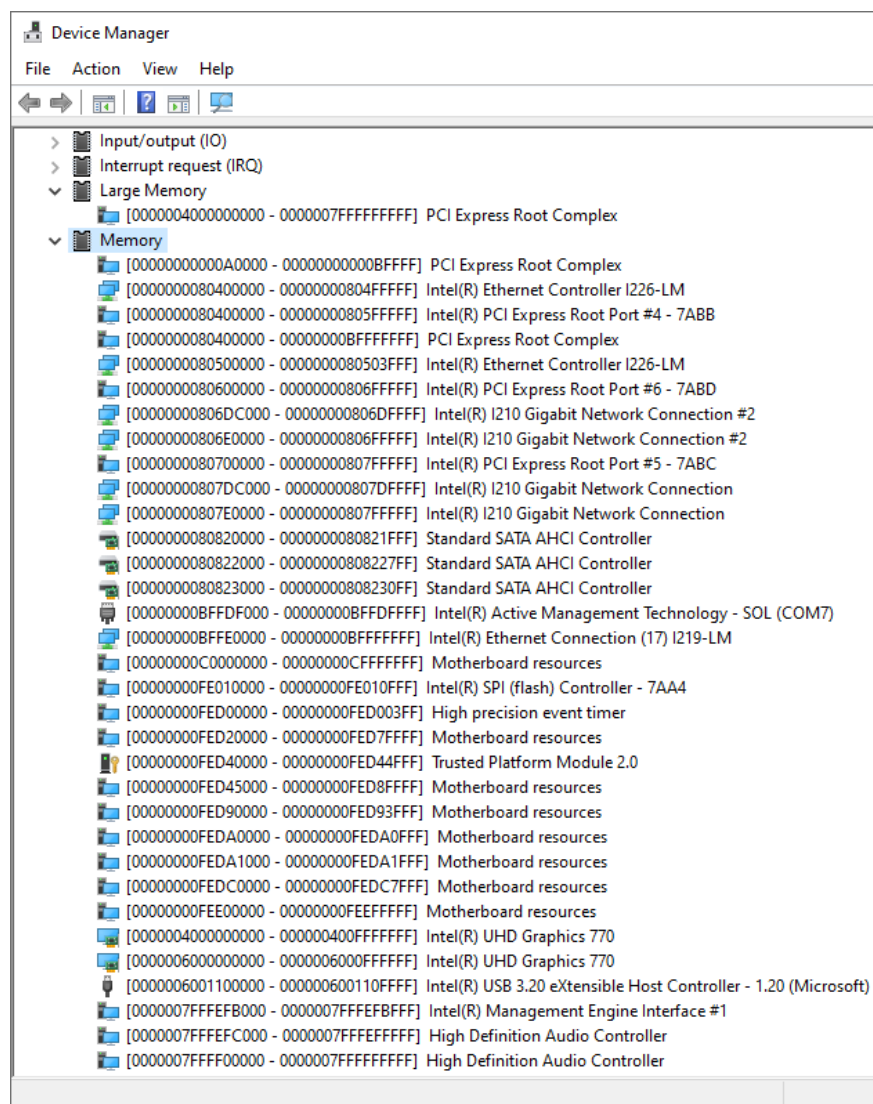

A.3 IRQ Mapping Chart

