



GENESYSM-MTH6

GENESYSM Compact Embedded System

User's Manual 1st Ed

Copyright Notice

This document is copyrighted, 2025. All rights are reserved. The original manufacturer reserves the right to make improvements to the products described in this manual at any time without notice.

No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without the prior written permission of the original manufacturer. Information provided in this manual is intended to be accurate and reliable. However, the original manufacturer assumes no responsibility for its use, or for any infringements upon the rights of third parties that may result from its use.

The material in this document is for product information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, AAEON assumes no liabilities resulting from errors or omissions in this document, or from the use of the information contained herein.

AAEON reserves the right to make changes in the product design without notice to its users.

Acknowledgements

All other products' name or trademarks are properties of their respective owners.

- Microsoft Windows is a registered trademark of Microsoft Corp.
- Intel® Core™ Ultra and Intel® Arc™ are trademarks of Intel Corporation
- Realtek is a trademark of Realtek Semiconductor Corporation.
- Ubuntu is a trademark of Canonical.
- Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries

All other product names or trademarks are properties of their respective owners.

Packing List

Before setting up your product, please make sure the following items have been shipped:

Item	Quantity
GENESYSM-MTH6	1

If any of these items are missing or damaged, please contact your distributor or sales representative immediately.

About this Document

This User’s Manual contains all the essential information, such as detailed descriptions and explanations on the product’s hardware and software features (if any), its specifications, dimensions, jumper/connector settings/definitions, and driver installation instructions (if any), to facilitate users in setting up their product.

Users may refer to the product page at AAEON.com for the latest version of this document.

Safety Precautions

Please read the following safety instructions carefully. It is advised that you keep this manual for future references

1. All cautions and warnings on the device should be noted.
2. Make sure the power source matches the power rating of the device.
3. Position the power cord so that people cannot step on it. Do not place anything over the power cord.
4. Always completely disconnect the power before working on the system's hardware.
5. No connections should be made when the system is powered as a sudden rush of power may damage sensitive electronic components.
6. If the device is not to be used for a long time, disconnect it from the power supply to avoid damage by transient over-voltage.
7. Always disconnect this device from any AC supply before cleaning.
8. While cleaning, use a damp cloth instead of liquid or spray detergents.
9. Make sure the device is installed near a power outlet and is easily accessible.
10. Keep this device away from humidity.
11. Place the device on a solid surface during installation to prevent falls
12. Do not cover the openings on the device to ensure optimal heat dissipation.
13. Watch out for high temperatures when the system is running.
14. Do not touch the heat sink or heat spreader when the system is running
15. Never pour any liquid into the openings. This could cause fire or electric shock.
16. As most electronic components are sensitive to static electrical charge, be sure to ground yourself to prevent static charge when installing the internal components. Use a grounding wrist strap and contain all electronic components in any static-shielded containers.

17. If any of the following situations arises, please the contact our service personnel:
 - i. Damaged power cord or plug
 - ii. Liquid intrusion to the device
 - iii. Exposure to moisture
 - iv. Device is not working as expected or in a manner as described in this manual
 - v. The device is dropped or damaged
 - vi. Any obvious signs of damage displayed on the device
18. **DO NOT LEAVE THIS DEVICE IN AN UNCONTROLLED ENVIRONMENT WITH TEMPERATURES BEYOND THE DEVICE'S PERMITTED STORAGE TEMPERATURES (SEE CHAPTER 1) TO PREVENT DAMAGE.**

FCC Statement

Warning!



This device complies with Part 15 FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation.

Caution:

There is a danger of explosion if the battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions and your local government's recycling or disposal directives.

Attention:

Il y a un risque d'explosion si la batterie est remplacée de façon incorrecte. Ne la remplacer qu'avec le même modèle ou équivalent recommandé par le constructeur. Recycler les batteries usées en accord avec les instructions du fabricant et les directives gouvernementales de recyclage.

产品中有毒有害物质或元素名称及含量

AAEON System

QO4-381 Rev.A2

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
印刷电路板 及其电子组件	×	○	○	○	○	○
外部信号 连接器及线材	×	○	○	○	○	○
外壳	○	○	○	○	○	○
中央处理器 与内存	×	○	○	○	○	○
硬盘	×	○	○	○	○	○
液晶模块	×	○	○	○	○	○
光驱	×	○	○	○	○	○
触控模块	×	○	○	○	○	○
电源	×	○	○	○	○	○
电池	×	○	○	○	○	○

本表格依据 SJ/T 11364 的规定编制。

○：表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T 26572 标准规定的限量要求以下。

×：表示该有害物质的某一均质材料超出了 GB/T 26572 的限量要求，然而该部件仍符合欧盟指令 2011/65/EU 的规范。

环保使用期限(EFUP (Environmental Friendly Use Period))：10 年

备注：

一、此产品所标示之环保使用期限，系指在一般正常使用状况下。

二、上述部件物质中央处理器、内存、硬盘、光驱、电源为选购品。

三、上述部件物质液晶模块、触控模块仅一体机产品适用。

China RoHS Requirement (EN)

Name and content of hazardous substances in product

AAEON System

QO4-381 Rev.A2

Part Name	Hazardous Substances					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
PCB Assemblies	×	○	○	○	○	○
Connector and Cable	×	○	○	○	○	○
Chassis	○	○	○	○	○	○
CPU and Memory	×	○	○	○	○	○
Hard Disk	×	○	○	○	○	○
LCD Modules	×	○	○	○	○	○
CD-ROM/DVD-ROM	×	○	○	○	○	○
Touch Modules	×	○	○	○	○	○
Power	×	○	○	○	○	○
Battery	×	○	○	○	○	○

The table is prepared in accordance with the provisions of SJ/T 11364.

○ : Indicates that said hazardous substance contained in all of the homogenous materials for this product is below the limit requirement of GB/T 26572.

× : Indicates that said hazardous substance contained in at least one of the homogenous materials used for this part is above the limit requirement of GB/T 26572. But this product still be compliance with 2011/65/EU Directive (allowed with 2011/65/EU Annex III of RoHS exemption with number 6(c),7(a),7(c)-1).

EFUP (Environment Friendly Use Period) value: 10 years.

Notes:

1. This product defined period of use is under normal condition.
2. In above part, CPU/Memory/ Hard Disk/CD-ROM/DVD-ROM/ Power are optional.
3. In above part, LCD Modules/ Touch Modules are for all-in-one product model.

Table of Contents

Chapter 1 - Product Specifications.....	1
1.1 Specifications	2
1.2 Block Diagram	6
Chapter 2 – Hardware Information	7
2.1 Dimensions	8
2.2 Jumpers and Connectors.....	10
2.3 List of Jumpers	12
2.3.1 COM 1 Pin 9 Function Selection (JP2).....	13
2.3.2 COM 2 Pin 9 Function Selection (JP3)	14
2.3.3 Clear CMOS Jumper (JP5).....	15
2.3.4 Auto Power Button Enable/Disable Selection (JP5)	16
2.4 List of Connectors.....	17
2.4.1 Audio I/O Port (CN1).....	18
2.4.2 M.2 3052 B-Key Slot (CN3)	19
2.4.3 External Power Input (CN5).....	21
2.4.4 DDR5 SODIMM Channel 1 (CN6)	22
2.4.5 Front Panel (CN7).....	22
2.4.6 External +5VSB Input (CN9)	23
2.4.7 SPI Flash Programming Port (CN10)	24
2.4.8 DDR5 SODIMM Channel 2 (CN11).....	25
2.4.9 USB 2.0 Port 6 (CN12)	25
2.4.10 USB 2.0 Port 5 (CN13)	26
2.4.11 USB 2.0 Port 4 (CN14).....	27
2.4.12 USB 2.0 Port 3 (CN15)	27
2.4.13 COM Port 1 (CN16)	28
2.4.14 COM Port 2 (CN17).....	29

2.4.15	M.2 2230 E-Key Slot (CN18).....	31
2.4.16	Nano SIM Card Socket (CN22)	33
2.4.17	GPIO (CN23)	34
2.4.18	M.2 2280 M-Key Slot (CN24)	35
2.4.19	LAN Port 2 LED Connector (CN25).....	37
2.4.20	LAN Port 1 LED Connector (CN27)	38
2.4.21	LAN Port 3 LED Connector (CN30).....	38
2.4.22	RJ-45 LAN Port 3 (CN31).....	39
2.4.23	RJ-45 LAN Port 1/Port 2 (CN32)	40
2.4.24	USB 3.2/USB 2.0 Port 1/Port 2 (CN33).....	41
2.4.25	DP Port (CN34).....	42
2.4.26	HDMI Port (CN35).....	43
2.4.27	RTC Battery Connector (CN36).....	44
2.4.28	I2C/SMBus Connector (CN37)	44
2.4.29	Port 80 Debug Port Connector (CN38).....	45
2.4.30	Board to Board Connector (CN39)	46
2.4.31	4-pin Fan Connector (CN40).....	49
2.5	Hardware Installation	50
2.5.1	Accessing the Bottom Panel	50
2.5.2	RAM Module Installation	52
2.5.3	PER-SB2B FPC2 Installation	55
2.5.4	M.2 2280 M-Key Module Installation.....	58
2.5.5	Wallmount Assembly.....	61
2.5.6	VESA Mount Installation	62
Chapter 3 - AMI BIOS Setup		64
3.1	System Test and Initialization	65
3.2	AMI BIOS Setup	66
3.3	Setup Submenu: Main	67

3.4	Setup Submenu: Advanced.....	68
3.4.1	CPU Configuration.....	69
3.4.2	Memory Configuration.....	71
3.4.3	Hardware Monitor	72
3.4.4	Smart Fan Mode Configuration.....	73
3.4.5	PCH-FW Configuration.....	74
3.4.6	Firmware Update Configuration	75
3.4.7	Power Management.....	76
3.4.8	AAEON BIOS Robot	77
3.4.9	Device Detecting Configuration	79
3.4.9.1	Device #1~#5 Detecting Configuration	80
3.4.10	AAEON Smart Boost.....	81
3.5	Setup Submenu: System I/O.....	82
3.5.1	Storage Configuration	83
3.5.2	NVMe Configuration.....	84
3.5.3	VMD Setup Menu	86
3.5.4	HD Audio Configuration	87
3.5.5	GPIO Port Configuration	88
3.5.6	Legacy Devices Configuration.....	89
3.5.6.1	Serial Port 1 Configuration	90
3.5.6.2	Serial Port 2 Configuration	91
3.5.7	Serial Port Console Redirection	92
3.6	Setup Submenu: Security.....	93
3.6.1	Trusted Computing.....	94
3.6.2	Secure Boot.....	96
3.6.3	Expert Key Management.....	97
3.7	Setup Submenu: Boot	99
3.7.1	BBS Priorities	100

3.8	Setup Submenu: Save & Exit.....	101
3.9	Setup Submenu: MEBx.....	102
3.9.1	Intel(R) AMT Configuration.....	103
3.9.2	Redirection Features.....	104
3.9.3	User Consent.....	105
3.9.4	Network Setup.....	106
3.9.5	Intel® ME Network Name Settings.....	107
3.9.6	TCP/IP Settings.....	108
3.9.7	Remote Setup and Configuration.....	109
3.9.8	Power Control.....	110
Chapter 4 – Driver Installation.....		111
4.1	Driver Download/Installation.....	112
Appendix A - I/O Information.....		116
A.1	I/O Address Map.....	117
A.2	Memory Address Map.....	119
A.3	Large Memory.....	121
A.4	IRQ Mapping Chart.....	122
Appendix B – Mating Connectors and Cables.....		126
B.1	Mating Connectors and Cables.....	127

Chapter 1

Product Specifications

1.1 Specifications

System

Form Factor	3.5" SubCompact Board System
CPU	Intel® Core™ Ultra Processors: Intel® Core™ Ultra 7 Processor 155H (16C/22T, up to 4.8 GHz, 28W) Intel® Core™ Ultra 5 Processor 125H (14C/18T, up to 4.5 GHz, 28W) Intel® Core™ Ultra 7 Processor 155U (12C/14T, up to 4.8 GHz, 15W) Intel® Core™ Ultra 5 Processor 125U (12C/14T, up to 4.3 GHz, 15W)
Chipset	Integrated with Intel® SoC
Memory Type	DDR5 5600, Dual Channel SODIMM x 2, Max. 96GB, Non-ECC
BIOS	UEFI
Wake on LAN	Yes
Watchdog Timer	255 Levels
Security	TPM 2.0
RTC Battery	Lithium Battery 3V/240mAh
Dimensions	7.48" x 5.28" x 1.69" (190mm x 134.1mm x 43mm)
OS Support	Windows 10 IoT LTSC (21H2) Windows 11 IoT LTSC (24H2) Linux Ubuntu 22.04.3 (kernel 6.2.0-26-generic)

Power

Power Requirement	+9V – 36V (Optional: +12V), support ERP
Power Supply Type	ATX
Connector	DC Jack Connector
Power Consumption	Intel® Core™ Ultra 7 Processor 155H, DDR5 32GB x 2, 5.78A @+12V (Typical) Intel® Core™ Ultra 7 Processor 155H, DDR5 32GB x 1, 8.42A @+12V (Max)

Display

Controller	Intel® Arc™ Graphics Intel® Graphics
LVDS/eDP	—
Display Interface	HDMI 2.1 x 1, up to 8K x 4K @60Hz or 4K x 2K @120Hz DP 2.0 x 1, up to 7680 x 4320 @60Hz 30bpp (support DP++)
Multiple Display	Up to 2 Simultaneous Displays

Audio

Codec	Realtek ALC897
Audio Interface	Line-in/Line-out/MIC
Speaker	—

External I/O

Ethernet	Intel® Ethernet Controller I226, 2.5GbE, RJ-45 x 2 Intel® Ethernet Connection I219, 1GbE, RJ-45 x 1
----------	--

Note: vPro only supported with Intel® Core™ Ultra 7 Processor 165U/165H, Intel® Core™ Ultra 5 Processor 135U/135H), LAN 2 & LAN 3 support PXE.

External I/O

USB	USB 3.2 Gen 2 x 2 USB 2.0 x 4
Serial Port	COM 1, COM 2 (RS-232/422/485, supports 5V/12V/RI)
Video	HDMI 2.1 x 1, DP 2.0++ x 1

Internal I/O

USB	—
Serial Port	—
Video	—
SATA	—
Audio	Audio Header x 1
DIO/GPIO	GPIO 8-bit
SMBus/I2C	SMBus/I2C x 1 (Default: SMBus)
Touch	—
FAN	4-pin Smart Fan x 1
SIM	Nano SIM x 1
Front Panel	HDD LED, PWR LED, Power Button, Buzzer, Reset
Others	—


Expansion

Mini PCIe/mSATA	—
M.2	M.2 2280 M-Key x 1 (PCIe [x4], SATA, select by BOM) M.2 3052 B-Key x 1 (PCIe [x2]/[x1], USB 3.0, Default: PCIe 3.0 [x1] + USB 3.0, selected by BOM) M.2 2230 E-Key x 1 (PCIe, USB 2.0), support Wi-Fi 6E CNVi (Storage using PCIe can support RAID 0, 1)
Others	M.2 2280 M-Key x 2 (PCIe [x4] via PER-SB2B FPC2)

Environmental

Operating Temperature	14°F – 122°F (-10°C – 50°C) 0.7 m/s air flow
Storage Temperature	-40°F – 185°F (-40°C – 85°C)
Operating Humidity	0% – 90% relative humidity, non-condensing
MTBF (Hours)	753,493
EMC	CE/FCC Class A

1.2 Block Diagram

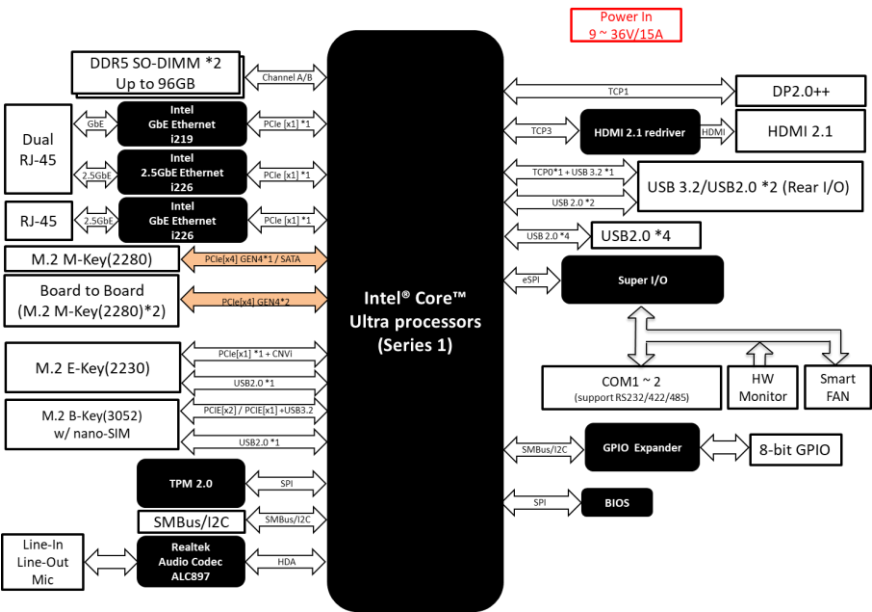


Chapter 2


Hardware Information

2.1 Dimensions

System-Level

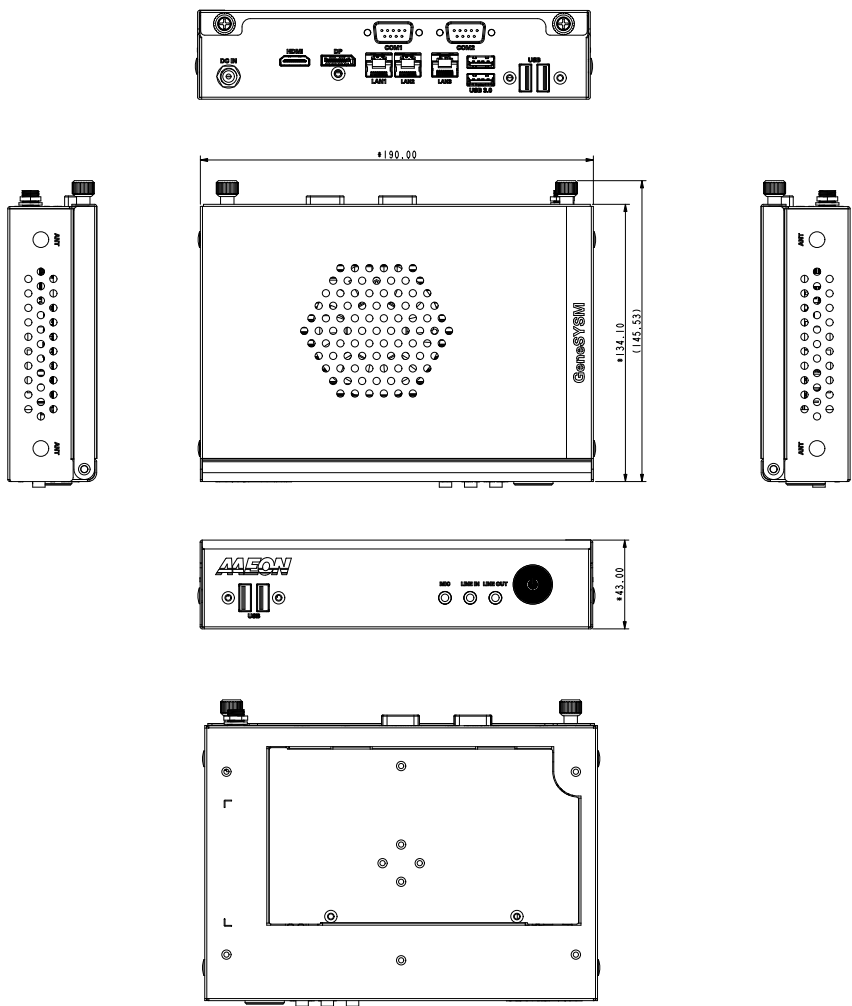


PCB-Level

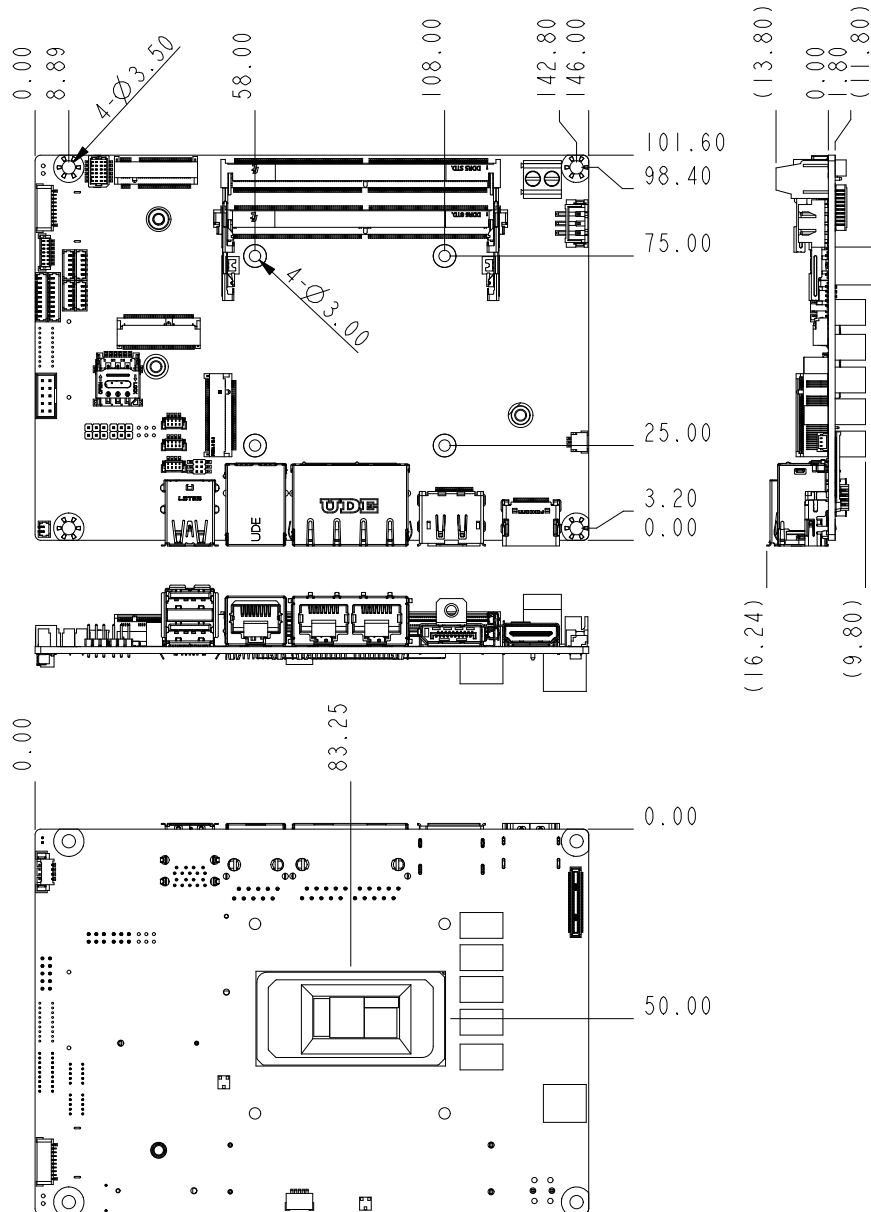


2.2 Jumpers and Connectors


Top View

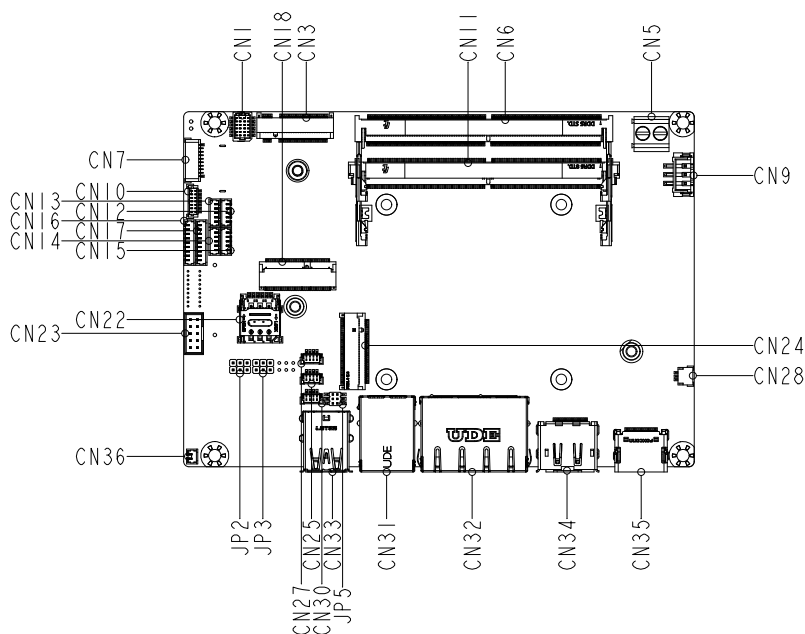

Front Panel I/O View

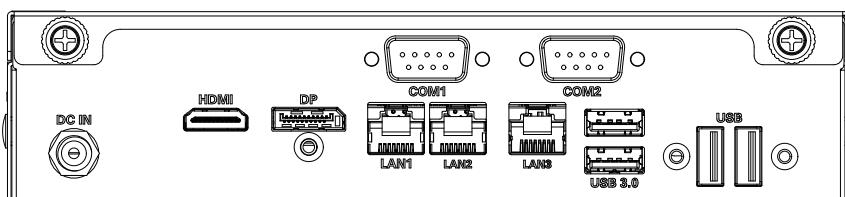

Bottom View


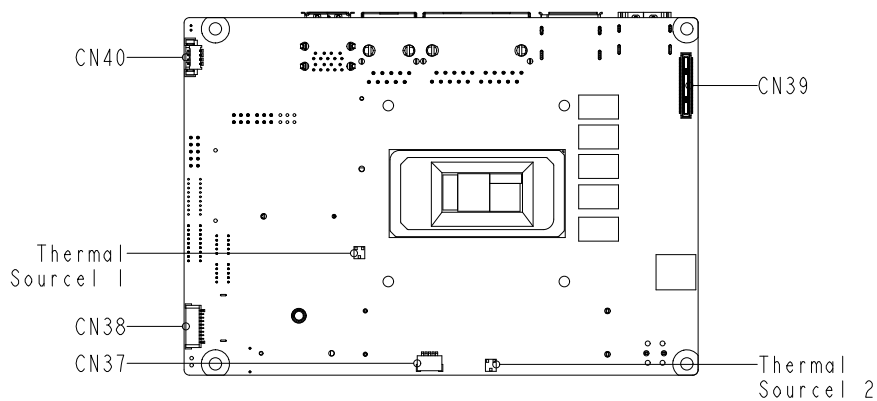


2.3 List of Jumpers


Please refer to the table below for all of the board's jumpers that you can configure for your application.

Label	Function
JP2	COM 1 Pin 9 Function Selection
JP3	COM 2 Pin 9 Function Selection
JP5	Clear CMOS Jumper
	Auto Power Button Enable/Disable Selection


2.3.1 COM 1 Pin 9 Function Selection (JP2)

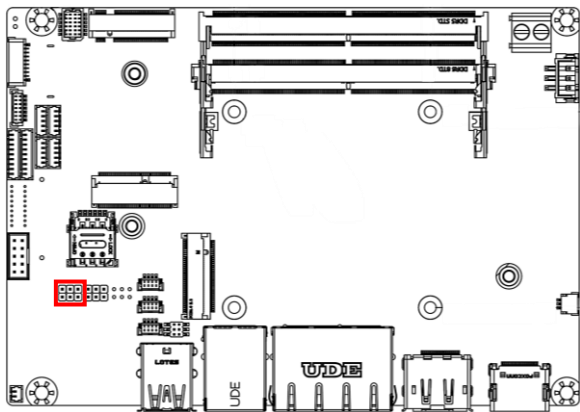

+12V





Ring (Default)




+5V


2.3.2 COM 2 Pin 9 Function Selection (JP3)

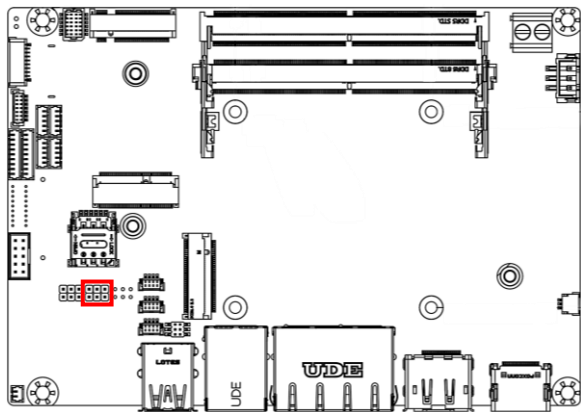

+12V





Ring (Default)




+5V

2.3.3 Clear CMOS Jumper (JP5)


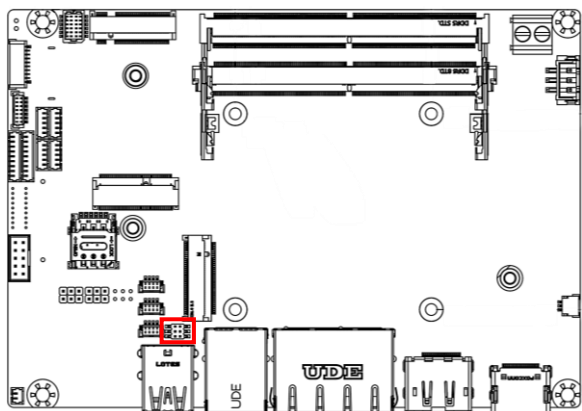


Normal (Default)




Clear CMOS

2.3.4 Auto Power Button Enable/Disable Selection (JP5)

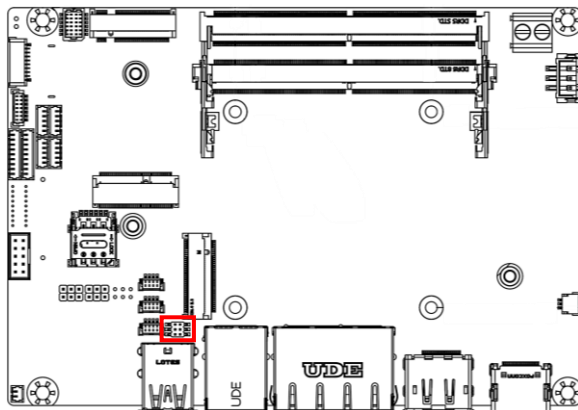

Disable Auto Power Button





Enable Auto Power Button (Default)

2.4 List of Connectors

Please refer to the table below for all of the board's connectors that you can configure for your application



Label	Function
CN1	Audio I/O Port
CN3	M.2 3052 B-Key Slot
CN5	External Power Input
CN6	DDR5 SODIMM Channel 1
CN7	Front Panel
CN9	External +5VSB Input
CN10	SPI Flash Programming Port
CN11	DDR5 SODIMM Channel 2
CN12	USB 2.0 Port 6
CN13	USB 2.0 Port 5
CN14	USB 2.0 Port 4
CN15	USB 2.0 Port 3
CN16	COM Port 1
CN17	COM Port 2
CN18	M.2 2230 E-Key Slot
CN22	Nano SIM Card Socket
CN23	GPIO
CN24	M.2 2280 M-Key Slot
CN25	LAN Port 2 LED Connector
CN27	LAN Port 1 LED Connector
CN30	LAN Port 3 LED Connector
CN31	RJ-45 LAN Port 3
CN32	RJ-45 LAN Port 1/Port 2
CN33	USB 3.2/USB 2.0 Port 1/Port 2
CN34	DP Port
CN35	HDMI Port
CN36	RTC Battery Connector
CN37	I2C/SMBus Connector
CN38	Port 80 Debug Port Connector
CN39	Board to Board Connector
CN40	4-pin Fan Connector

2.4.1 Audio I/O Port (CN1)

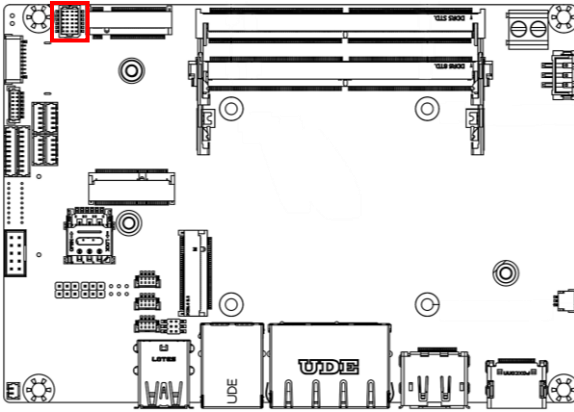

Pin	Pin Name	Signal Type	Signal Level
1	RIGHT_OUT	OUT	-
2	MIC_R	IN	-
3	LEFT_OUT	OUT	-
4	MIC_L	IN	-
5	JD_LOUT	IN	-
6	JD_MIC	IN	-
7	GND_AUDIO	GND	GND
8	GND_AUDIO	GND	GND
9	JD_LIN	IN	-
10	LINE_R_IN	IN	-
11	+VDD_AUDIO	PWR	+5V
12	LINE_L_IN	IN	-

2.4.2 M.2 3052 B-Key Slot (CN3)


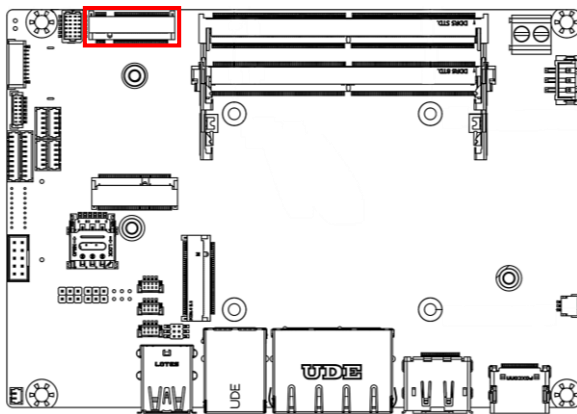


Pin	Pin Name	Signal Type	Signal Level
1	NC		
2	+V3P3S	PWR	+3.3V
3	GND	GND	GND
4	+V3P3S	PWR	+3.3V
5	GND	GND	GND
6	NC		
7	USB2_2_DP	DIFF	-
8	KEYB_DISABLE_N	IN	
9	USB2_2_DN	DIFF	-
10	PCH_SATA_LED_N	OUT	+3.3V
11	GND	GND	GND
20	NC	-	-
21	NC	-	-
22	NC	-	-
23	NC	-	-
24	NC	-	-
25	NC	-	-
26	NC	-	-
27	GND	GND	GND
28	NC	-	-
29	PCIE_4_RXN/ USB3_2_RXN	DIFF	-
30	UIM_RST_M2B	OUT	-

Pin	Pin Name	Signal Type	Signal Level
31	PCIE4_1_RXP/ USB3_2_RXP	DIFF	-
32	UIM_CLK_M2B	-	-
33	GND	GND	GND
34	UIM_DAT_M2B	IN/OUT	-
35	PCIE4_TXN/ SB3_2_TXN	DIFF	-
36	UIM_PWR	PWR	-
37	PCIE4_TXP/ SB3_2_TXP	DIFF	-
38	NC	-	-
39	GND	GND	GND
40	NC	-	-
41	PCIE_3_RXN	DIFF	-
42	NC	-	-
43	PCIE_3_RXP	DIFF	-
44	NC	-	-
45	GND	GND	GND
46	NC	-	-
47	PCIE_3_TXN	DIFF	-
48	NC	-	-
49	PCIE_3_TXP	DIFF	-
50	BUF_PLT_RST#	OUT	-
51	GND	GND	GND
52	M2B_CLKREQ#	IN	-
53	PCIE_4_CLK_DN	DIFF	-
54	KEYB_WAKE_N	IN	-
55	PCIE_4_CLK_DN	DIFF	-
56	NC	-	-
57	GND	GND	GND
58	NC	-	-
59	NC	-	-
60	NC	-	-
61	NC	-	-
62	NC	-	-
63	NC	-	-
64	NC	-	-
65	NC	-	-
66	SIM_Detect	IN	-
67	KEYB_WWAN_RST_N	OUT	-
68	PCH_SUS_CLK	IN	-



Pin	Pin Name	Signal Type	Signal Level
69	NC	-	-
70	+V3P3A	PWR	+3.3V
71	GND	GND	GND
72	+V3P3A	PWR	+3.3V
73	GND	GND	GND
74	+V3P3A	PWR	+3.3V
75	NC	-	-

2.4.3 External Power Input (CN5)

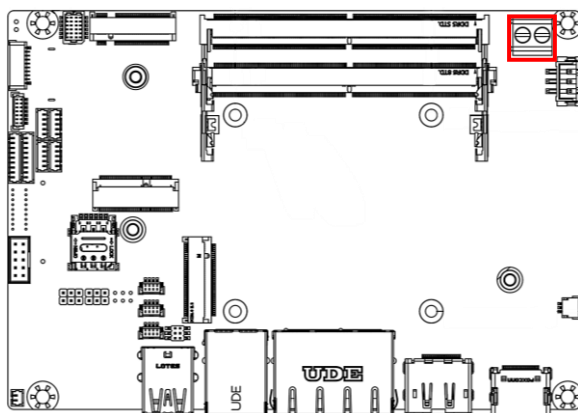



Pin	Pin Name	Signal Type	Signal Level
1	+VIN	PWR	+12V or +9~+36V
2	GND	GND	GND

2.4.4 DDR5 SODIMM Channel 1 (CN6)

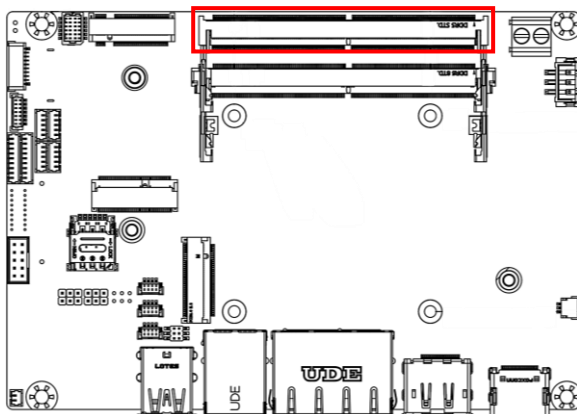

Standard specification.


2.4.5 Front Panel (CN7)

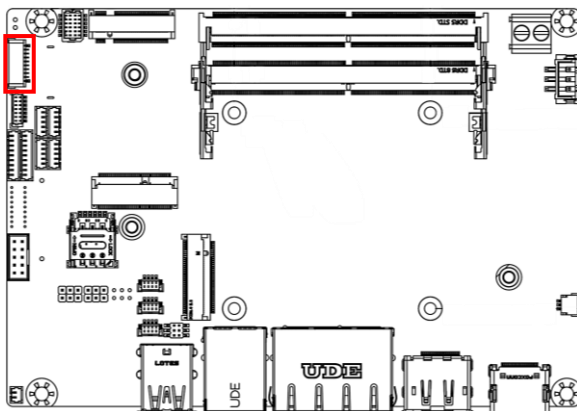

Pin	Pin Name	Signal Type	Signal Level
1	GND	GND	GND
2	EXT_PWRBTN#	IN	-
3	SATA_LED-	OUT	-
4	SATA_LED+	OUT	-



Pin	Pin Name	Signal Type	Signal Level
5	BUZZER-	OUT	-
6	BUZZER+	OUT	-
7	GND	GND	GND
8	PWR_LED+	OUT	-
9	GND	GND	GND
10	HWRST#	IN	-

2.4.6 External +5VSB Input (CN9)

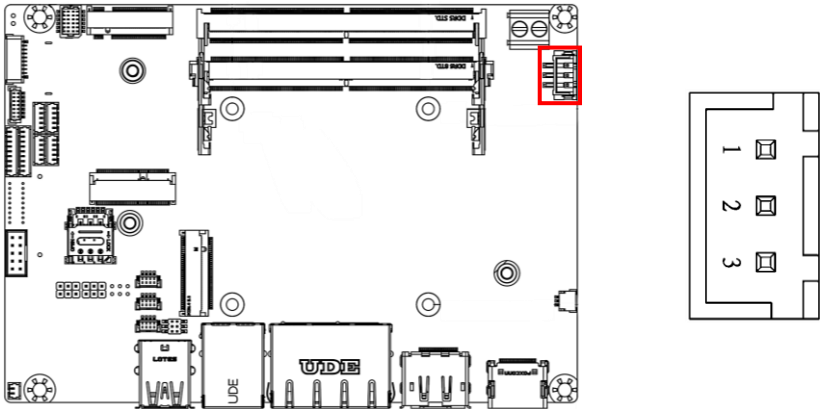



Pin	Pin Name	Signal Type	Signal Level
1	PS_ON#	OUT	+5V
2	GND	GND	GND
3	+5VSB	PWR	+5V(2.5A)

2.4.7 SPI Flash Programming Port (CN10)

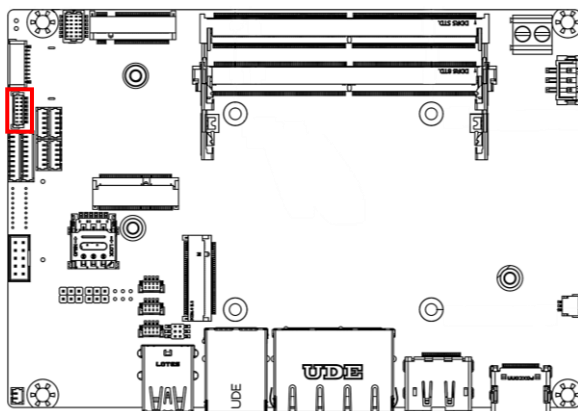



Pin	Pin Name	Signal Type	Signal Level
1	SPI_MISO	OUT	-
2	GND	GND	GND
3	SPI_CLK	IN	-
4	+V1P8A_SPI	PWR	+1.8V
5	SPI_MOSI	IN	-
6	SPI_CS	IN	-
7	NC	-	-

2.4.8 DDR5 SODIMM Channel 2 (CN11)

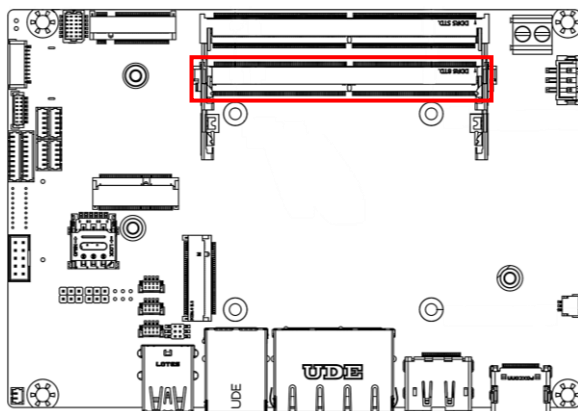

Standard specification.



2.4.9 USB 2.0 Port 6 (CN12)

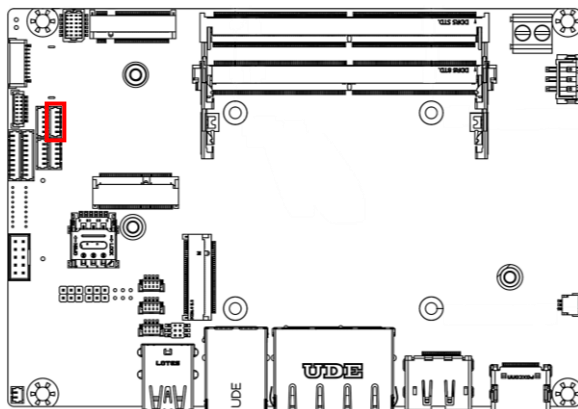

Pin	Pin Name	Signal Type	Signal Level
1	+5VSB	PWR	+5V
2	USB2_6_DN	DIFF	-
3	USB2_6_DP	DIFF	-
4	GND	GND	GND



Pin	Pin Name	Signal Type	Signal Level
5	GND	GND	GND

2.4.10 USB 2.0 Port 5 (CN13)

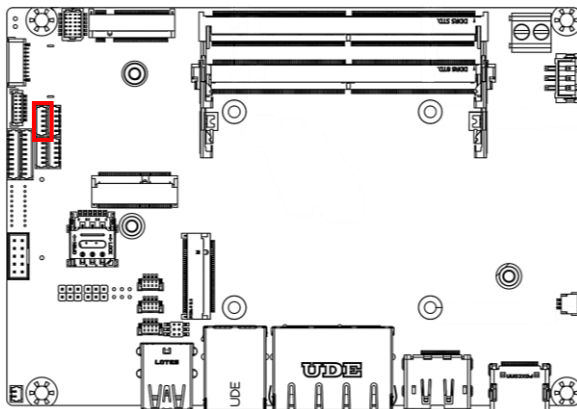



Pin	Pin Name	Signal Type	Signal Level
1	+5VSB	PWR	+5V
2	USB2_5_DN	DIFF	-
3	USB2_5_DP	DIFF	-
4	GND	GND	GND
5	GND	GND	GND

2.4.11 USB 2.0 Port 4 (CN14)

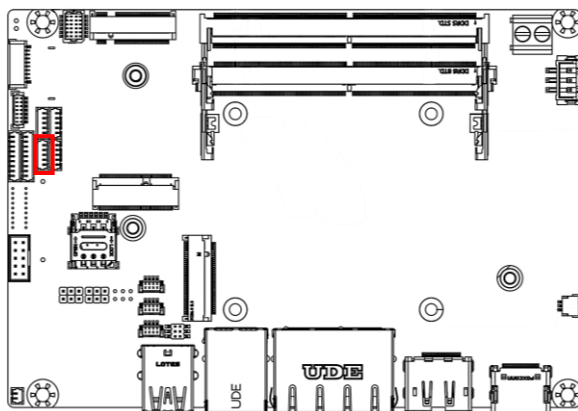


Pin	Pin Name	Signal Type	Signal Level
1	+5VSB	PWR	+5V
2	USB2_4_DN	DIFF	-
3	USB2_4_DP	DIFF	-
4	GND	GND	GND
5	GND	GND	GND

2.4.12 USB 2.0 Port 3 (CN15)

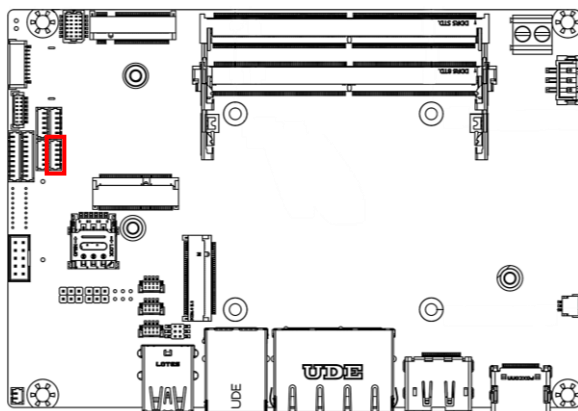

Pin	Pin Name	Signal Type	Signal Level
1	+5VSB	PWR	+5V
2	USB2_3_DN	DIFF	-
3	USB2_3_DP	DIFF	-
4	GND	GND	GND
5	GND	GND	GND

2.4.13 COM Port 1 (CN16)

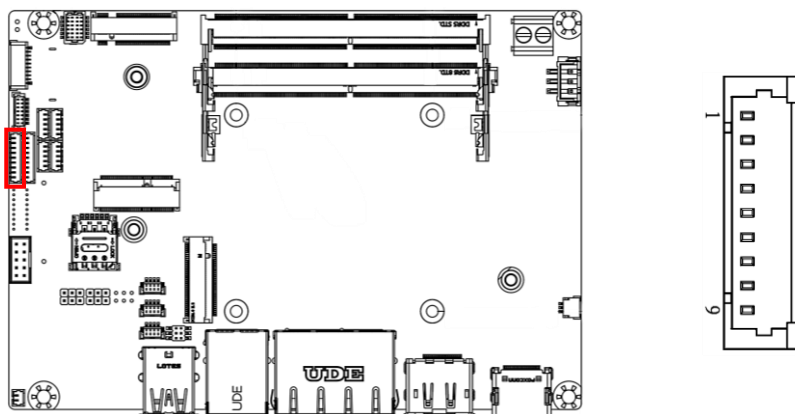

RS-232 (Default)			
Pin	Pin Name	Signal Type	Signal Level
1	DCD1	IN	-
2	DSR1	IN	-
3	RX1	IN	-
4	RTS1	OUT	±9V
5	TX1	OUT	±9V
6	CTS1	IN	-
7	DTR1	OUT	±9V
8	RI1/ +5V/ +12V	IN/ PWR	+5V/+12V
9	GND	GND	GND

RS-422			
Pin	Pin Name	Signal Type	Signal Level
1	RS422_TX-	OUT	±9V
2	NC		


RS-422			
Pin	Pin Name	Signal Type	Signal Level
3	RS422_TX+	OUT	±9V
4	NC		
5	RS422_RX+	IN	-
6	NC		
7	RS422_RX-	IN	-
8	NC		
9	GND	GND	GND

RS-485			
Pin	Pin Name	Signal Type	Signal Level
1	RS485_D-	IN/OUT	±9V
2	NC		
3	RS485_D+	IN/OUT	±9V
4	NC		
5	NC		
6	NC		
7	NC		
8	NC		
9	GND	GND	GND

Note: COM 1 RS-232/422/485 can be set by BIOS setting. Default is RS-232.

Note: Pin 8 function can be set by JP2.

2.4.14 COM Port 2 (CN17)

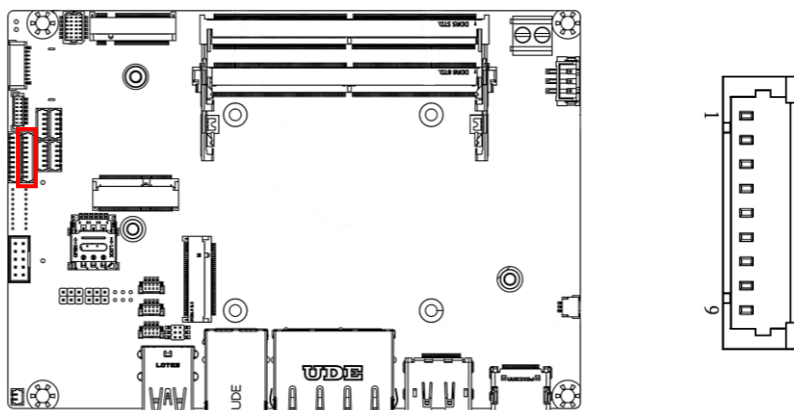

RS-232 (Default)			
Pin	Pin Name	Signal Type	Signal Level
1	DCD2	IN	-
2	DSR2	IN	-
3	RX2	IN	-
4	RTS2	OUT	±9V
5	TX2	OUT	±9V
6	CTS2	IN	-
7	DTR2	OUT	±9V
8	RI2/ +5V/ +12V	IN/ PWR	+5V/+12V
9	GND	GND	GND



RS-422			
Pin	Pin Name	Signal Type	Signal Level
1	RS422_TX-	OUT	±9V
2	NC		
3	RS422_TX+	OUT	±9V
4	NC		
5	RS422_RX+	IN	-
6	NC		
7	RS422_RX-	IN	-
8	NC		
9	GND	GND	GND

RS-485			
Pin	Pin Name	Signal Type	Signal Level
1	RS485_D-	IN/OUT	±9V
2	NC		
3	RS485_D+	IN/OUT	±9V
4	NC		
5	NC		
6	NC		
7	NC		
8	NC		
9	GND	GND	GND

Note: COM 2 RS-232/422/485 can be set by BIOS setting. Default is RS-232.

Note: Pin 8 function can be set by JP3.

2.4.15 M.2 2230 E-Key Slot (CN18)


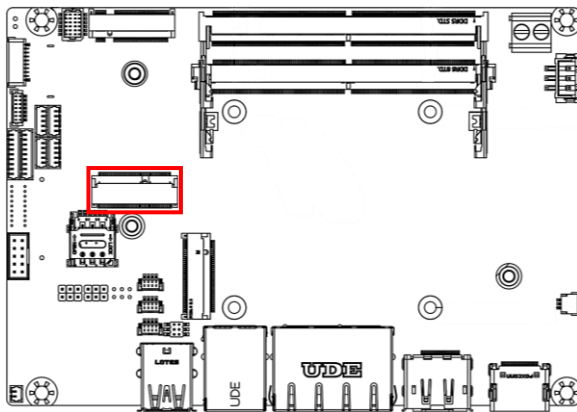


Pin	Pin Name	Signal Type	Signal Level
1	GND	GND	GND
2	+V3P3A	PWR	+3.3V
3	USB2_10_DP	DIFF	-
4	+V3P3A	PWR	+3.3V
5	USB2_10_DN	DIFF	-
6	NC	-	-
7	GND	GND	GND
8	NC	-	-
9	CNV_WR_D1_DN	DIFF	-
10	KEYE_CNV_RF_RST	IN	-
11	CNV_WR_D1_DP	DIFF	-
12	NC	-	-
13	GND	GND	GND
14	KEYE_CNV_CLKREQ	OUT	-
15	CNV_WR_D0_DN	DIFF	-
16	NC	-	-
17	CNV_WR_D0_DP	DIFF	-
18	GND	GND	GND
19	GND	GND	GND
20	KEYE_UART_WAKE_N	IN	-
21	CNV_WR_CLK_DN	DIFF	-
22	CNV_BRI_RSP	IN	-
23	CNV_WR_CLK_DP	DIFF	-

Pin	Pin Name	Signal Type	Signal Level
32	CNV_RGI_DT	IN	-
33	GND	GND	GND
34	CNV_RGI_RSP	OUT	-
35	PCIE_8_TXP	DIFF	-
36	CNV_BRI_DT	-	-
37	PCIE_8_TXN	DIFF	-
38	MLK_RST_N	IN	-
39	GND	GND	GND
40	MLK_DATA	IN/OUT	-
41	PCIE_8_RXP	DIFF	-
42	MLK_CLK	IN	-
43	PCIE_8_RXN	DIFF	-
44	NC	-	-
45	GND	GND	GND
46	NC	-	-
47	PCIE_3_CLK_DP	DIFF	-
48	NC	-	-
49	PCIE_3_CLK_DN	DIFF	-
50	SUS_CLK	IN	-
51	GND	GND	GND
52	BUF_PLT_RST#	IN	-
53	PCIE_CLKREQ#3	OUT	-
54	NC	-	-
55	PCIE_WAKE#	IN/OUT	-
56	NC	-	-
57	GND	GND	GND
58	NC	-	-
59	CNV_WT_D1_DN	DIFF	-
60	NC	-	-
61	CNV_WT_D1_DP	DIFF	-
62	NC	-	-
63	GND	GND	GND
64	NC	-	-
65	CNV_WT_D0_DN	DIFF	-
66	NC	-	-
67	CNV_WT_D0_DP	DIFF	-
68	NC	-	-
69	GND	GND	GND
70	NC	-	-



Pin	Pin Name	Signal Type	Signal Level
71	CNV_WT_CLK_DN	DIFF	-
72	+V3P3A	PWR	+3.3V
73	CNV_WT_CLK_DP	DIFF	-
74	+V3P3A	PWR	+3.3V
75	GND	GND	GND

2.4.16 Nano SIM Card Socket (CN22)

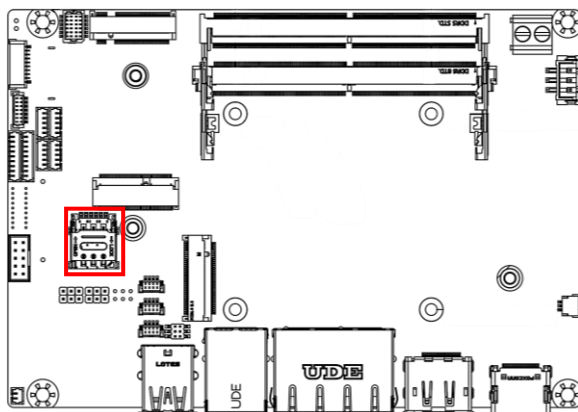



Pin	Pin Name	Signal Type	Signal Level
C1	UIM_PWR	PWR	-
C2	UIM_RST	IN	-
C3	UIM_CLK	IN	-
C5	GND	GND	GND
C6	UIM_VPP	PWR	-
C7	UIM_DATA	IN/OUT	-

2.4.17 GPIO (CN23)

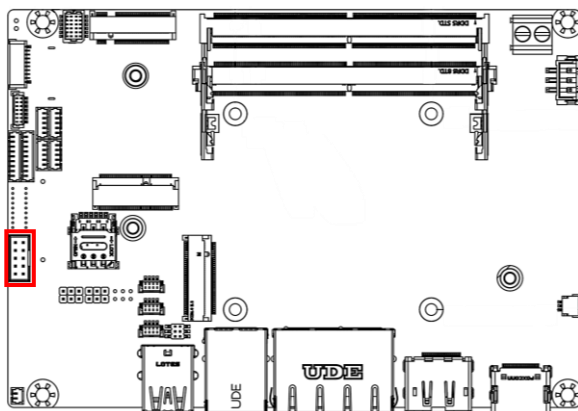

Pin	Pin Name	Signal Type	Signal Level
1	GPIO_0	IN/OUT	-
2	GPIO_1	IN/OUT	-
3	GPIO_2	IN/OUT	-
4	GPIO_3	IN/OUT	-
5	GPIO_4	IN/OUT	-
6	GPIO_5	IN/OUT	-
7	GPIO_6	IN/OUT	-
8	GPIO_7	IN/OUT	-
9	+V5S	PWR	+5V
10	GND	GND	GND

2.4.18 M.2 2280 M-Key Slot (CN24)

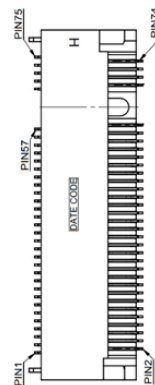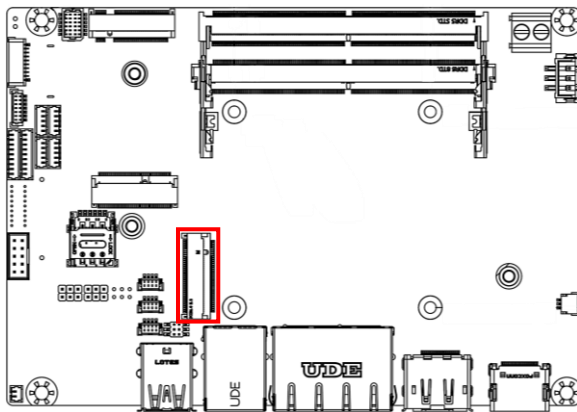


Pin	Pin Name	Signal Type	Signal Level
1	GND	GND	GND
2	+V3P3S	PWR	+3.3V
3	GND	GND	GND
4	+V3P3S	PWR	+3.3V
5	PCIE_12_RXN	DIFF	-
6	CARD_PWR_OFF_N	IN	-
7	PCIE_12_RXP	DIFF	-
8	NC	-	-
9	GND	GND	GND
10	PCH_SATA_LED_N	OUT	+3.3V
11	PCIE_12_TXN	DIFF	-
12	+V3P3S	PWR	+3.3V
13	PCIE_12_TXP	DIFF	-
14	+V3P3S	PWR	+3.3V
15	GND	GND	GND
16	+V3P3S	PWR	+3.3V
17	PCIE_11_RXN	DIFF	-
18	+V3P3S	PWR	+3.3V
19	PCIE_11_RXP	DIFF	-
20	NC	-	-
21	GND	GND	GND
22	KEYM_SSD_VIO	IN	-
23	PCIE_11_TXN	DIFF	-

Pin	Pin Name	Signal Type	Signal Level
24	NC	-	-
25	PCIE_11_TXP	DIFF	-
26	NC	-	-
27	GND	GND	GND
28	NC	-	-
29	PCIE_10_RXN	DIFF	-
30	NC	-	-
31	PCIE_10_RXP	DIFF	-
32	NC	-	-
33	GND	GND	GND
34	NC	-	-
35	PCIE_10_TXN	DIFF	-
36	NC	-	-
37	PCIE_10_TXP	DIFF	-
38	NC	-	-
39	GND	GND	GND
40	NC	-	-
41	PCIE_9_RXN/ SATA_1_RXP	DIFF	-
42	NC	-	-
43	PCIE_9_RXP/ SATA_1_RXN	DIFF	-
44	NC	-	-
45	GND	GND	GND
46	NC	-	-
47	PCIE_9_TXN/ SATA_1_TXN	DIFF	-
48	NC	-	-
49	PCIE_9_TXP/ SATA_1_TXP	DIFF	-
50	BUF_PLT_RST#	IN	-
51	GND	GND	GND
52	M2M_CLKREQ#	OUT	-
53	PCIE_5_CLK_DN	DIFF	-
54	PCIE_WAKE#	OUT	-
55	PCIE_5_CLK_DP	DIFF	-
56	NC	-	-
57	GND	GND	GND
58	NC	-	-



Pin	Pin Name	Signal Type	Signal Level
67	NC	-	-
68	SUS_CLK	IN	-
69	KEYM_DET	IN	-
70	+V3P3S	PWR	+3.3V
71	GND	GND	GND
72	+V3P3S	PWR	+3.3V
73	GND	GND	GND
74	+V3P3S	PWR	+3.3V
75	GND	GND	GND

2.4.19 LAN Port 2 LED Connector (CN25)

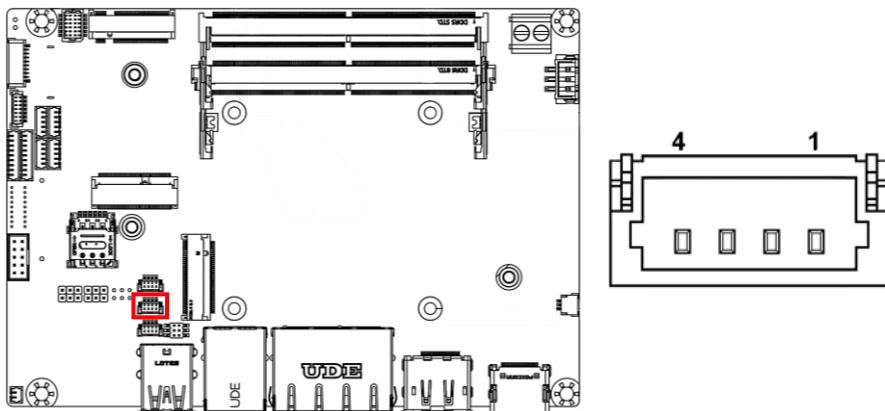



Pin	Pin Name	Signal Type	Signal Level
1	+V3P3A_LAN	PWR	+3.3V
2	LAN2_LED_1000#	OUT	+3.3V
3	LAN2_LED_LNK#_ACT	OUT	+3.3V
4	LAN2_LED_2500#	OUT	+3.3V

2.4.20 LAN Port 1 LED Connector (CN27)

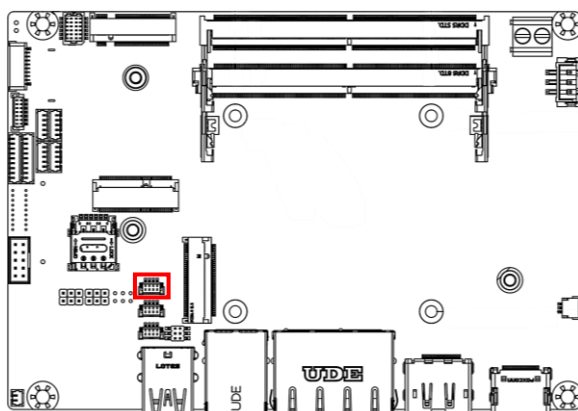



Pin	Pin Name	Signal Type	Signal Level
1	+V3P3A_LAN	PWR	+3.3V
2	LAN1_LED_1000#	OUT	+3.3V
3	LAN1_LED_LNK#_ACT	OUT	+3.3V
4	LAN1_LED_100#	OUT	+3.3V

2.4.21 LAN Port 3 LED Connector (CN30)

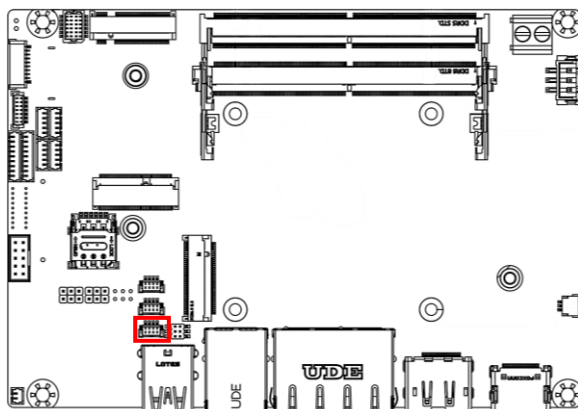

Pin	Pin Name	Signal Type	Signal Level
1	+V3P3A_LAN	PWR	+3.3V
2	LAN3_LED_1000#	OUT	+3.3V
3	LAN3_LED_LNK#_ACT	OUT	+3.3V
4	LAN3_LED_2500#	OUT	+3.3V



2.4.22 RJ-45 LAN Port 3 (CN31)

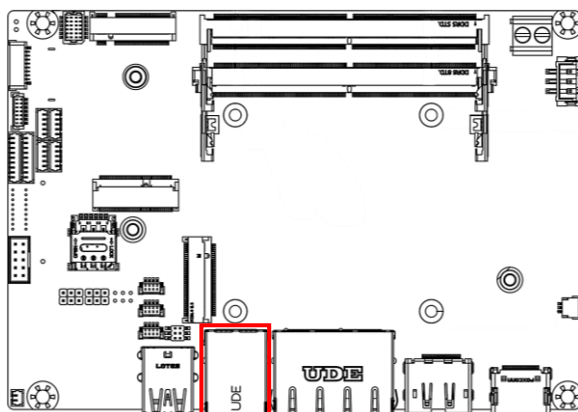

Pin	Pin Name	Signal Type	Signal Level
1	LAN3_MDIO_P	DIFF	-
2	LAN3_MDIO_N	DIFF	-
3	LAN3_MDIO_P	DIFF	-
4	LAN3_MDIO_N	DIFF	-
5	LAN3_MDIO_P	DIFF	-
6	LAN3_MDIO_N	DIFF	-
7	LAN3_MDIO_P	DIFF	-
8	LAN3_MDIO_N	DIFF	-

Note: The chip used for LAN 3 is Intel® Ethernet Controller I226.

2.4.23 RJ-45 LAN Port 1/Port 2 (CN32)

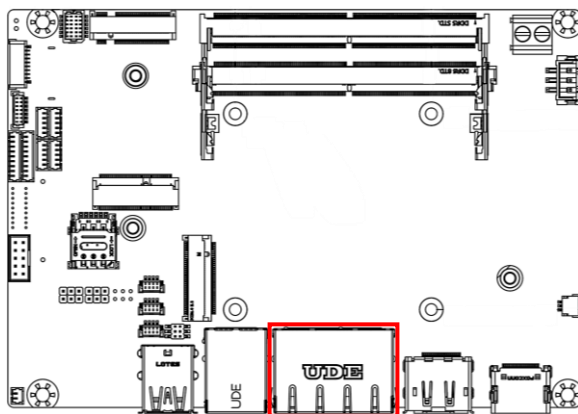


Pin	Pin Name	Signal Type	Signal Level
L_1	LAN2_MDIO_P	DIFF	-
L_2	LAN2_MDIO_N	DIFF	-
L_3	LAN2_MDIO_P	DIFF	-
L_4	LAN2_MDIO_N	DIFF	-
L_5	LAN2_MDIO_P	DIFF	-
L_6	LAN2_MDIO_N	DIFF	-
L_7	LAN2_MDIO_P	DIFF	-
L_8	LAN2_MDIO_N	DIFF	-
R_1	LAN1_MDIO_P	DIFF	-
R_2	LAN1_MDIO_N	DIFF	-
R_3	LAN1_MDIO_P	DIFF	-
R_4	LAN1_MDIO_N	DIFF	-
R_5	LAN1_MDIO_P	DIFF	-
R_6	LAN1_MDIO_N	DIFF	-
R_7	LAN1_MDIO_P	DIFF	-
R_8	LAN1_MDIO_N	DIFF	-

Note: The chip used for LAN 1 is Intel® Ethernet Connection I219.

Note: The chip used for LAN 2 is Intel® Ethernet Controller I226.



2.4.24 USB 3.2/USB 2.0 Port 1/Port 2 (CN33)

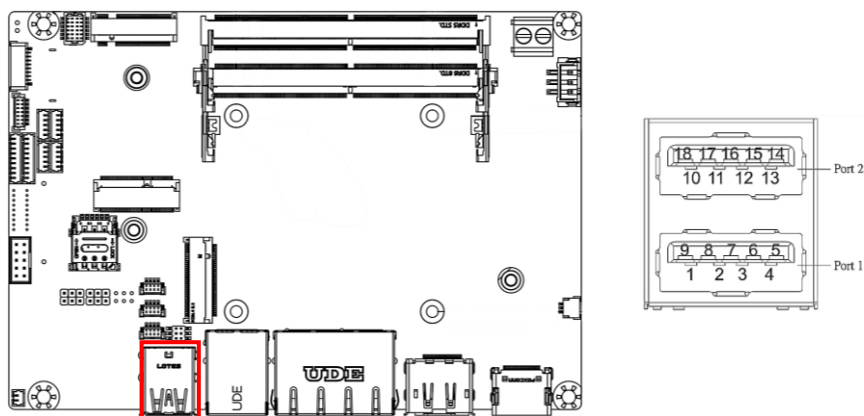

Pin	Pin Name	Signal Type	Signal Level
1	+5VSB	PWR	+5V
2	USB2_1_DN	DIFF	-
3	USB2_1_DP	DIFF	-
4	GND	GND	GND
5	USB3_1_RXN	DIFF	-
6	USB3_1_RXP	DIFF	-
7	GND	GND	GND
8	USB3_1_TXN	DIFF	-
9	USB3_1_TXP	DIFF	-
10	+5VSB	PWR	+5V
11	USB2_8_DN	DIFF	-
12	USB2_8_DP	DIFF	-
13	GND	GND	GND
14	USB3_2_RXN	DIFF	-
15	USB3_2_RXP	DIFF	-
16	GND	GND	GND
17	USB3_2_TXN	DIFF	-
18	USB3_2_TXP	DIFF	-


Note: The driving current of +5VSB supports up to 0.9A/Port

2.4.25 DP Port (CN34)

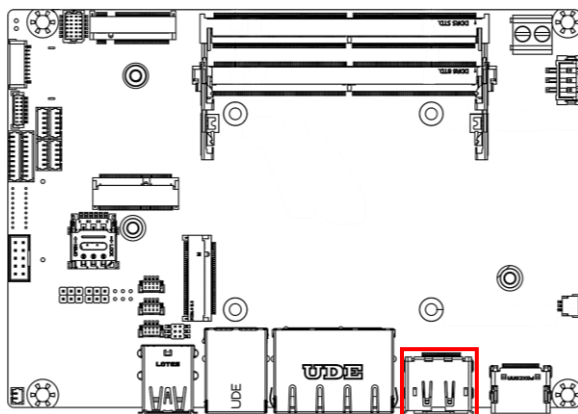



Pin	Pin Name	Signal Type	Signal Level
1	GND	GND	GND
2	+V3P3A	PWR	+3.3V
3	USB2_10_DP	DIFF	-
4	+V3P3A	PWR	+3.3V
5	USB2_10_DN	DIFF	-
6	NC	-	-
7	GND	GND	GND
8	NC	-	-
9	CNV_WR_D1_DN	DIFF	-
10	KEYE_CNV_RF_RST	IN	-
11	CNV_WR_D1_DP	DIFF	-
12	NC	-	-
13	GND	GND	GND
14	KEYE_CNV_CLKREQ	OUT	-
15	CNV_WR_D0_DN	DIFF	-
16	NC	-	-
17	CNV_WR_D0_DP	DIFF	-

2.4.26 HDMI Port (CN35)

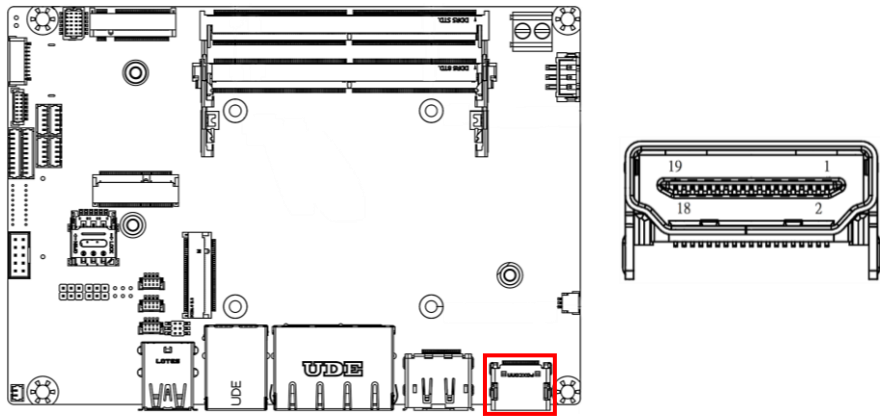



Pin	Pin Name	Signal Type	Signal Level
1	HDMI_TX2+	DIFF	-
2	GND	GND	GND
3	HDMI_TX2-	DIFF	-
4	HDMI_TX1+	DIFF	-
5	GND	GND	GND
6	HDMI_TX1-	DIFF	-
7	HDMI_TX0+	DIFF	-
8	GND	GND	GND
9	HDMI_TX0-	DIFF	-
10	HDMI_CLK+	DIFF	-
11	GND	GND	GND
12	HDMI_CLK-	DIFF	-
13	N/A	N/A	N/A
14	N/A	N/A	N/A
15	DDC_CLK	IN/OUT	-
16	DDC_DATA	IN/OUT	-
17	GND	GND	GND
18	+V5S	PWR	+5V
19	HDMI_HPD	IN	-

2.4.27 RTC Battery Connector (CN36)

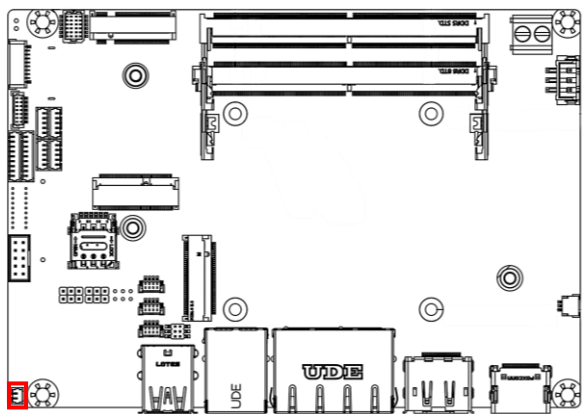

Pin	Pin Name	Signal Type	Signal Level
1	+3.3V	PWR	+3.3V
2	GND	GND	GND

2.4.28 I2C/SMBus Connector (CN37)


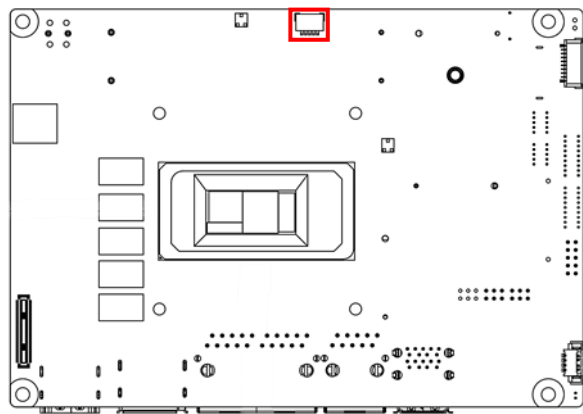


Pin	Pin Name	Signal Type	Signal Level
1	+V3P3S	PWR	+3.3V

Pin	Pin Name	Signal Type	Signal Level
2	SMB_CLK/ I2C_CLK/TIME_SYNC0	OUT	+3.3V
3	SMB_DAT/ I2C_DAT/TIME_SYNC1	OUT	+3.3V
4	SMB_ALERT/ INT_SERIRQ/LAN_SDP	IN	+3.3V
5	GND	GND	GND



Note: Default function is SMBus.

2.4.29 Port 80 Debug Port Connector (CN38)

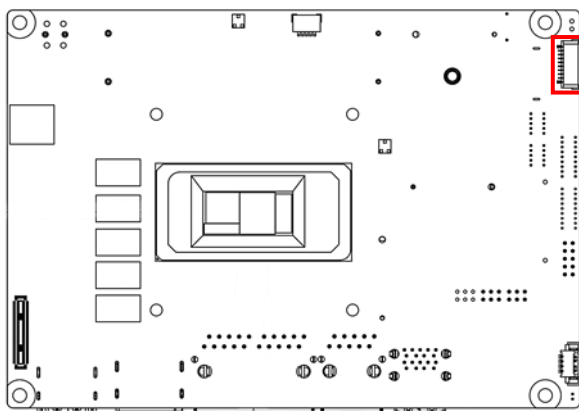

Pin	Pin Name	Signal Type	Signal Level
1	ESPI_IO0_EC_R	IN/OUT	+3.3V
2	ESPI_IO1_EC_R	IN/OUT	+1.8V
3	ESPI_IO2_EC_R	IN/OUT	+1.8V
4	ESPI_IO3_EC_R	IN/OUT	+1.8V
5	+V3P3S	PWR	+3.3V
6	ESPI_CS_EC_R_N	OUT	+3.3V
7	ESPI_RST_EC_R_N	OUT	+1.8V
8	GND	GND	GND
9	ESPI_CLK_EC_R	OUT	+1.8V
10	+V3P3A	PWR	+3.3V

2.4.30 Board to Board Connector (CN39)


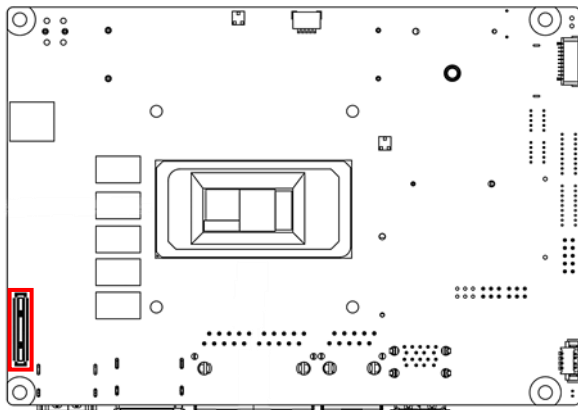


Pin	Pin Name	Signal Type	Signal Level
1	+V12S	PWR	+12V
2	+V12S	PWR	+12V
3	+V12S	PWR	+12V
4	+V12S	PWR	+12V
5	+V12S	PWR	+12V
6	+V12S	PWR	+12V
7	+V12S	PWR	+12V
8	+V12S	PWR	+12V
9	+V12S	PWR	+12V
10	+V12S	PWR	+12V
11	GND	GND	GND
12	GND	GND	GND
13	PCIE_13_TXP	DIFF	-
14	PCIE_17_TXP	DIFF	-
15	PCIE_13_TXN	DIFF	-
16	PCIE_17_TXN	DIFF	-
17	GND	GND	GND
18	GND	GND	GND
19	PCIE_7_CLK_TXP	DIFF	-
20	PCIE_8_CLK_TXP	DIFF	-
21	PCIE_7_CLK_TXN	DIFF	-
22	PCIE_8_CLK_TXN	DIFF	-
23	GND	GND	GND

Pin	Pin Name	Signal Type	Signal Level
24	GND	GND	GND
25	PCIE_14_TXP	DIFF	-
26	PCIE_18_TXP	DIFF	-
27	PCIE_14_TXN	DIFF	-
28	PCIE_18_TXN	DIFF	-
29	GND	GND	GND
30	GND	GND	GND
31	PCIE_15_TXP	DIFF	-
32	PCIE_19_TXP	DIFF	-
33	PCIE_15_TXN	DIFF	-
34	PCIE_19_TXN	DIFF	-
35	GND	GND	GND
36	GND	GND	GND
37	PCIE_16_TXP	DIFF	-
38	PCIE_20_TXP	DIFF	-
39	PCIE_16_TXN	DIFF	-
40	PCIE_20_TXN	DIFF	-
41	GND	GND	GND
42	GND	GND	GND
43	PCIE_13_RXN	DIFF	-
44	PCIE_17_RXN	DIFF	-
45	PCIE_13_RXP	DIFF	-
46	PCIE_17_RXP	DIFF	-
47	GND	GND	GND
48	GND	GND	GND
49	PCIE_14_RXN	DIFF	-
50	PCIE_18_RXN	DIFF	-
51	PCIE_14_RXP	DIFF	-
52	PCIE_18_RXP	DIFF	-
53	GND	GND	GND
54	GND	GND	GND
55	PCIE_15_RXN	DIFF	-
56	PCIE_19_RXN	DIFF	-
57	PCIE_15_RXP	DIFF	-
58	PCIE_19_RXP	DIFF	-
59	GND	GND	GND
60	GND	GND	GND
61	PCIE_16_RXN	DIFF	-
62	PCIE_20_RXN	DIFF	-

Pin	Pin Name	Signal Type	Signal Level
63	PCIE_16_RXP	DIFF	-
64	PCIE_20_RXP	DIFF	-
65	GND	GND	GND
66	GND	GND	GND
67	+V3P3A	PWR	+3.3V
68	+V3P3A	PWR	+3.3V
69	BUF_PLT_RST#	OUT	-
70	BUF_PLT_RST#	OUT	-
71	SMB_CLK	OUT	-
72	SMB_CLK	OUT	-
73	SMB_DATA	IN/OUT	-
74	SMB_DATA	IN/OUT	-
75	+V3P3S	PWR	+3.3V
76	+V3P3S	PWR	+3.3V
77	+V3P3S	PWR	+3.3V
78	+V3P3S	PWR	+3.3V
79	+V3P3S	PWR	+3.3V
80	+V3P3S	PWR	+3.3V

2.4.31 4-pin Fan Connector (CN40)

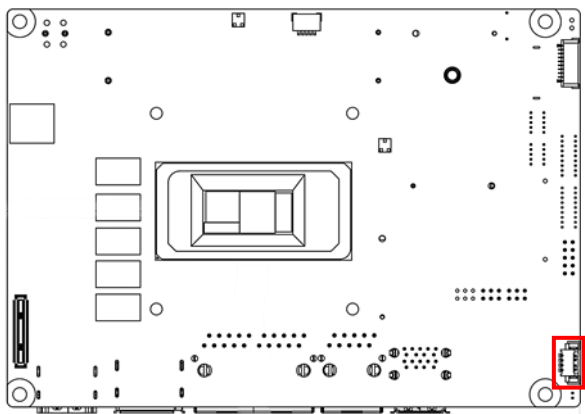

Pin	Pin Name	Signal Type	Signal Level
1	GND	GND	GND
2	FAN_POWER	PWR	+12V
3	FAN_TAC	IN	-
4	FAN_CTL	OUT	-


2.5 Hardware Installation

This section details the steps needed to install various hardware components for the GENESYSM-MTH6. It is recommended that you read through each step before beginning installation and to make sure you have all necessary tools and components.


2.5.1 Accessing the Bottom Panel

For this process you will need a Phillips head screwdriver.

- Remove the two black screws securing the bottom panel.

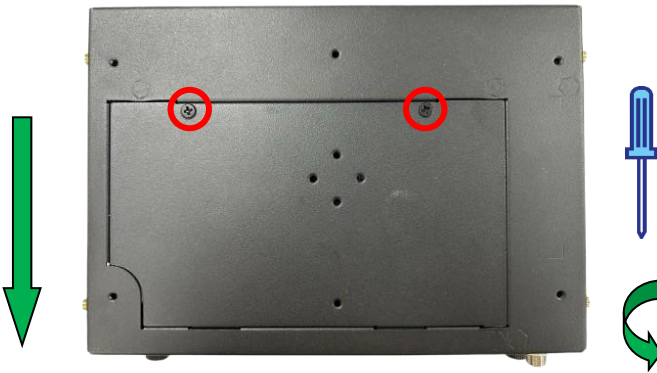

- The bottom panel will lift up and swing toward the rear panel of the system, then can be removed.

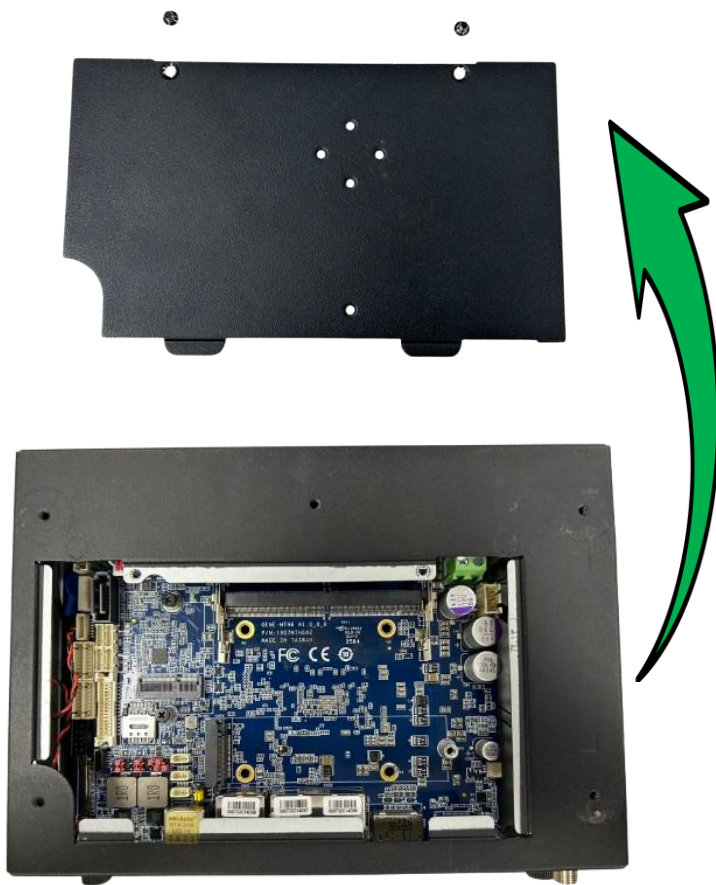


2.5.2 RAM Module Installation


Before you begin, make sure you have the RAM module(s) you wish to install, along with thermal pads for each.



- Remove the protective film of the upper and lower layers of the thermal pad.

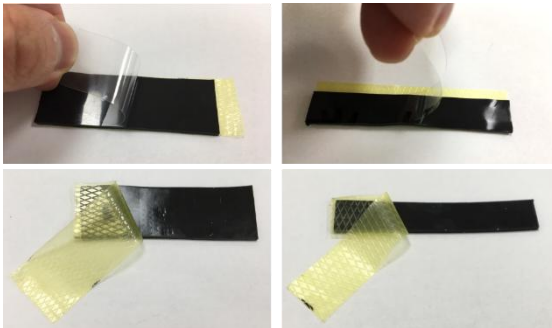

- Apply thermal pad to RAM module.

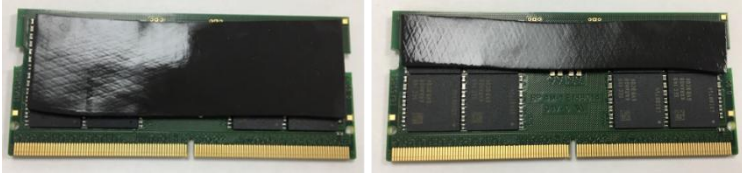

- Insert the RAM module with the full size thermal pad affixed into the DDR SODIMM Slot (CN11) at approximately a 45° angle, then gently press down until it is secured by the tabs.



- Repeat for the second DDR module in Slot CN6, ensuring the half size thermal pad is applied to the module prior to insertion.



RAM module installation is complete.



2.5.3 PER-SB2B FPC2 Installation

- Release the top panel by unscrewing the two captive screws highlighted., this will enable you to swing the top panel upwards and expose the system motherboard. Note that these screws are designed to stay with the panel and should not be removed completely.



- Note the location of the system's Board to Board/FPC Connector (CN39).



- Insert the PER-SB2B module by firmly pressing into the slot, ensuring the connector pins on both the system motherboard and module are aligned. Once inserted, secure with screws, as shown below.




2.5.4 M.2 2280 M-Key Module Installation

M.2 2280 M-Key modules can be installed via both the top and bottom sides of the PER-SB2B.

Top Side M.2 Module Installation

- Follow standard expansion module installation process, inserting the card at an angle of approximately 45°, then gently pressing down and securing the module with the corresponding screw, as shown.

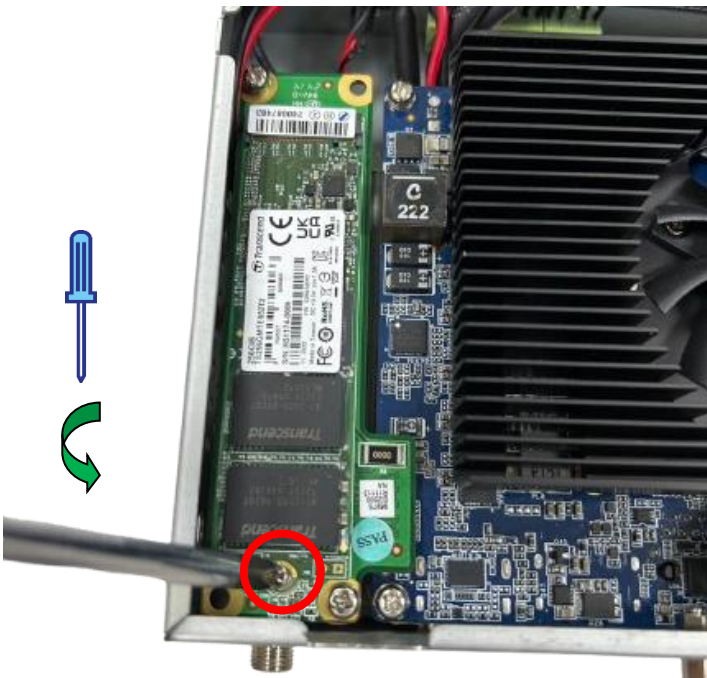

Bottom Side M.2 Module Installation

Note: Prior to installing a module to the PER-SB2B bottom side, the PER-SB2B must be removed from the system.



PER-SB2B Bottom Side



PER-SB2B Top Side

- Remove any screws secured to the module, then pull gently upwards and away from the system motherboard.





- Follow standard expansion module installation process, inserting the card at an angle of approximately 45° to the slot present on the bottom side of the PER-SB2B, then gently pressing down and securing the module with the corresponding screw.



- Once all modules have been installed, reinstall the PER-SB2B as per the instructions provided in section 2.5.3.


2.5.5 Wallmount Assembly

Before beginning, ensure all panels on the system are secured. Then make sure you have to following components ready:

- Wallmount brackets x 2
- Black screws x 4 (two for each bracket)
- Phillips head screwdriver




Line up the brackets with the four open holes on the bottom panel of the system as shown, then secure brackets with the four screws.

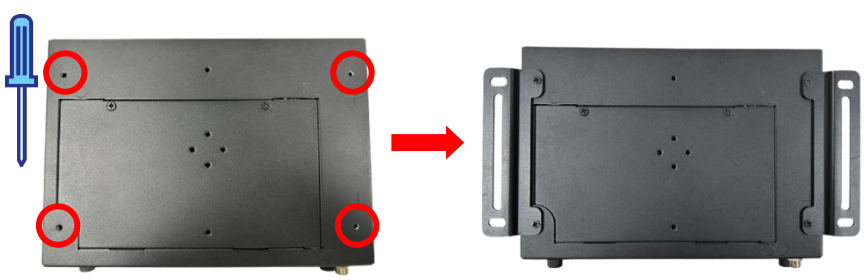


2.5.6 VESA Mount Installation

Before beginning, ensure all panels on the system are secured. Then make sure you have to following components ready:


- Silver screws with washers x 4 (rounded head)
- VESA Mount screws x 2 (head is flat)
- VESA Mount x 1
- Phillips head screwdriver

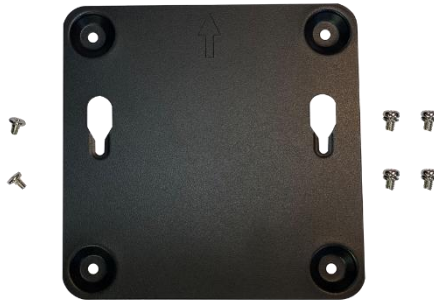

Insert VESA mount screws into the two empty holes on the bottom panel of the system as shown.

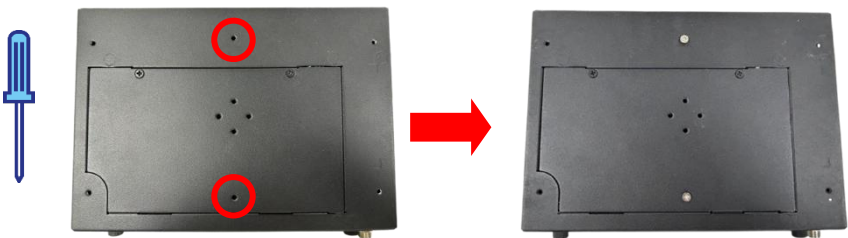

The system can now be attached to the VESA bracket. Mount the bracket to a surface or the back of a display/monitor with VESA attachment points. Use the four silver screws with washers to secure the bracket to the back of the monitor with the arrow pointing up. Then, attach the system to the VESA mount.

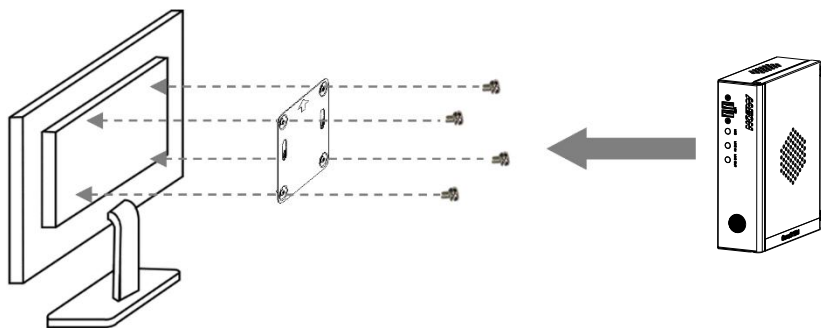

Chapter 3

AMI BIOS Setup

3.1 System Test and Initialization

These routines test and initialize board hardware. If the routines encounter an error during the tests, you will either hear a few short beeps or see an error message on the screen. There are two kinds of errors: fatal and non-fatal. The system can usually continue the boot up sequence with non-fatal errors.

System configuration verification

These routines check the current system configuration stored in the CMOS memory and BIOS NVRAM. If system configuration is not found or system configuration data error is detected, system will load optimized default and re-boot with this default system configuration automatically.

There are four situations in which you will need to setup system configuration:

1. You are starting your system for the first time
2. You have changed the hardware attached to your system
3. The system configuration is reset by Clear-CMOS jumper
4. The CMOS memory has lost power and the configuration information has been erased.

GENESYSM-MTH6 CMOS memory has an integral lithium battery backup for data retention. However, you will need to replace the complete unit when it finally runs down.

3.2 AMI BIOS Setup

AMI BIOS ROM has a built-in Setup program that allows users to modify the basic system configuration. This type of information is stored in battery-backed CMOS RAM and BIOS NVRAM so that it retains the Setup information when the power is turned off.

Entering Setup

Power on the computer and press or <ESC> immediately. This will allow you to enter Setup.

Main

Set the date, use tab to switch between date elements.

Advanced

Enable/disable boot option for legacy network devices.

System I/O

Host bridge parameters.

Security

Set setup administrator password.

Boot

Enables/disables quiet boot option.


Save & Exit

Exit system setup after saving the changes.


MEBx

Enables/disables MEBx option.


3.3 Setup Submenu: Main

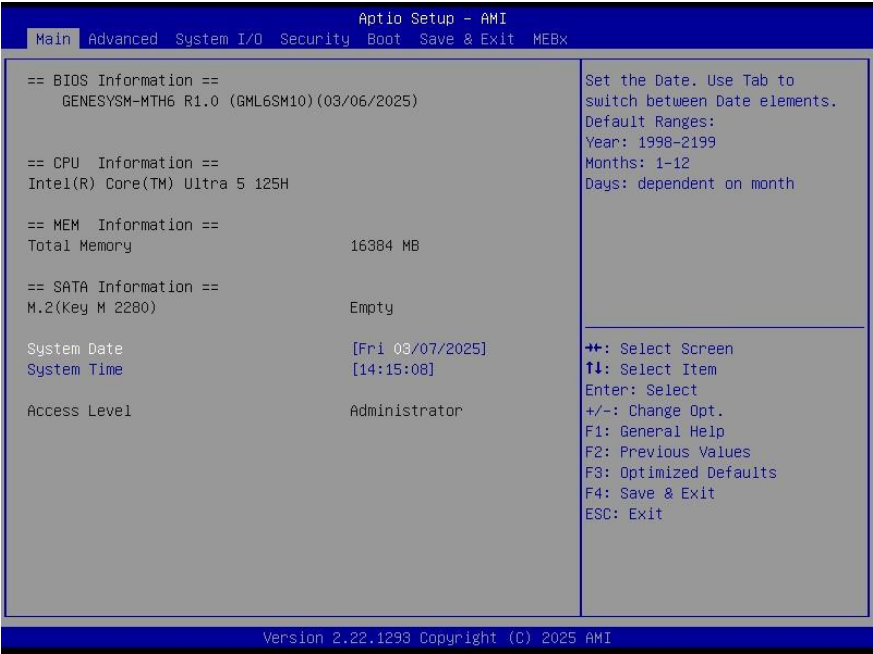


3.4 Setup Submenu: Advanced

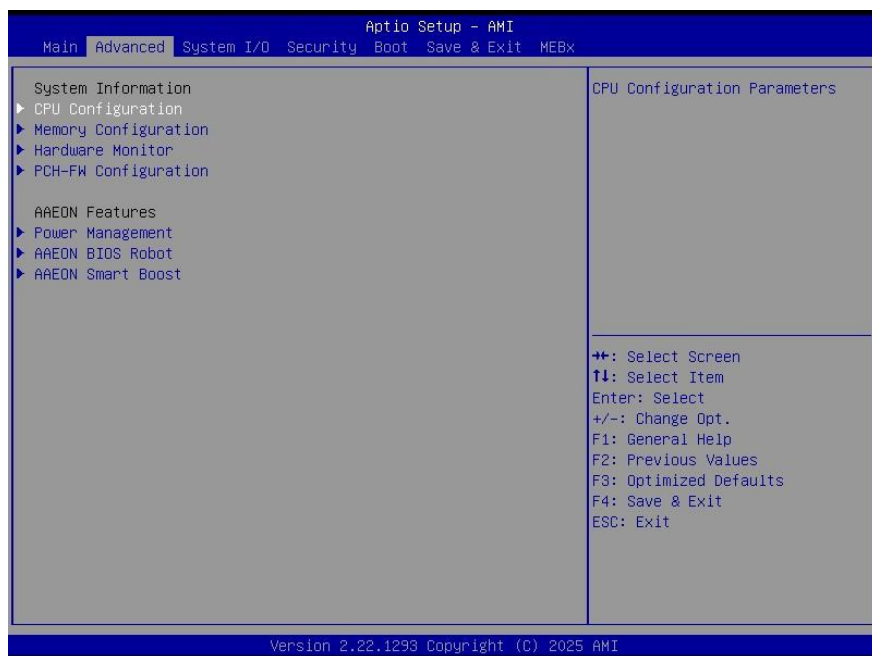

3.4.1 CPU Configuration

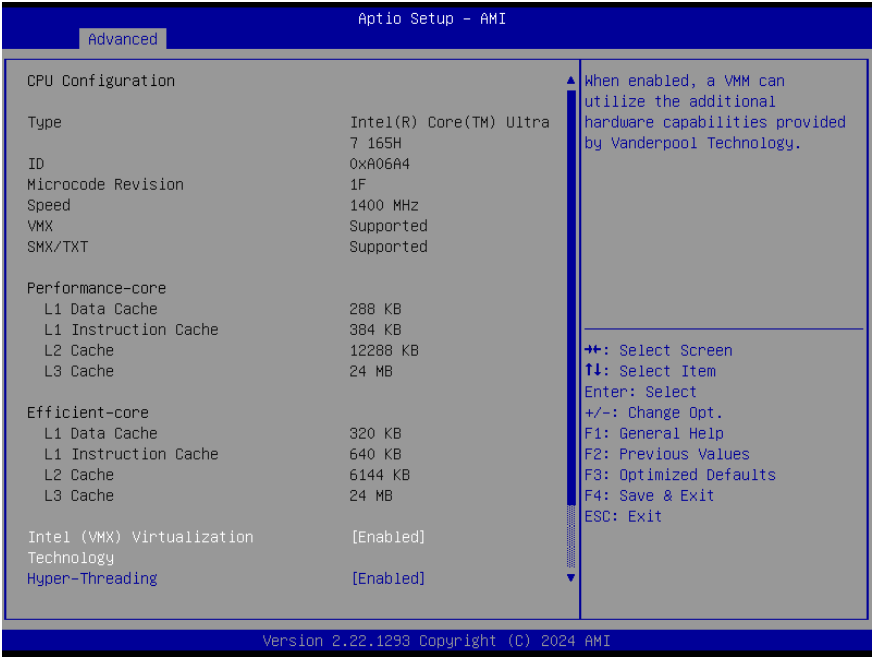

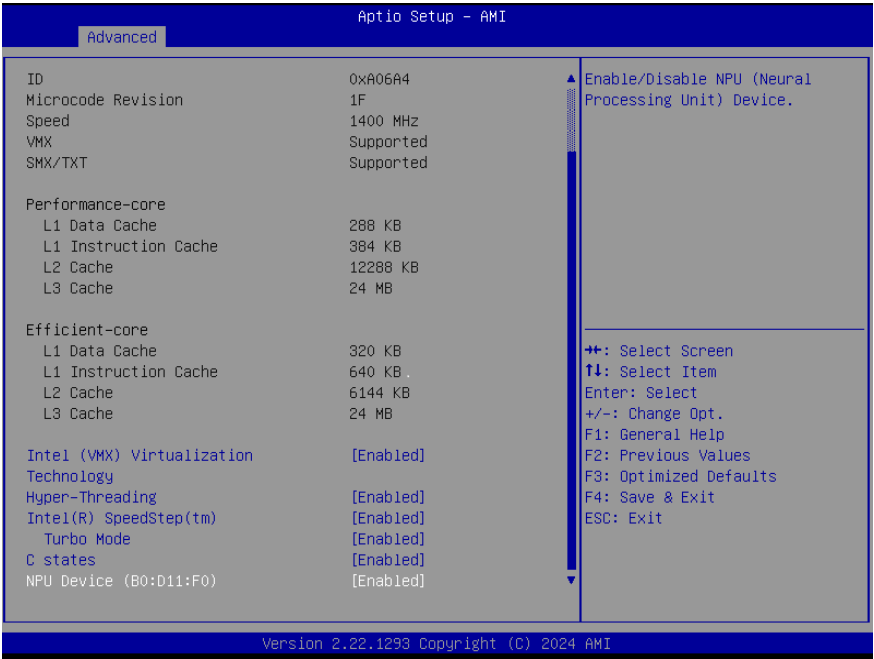

Options Summary		
Intel (VMX) Virtualization Technology	Disabled	
	Enabled	Optimal Default, Failsafe Default
When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology.		
Hyper-Threading	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable Hyper-Threading Technology.		
Intel® SpeedStep™	Disabled	
	Enabled	Optimal Default, Failsafe Default
Allows more than two frequency ranges to be supported.		
Turbo Mode	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or disable the processor's Turbo Mode (requires EMTTM to be enabled). AUTO means Turbo Mode is enabled.		
C states	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or disable CPU power management. This allows the CPU to enter C-states when it is not fully utilized.		

Options Summary		
NPU Device (B0:D11:F0)	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable/Disable NPU (Neural Processing Unit) Device		

3.4.2 Memory Configuration

Advanced

Aptio Setup - AMI

Total Memory8192 MB

Memory Frequency5600 MHz

MC 1 Ch 0 DIMM 0
SizePopulated & Enabled
8192 MB (DDR5)

++: Select Screen

tl: Select Item

Enter: Select

+/-: Change Opt.

F1: General Help

F2: Previous Values


F3: Optimized Defaults

F4: Save & Exit

ESC: Exit


Version 2.22.1293 Copyright (C) 2024 AMI

3.4.3 Hardware Monitor

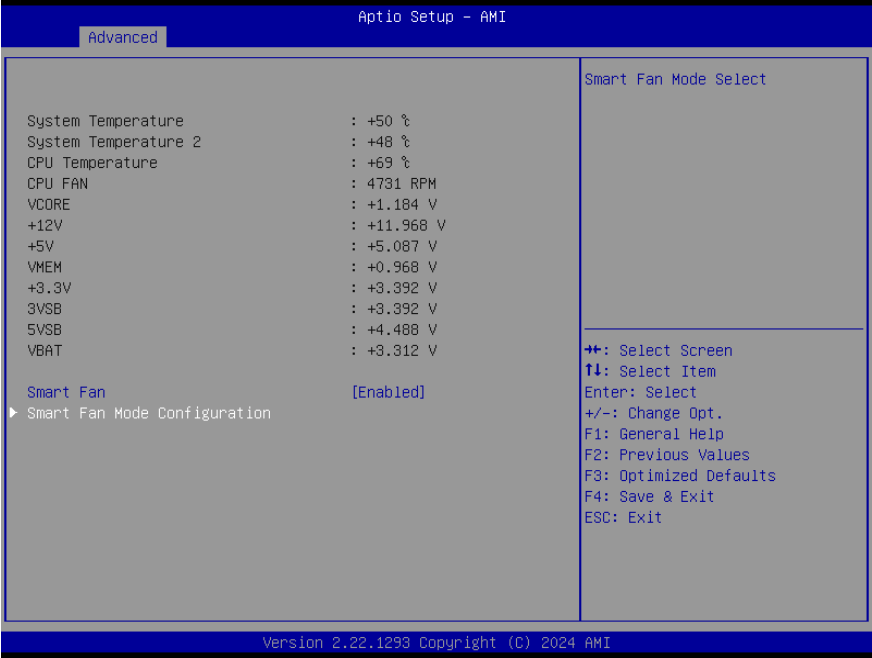


Options Summary		
Smart Fan	Disable	
	Enable	Optimal Default, Failsafe Default
Enables or Disables Smart Fan.		

3.4.4 Smart Fan Mode Configuration

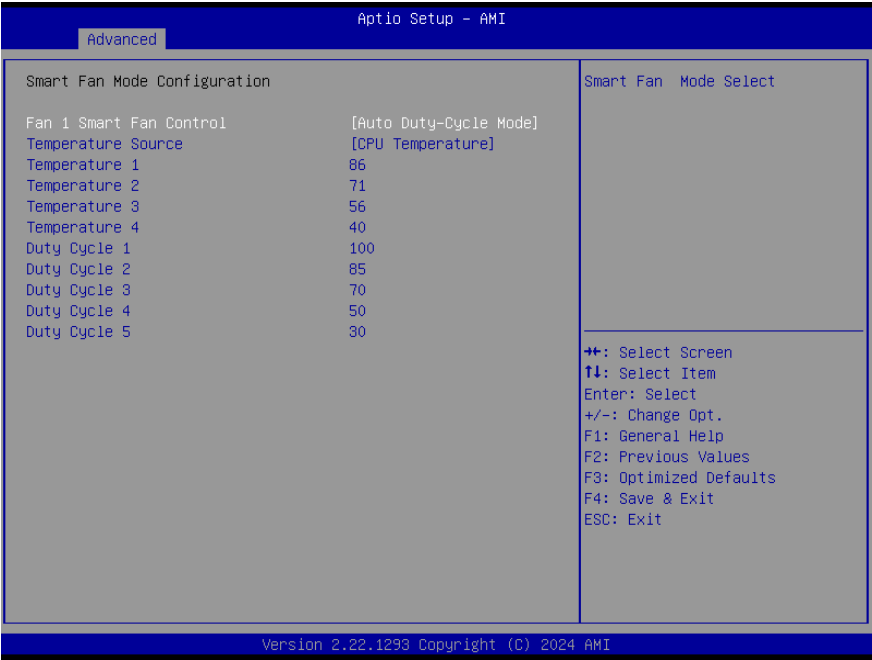


Options Summary		
Fan 1 Smart Fan Control	Manual Duty Mode	
	Auto Duty-Cycle Mode	Optimal Default, Failsafe Default
Smart Fan Mode Select		
Temperature Source	CPU Temperature	Optimal Default, Failsafe Default
	System Temperature	
	System Temperature 2	
Select the temperature source to be monitored for this fan.		
Temperature 1	86	
Duty Cycle 1	100	
Automatic fan speed control. The fan speed adjusts according to temperature, using different duty cycles ranging from 1% to 100%.		

3.4.5 PCH-FW Configuration

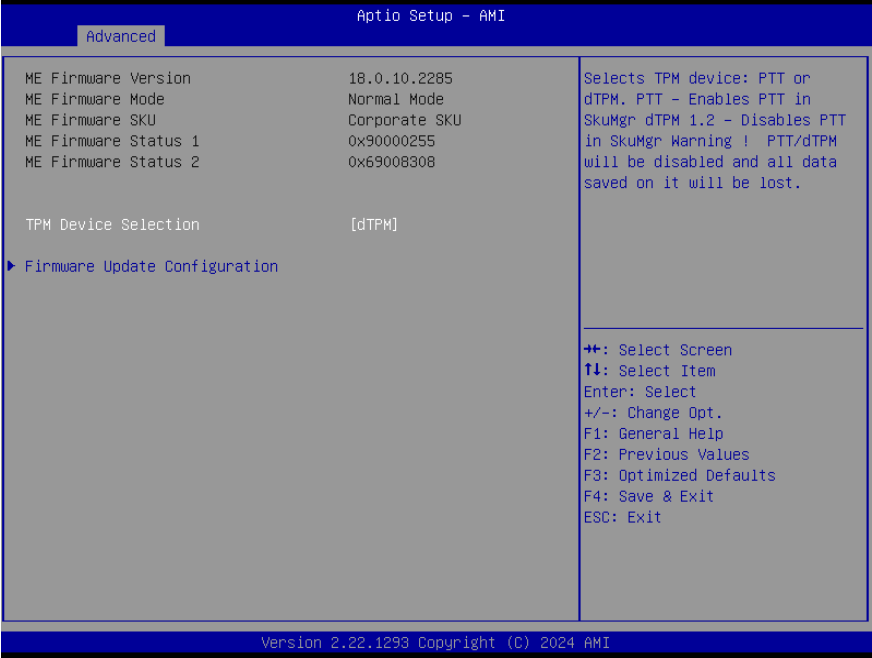


Options Summary		
TPM Device Selection	dTPM	Optimal Default, Failsafe Default
	PTT	
Select the TPM device: PTT or discrete TPM. PTT – Enables PTT in SkuMgr. dTPM – Disables PTT in SkuMgr. Warning: Switching between PTT and dTPM will disable the current TPM and erase all data stored on it.		

3.4.6 Firmware Update Configuration

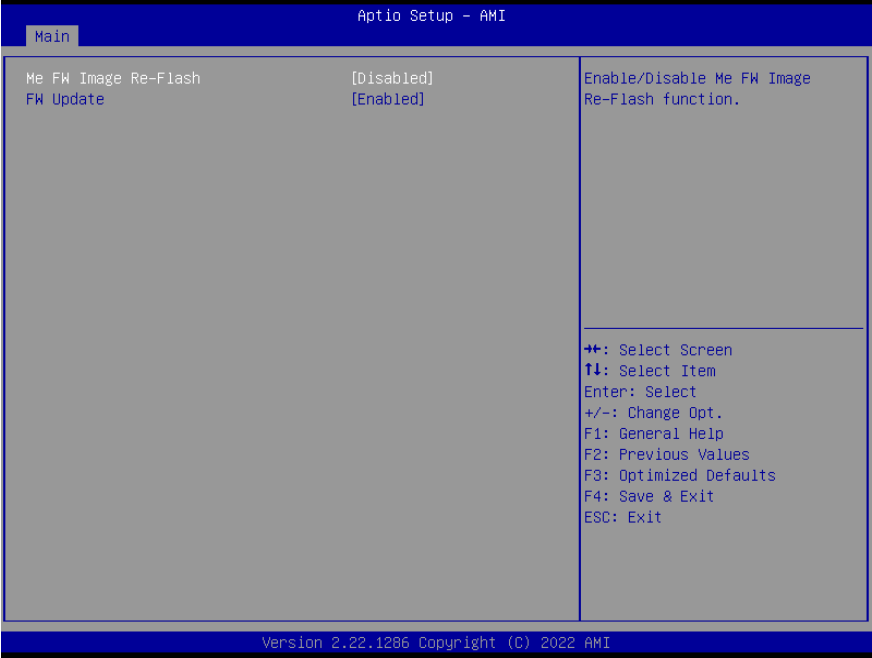

Options Summary		
Me FW Image Re-Flash	Enabled	
	Disabled	Optimal Default, Failsafe Default
Enable/Disable Me FW Image Re-Flash function.		
FW Update	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable/Disable ME FW Update function.		

3.4.7 Power Management

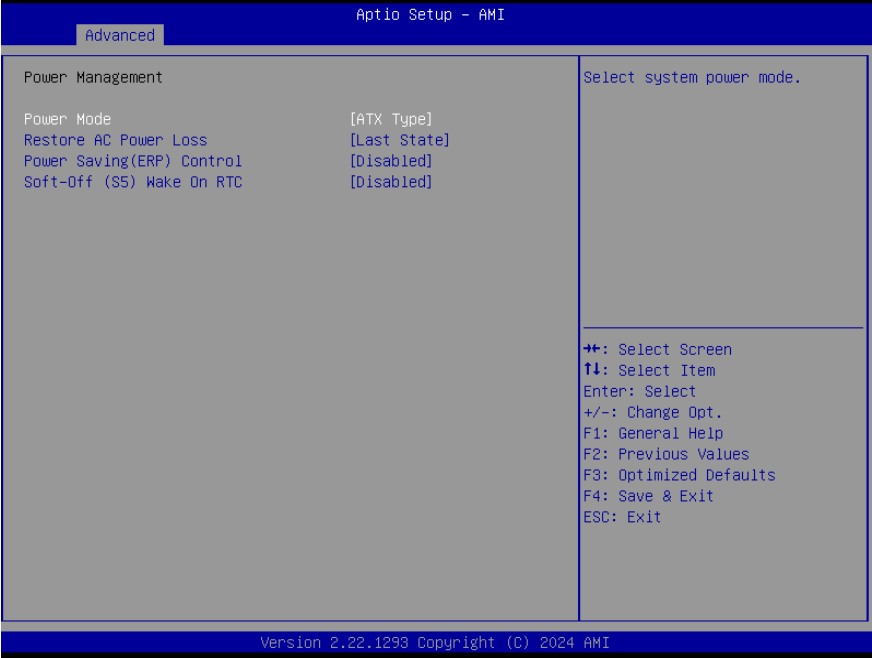

Options Summary		
Power Mode	ATX Type	Optimal Default, Failsafe Default
	AT Type	
Select system power mode.		
Restore AC Power Loss	Last State	Optimal Default, Failsafe Default
	Always On	
	Always Off	
Select the power state the system will enter when power is restored after a power failure.		
Power Saving(ERP) Control	Disabled	Optimal Default, Failsafe Default
	Enabled	
Select Power saving control.		
Soft-Off (S5) Wake On RTC	Disable	Optimal Default, Failsafe Default
	By Date	
	By Weekday	
	Bypass	

Options Summary

By Date: The system will wake at the specified hour, minute, and second on the selected date.

By Weekday: The system will wake at the specified hour, minute, and second on the selected weekdays.

Bypass: The BIOS will not control the RTC wake function.

3.4.8 AAEON BIOS Robot



Options Summary

Sends watch dog before BIOS POST	Disabled	Optimal Default, Failsafe Default
	Enabled	

Enabled – The robot sets the Watch Dog Timer (WDT) immediately after power-on, before the BIOS starts the POST process.

The robot then clears the WDT upon completion of POST.

If the WDT is not cleared before the timer expires, it will automatically reset the system.


Options Summary		
POST Timer (second)	30	Optimal Default, Failsafe Default
Sets the Watch Dog Timer (WDT) duration for POST.		
Warning: Do not set this value equal to or shorter than the normal POST time, as the system may fail to complete POST unless BIOS settings are cleared. It is recommended to set the value to more than twice the normal POST time.		
Sends watch dog before booting OS	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enabled – The robot sets the Watch Dog Timer (WDT) after POST completion, before the BIOS transfers control to the operating system.		
Warning: Before enabling this function, an OS-level program must be responsible for clearing the WDT. This function should be disabled if the operating system is going to perform updates.		
OS Timer (minute)	3	Optimal Default, Failsafe Default
Sets the Watch Dog Timer (WDT) duration for operating system loading.		
Delayed POST (PEI phase)	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enabled – The robot delays the BIOS from starting POST immediately after power-on. This ensures the POST process begins with stable power or after the system has physically warmed up.		
Note: This action occurs before the "Send Watch Dog" operation.		
Delayed time (second)	10	Optimal Default, Failsafe Default
Period of time for Robot to hold BIOS from POST.		
Delayed POST (DXE phase)	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enabled – The robot delays the BIOS before POST completion. This ensures the POST process runs with stable power or after the system has physically warmed up.		
Note: This action occurs after the "Send Watch Dog before BIOS POST" operation.		
Delayed time (second)	10	Optimal Default, Failsafe Default
Period of time for Robot to hold BIOS from POST.		
Reset system once	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enabled – The robot performs a one-time system reset on each boot. This sends either a soft or hard reset to onboard devices, helping them reach a more stable state.		
Soft or hard reset	Soft reset	Optimal Default, Failsafe Default
	Hard reset"	
Select the type of reset the robot should perform on each boot.		

3.4.9 Device Detecting Configuration




Options Summary		
Action	Reset System	Optimal Default, Failsafe Default
	Hold System	
Select the action the robot should perform.		
Soft or hard reset	Soft	Optimal Default, Failsafe Default
	Hard	
Select the type of reset the robot should perform at each boot.		
Retry-Count	30	Optimal Default, Failsafe Default
Enter the retry count. The robot will reset the system up to the specified number of times, then allow the system to continue POST.		
At time	After show logo	Optimal Default, Failsafe Default
	Before show logo	
Select the robot action time: After show logo – The robot performs the action after the logo is displayed, when system devices are nearly ready.		
Before show logo – The robot performs the action before the logo is displayed, but some devices may not yet be ready.		

3.4.9.1 Device #1~#5 Detecting Configuration

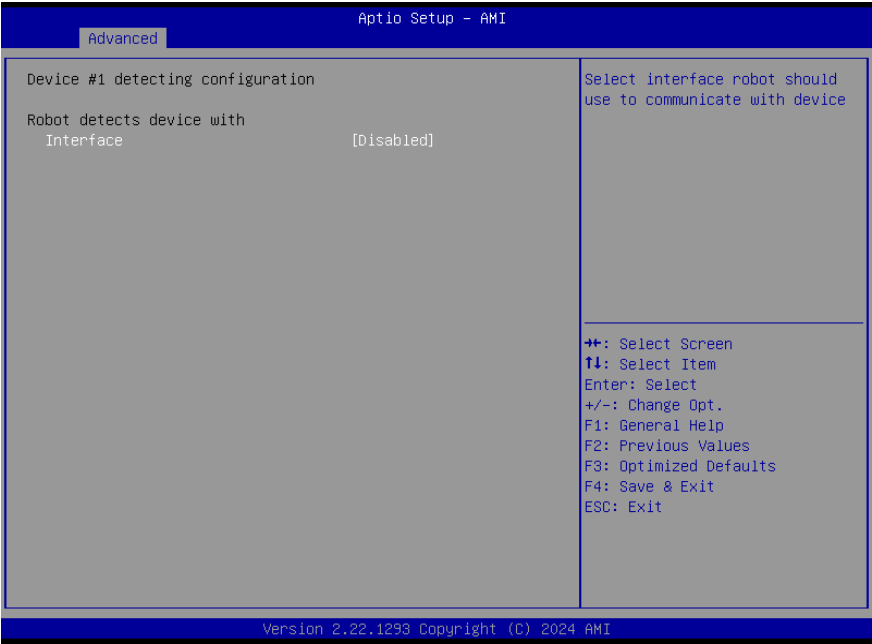

Options Summary		
Action	Disable	Optimal Default, Failsafe Default
	PCI	
	DIO	
	SMBUS	
	Legacy I/O	
	Super I/O	
	MMIO	
Select interface robot should use to communicate with device.		

3.4.10 AAEON Smart Boost

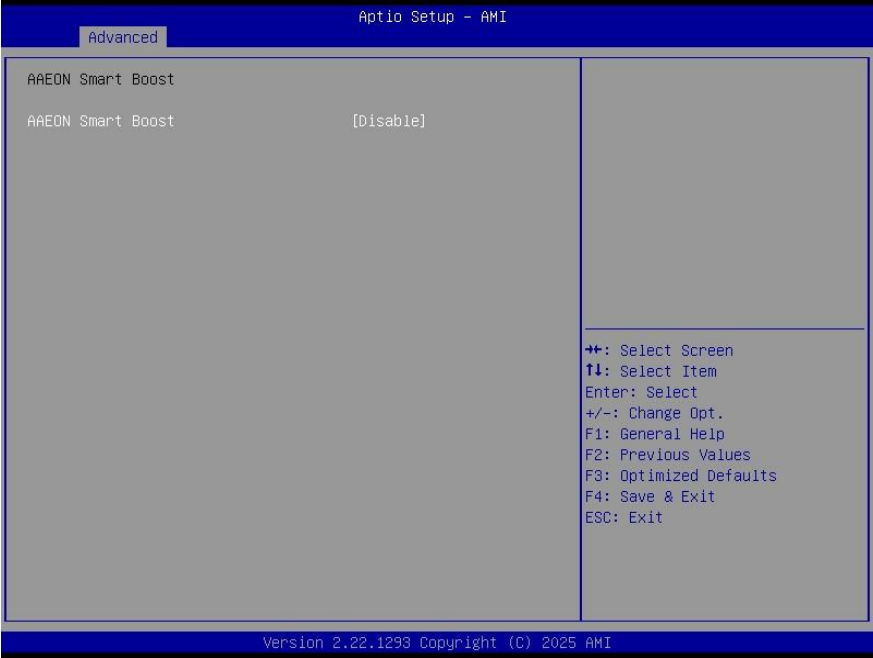


Options Summary		
AAEON Smart Boost	Disabled	Optimal Default, Failsafe Default
	Smart Boost	
	Maximum Performance	
	Good Stability	
Enable/Disable AAEON Smart Boost		

3.5 Setup Submenu: System I/O



3.5.1 Storage Configuration

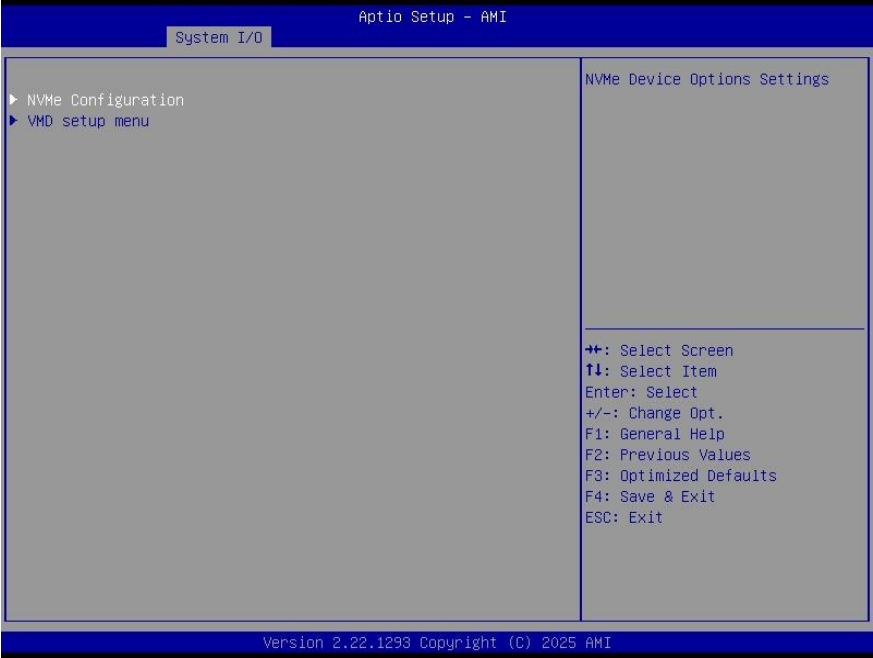

3.5.2 NVMe Configuration





Options Summary		
Self Test Option	Short	Optimal Default, Failsafe Default
	Extended	
Select either Short or Extended self-test: Short – Completes in a few minutes. Extended – Takes several minutes to complete.		
Self Test Action	Controller Only Test	Optimal Default, Failsafe Default
	Controller and Namespace Test	
Select whether to test the Controller only or the Controller and Namespace : Controller only – Tests just the controller. Controller and Namespace – Tests both the controller and namespace, which will take significantly longer to complete.		
Run Device Self Test	N/A	N/A
Performs a device self-test based on the option and action selected by the user. Press Esc to abort the test. The results displayed below show the most recent test logged on the device.		

3.5.3 VMD Setup Menu




Options Summary		
Enable VMD Controller	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enable/Disable VMD Controller		

3.5.4 HD Audio Configuration




3.5.5 GPIO Port Configuration

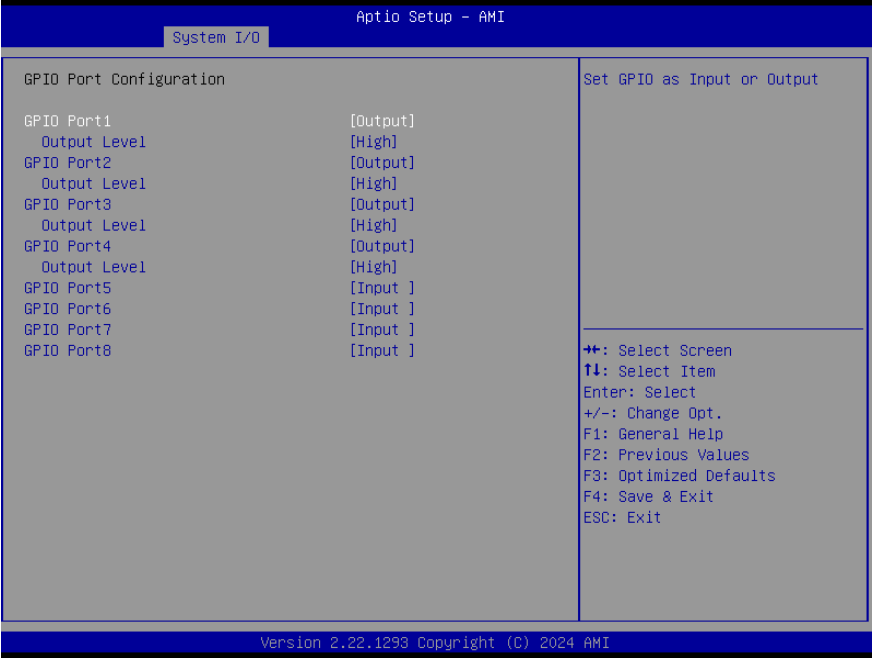


Options Summary		
GPIO Port*	Output	
	Input	
Set GPIO as Input or Output		
Output Level	High	
	Low	
Set output level when GPIO pin is output		

3.5.6 Legacy Devices Configuration

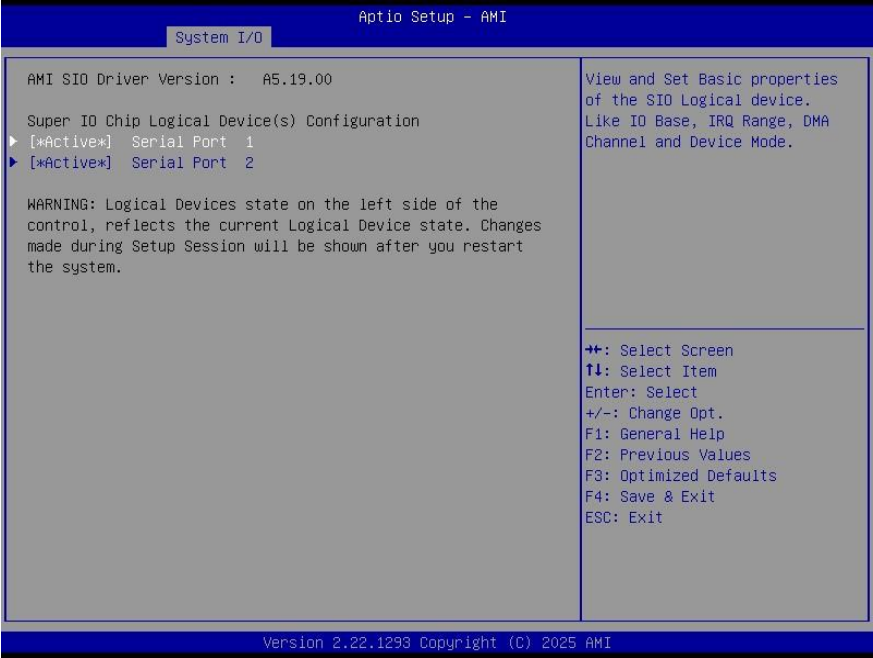


3.5.6.1 Serial Port 1 Configuration

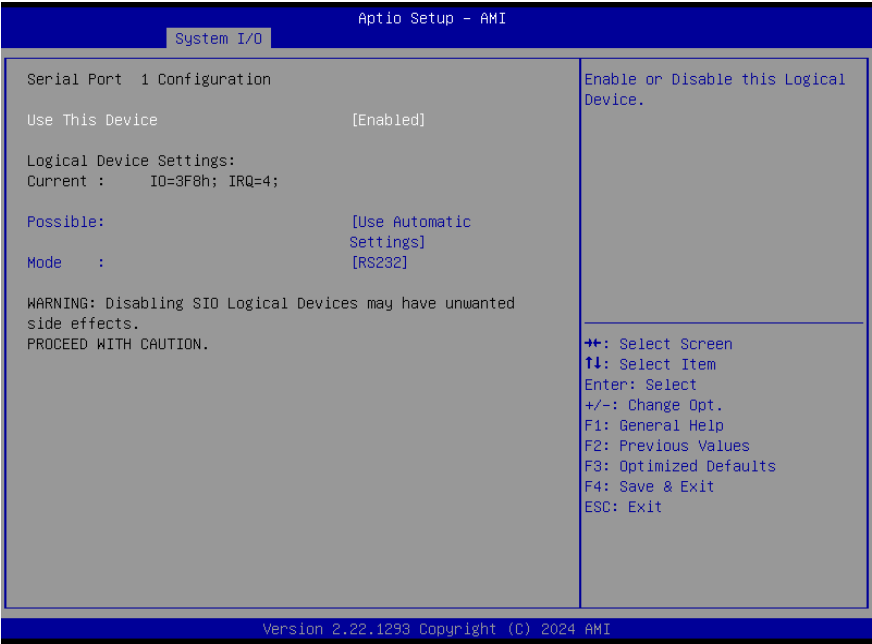


Options Summary		
Use This Device	Disable	
	Enable	Optimal Default, Failsafe Default
Enable or Disable this Logical Device.		
Possible:	Use Automatic Settings	Optimal Default, Failsafe Default
	IO=3F8h; IRQ=4	
	IO=2F8h; IRQ=3	
Allows user to change Device's Resource settings. New settings will be reflected on This Setup Page after System restarts.		
Mode:	RS232	Optimal Default, Failsafe Default
	RS422	
	RS485	
UART RS232, 422, 485 selection.		

3.5.6.2 Serial Port 2 Configuration

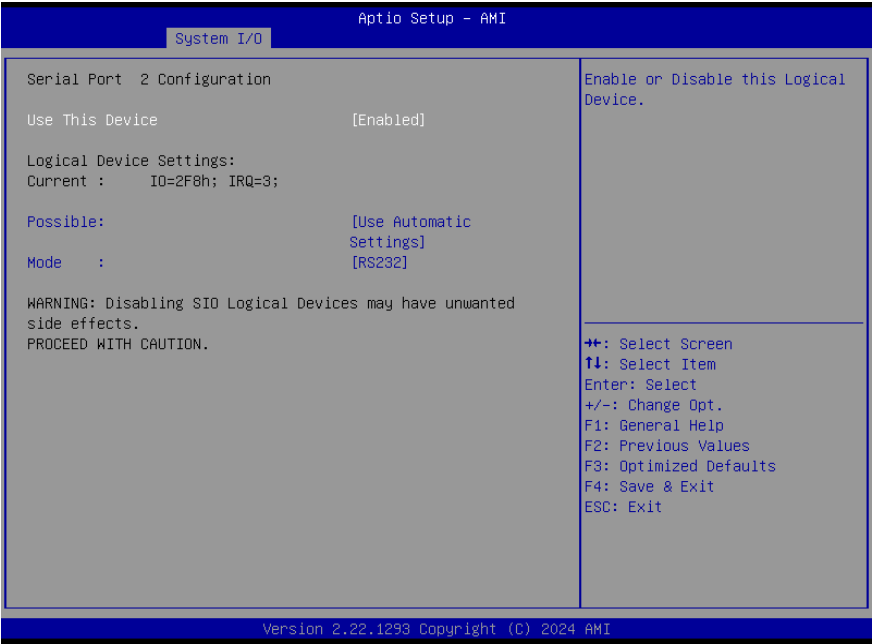


Options Summary		
Use This Device	Disable	
	Enable	Optimal Default, Failsafe Default
Enable or Disable this Logical Device.		
Possible:	Use Automatic Settings	Optimal Default, Failsafe Default
	IO=2F8h; IRQ=3	
	IO=3F8h; IRQ=4	
Allows user to change Device's Resource settings. New settings will be reflected on This Setup Page after System restarts.		
Mode:	RS232	Optimal Default, Failsafe Default
	RS422	
	RS485	
UART RS232, 422, 485 selection.		

3.5.7 Serial Port Console Redirection

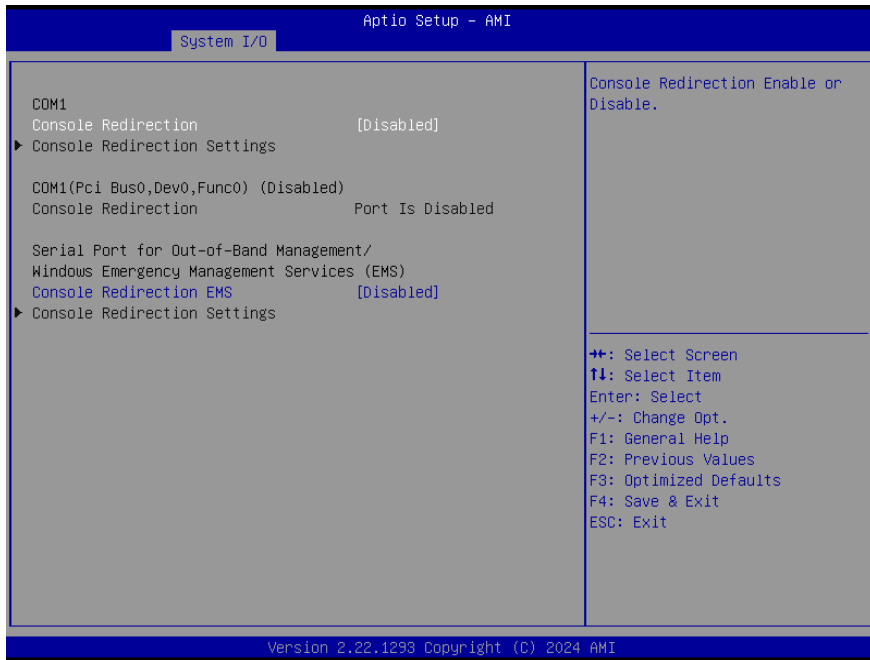

Options Summary		
Console Redirection	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enable or Disable Console Redirection.		
Console Redirection EMS	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enable or Disable Console Redirection.		

3.6 Setup Submenu: Security

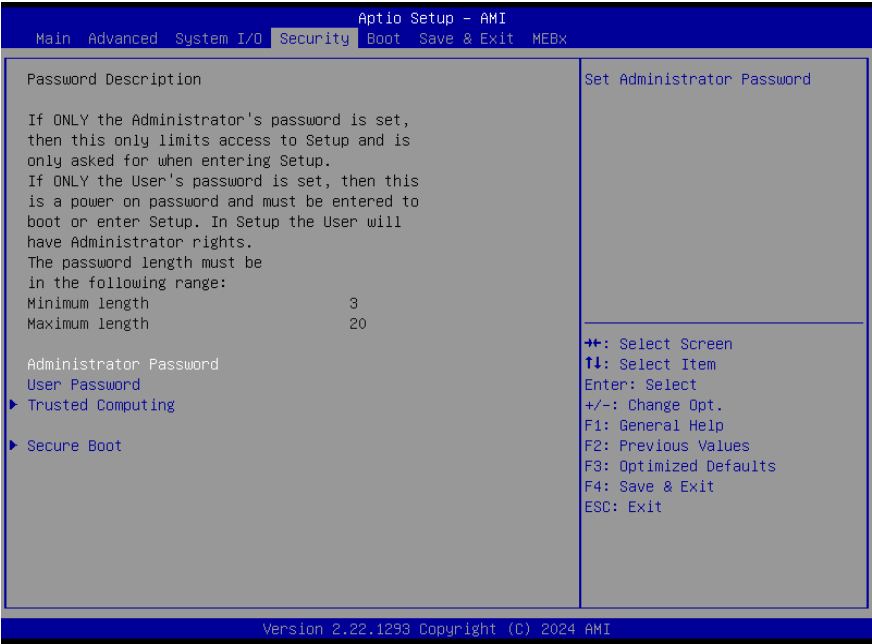

Change User/Supervisor Password

You can install a Supervisor password, and if you install a supervisor password, you can then install a user password. A user password does not provide access to many of the features in the Setup utility.

If you highlight these items and press Enter, a dialog box appears which lets you enter a password. You can enter no more than six letters or numbers. Press Enter after you have typed in the password. A second dialog box asks you to retype the password for confirmation. Press Enter after you have retyped it correctly. The password is required at boot time, or when the user enters the Setup utility.

Removing the Password

Highlight this item and type in the current password. At the next dialog box press Enter to disable password protection.

3.6.1 Trusted Computing



Options Summary		
Security Device Support	Enable	Optimal Default, Failsafe Default
	Disable	
Enable or disable BIOS support for the security device. When disabled, the operating system will not detect the security device, and the TCG EFI protocol and INT1A interface will be unavailable.		
SHA256 PCR Bank	Enabled	Optimal Default, Failsafe Default
	Disabled	
Enable or Disable SHA256 PCR Bank.		
SHA384 PCR Bank	Enabled	Optimal Default, Failsafe Default
	Disabled	
Enable or Disable SHA384 PCR Bank.		
Pending operation	None	Optimal Default, Failsafe Default
	TPM Clear	

Options Summary		
Schedule an operation for the security device.		
Note: The computer will automatically reboot to apply the security device state change.		
Platform Hierarchy	Enabled	Optimal Default, Failsafe Default
	Disabled	
Enable or Disable Platform Hierarchy		
Storage Hierarchy	Enabled	Optimal Default, Failsafe Default
	Disabled	
Enable or Disable Storage Hierarchy		
Endorsement Hierarchy	Enabled	Optimal Default, Failsafe Default
	Disabled	
Enable or Disable Endorsement Hierarchy		
Physical Presence Spec Version	1.3	Optimal Default, Failsafe Default
	1.2	
Select whether to inform the operating system to support PPI Specification version 1.2 or 1.3.		
Note: Some HCK tests may not be compatible with version 1.3.		
Device Select	Auto	
	TPM 1.2	
	TPM 2.0	Optimal Default, Failsafe Default
TPM 1.2 – Supports only TPM 1.2 devices.		
TPM 2.0 – Supports only TPM 2.0 devices.		
Auto – Supports both TPM 1.2 and TPM 2.0 devices. If no TPM is detected, the system defaults to TPM 2.0. TPM 1.2 devices will still be enumerated when present.		

3.6.2 Secure Boot



Options Summary		
Secure Boot	Disabled	Optimal Default, Failsafe Default
	Enabled	
The Secure Boot feature is active when Secure Boot is enabled, the Platform Key (PK) is enrolled, and the system is in User mode . Changing the mode requires a platform reset.		
Secure Boot Mode	Custom	Optimal Default, Failsafe Default
	Standard	
Secure Boot mode options: Standard or Custom . In Custom mode, Secure Boot policy variables can be configured by a physically present user without requiring full authentication.		
Restore Factory Keys		
Force System to User Mode. Install factory default Secure Boot key databases		
Reset To Setup Mode		
Delete all Secure Boot key databases from NVRAM		


3.6.3 Expert Key Management



Options Summary		
Factory Key Provision	Disabled	Optimal Default, Failsafe Default
	Enabled	
The Secure Boot feature is active when Secure Boot is enabled, the Platform Key (PK) is enrolled, and the system is in User mode . Changing the mode requires a platform reset.		
Restore Factory Keys		
Force System to User Mode. Install factory default Secure Boot key databases		
Reset To Setup Mode		
Delete all Secure Boot key databases from NVRAM		
Export Secure Boot variables		
Copy NVRAM content of Secure Boot variables to files in a root folder on a file system device		
Enroll Efi Image		
Allow the image to run in Secure Boot mode. Enroll SHA256 Hash certificate of a PE image into Authorized Signature Database (db)		

Options Summary	
Remove 'UEFI CA' from DB	
A Device Guard-ready system must not include the Microsoft UEFI CA certificate in the Authorized Signature Database (db).	
Restore DB defaults	
Restore DB variable to factory defaults	
Platform Key(PK)	Details
	Export
	Update
	Delete
Key Exchange Keys	Details
	Export
	Update
	Append
	Delete
Authorized Signatures	Details
	Export
	Update
	Append
	Delete
Forbidden Signatures	Details
	Export
	Update
	Append
	Delete
Authorized TimeStamps	Update
	Append
OsRecovery Signatures	Update
	Append
Enroll Factory Defaults or load certificates from a file:	
1.Public Key Certificate:	
a) EFI_SIGNATURE_LIST	
b) EFI_CERT_X509 (DER)	
c) EFI_CERT_RSA2048 (bin)	
d) EFI_CERT_SHAXXX	
2.Authenticated UEFI Variable	
3.EFI PE/COFF Image (SHA256)	
Key Source: Factory, External, Mixed.	

3.7 Setup Submenu: Boot

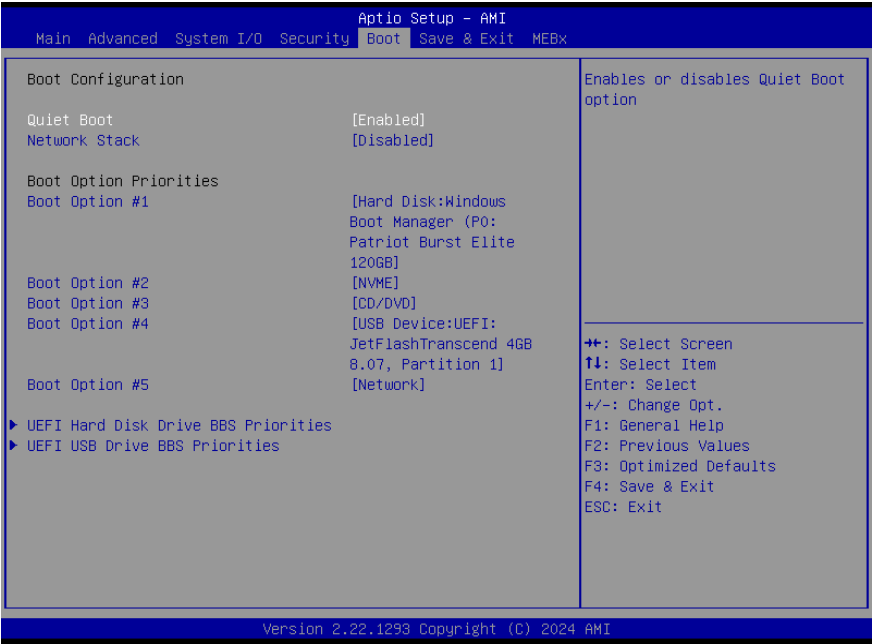

Options Summary		
Quiet Boot	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable Quiet Boot option.		
Network Stack	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enable/Disable UEFI Network Stack.		
BOOT Option Priorities		
Sets the system boot order.		

3.7.1 BBS Priorities




3.8 Setup Submenu: Save & Exit




Options Summary	
Save Changes and Reset	Reset the system after saving the changes.
Discard Changes and Exit	Exit system setup without saving any changes.
Restore Defaults	Restore/Load Default values for all the setup options.

3.9 Setup Submenu: MEBx

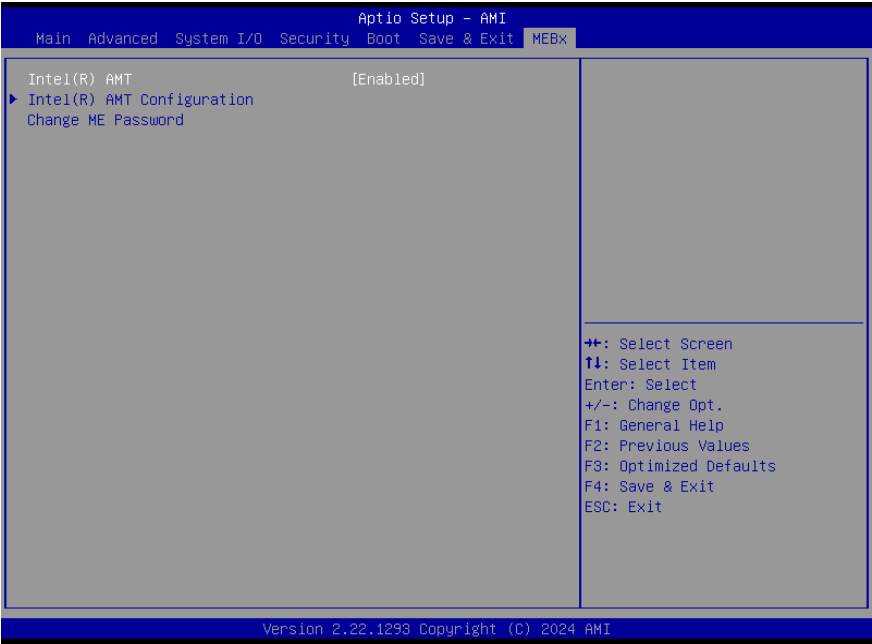

Options Summary		
Intel (R) AMT	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable Intel® AMT.		
Change ME Password		
Change Password for entering MEBx.		

3.9.1 Intel(R) AMT Configuration

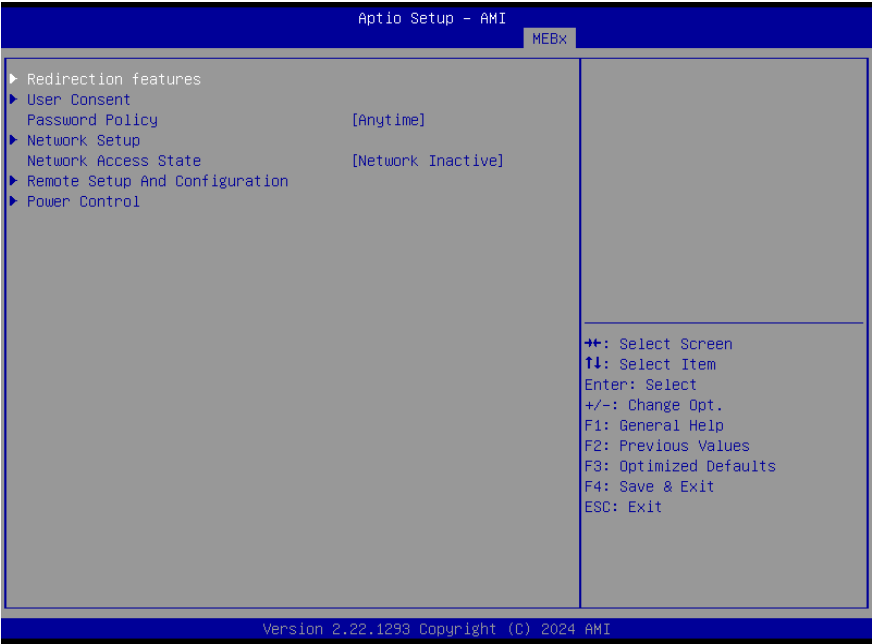


Options Summary		
Password Policy	Default Password Only	
	During Setup and Configuration	
	Anytime	Optimal Default, Failsafe Default
Network Access State	Network Active	
	Network Inactive	Optimal Default, Failsafe Default
	Full Unprovision	
Changes the network state of ME. Disabling it will also clear certain other settings.		

3.9.2 Redirection Features



Options Summary		
SOL	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable FW SOL Interface		
Storage Redirection	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable FW Remote – Storage Redirection.		
KVM Features Selection	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable FW KVM Feature.		

3.9.3 User Consent

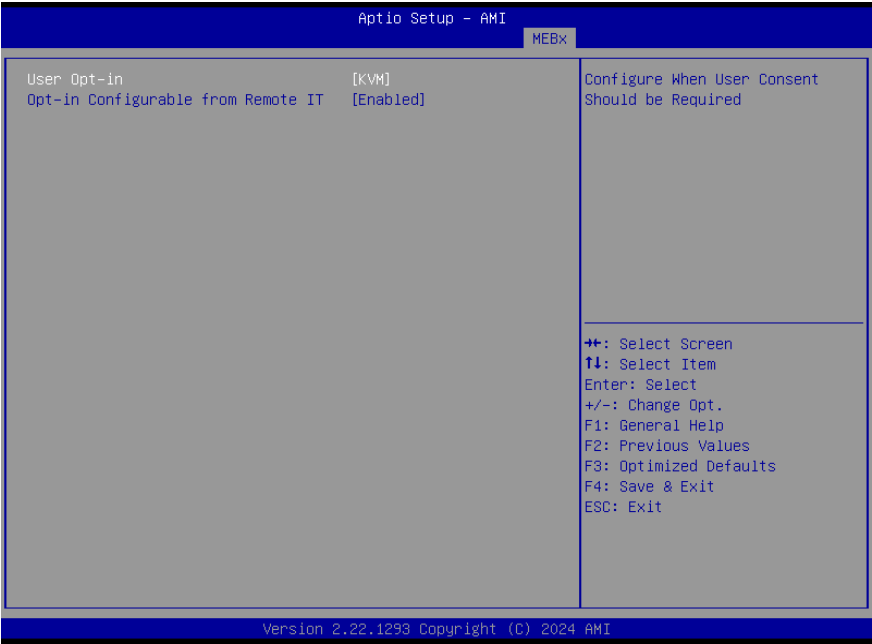


Options Summary		
User Opt-in	None	
	KVM	Optimal Default, Failsafe Default
	ALL	
Configure when User Consent Should be Required.		
Opt-in Configurable from Remote IT	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable/Disable Remote Change Capability of User Consent Feature		

3.9.4 Network Setup



3.9.5 Intel® ME Network Name Settings

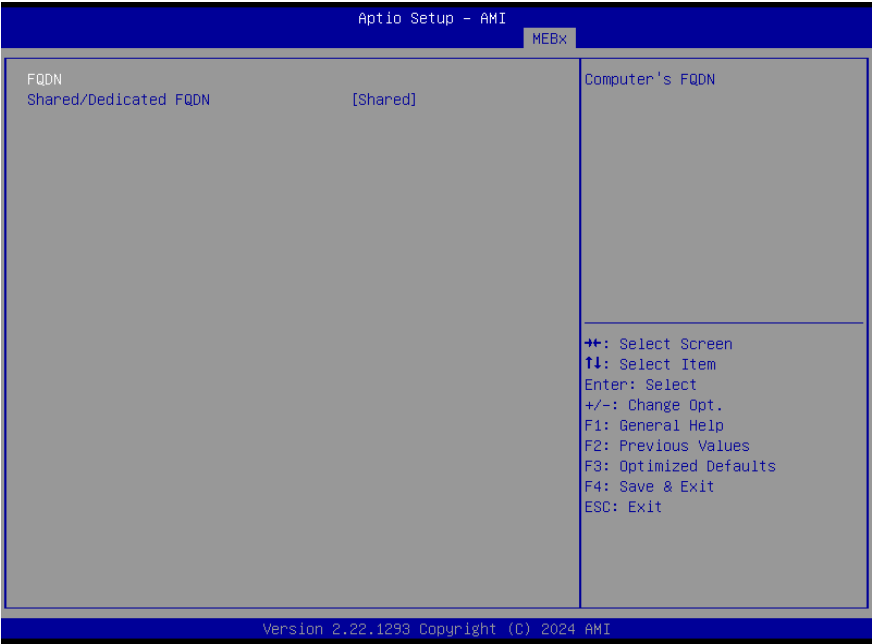


Options Summary		
FQDN		
Computer's FQDN		
Shared/Dedicated FQDN	Dedicated	
	Shared	Optimal Default, Failsafe Default

3.9.6 TCP/IP Settings



Options Summary		
DHCP Mode	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable/Disable IPV4 DHCP Mode.		

3.9.7 Remote Setup and Configuration

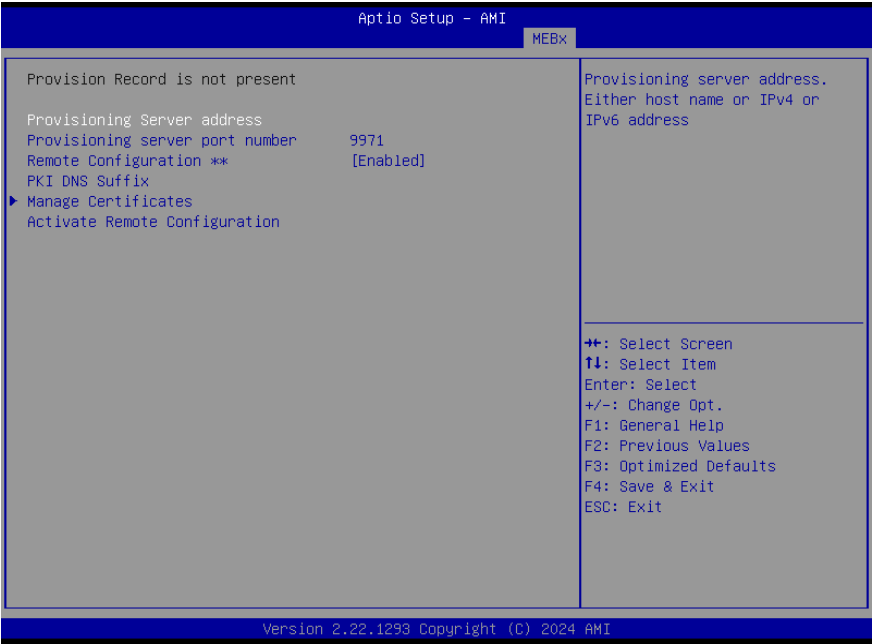

Options Summary		
Provisioning Server Address		
Provisioning server address. Either host name or IPv4 or IPv6 address.		
Provisioning Server Port number		
Provisioning server port number (0-65535)		
Remote Configuration **	Enabled	Optimal Default, Failsafe Default
	Disabled	

3.9.8 Power Control



Options Summary		
ME ON in Host Sleep States	Mobile: ON in S0	
	Mobile: ON in S0, ME Wake in S3, S4-5 (AC only)	Optimal Default, Failsafe Default
Idle Timeout	15	Optimal Default, Failsafe Default
Specify the timeout value (range: 1-65,535).		

Chapter 4

Driver Installation

4.1 Driver Download/Installation

Drivers for the GENESYSM-MTH6 can be downloaded from the product page on the AAEON website by following this link:

<https://www.aaeon.com/en/>

Download the driver(s) you need and follow the steps below to install them.

Chipset Driver

1. Open the folder where you unzipped the **Chipset Drivers**.
2. Run the **SetupChipset.exe** file in the folder.
3. Follow the instructions.
4. Drivers will be installed automatically.

Graphics Driver

1. Open the **Graphics Driver** folder
2. Run the **gfx_win_101.5590.exe** file in the folder.
3. Follow the instructions.
4. Drivers will be installed automatically.

LAN Drivers

a) Install Intel® Ethernet Controller I225/I226 Series Drivers:

1. Open the folder where you unzipped the **LAN Drivers**.
2. Locate the file named **e2f.inf** (Setup Information).
3. Right-click **e2f.inf** and select **Install**.
4. If prompted by Windows, click **Yes** to confirm.
5. Wait for the installation to complete. LAN driver will be installed automatically.

b) Install Intel® Ethernet Connection I219 Driver:

1. Open the folder where you unzipped the **LAN Drivers**.
2. Locate the file named **eld.inf** (Setup Information).
3. Right-click **eld.inf** and select **Install**.
4. If prompted by Windows, click **Yes** to confirm.
5. Wait for the installation to complete. LAN driver will be installed automatically.

ME & TXE Drivers (Windows 10)

1. Open the folder where you unzipped the **ME & TXE Drivers**.
2. Run the **SetupME.exe** file in the folder.
3. Follow the instructions.
4. Drivers will be installed automatically.

Intel Platform Monitoring Technology Driver

1. Open the folder where you unzipped the **Intel Platform Monitoring Technology Driver**.
2. Locate the **intcpmt.inf** file.
3. Right-click **intcpmt.inf** and select **Install**.
4. Approve any security prompts.
5. The Platform Monitoring driver will be installed automatically.

Intel NPU Driver

1. Open the folder where you unzipped the **Intel NPU Driver**.
2. Locate the **npu.inf** file.
3. Right-click **npu.inf** and select **Install**.
4. Confirm any Windows security prompts.
5. The Intel® Neural Processing Unit (NPU) driver will be installed automatically.

Install Peripheral Driver


1. Open the **Peripheral Driver** folder
2. Run the **SetupSerialIO.exe** file
3. Follow the instructions
4. Drivers will be installed automatically

Install RAID Driver


1. Open the **RAID Driver** folder
2. Run the **SetupRST.exe** file
3. Follow the instructions
4. Drivers will be installed automatically

Install Intel Smart Sound Technology Driver

1. Open the **Intel Smart Sound Technology Driver** folder
2. Install Intel SST driver **IntcAudioBus.inf** and **IntcOED.inf**

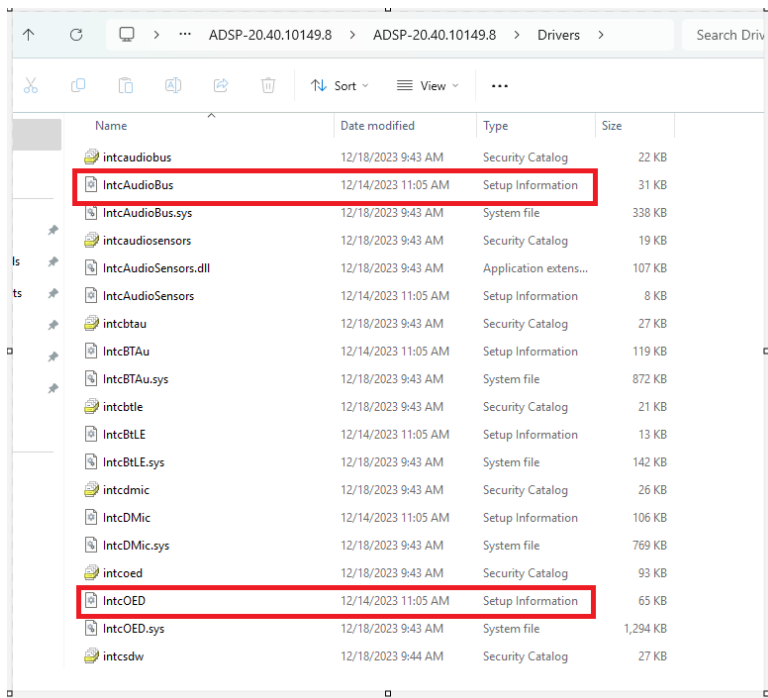

Note: Make sure to install **IntcAudioBus.inf** before installing **IntcOED.inf**. Right click on **IntcAudioBus.inf** and install **IntcOED.inf**, then **Install Driver**, as shown below:

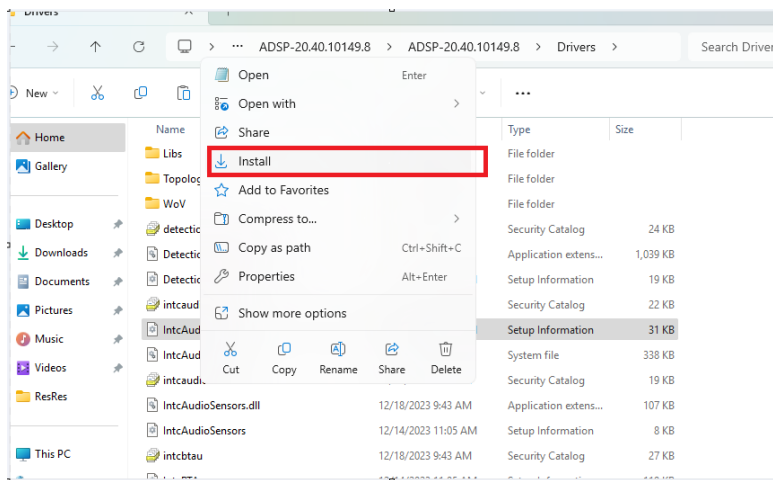

Install Realtek Audio Driver

1. Open the **Realtek Audio Driver** folder.
2. Run the **Setup.exe** file,
3. Follow the instructions.
4. Drivers will be installed automatically.

Appendix A

I/O Information

A.1 I/O Address Map

▼	Input/output (IO)
	[0000000000000000 - 000000000000CF7] PCI Express Root Complex
	[0000000000000020 - 0000000000000021] Programmable interrupt controller
	[0000000000000024 - 0000000000000025] Programmable interrupt controller
	[0000000000000028 - 0000000000000029] Programmable interrupt controller
	[000000000000002C - 000000000000002D] Programmable interrupt controller
	[000000000000002E - 000000000000002F] Motherboard resources
	[0000000000000030 - 0000000000000031] Programmable interrupt controller
	[0000000000000034 - 0000000000000035] Programmable interrupt controller
	[0000000000000038 - 0000000000000039] Programmable interrupt controller
	[000000000000003C - 000000000000003D] Programmable interrupt controller
	[0000000000000040 - 0000000000000043] System timer
	[000000000000004E - 000000000000004F] Motherboard resources
	[0000000000000050 - 0000000000000053] System timer
	[0000000000000061 - 0000000000000061] Motherboard resources
	[0000000000000063 - 0000000000000063] Motherboard resources
	[0000000000000065 - 0000000000000065] Motherboard resources
	[0000000000000067 - 0000000000000067] Motherboard resources
	[0000000000000070 - 0000000000000070] Motherboard resources
	[0000000000000080 - 0000000000000080] Motherboard resources
	[0000000000000092 - 0000000000000092] Motherboard resources
	[00000000000000A0 - 00000000000000A1] Programmable interrupt controller
	[00000000000000A4 - 00000000000000A5] Programmable interrupt controller
	[00000000000000A8 - 00000000000000A9] Programmable interrupt controller
	[00000000000000AC - 00000000000000AD] Programmable interrupt controller
	[00000000000000B0 - 00000000000000B1] Programmable interrupt controller
	[00000000000000B2 - 00000000000000B3] Motherboard resources
	[00000000000000B4 - 00000000000000B5] Programmable interrupt controller
	[00000000000000B8 - 00000000000000B9] Programmable interrupt controller
	[00000000000000BC - 00000000000000BD] Programmable interrupt controller
	[00000000000002E8 - 00000000000002EF] Communications Port (COM4)
	[00000000000002F8 - 00000000000002FF] Communications Port (COM2)
	[00000000000003E8 - 00000000000003EF] Communications Port (COM3)
	[00000000000003F8 - 00000000000003FF] Communications Port (COM1)
	[00000000000004D0 - 00000000000004D1] Programmable interrupt controller
	[0000000000000680 - 000000000000069F] Motherboard resources
	[0000000000000A00 - 0000000000000A0F] Motherboard resources
	[0000000000000A10 - 0000000000000A1F] Motherboard resources
	[0000000000000A20 - 0000000000000A2F] Motherboard resources
	[0000000000000D00 - 000000000000FFFF] PCI Express Root Complex
	[000000000000164E - 000000000000164F] Motherboard resources

	[000000000000D00 - 000000000000FFFF] PCI Express Root Complex
	[000000000000164E - 000000000000164F] Motherboard resources
	[0000000000001854 - 0000000000001857] Motherboard resources
	[0000000000002000 - 00000000000020FE] Motherboard resources
	[0000000000003020 - 000000000000303F] Standard SATA AHCI Controller
	[0000000000003040 - 0000000000003043] Standard SATA AHCI Controller
	[0000000000003050 - 0000000000003057] Standard SATA AHCI Controller
	[000000000000EFA0 - 000000000000EFBF] Intel(R) SMBus - 7E22

A.2 Memory Address Map

▼	Memory
	[0000000000000000 - 000000000000FFFF] Motherboard resources
	[0000000000000000 - 000000000000FFFF] Motherboard resources
	[0000000000A00000 - 0000000000BFFFFF] PCI Express Root Complex
	[0000000008000000 - 000000000800FFFF] Intel(R) Ethernet Controller I226-LM #2
	[0000000008000000 - 000000000801FFFF] PCI Express Root Port
	[0000000008000000 - 00000000BFFFFFFF] PCI Express Root Complex
	[0000000008010000 - 00000000080103FF] Intel(R) Ethernet Controller I226-LM #2
	[0000000008020000 - 000000000802FFFF] Intel(R) Ethernet Controller I226-LM
	[0000000008020000 - 000000000803FFFF] PCI Express Root Port
	[0000000008030000 - 00000000080303FF] Intel(R) Ethernet Controller I226-LM
	[0000000008042000 - 00000000080421FF] Standard SATA AHCI Controller
	[0000000008042200 - 000000000804227F] Standard SATA AHCI Controller
	[0000000008042300 - 000000000804230F] Standard SATA AHCI Controller
	[00000000BFFF0000 - 00000000BFFFFFFF] Intel(R) Ethernet Connection (18) I219-LM
	[00000000C0000000 - 00000000CFFFFFFF] Motherboard resources
	[00000000E0D10000 - 00000000E0D1FFFF] Intel(R) Serial IO GPIO Host Controller - INTC1083
	[00000000E0D20000 - 00000000E0D2FFFF] Intel(R) Serial IO GPIO Host Controller - INTC1083
	[00000000E0D30000 - 00000000E0D3FFFF] Intel(R) Serial IO GPIO Host Controller - INTC1083
	[00000000E0D40000 - 00000000E0D4FFFF] Intel(R) Serial IO GPIO Host Controller - INTC1083
	[00000000E0D50000 - 00000000E0D5FFFF] Intel(R) Serial IO GPIO Host Controller - INTC1083
	[00000000FC800000 - 00000000FC81FFFF] Motherboard resources
	[00000000FE010000 - 00000000FE010FFF] Intel(R) SPI - 7E23
	[00000000FED00000 - 00000000FED003FF] High precision event timer
	[00000000FED20000 - 00000000FED7FFFF] Motherboard resources
	[00000000FED40000 - 00000000FED44FFF] Trusted Platform Module 2.0
	[00000000FED45000 - 00000000FED8FFFF] Motherboard resources
	[00000000FEDC0000 - 00000000FEDC7FFF] Motherboard resources
	[00000000FEE00000 - 00000000FEEFFFFF] Motherboard resources
	[0000000400000000 - 0000000400FFFFFF] Intel(R) Graphics
	[0000000401700000 - 00000004017FFFFF] Intel(R) Graphics
	[0000000402024000 - 0000000402024FFFF] Intel(R) USB 3.20 eXtensible Host Controller - 1.20 (Microsoft)
	[0000000402025000 - 0000000402025FFFF] Intel(R) USB 3.20 eXtensible Host Controller - 1.20 (Microsoft)
	[0000000402026800 - 000000040202680F] Intel(R) SMBus - 7E22
	[0000000402026A00 - 0000000402026AFFF] Intel(R) Management Engine Interface #1
	[0000000402026B00 - 0000000402026BFFF] Intel(R) Serial IO I2C Host Controller - 7E79
	[0000000402026C00 - 0000000402026CFFF] Intel(R) Serial IO I2C Host Controller - 7E78
	[000003FFB0000000 - 000003FFB7FFFFF] Intel(R) AI Boost
	[000003FFBFC00000 - 000003FFBFDFFFFF] Intel® Smart Sound Technology BUS
	[000003FFBFFBA000 - 000003FFBFFBBAFFF] Intel(R) Serial IO UART Host Controller - 7E25



[000003FFBFFBB000 - 000003FFBFFBBFFF] Intel(R) AI Boost



[000003FFBFFBC000 - 000003FFBFFBFFFF] Intel® Smart Sound Technology BUS



[000003FFBFFC0000 - 000003FFBFFFFFFF] Intel(R) Platform Monitoring Technology (PMT) Driver

A.3 Large Memory

- ✓  Large Memory
 -  [0000004000000000 - 000003FFBFFFFFFF] PCI Express Root Complex

A.4 IRQ Mapping Chart

▼ 	Interrupt request (IRQ)	
	(ISA) 0x00000000 (00)	System timer
	(ISA) 0x00000003 (03)	Communications Port (COM2)
	(ISA) 0x00000004 (04)	Communications Port (COM1)
	(ISA) 0x00000005 (05)	Communications Port (COM3)
	(ISA) 0x00000007 (07)	Communications Port (COM4)
	(ISA) 0x0000000E (14)	Intel(R) Serial IO GPIO Host Controller - INTC1083
	(ISA) 0x00000037 (55)	Microsoft ACPI-Compliant System
	(ISA) 0x00000038 (56)	Microsoft ACPI-Compliant System
	(ISA) 0x00000039 (57)	Microsoft ACPI-Compliant System
	(ISA) 0x0000003A (58)	Microsoft ACPI-Compliant System
	(ISA) 0x0000003B (59)	Microsoft ACPI-Compliant System
	(ISA) 0x0000003C (60)	Microsoft ACPI-Compliant System
	(ISA) 0x0000003D (61)	Microsoft ACPI-Compliant System
	(ISA) 0x0000003E (62)	Microsoft ACPI-Compliant System
	(ISA) 0x0000003F (63)	Microsoft ACPI-Compliant System
	(ISA) 0x00000040 (64)	Microsoft ACPI-Compliant System
	(ISA) 0x00000041 (65)	Microsoft ACPI-Compliant System
	(ISA) 0x00000042 (66)	Microsoft ACPI-Compliant System
	(ISA) 0x00000043 (67)	Microsoft ACPI-Compliant System
	(ISA) 0x00000044 (68)	Microsoft ACPI-Compliant System
	(ISA) 0x00000045 (69)	Microsoft ACPI-Compliant System
	(ISA) 0x00000046 (70)	Microsoft ACPI-Compliant System
	(ISA) 0x00000047 (71)	Microsoft ACPI-Compliant System
	(ISA) 0x00000048 (72)	Microsoft ACPI-Compliant System
	(ISA) 0x00000049 (73)	Microsoft ACPI-Compliant System
	(ISA) 0x0000004A (74)	Microsoft ACPI-Compliant System
	(ISA) 0x0000004B (75)	Microsoft ACPI-Compliant System
	(ISA) 0x0000004C (76)	Microsoft ACPI-Compliant System
	(ISA) 0x0000004D (77)	Microsoft ACPI-Compliant System
	(ISA) 0x0000004E (78)	Microsoft ACPI-Compliant System
	(ISA) 0x0000004F (79)	Microsoft ACPI-Compliant System
	(ISA) 0x00000050 (80)	Microsoft ACPI-Compliant System
	(ISA) 0x00000051 (81)	Microsoft ACPI-Compliant System
	(ISA) 0x00000052 (82)	Microsoft ACPI-Compliant System
	(ISA) 0x00000053 (83)	Microsoft ACPI-Compliant System
	(ISA) 0x00000054 (84)	Microsoft ACPI-Compliant System
	(ISA) 0x00000055 (85)	Microsoft ACPI-Compliant System
	(ISA) 0x00000056 (86)	Microsoft ACPI-Compliant System
	(ISA) 0x00000057 (87)	Microsoft ACPI-Compliant System
	(ISA) 0x00000058 (88)	Microsoft ACPI-Compliant System

	(ISA) 0x00000058 (88)	Microsoft ACPI-Compliant System
	(ISA) 0x00000059 (89)	Microsoft ACPI-Compliant System
	(ISA) 0x0000005A (90)	Microsoft ACPI-Compliant System
	(ISA) 0x0000005B (91)	Microsoft ACPI-Compliant System
	(ISA) 0x0000005C (92)	Microsoft ACPI-Compliant System
	(ISA) 0x0000005D (93)	Microsoft ACPI-Compliant System
	(ISA) 0x0000005E (94)	Microsoft ACPI-Compliant System
	(ISA) 0x0000005F (95)	Microsoft ACPI-Compliant System
	(ISA) 0x00000060 (96)	Microsoft ACPI-Compliant System
	(ISA) 0x00000061 (97)	Microsoft ACPI-Compliant System
	(ISA) 0x00000062 (98)	Microsoft ACPI-Compliant System
	(ISA) 0x00000063 (99)	Microsoft ACPI-Compliant System
	(ISA) 0x00000063 (99)	Trusted Platform Module 2.0
	(ISA) 0x00000064 (100)	Microsoft ACPI-Compliant System
	(ISA) 0x00000065 (101)	Microsoft ACPI-Compliant System
	(ISA) 0x00000066 (102)	Microsoft ACPI-Compliant System
	(ISA) 0x00000067 (103)	Microsoft ACPI-Compliant System
	(ISA) 0x00000068 (104)	Microsoft ACPI-Compliant System
	(ISA) 0x00000069 (105)	Microsoft ACPI-Compliant System
	(ISA) 0x0000006A (106)	Microsoft ACPI-Compliant System
	(ISA) 0x0000006B (107)	Microsoft ACPI-Compliant System
	(ISA) 0x0000006C (108)	Microsoft ACPI-Compliant System
	(ISA) 0x0000006D (109)	Microsoft ACPI-Compliant System
	(ISA) 0x0000006E (110)	Microsoft ACPI-Compliant System
	(ISA) 0x0000006F (111)	Microsoft ACPI-Compliant System
	(ISA) 0x00000070 (112)	Microsoft ACPI-Compliant System
	(ISA) 0x00000071 (113)	Microsoft ACPI-Compliant System
	(ISA) 0x00000072 (114)	Microsoft ACPI-Compliant System
	(ISA) 0x00000073 (115)	Microsoft ACPI-Compliant System
	(ISA) 0x00000074 (116)	Microsoft ACPI-Compliant System
	(ISA) 0x00000075 (117)	Microsoft ACPI-Compliant System
	(ISA) 0x00000076 (118)	Microsoft ACPI-Compliant System
	(ISA) 0x00000077 (119)	Microsoft ACPI-Compliant System
	(ISA) 0x00000078 (120)	Microsoft ACPI-Compliant System
	(ISA) 0x00000079 (121)	Microsoft ACPI-Compliant System
	(ISA) 0x0000007A (122)	Microsoft ACPI-Compliant System
	(ISA) 0x0000007B (123)	Microsoft ACPI-Compliant System
	(ISA) 0x0000007C (124)	Microsoft ACPI-Compliant System
	(ISA) 0x0000007D (125)	Microsoft ACPI-Compliant System
	(ISA) 0x0000007E (126)	Microsoft ACPI-Compliant System
	(ISA) 0x0000007F (127)	Microsoft ACPI-Compliant System

	(ISA) 0x000001DE (478)	Microsoft ACPI-Compliant System
	(ISA) 0x000001DF (479)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E0 (480)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E1 (481)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E2 (482)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E3 (483)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E4 (484)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E5 (485)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E6 (486)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E7 (487)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E8 (488)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E9 (489)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EA (490)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EB (491)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EC (492)	Microsoft ACPI-Compliant System
	(ISA) 0x000001ED (493)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EE (494)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EF (495)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F0 (496)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F1 (497)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F2 (498)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F3 (499)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F4 (500)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F5 (501)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F6 (502)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F7 (503)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F8 (504)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F9 (505)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FA (506)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FB (507)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FC (508)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FD (509)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FE (510)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FF (511)	Microsoft ACPI-Compliant System
	(PCI) 0x00000010 (16)	Intel(R) Serial IO UART Host Controller - 7E25
	(PCI) 0x00000020 (32)	Intel(R) Serial IO I2C Host Controller - 7E78
	(PCI) 0x00000021 (33)	Intel(R) Serial IO I2C Host Controller - 7E79
	(PCI) 0xFFFFFDD3 (-45)	Intel® Smart Sound Technology BUS
	(PCI) 0xFFFFFDD4 (-44)	Intel(R) Ethernet Connection (18) I219-LM
	(PCI) 0xFFFFFDD5 (-43)	Intel(R) AI Boost
	(PCI) 0xFFFFFDD6 (-42)	Intel(R) Ethernet Controller I226-LM

	(PCI) 0xFFFFFD8 (-40)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFD9 (-39)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFDA (-38)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFDB (-37)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFDC (-36)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFDD (-35)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFDE (-34)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFDF (-33)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFE0 (-32)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFE1 (-31)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFE2 (-30)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFE3 (-29)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFE4 (-28)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFE5 (-27)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFE6 (-26)	Intel(R) Ethernet Controller I226-LM
	(PCI) 0xFFFFFE7 (-25)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFE8 (-24)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFE9 (-23)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFEA (-22)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFEB (-21)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFEC (-20)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFED (-19)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFEE (-18)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFEF (-17)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFFF0 (-16)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFFF1 (-15)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFFF2 (-14)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFFF3 (-13)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFFF4 (-12)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFFF5 (-11)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFFF6 (-10)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFFF7 (-9)	Intel(R) Ethernet Controller I226-LM #2
	(PCI) 0xFFFFFFF8 (-8)	Intel(R) Management Engine Interface #1
	(PCI) 0xFFFFFFF9 (-7)	Intel(R) USB 3.20 eXtensible Host Controller - 1.20 (Microsoft)
	(PCI) 0xFFFFFFFA (-6)	Intel(R) USB 3.20 eXtensible Host Controller - 1.20 (Microsoft)
	(PCI) 0xFFFFFFFB (-5)	Intel(R) Graphics
	(PCI) 0xFFFFFFFC (-4)	Standard SATA AHCI Controller
	(PCI) 0xFFFFFFFD (-3)	PCI Express Root Port
	(PCI) 0xFFFFFFFE (-2)	PCI Express Root Port

Appendix B

Mating Connectors and Cables

B.1 Mating Connectors and Cables

Label	Function	Mating Connector		Mating Cable P/N
		Vendor	Model No.	
CN1	Audio with detect	Aces	50247-012H0H0-001	170X000156
CN5	Power	N/A	N/A	1702030200
CN7	Front Panel	JST	SHR-10V-S-B	170X001079
CN9	External +5VSB Power Input & PS_ON#	JST	XHP-3	170220020B
CN12	USB 2.0 Port6	Molex	51021-0500	170X001118
CN13	USB 2.0 Port6	Molex	51021-0500	170X001118
CN14	USB 2.0 Port6	Molex	51021-0500	170X001118
CN15	USB 2.0 Port6	Molex	51021-0500	170X001118
CN16	COM Port1	Molex	51021-0900	1701090201
CN17	COM Port4	Molex	51021-0900	1701090201
CN23	GPIO	MOLEX	51110-1050	N/A
CN25	LAN2 LED	JST	SHR-04V-S-B	170X000634
CN26	LVDS Inverter	ACES	50236-006H0H0-001	170X000152
CN27	LAN1 LED	JST	SHR-04V-S-B	170X000634
CN30	LAN3 LED	JST	SHR-04V-S-B	170X000634
CN36	External RTC	Molex	51021-0200	175011301K
CN37	I2C/SMBUS	JST	SHR-05V-S-B	170X000743
CN38	Port 80 Debug Port	JST	SHR-10V-S-B	1703100133
CN39	Board to Board	Hirose	DF40C-80DP-0.4V(51)	N/A