0363

FCC CLASS A COMPLIANCE REPORT

for

Electromagnetic Emissions

of

Industrial Display Monitor

Trade Name	**:** AAEON
Model Number	**:** AMB-270; OPD-217
Serial Number	**:** N/A
Report Number	**:** 020039-F
Date	**:** January 16, 2002

Prepared for **:**

AAEON TECHNOLOGY INC.
5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C.

Prepared by **:**

C&C LABORATORY, CO., LTD.
#B1, 1st Fl., Universal Center,
No. 183, Sec. 1, Tatung Rd., Hsi Chih,
Taipei Hsien, Taiwan, R.O.C.
TEL: (02)8642-2071~3
FAX: (02)8642-2256

ACCREDITED

TABLE OF CONTENTS

0363

VERIFICATION OF COMPLIANCE

Equipment Under Test:	Industrial Display Monitor
Trade Name:	AAEON
Model Number:	AMB-270; OPD-217
Serial Number:	N/A
Applicant:	**AAEON TECHNOLOGY INC.** 5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R.O.C.
Manufacturer:	**AAEON TECHNOLOGY INC.** 5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R.O.C.
Type of Test:	FCC Class A
Measurement Procedure:	ANSI C63.4: 1992
File Number:	020039-F
Date of test:	January 11 ~ 14, 2002
Deviation:	According to applicant's declaration this EUT is a class A product, and to be market in industrial environment only.
Condition of Test Sample:	Normal

The above equipment was tested by C&C Laboratory, Co., Ltd. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, Subpart B and the measurement procedure according to ANSI C63.4, 1992. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Responsible Party

Kurt Chen

Authorized Signatory

Officer of the Responsible Party

SYSTEM DESCRIPTION

EUT Test Program:

1. EMI test program was loaded and executed in Windows mode.
2. Data was sent to EUT filling the screen with upper case of "H" patterns.
3. Test program sequentially exercised printer and modem, then sent "H" patterns to them individually.
4. Repeat 2 to 3. Test program is self-repeating throughout the test.

PRODUCT INFORMATION

Housing Type:	Metal Case		
EUT Power Rating:	DCV from to Power Adapter		
AC Power during test:	120VAC, 60Hz to Power Adapter		
Power Adapter Manufacturer:	EDAC	**Model:**	EA1050A
Power Adapter Power Rating:	I/P: 100-240VAC, 50/60Hz, 1.8A O/P: 12VDC, 5A		
AC Power Cord Type:	Unshielded, 1.8m (Detachable) to Power Adapter		
DC Power Cord Type:	Unshielded, 1.2m (Non-detachable) at Power Adapter with a core		
17" LCD Panel Manufacturer:	CHI MEI	**Model:**	M170E1
A/D Board Manufacturer:	AAEON	**Model:**	MTC-V03
LVDS Board Manufacturer:	AAEON	**Model:**	MTC-LVDS83A
VGA Cable Type:	Shielded, 1.8m (Detachable) with two cores		
RS232 Cable Type:	Shielded, 1.8m (Detachable)		

I/O Port of EUT:

I/O PORT TYPES	Q'TY	TESTED WITH
1). Video Port	1	1
2). RS232 Port	1	1
3). S-Video Port	1	1
4). AV Terminal Port	1	1

Note:1. The difference between two models number as below: AMB-270 with faceplate and OPD-217 without faceplate (Please refer to External Photographs).

2. Client consigns only one model sample to test (Model Number: AMB-270), Therefore, the testing Lab. just guarantees the units, which have been tested.

SUPPORT EQUIPMENT

No.	Equipment	Model #	Serial #	FCC ID	Trade Name	Data Cable	Power Cord
1.	PC	GA-8IDXH	N/A	N/A	GIGABYTE	N/A	Unshielded, 1.8m
2.	Modem	231AA	A08631083930	BFJ9D93108US	Hayes	Shielded, 1.8m	Unshielded, 1.8m
3.	Printer	2225C	2909S40149	DSI6XU2225	HP	Shielded, 1.8m	Unshielded, 1.8m
4.	PS/2 Keyboard	SK-2800C	B1C790BCPJCN6L	GYUR79SK	Compaq	Shielded, 1.8m	N/A
5.	PS/2 Mouse	M-CAA43	LZA11750827	FCC DoC	Logitech	Shielded, 1.8m	N/A
6.	VCR	HR-S3600U	N/A	N/A	JVC	S-Video Cable: Shielded, 1.8m AV TerminalCable: Shielded, 1.8m	Unshielded, 1.8m

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

Grounding: Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.

MEASUREMENT PROCEDURE
(PRELIMINARY LINE CONDUCTED EMISSION TEST)

1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

2) Support equipment, if needed, was placed as per ANSI C63.4.

3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

4) The EUT received AC power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

5) All support equipment received power from a second LISN supplying power of 110VAC/60Hz, if any.

6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.

7) Analyzer / Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.

8) During the above scans, the emissions were maximized by cable manipulation.

9) The following test mode(s) were scanned during the preliminary test:

Mode(s):

1. **1024 x 768 Resolution**
2. **800 x 600 Resolution**
3. **640 x 480 Resolution**

10) After the preliminary scan, we found the following test mode producing the highest emission level.

Mode: 1.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

MEASUREMENT PROCEDURE
(FINAL LINE CONDUCTED EMISSION TEST)

1) EUT and support equipment was set up on the test bench as per step 10 of the preliminary test.

2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Q.P. mode, then the emission signal was re-checked using an Average detector.

3) The test data of the worst case condition(s) was reported on the Summary Data page.

Data Sample:

Freq. MHz	Q.P. Raw dBuV	Average Raw dBuV	Q.P. Limit dBuV	Average Limit dBuV	Q.P. Margin dB	Average Margin dB	Note
x.xx	43.95	---	73	60	-29.09	---	L 1

Freq. = Emission frequency in MHz
Raw dBuV = Uncorrected Analyzer/Receiver reading
Limit dBuV = Limit stated in standard
Margin dB = Reading in reference to limit
Note = Current carrying line of reading
"---" = The emission level complied with the Average limits, with at least 2 dB margin, so no further recheck.

LINE CONDUCTED EMISSION LIMIT

Frequency	Maximum RF Line Voltage	
	Q.P.	AVERAGE
150kHz-500kHz	79dBuV	66dBuV
500kHz-5MHz	73dBuV	60dBuV
5MHz-30MHz	73dBuV	60dBuV

Note: The lower limit shall apply at the transition frequency.

MEASUREMENT PROCEDURE
(PRELIMINARY RADIATED EMISSION TEST)

1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2) Support equipment, if needed, was placed as per ANSI C63.4.
3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4) The EUT received AC power source from the outlet socket under the turntable. All support equipment received 110VAC/60Hz power from another socket under the turntable, if any.
5) The antenna was placed at 10 meter away from the EUT as stated in ANSI C63.4: 1992. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
6) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
7) The following test mode(s) were scanned during the preliminary test:

Mode(s):

1. 1024 x 768 Resolution
2. 800 x 600 Resolution
3. 640 x 480 Resolution

8) After the preliminary scan, we found the following test mode producing the highest emission level.

Mode: 1.

Then, the EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for reference of final testing.

MEASUREMENT PROCEDURE
(FINAL RADIATED EMISSION TEST)

1) EUT and support equipment were set up on the turntable as per step 8 of the preliminary test.

2) The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

3) Recorded at least the six highest emissions. Emission frequency, amplitude, were recorded into a computer (The antenna position, polarization and turntable position were kept in raw data file) in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

4) The test data of the worst case condition(s) was reported on the Summary Data page.

Data Sample:

Freq. (MHz)	Raw Data (dBuV/m)	Corr. Factor (dB)	Emiss. Level (dBuV/m)	Limits	Margin (dB)
xx.xx	14.0	11.2	26.2	40	-13.8

Freq. = Emission frequency in MHz
Raw Data (dBuV/m) = Uncorrected Analyzer / Receiver reading
Corr. Factor (dB) = Correction factors of antenna factor and cable loss
Emiss. Level = Raw reading converted to dBuV/m and CF added
Limit dBuV/m = Limit stated in standard
Margin dB = Reading in reference to limit

RADIATED EMISSION LIMIT

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBu V/m/ Q.P.)
30-230	10	40
230-1000	10	47

Note: The lower limit shall apply at the transition frequency.

SUMMARY DATA

(LINE CONDUCTED TEST)

Model Number: AMB-270 **Location:** Site # 3

Tested by: Tommy Lin

Test Mode: Mode 1

Detector Function: Quasi-Peak **Test Results:** Passed

Temperature: 23℃ **Humidity:** 65%RH

(The chart below shows the highest readings taken from the final data)

FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.195	48.60	---	79.00	66.00	-30.40	---	L1
2.332	47.50	---	73.00	60.00	-25.50	---	L1
2.388	45.00	---	73.00	60.00	-28.00	---	L1
4.008	34.10	---	73.00	60.00	-38.90	---	L1
9.046	34.90	---	73.00	60.00	-38.10	---	L1
12.223	32.20	---	73.00	60.00	-40.80	---	L1
0.196	45.00	---	79.00	66.00	-34.00	---	L2
2.193	46.20	---	73.00	60.00	-26.80	---	L2
2.378	43.60	---	73.00	60.00	-29.40	---	L2
3.926	34.80	---	73.00	60.00	-38.20	---	L2
8.692	32.20	---	73.00	60.00	-40.80	---	L2
14.289	31.90	---	73.00	60.00	-41.10	---	L2

L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

****NOTE: "---" denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.**

SUMMARY DATA

(RADIATED EMISSION TEST)

Model Number: AMB-270 **Location:** Site # 1

Tested by: Tommy Lin **Polar:** Vertical--10m

Test Mode: Mode 1 **Test Results:** Passed

Detector Function: Quasi-Peak

Temperature: 19℃ **Humidity:** 67%RH

(The chart below shows the highest readings taken from the final data)

Freq. (MHz)	Raw Data (dBuV/m)	Corr. Factor (dB)	Emiss. Level (dBuV/m)	Limits	Margin (dB)
144.37	16.5	11.7	28.2	40.0	-11.8
172.04	16.1	11.2	27.3	40.0	-12.7
184.26	14.7	11.0	25.7	40.0	-14.3
192.51	22.1	10.9	33.0	40.0	-7.0
336.88	24.4	17.0	41.4	47.0	-5.6
673.77	16.3	23.9	40.2	47.0	-6.8

SUMMARY DATA

(RADIATED EMISSION TEST)

Model Number: AMB-270 **Location:** Site # 1

Tested by: Tommy Lin **Polar:** Horizontal--10m

Test Mode: Mode 1 **Test Results:** Passed

Detector Function: Quasi-Peak

Temperature: 19℃ **Humidity:** 67%RH

(The chart below shows the highest readings taken from the final data)

Freq. (MHz)	Raw Data (dBuV/m)	Corr. Factor (dB)	Emiss. Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)
184.26	13.8	11.0	24.8	40.0	-15.2
192.52	18.6	10.9	29.5	40.0	-10.5
216.58	15.9	11.4	27.3	40.0	-12.7
344.63	11.6	17.2	28.8	47.0	-18.2
577.52	13.2	23.0	36.2	47.0	-10.8
673.80	14.8	23.9	38.7	47.0	-8.3

APPENDIX 1

TEST FACILITY

TEST FACILITY

Location: No. 81-1, 210 Lane, Pa-de 2nd Road, Lu-Chu Hsiang, Taoyuan, Taiwan, R.O.C.

Description: There are four 3/10m open area test sites and three line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 1992 and CISPR 22/EN 55022 requirements.

Site Filing: A site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

Registration also was made with Voluntary Control Council for Interference (VCCI).

Site Accreditation: Accredited by NEMKO (Authorization #: ELA 124) for EMC & A2LA (Certificate #: 824.01) for Emission

Also accredited by BSMI for the product category of Information Technology Equipment.

Instrument Tolerance: All measuring equipment is in accord with ANSI C63.4 and CISPR 22 requirements that meet industry regulatory agency and accreditation agency requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. It has no holes or gaps having longitudinal dimensions larger than one-tenth of a wavelength at the highest frequency of measurement up to 1GHz.

Site # 3 & # 4 Line Conducted Test Site: At Shielding Room

THE AMERICAN
ASSOCIATION
FOR LABORATORY
ACCREDITATION

ACCREDITED LABORATORY

A2LA has accredited

C & C LABORATORY CO., LTD
Taipei, Taiwan, R.O.C

for technical competence in the field of

Electrical (EMC) Testing

The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC Guide 25-1990 "General Requirements for the Competence of Calibration and Testing Laboratories" (equivalent to relevant requirements of the ISO 9000 series of standards) and any additional program requirements in the identified field of testing.

Presented this 26th day of April, 2000.

President
For the Accreditation Council
Certificate Number 824.01
Valid to January 31, 2002

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation.

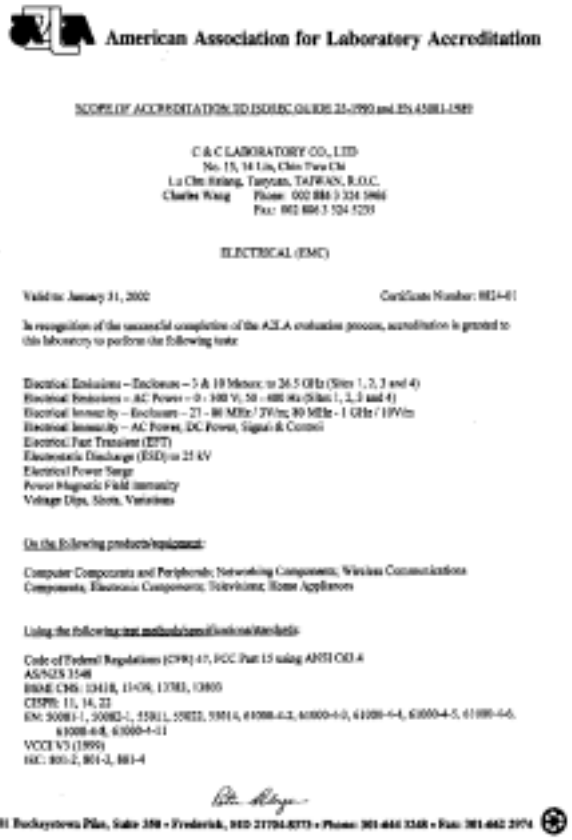

American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC GUIDE 25-1990 and EN 45001-1989

C & C LABORATORY CO., LTD.
No. 15, 14 Lin, Chin Twu Chi
Lu Chu Hsiang, Taoyuan, TAIWAN, R.O.C.
Charles Wang Phone: 002 886 3 324 0966
Fax: 002 886 3 324 5255

ELECTRICAL (EMC)

Valid to: January 31, 2002 Certificate Number: 0824-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following tests:

Electrical Emissions – Enclosure – 5 & 10 Meters: to 26.5 GHz (Sites 1, 2, 3 and 4)
Electrical Emissions – AC Power – 0 - 100 V; 50 - 400 Hz (Sites 1, 2, 3 and 4)
Electrical Immunity – Enclosure – 27 - 80 MHz / 3V/m; 80 MHz - 1 GHz / 10V/m
Electrical Immunity – AC Power, DC Power, Signal & Control
Electrical Fast Transient (EFT)
Electrostatic Discharge (ESD) to 25 kV
Electrical Power Surge
Power Magnetic Field Immunity
Voltage Dips, Short, Variations

On the following products/equipment:

Computer Components and Peripherals; Networking Components; Wireless Communications Components; Electronics Components; Televisions; Home Appliances

Using the following test methods/specifications/standards:

Code of Federal Regulations (CFR) 47, FCC Part 15 using ANSI C63.4
AS/NZS 3548
BSMI CNS: 13438, 13439, 13783, 13803
CISPR: 11, 14, 22
EN: 50081-1, 50082-1, 55011, 55022, 55014, 61000-4-2, 61000-4-3, 61000-4-4, 61000-4-5, 61000-4-6, 61000-4-8, 61000-4-11
VCCI V3 (1999)
IEC: 801-2, 801-3, 801-4

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8373 • Phone: 301 644 3448 • Fax: 301 662 2974

FEDERAL COMMUNICATIONS COMMISSION
Equipment Authorization Division
7435 Oakland Mills Road
Columbia, MD 21046

February 11, 1999

Registration Number: 90185

C & C Laboratory Co., Ltd.
1st Fl., No. 144, Ho Ching Street
Taipei
Taiwan, R.O.C.

Attention: Charles Wang

Re: Measurement facility located at Taoyuan, Site No. 4
1 & 10 meters
Date of Listing: February 10, 1999

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in connection with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that this filing must be updated for any changes made to the facility, and at least every three years from the date of listing the data on file must be certified as current.

If requested, the above mentioned facility has been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list of such public test facilities is available on the Internet on the FCC Website at WWW.FCC.GOV, Electronic Filing, OET Equipment Authorization Electronic Filing.

Sincerely,

Thomas W Phillips
Electronics Engineer

FEDERAL COMMUNICATIONS COMMISSION
Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

February 27, 2001

Registration Number: 90671

C & C Laboratory Co., Ltd.
5Fl., 10 Fl., No. 140, Sec. 1
Tatung Rd., Hsi Chih
Taipei
Taiwan, R.O.C.

Attention: Kuei Chen

Re: Measurement facility located in Taoyuan
Sites No. 1 & 3 (3 & 10 meters)
Date of Listing: February 27, 2001

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in connection with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that this filing must be updated for any changes made to the facility, and at least every three years from the date of listing the data on file must be certified as current.

If requested, the above mentioned facility has been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list of such public test facilities is available on the Internet on the FCC Website at WWW.FCC.GOV, Electronic Filing, OET Equipment Authorization Electronic Filing.

Sincerely,

Thomas W Phillips
Electronics Engineer

COMMERCE
MINISTRY OF COMMERCE

ENG 3/9
AJD

22 January 1998

C & C Laboratory Co Ltd
1st Fl
No. 344
Fu Ching Street
Taipei
TAIWAN ROC

Attention: Mr Tony Houng

Dear Sir

LABORATORY APPROVAL

Thank you for your submission of 21 January regarding the approval of your testing laboratory to the Ministry of Commerce's laboratory approval criteria. Thank you for your interest in this matter.

I am pleased to advise that your submission has been successful and your laboratory has been added to the list of Ministry-approved laboratories. Your approved status is valid until 31 December 1998. At this time, the Approved Laboratory scheme will cease operation with the implementation of the new radiocommunications regulations. Test reports from your laboratory will be accepted under the new framework. Please find enclosed a copy of the Ministry's discussion paper, DP10, outlining the proposed compliance process from 1 January 1999.

If you have any further questions on this matter please do not hesitate to contact me.

Yours faithfully

Andrew Dyke
Senior Technical Officer(Regulatory)

[illegible]

COMMERCE
MINISTRY OF COMMERCE

ENG 3/9
AJD

22 January 1998

C & C Laboratory Co Ltd
1st Fl
No. 344
Fu Ching Street
Taipei
TAIWAN ROC

Attention: Mr Tony Houng

Dear Sir

LABORATORY APPROVAL

Thank you for your submission of 21 January regarding the approval of your testing laboratory to the Ministry of Commerce's laboratory approval criteria. Thank you for your interest in this matter.

I am pleased to advise that your submission has been successful and your laboratory has been added to the list of Ministry-approved laboratories. Your approved status is valid until 31 December 1998. At this time, the Approved Laboratory scheme will cease operation with the implementation of the new radiocommunications regulations. Test reports from your laboratory will be accepted under the new framework. Please find enclosed a copy of the Ministry's discussion paper, DP10, outlining the proposed compliance process from 1 January 1999.

If you have any further questions on this matter please do not hesitate to contact me.

Yours faithfully

Andrew Dyke
Senior Technical Officer(Regulatory)

TÜV Rheinland

Technischer Überwachungs-Verein Rheinland

Certificate

of

Appointment

No. I 9964142-9986

The applicant:

C & C Laboratory Co., Ltd.

No. 15, 14 Lin, Chin-ren Chi, Lu Chu Hsiang, Taoyuan, Taiwan, R.O.C.

has been authorized to carry out EMC tests by order and under supervision of TÜV Rheinland according to

[illegible]

An inspection of the facility was conducted according to the Document "Approval of Test Site" with reference to EN 45 001 by a TÜV Rheinland inspector.

Audit Report No. F 9964142E01, Rev.-

This certificate is valid until the next scheduled inspection or up to 15 month, at the discretion of TÜV Rheinland.

TÜV Rheinland Taiwan Ltd.
Taipei, 24, June 1999

Dipl.-Ing. A. Kleiner

Dipl.-Ing. R. Charton
Auditor

中華民國經濟部標準檢驗局
BUREAU OF STANDARDS, METROLOGY AND INSPECTION
MINISTRY OF ECONOMIC AFFAIRS, REPUBLIC OF CHINA

To: C&C Laboratory Co., Ltd.

IN REPLY REFER TO
90-3-3000015

#B1, 1st Fl., Universal Center, No. 183, Sec. 1,Tatung Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

This Designation Document confirms that your subject measurement facility has been validated according to the **ISO/IEC Guide 25-1990** and found to be in compliance with the requirements of " BSMI's Operation Guidelines of the Approval and Management of Designated Laboratories."

The description of your facility has, therefore, been placed on file and the name of your organization added to the Bureau's list of facilities where measurement data and test reports will be accepted as a basis for assuring conformity to CNS13803-1997, CNS13438-1997, CNS13783-1-1998, CNS13439-1997, CNS14115-1998 for Industrial, Scientific and Medical Instrument, Information Technology Equipment, household appliances/tools, broadcast receivers and related equipments and fluorescent lights/luminaries.

It is located at: **http://www.bsmi.gov.tw**

Please reference the file numbers below in the body of all test reports containing measurements made on the corresponding facility.

For your **EMI Testing Lab**, our reference "**SL2-IS-E-0014, SL2-IN-E-0014, SL2-A1-E-0014, SL2-R1-E-0014, SL2-R2-E-0014, SL2-L1-E-0014**"

Note that this filing must be updated for any changes made to the documentation and / or facility and whenever major modifications to your documentation or major construction or repairs to your facility are completed, re-submission of the related information or the site attenuation characteristics will be required within 2 weeks.

The Designation is valid through January 16, 2004.

Taipei, January 5, 2000
For BSMI, MOEA

Neng-Jong Lin

Nemko — World-wide Testing and Certification

ELA 4RTTE

EMC Laboratory Authorisation

Aut. No. : ELA 192

Testing of
Radio & Telecommunications Terminal Equipment

EMC Laboratory: **C & C Laboratory Co., Ltd.**
No. 15, 14 Lin, Chin Two Chi, Lu Chu Hsiang,
Taoyuan 338, Taiwan R.O.C.

Scope of Authorisation: **All CENELEC and ETSI standards [ENs and ETSs that are listed on the accompanying page, and, all of the corresponding CISPR, IEC, and ISO EMC standards]. This authorisation covers all of the EMC-related testing and documentation within the scope of the *Radio and Telecommunications Terminal Equipment (R&TTE) Directive (i.e. 1999/5/EC)*.**

NOTE: This authorisation also covers EMC-related testing and documentation that is within the scope of Article 10.5 of the EMC *Directive (i.e. 89/336/EEC as amended by 92/31/EEC)*.

This Authorisation Document confirms that the above mentioned EMC Laboratory has been validated against EN 45001 and found to be compliant. The laboratory also fulfils the conditions described in Nemko Document ELA 10. During Nemko's visit to the laboratory, an assessment was made of the relevant parts of your organisation - i.e. facilities, personnel qualifications, test equipment, and testing practices. It was found that the EMC Laboratory is capable of performing tests within the Scope of Authorisation given on the accompanying page. Accordingly, Nemko will accept your test reports as a basis for attesting conformity to those EMC Standards for the products in question under the European Union's Directives specified above.

For Type Examination Certificate(s) to be issued by Nemko, your EMC Laboratory's test report(s) will be accepted by Nemko if they are enclosed with the Application Form submitted by the manufacturer.

In order to maintain the Authorisation, the information given in the enclosed ELA-INFOs (if any) must be carefully followed. Nemko is to be promptly notified about any changes in the situation at your EMC Laboratory which may affect the basis for this Authorisation. The Authorisation may at any time be withdrawn if the conditions are no longer considered to be fulfilled.

The Authorisation is valid through **31. December 2003.**

Oslo 26 April 2001

For Nemko AS:

Kjell Bergh, Nemko Group EMC Co-ordinator

Nemko — World-wide Testing and Certification

ELA 4RTTE

EMC Laboratory Authorisation

Aut. No. : ELA 192

(Page 2 of 2)

SCOPE OF AUTHORISATION

Generic and product-family standards, R&TTE

[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]
[illegible]		

Basic standards

[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]
[illegible]		

Oslo 26 April 2001 — Kjell Bergh, Nemko Group EMC Co-ordinator

Nemko — World-wide Testing and Certification

ELA 4

EMC Laboratory Authorisation

Aut. No. : ELA 124

EMC Laboratory: **C & C Laboratory Co., Ltd.**
No. 15, 14 Lin, Chin Two Chi, Lu Chu Hsiang,
Taoyuan 338, Taiwan R.O.C.

Scope of Authorisation: **All CENELEC standards [ENs] for EMC that are listed on the accompanying page, and, all of the corresponding CISPR, IEC, and ISO EMC standards that are listed on the accompanying page.**

This Authorisation Document confirms that the above-mentioned EMC Laboratory has been validated against EN 45001 and found to be compliant. The laboratory also fulfils the conditions described in Nemko Document ELA 10. During Nemko's visit to the laboratory an assessment was made of the relevant parts of your organisation - i.e. facilities, personnel qualifications, test equipment, and testing practices. It was found that the EMC Laboratory is capable of performing tests within the Scope of Authorisation given on the accompanying page. Accordingly, Nemko will accept your test reports as a basis for attesting conformity to those EMC Standards for the products in question under the European Union EMC Directive [89/336/EEC as amended by 92/31/EEC and 93/68/EEC].

In case of applications for Product Certification(s) to be issued by Nemko, your EMC Laboratory's test report(s) will be accepted by Nemko if they are enclosed with the Application Form submitted by the manufacturer.

In order to maintain this Authorization, the information given in the enclosed ELA-INFOs (if any) must be carefully followed. Nemko is to be promptly notified about any changes in the situation at your EMC Laboratory, which may affect the basis for this Authorization. The Authorization may at any time be withdrawn if the conditions are no longer considered to be fulfilled.

The Authorisation is valid through **31 December 2003.**

Oslo 26 April 2001

For Nemko AS:

Kjell Bergh, Nemko Group EMC Co-ordinator

Nemko — World-wide Testing and Certification

ELA 4

EMC Laboratory Authorisation

Aut. No. : ELA 160

EMC Laboratory: **C & C Laboratory Co., Ltd.**
No. 15, 14 Lin, Chin Two Chi, Lu Chu Hsiang,
Taoyuan 338, Taiwan R.O.C.

Scope of Authorisation: **EN 60601-1-2 and IEC 60601-1-2, the Collateral Standards for electromedical products, with particular application to EMC requirements only.**

This Authorisation Document confirms that the above mentioned EMC Laboratory has been validated against EN 45001 and found to be compliant. The laboratory also fulfils the conditions described in Nemko Document ELA 10. During Nemko's visit to the laboratory an assessment was made of the relevant parts of your organisation - i.e. facilities, personnel qualifications, test equipment, and testing practices. It was found that the EMC Laboratory is capable of performing tests within the Scope of Authorisation listed above. Accordingly, Nemko will accept your test reports as a basis for attesting conformity to those EMC Standards for the products in question under either the European Union Medical Device Directive [MDD], 93/42/EEC, or the European Union Active Implantable Medical Device Directive [AIMD], 90/385/EEC, (as applicable).

In case of applications for Product Certification(s) to be issued by Nemko, your EMC Laboratory's test report(s) will be accepted by Nemko if they are enclosed with the Application Form submitted by the manufacturer.

In order to maintain the Authorisation, the information given in the enclosed ELA-INFOs (if any) must be carefully followed. Nemko is to be promptly notified about any changes in the situation at your EMC Laboratory which may affect the basis for this Authorisation. The Authorisation may at any time be withdrawn if the conditions are no longer considered to be fulfilled.

The Authorisation is valid through **31. December 2003**

Oslo 26 April 2001

For Nemko AS:

Kjell Bergh, Nemko Group EMC Co-ordinator

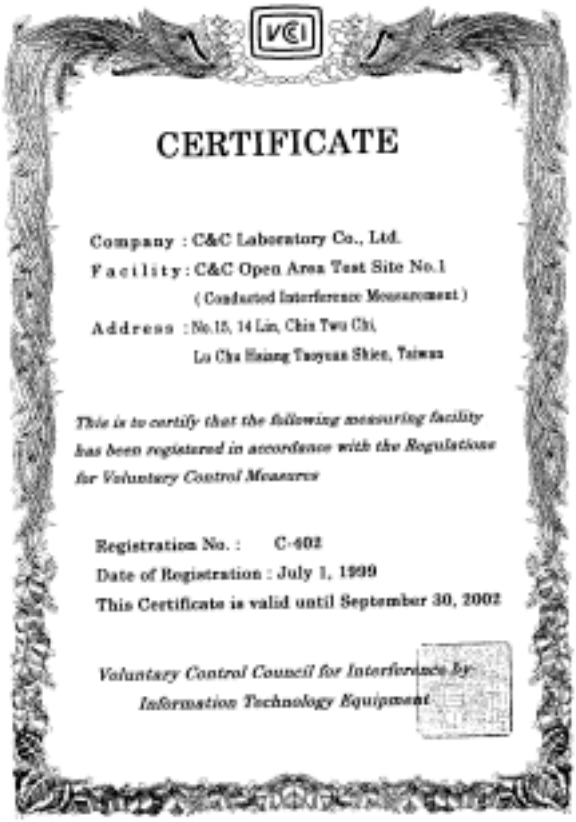

CERTIFICATE

Company : C&C Laboratory Co., Ltd.
Facility : C&C Open Area Test Site No.1
(Conducted Interference Measurement)
Address : No.15, 14 Lin, Chin Twu Chi,
Lu Chu Hsiang Taoyuan Shien, Taiwan

This is to certify that the following measuring facility has been registered in accordance with the Regulations for Voluntary Control Measures

Registration No. : C-402
Date of Registration : July 1, 1999
This Certificate is valid until September 30, 2002

Voluntary Control Council for Interference by Information Technology Equipment

CERTIFICATE

Company : C&C Laboratory Co., Ltd.
Facility : C&C Open Area Test Site No.1
(Radiation 3 and 10 meter site)
Address : No.15, 14 Lin, Chin Twu Chi,
Lu Chu Hsiang Taoyuan Shien, Taiwan

This is to certify that the following measuring facility has been registered in accordance with the Regulations for Voluntary Control Measures

Registration No. : R-393
Date of Registration : July 1, 1999
This Certificate is valid until September 30, 2002

Voluntary Control Council for Interference by Information Technology Equipment

CERTIFICATE

Company : C&C Laboratory Co., Ltd.
Facility : C&C Open Area Test Site No.2
(Radiation 3 and 10 meter site)
Location of Facility : No.15, 14 Lin, Chin Twu Chi, Lu Chu Hsiang Taoyuan Shien

This is to certify that the following measuring facility has been registered in accordance with the Regulations for Voluntary Control Measures

Registration No. : R-1066
Date of Registration : March 6, 2000
This Certificate is valid until March 31, 2003

Voluntary Control Council for Interference by Information Technology Equipment

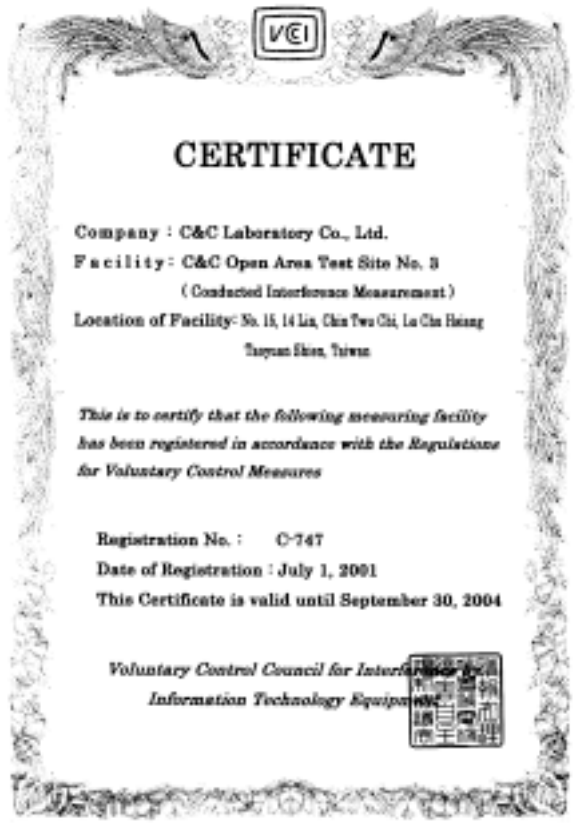

CERTIFICATE

Company : C&C Laboratory Co., Ltd.
Facility : C&C Open Area Test Site No. 3
(Conducted Interference Measurement)
Location of Facility : No. 15, 14 Lin, Chin Twu Chi, Lu Chu Hsiang Taoyuan Shien, Taiwan

This is to certify that the following measuring facility has been registered in accordance with the Regulations for Voluntary Control Measures

Registration No. : C-747
Date of Registration : July 1, 2001
This Certificate is valid until September 30, 2004

Voluntary Control Council for Interference by Information Technology Equipment

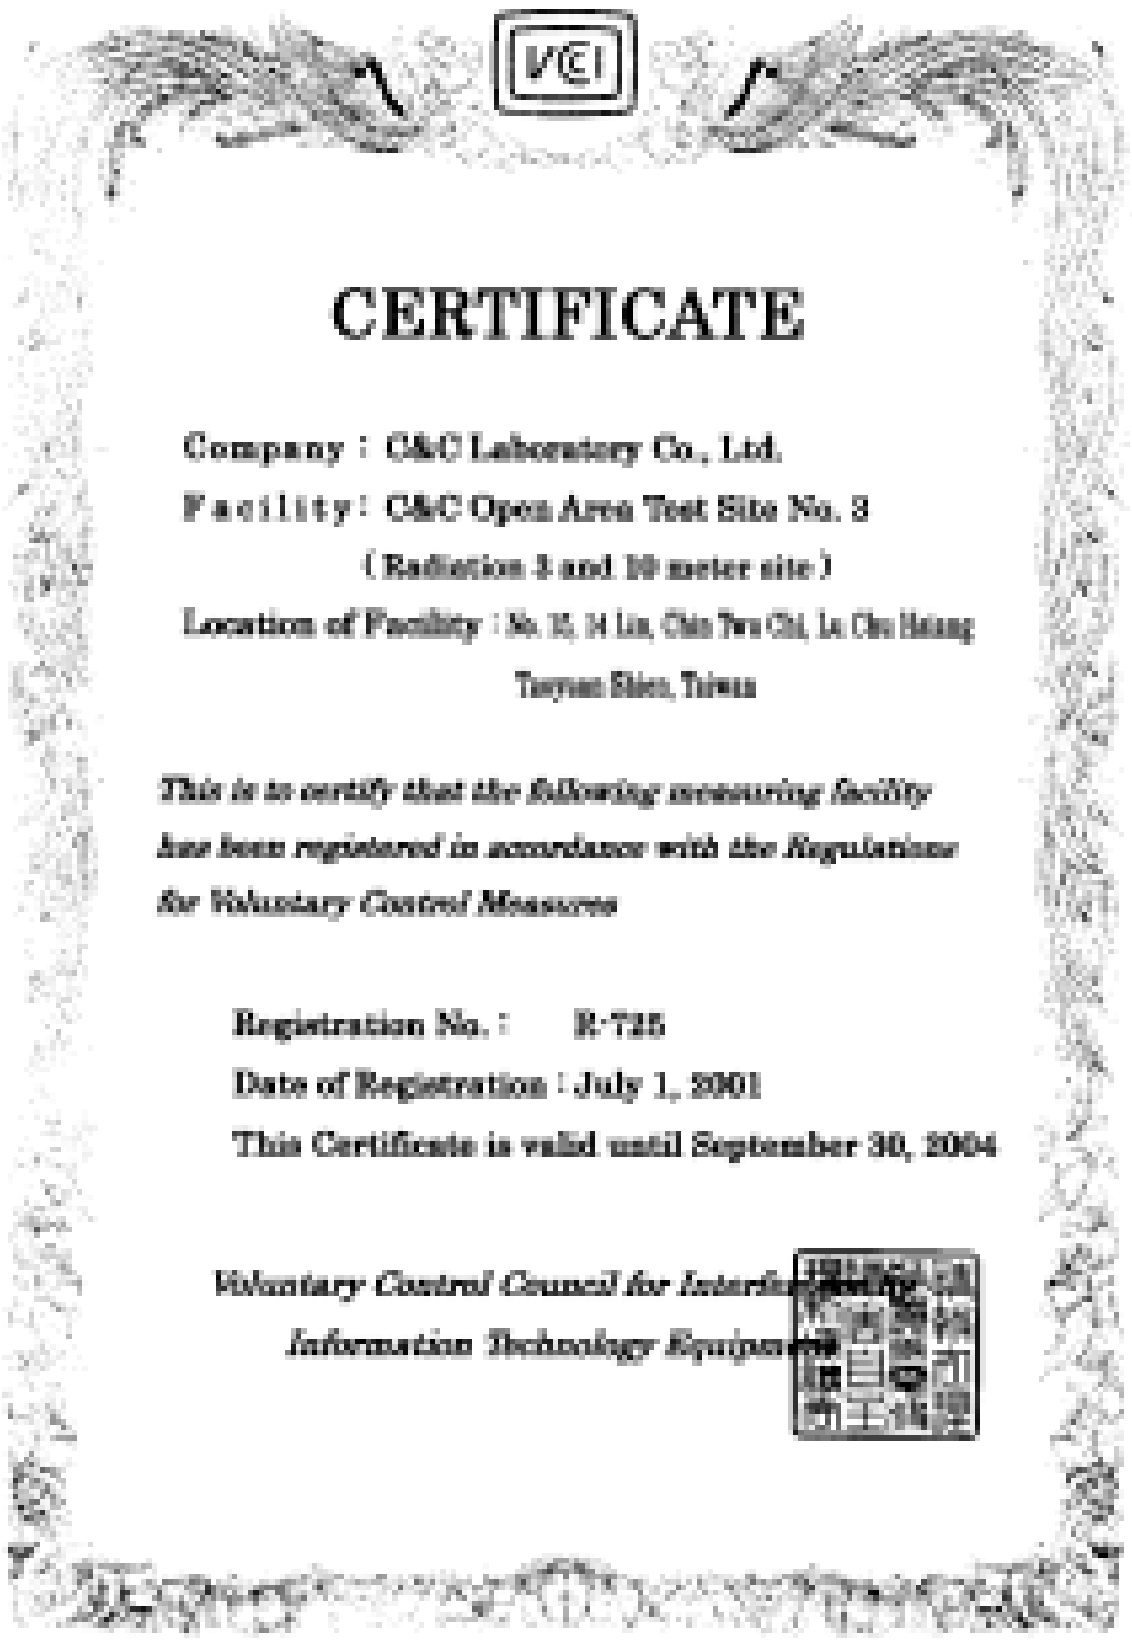

CERTIFICATE

Company : C&C Laboratory Co., Ltd.
Facility : C&C Open Area Test Site No. 3
(Radiation 3 and 10 meter site)
Location of Facility : No. 10, 14 Lin, Chin Pwu Chi, Lu Chu Hsiang Taoyuan Shien, Taiwan

This is to certify that the following measuring facility has been registered in accordance with the Regulations for Voluntary Control Measures

Registration No. : R-725
Date of Registration : July 1, 2001
This Certificate is valid until September 30, 2004

Voluntary Control Council for Interference by Information Technology Equipment

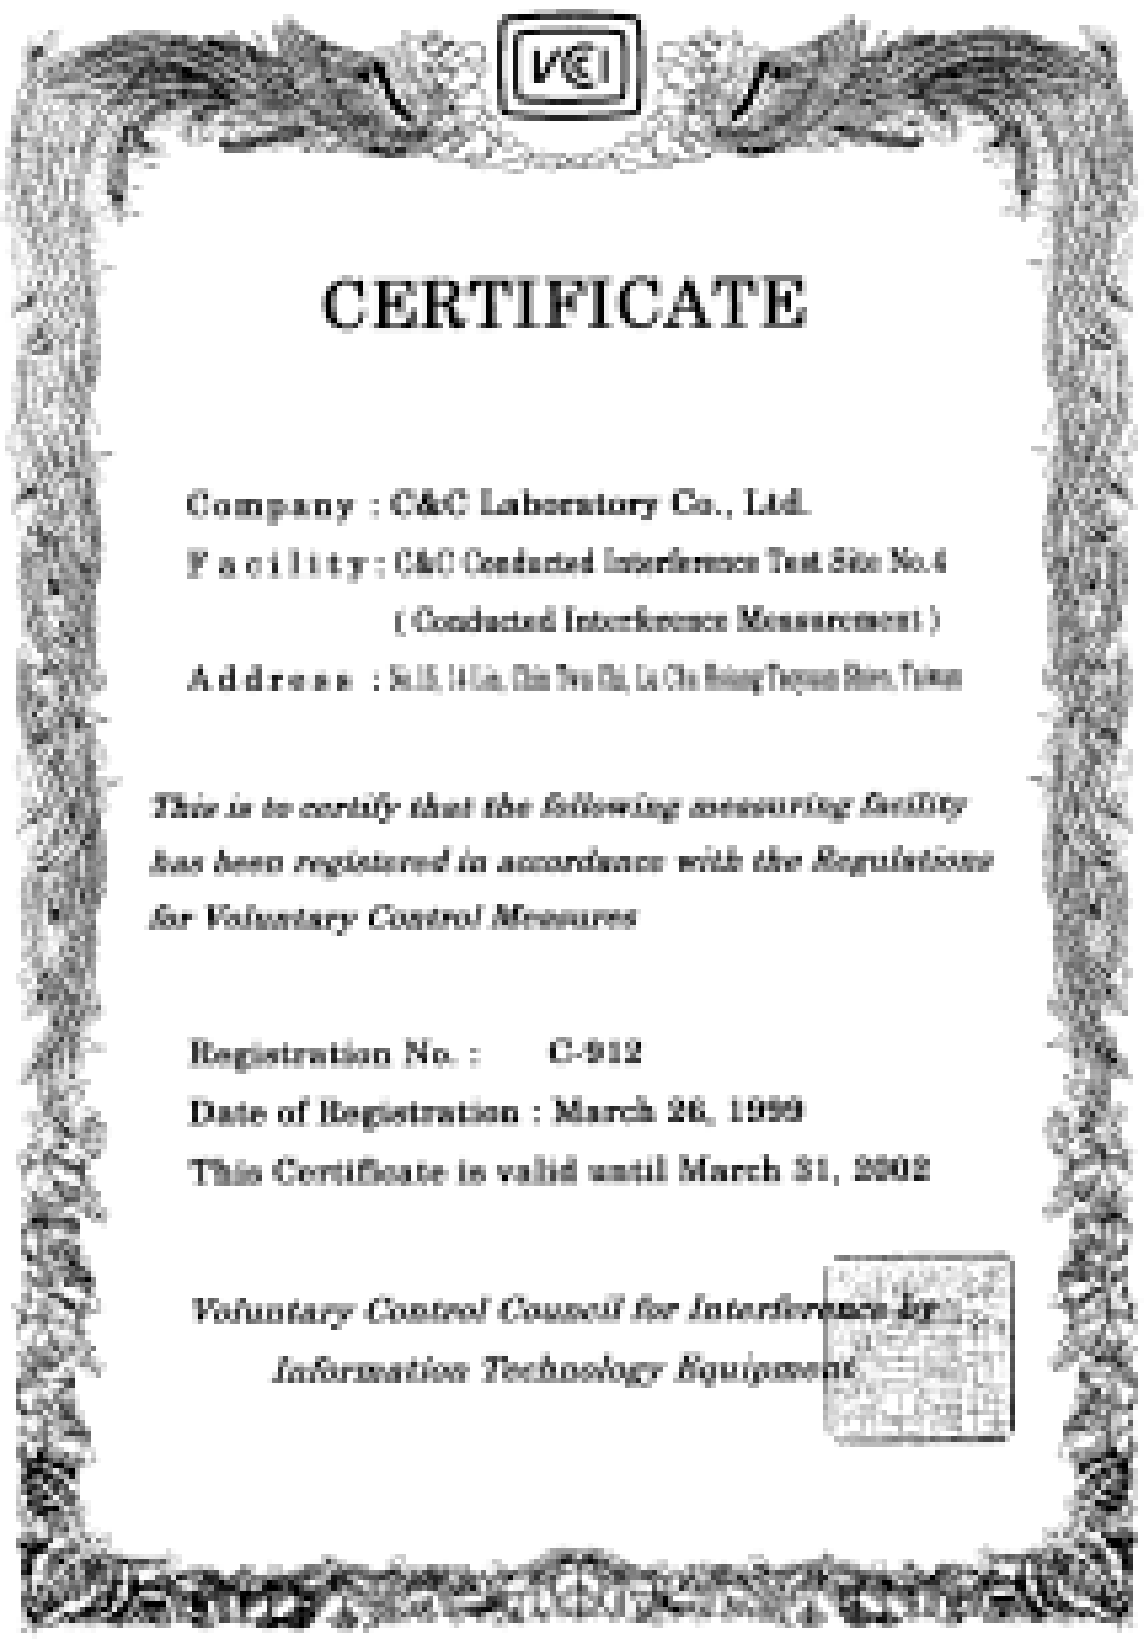

CERTIFICATE

Company : C&C Laboratory Co., Ltd.
Facility : C&C Conducted Interference Test Site No.4
(Conducted Interference Measurement)
Address : No.10, 14 Lin, Chin Pwu Chi, Lu Chu Hsiang Taoyuan Shien, Taiwan

This is to certify that the following measuring facility has been registered in accordance with the Regulations for Voluntary Control Measures

Registration No. : C-912
Date of Registration : March 26, 1999
This Certificate is valid until March 31, 2002

Voluntary Control Council for Interference by Information Technology Equipment

CERTIFICATE

Company : C&C Laboratory Co., Ltd.
Facility : C&C Open Area Test Site No.4
(Radiation 3 and 10 meter site)
Address : No.10, 14 Lin, Chin Pwu Chi, Lu Chu Hsiang Taoyuan Shien, Taiwan

This is to certify that the following measuring facility has been registered in accordance with the Regulations for Voluntary Control Measures

Registration No. : R-879
Date of Registration : March 26, 1999
This Certificate is valid until March 31, 2002

Voluntary Control Council for Interference by Information Technology Equipment

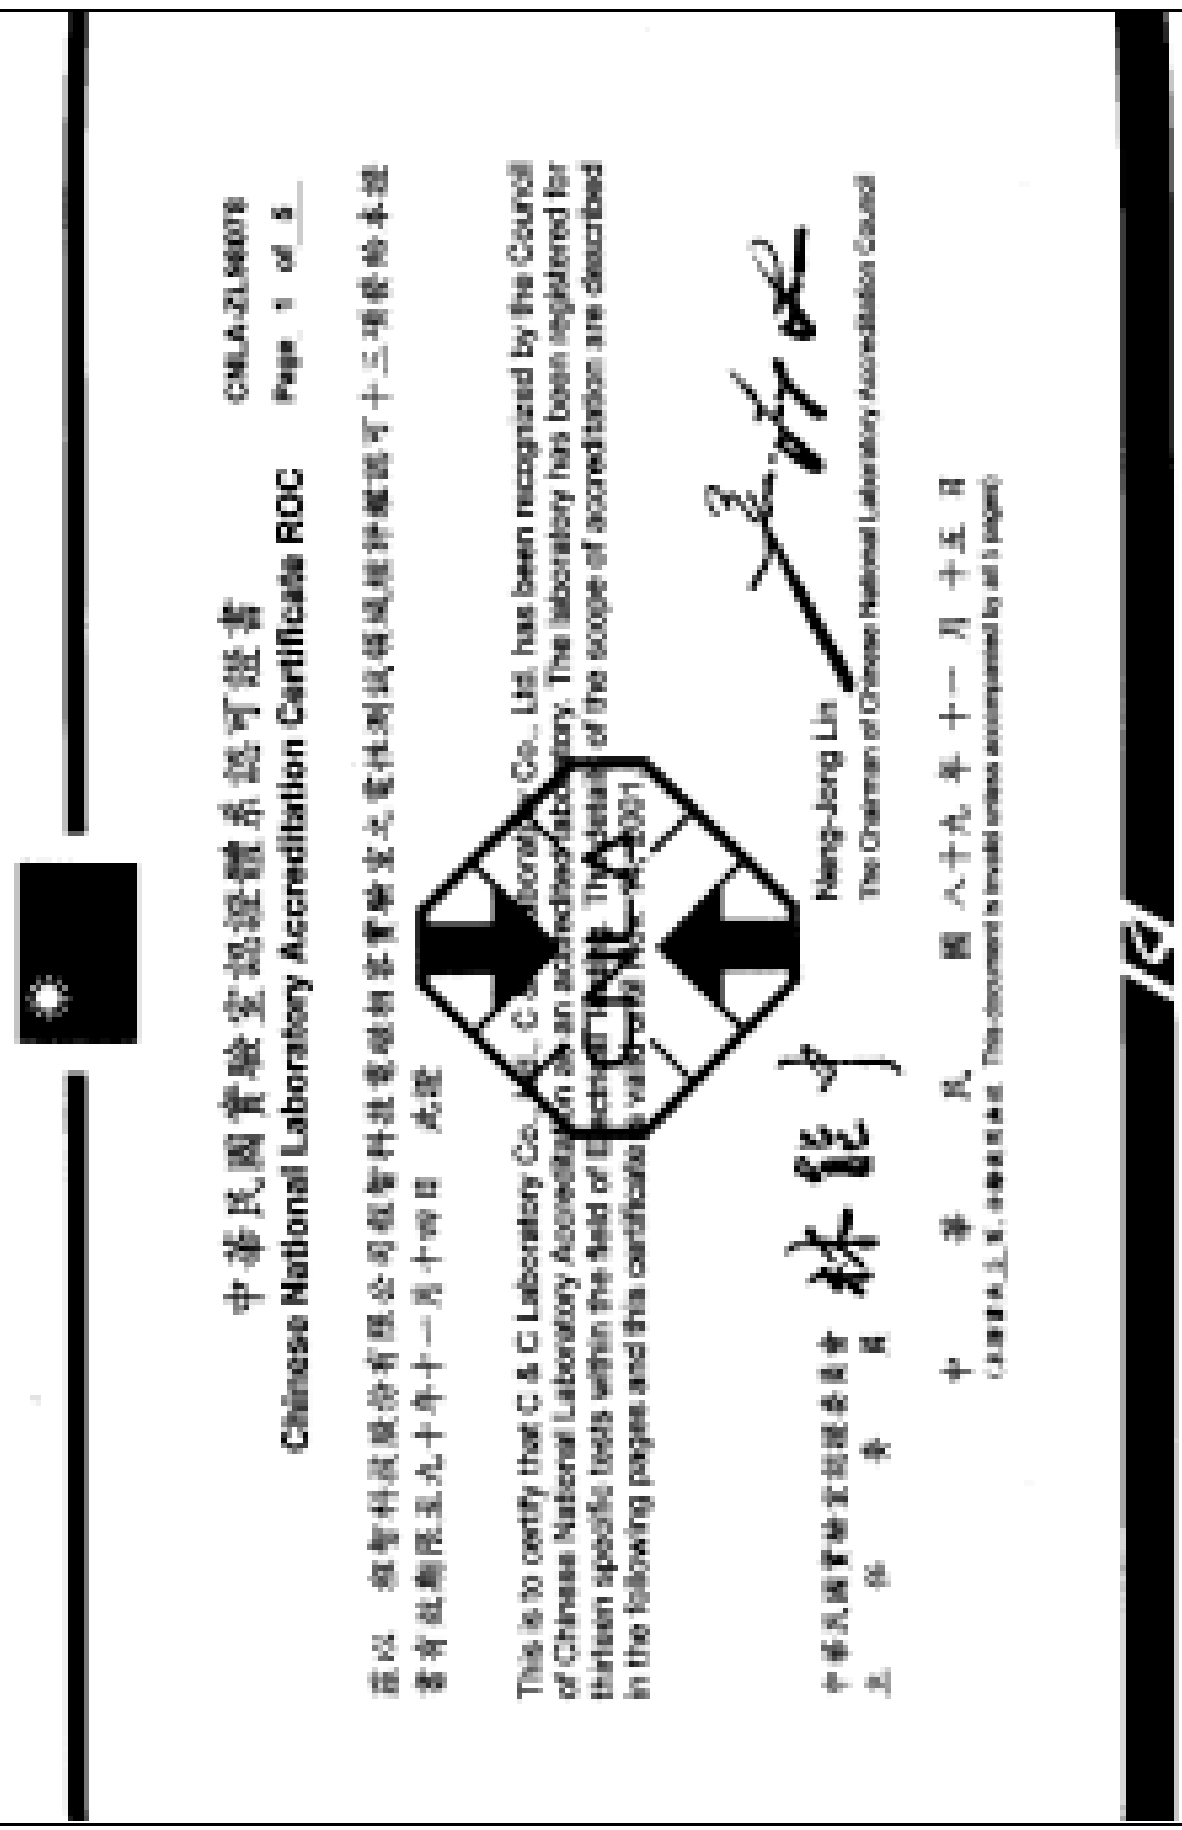

中華民國實驗室認證體系認可證書
Chinese National Laboratory Accreditation Certificate ROC

Page 1 of 5

This is to certify that C & C Laboratory Co., Ltd. has been recognized by the Council of Chinese National Laboratory Accreditation as an accredited laboratory. The laboratory has been registered for thirteen specific tests within the field of ... of the scope of accreditation are described in the following pages and this certificate ...

Neng-Jong Lin
The Chairman of Chinese National Laboratory Accreditation Council

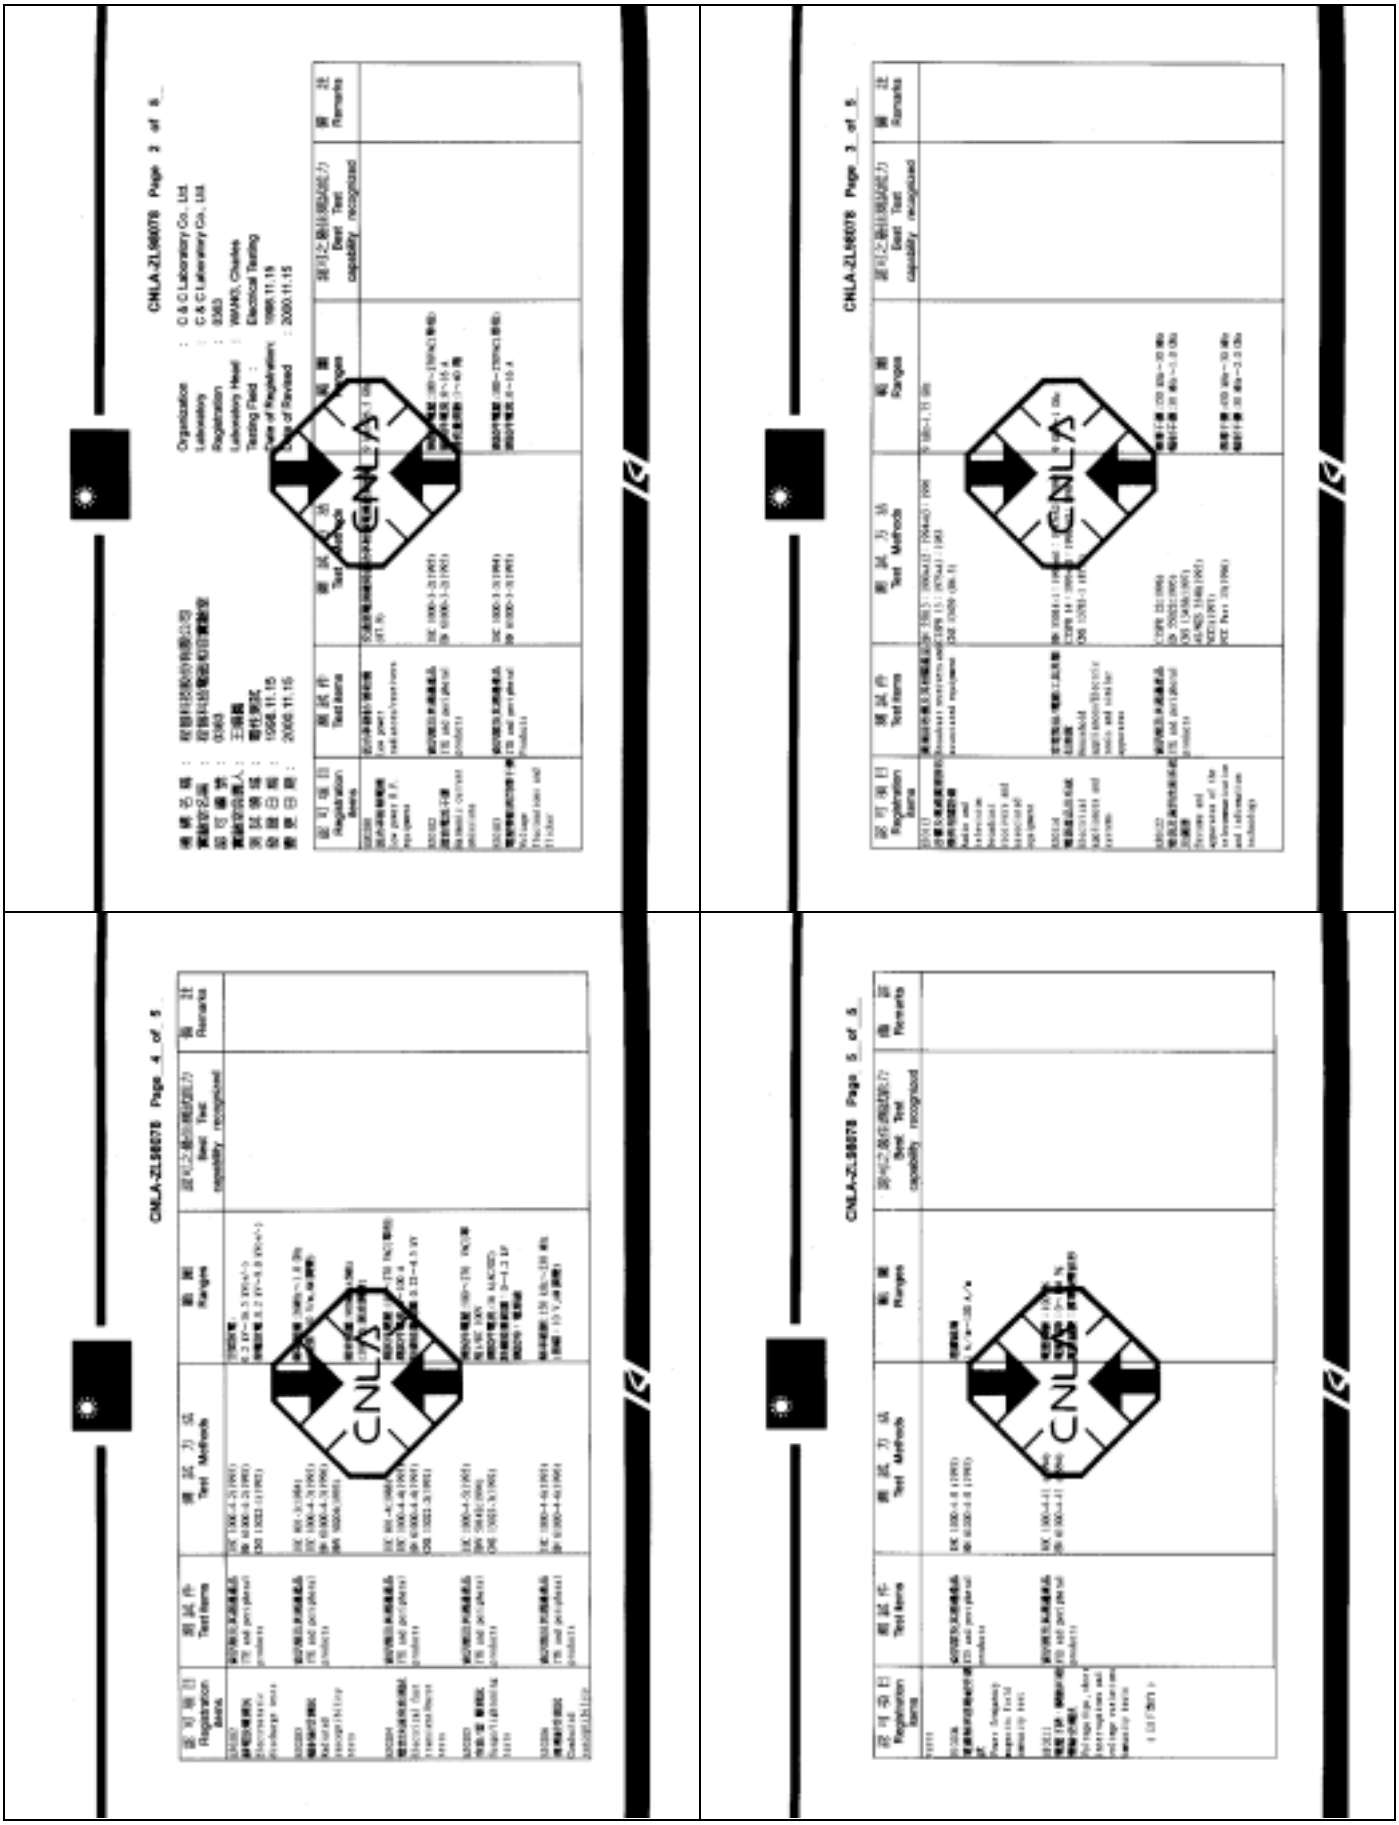

APPENDIX 2

TEST EQUIPMENT

TEST EQUIPMENT LIST

Instrumentation: The following list contains equipment used at C & C Laboratory, Co., Ltd. for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2-1988 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10kHz to 1.0GHz or above.
Equipment used during the tests:

Open Area Test Site: # 1

Open Area Test Site # 1					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
Q.P Adaptor	HP	85650A	2811A01399	06/19/2001	06/18/2002
RF Pre-selector	HP	85685A	2947A01064	06/19/2001	06/18/2002
Spectrum Analyzer	HP	8568B	3001A05004	06/19/2001	06/18/2002
S.P.A Display	HP	8568B	3014A18846	06/19/2001	06/18/2002
Precision Dipole	SCHWAZBECK	VHAP	998/999	05/17/2001	05/16/2002
Precision Dipole	SCHWAZBECK	UHAP	981/982	05/17/2001	05/16/2002
Bilog Antenna	CHASE	CBL6112A	2309	02/11/2001	02/10/2002
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R
Antenna Tower	EMCO	2075-2	9707-2604	N.C.R	N.C.R
Controller	EMCO	2090	N/A	N.C.R	N.C.R
RF Switch	ANRITSU	MP59B	M54367	N.C.R	N.C.R
Site NSA	C&C	N/A	N/A	11/03/2001	11/02/2002
Spectrum Analyzer	ADVANTEST	R3261A	21070279	08/16/2001	08/15/2002

Conducted Emission Test Site: # 3

Conducted Emission Test Site # 3					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL. DUE**
EMI Test Receiver	R&S	ESHS10	843743/015	12/19/2001	12/18/2002
LISN	R&S	ESH2-Z5	843285/010	12/10/2001	12/09/2002
LISN	EMCO	3825/2	9003-1628	07/16/2001	07/15/2002

The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

APPENDIX 3

BLOCK DIAGRAM OF TEST SETUP

BLOCK DIAGRAM OF TEST SETUP

System Diagram of Connections between EUT and Simulators

EUT: Industrial Display Monitor

Trade Name: AAEON

Model Number: AMB-270

AC Power Cord: Unshielded, 1.8m to Power Adapter

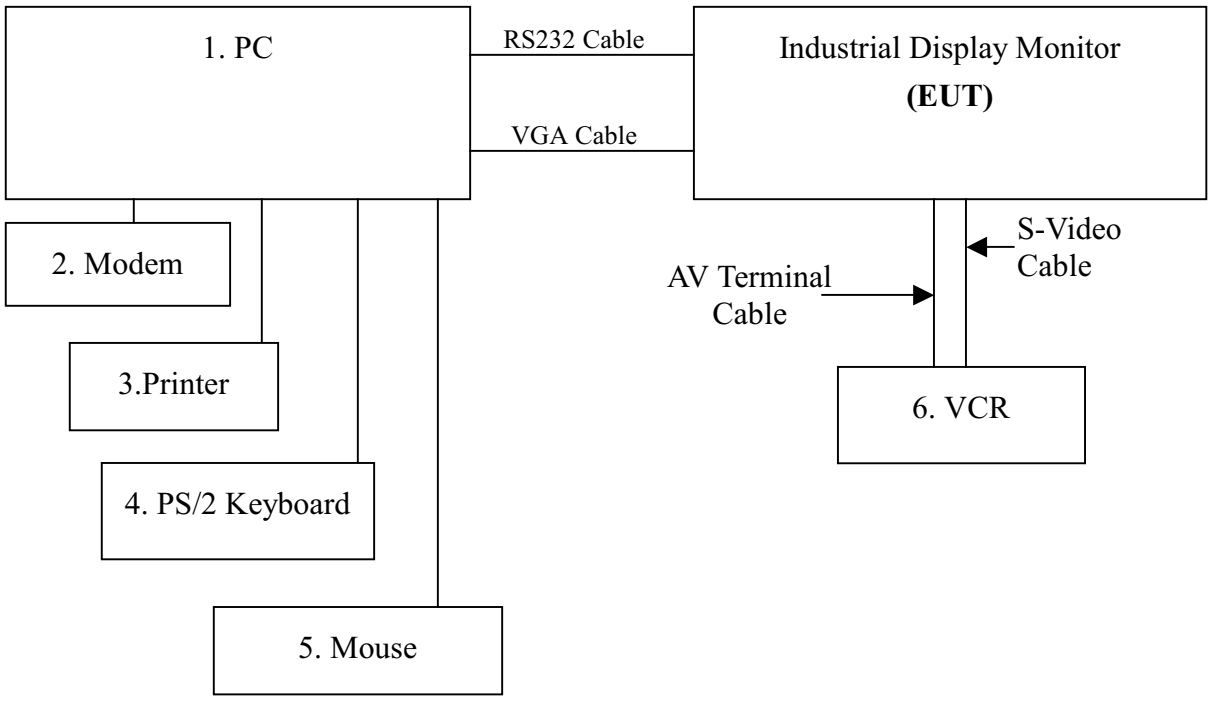

APPENDIX 4

PHOTOGRAPHS OF TEST SETUP
(TEST SETUP OF LINE CONDUCTED EMISSION)

LINE CONDUCTED EMISSION TEST

APPENDIX 5

PHOTOGRAPHS OF TEST SETUP
(TEST SETUP OF RADIATED EMISSION)

RADIATED EMISSION TEST

APPENDIX 6

PHOTOGRAPHS OF EUT

Front View of AMB-270

Front View of OPD-217

Back View of EUT

I/O Port of EUT

Front View of Power Adapter

Back View of Power Adapter

Cable