

# CE EMC

# **TEST REPORT**

For

**PICMG Full-Size SBC** 

Model: FSB-866G

**Trade Name: AAEON** 

Issued to

AAEON Technology Inc. 5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R.O.C.

Issued by



Compliance Certification Services Inc. Hsintien Lab. No. 165, Chunghsen Road, Hsintien City Taipei Hsien, Taiwan TEL: (02) 2217-0894 FAX: (02) 2217-1029



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



## **TABLE OF CONTENTS**

1	TEST RESULT CERTIFICATION	3
2	EUT DESCRIPTION	4
3	TEST METHODOLOGY	5
	<ul> <li>3.1 EUT SYSTEM OPERATION</li> <li>3.2 DECISION OF FINAL TEST MODE</li> </ul>	
4	SETUP OF EQUIPMENT UNDER TEST	6
5	FACILITIES AND ACCREDITATIONS	7
	5.1 FACILITIES	7
	5.2 LABORATORY ACCREDITATIONS AND LISTINGS	
6	INSTRUMENT AND CALIBRATION	8
	6.1 MEASURING INSTRUMENT CALIBRATION	8
	6.2 TEST AND MEASUREMENT EQUIPMENT	8
7	LINE CONDUCTED & RADIATED EMISSION TEST1	.1
	7.1 LIMIT	1
	7.2 TEST PROCEDURE OF LINE CONDUCTED EMISSION	
	7.3 TEST PROCEDURE OF COMMON MODE CONDUCTED EMISSION FOR	
	TELECOMMUNICATION PORT 1	3
	7.4 TEST PROCEDURE OF RADIATED EMISSION	
	7.5 TEST RESULTS 1	.6
8	POWER HARMONICS TEST1	.8
9	POWER VOLTAGE FLUCTUATION / FLICKER TEST	20
10	ELECTROSTATIC DISCHARGE (ESD) IMMUNITY TEST 2	2
11	RADIATED ELECTROMAGNETIC FIELD IMMUNITY TEST 2	8
12	2 FAST TRANSIENTS/BURST IMMUNITY TEST 3	<b>1</b>
13	SURGE IMMUNITY TEST	3
14	CONDUCTED DISTRBANCE/INDUCED RADIO-FREQUENCY FIELD IMMUNITY TEST 3	5
15	5 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST	57
16	<b>5 VOLTAGE DIPS / SHORT INTERRUPTIONS3</b>	9
A	PPENDIX I - PHOTOGRAPHS OF TEST SETUP 4	1
AI	PPENDIX II – TEST RESULT OF EN 61000-3/2-3 4	9
Al	PPENDIX III - TEST RESULT OF FINAL DATAS5	53



# **1 TEST RESULT CERTIFICATION**

Applicant:	AAEON Technology Inc. 5F, No.135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R.O.C.
Manufacturer:	AAEON Technology Inc.
	5F, No.135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R.O.C.
<b>Equipment Under Test:</b>	PICMG Full-Size SBC
Trade Name:	AAEON
Model:	FSB-866G
<b>Detailed EUT Description:</b>	See Item 2 of this report
Date of Test:	July 8, 2005 ~ July 20, 2005

Applicable Standard	Class/Limit/Criterion	Test Result		
EN 55022:1998 + A1: 2000+A2: 2003	Class A	No non-compliance noted		
EN 61000-3-2: 2000	Class A	No non-compliance noted		
EN 61000-3-3: 1995 + A1: 2001	Limit	No non-compliance noted		
EN 55024:1998 + A1: 2001 + A2: 2003, includin	ng			
IEC 61000-4-2: 1995 +A1: 1998 +A2: 2000	Criterion B	No non-compliance noted		
IEC 61000-4-3: 2002 + A1: 2002	Criterion A	No non-compliance noted		
IEC 61000-4-4: 1995 + A1: 2000 + A2: 2001	Criterion B	No non-compliance noted		
IEC 61000-4-5: 1995 +A1: 2000	Criterion B	No non-compliance noted		
IEC 61000-4-6: 1996 +A1: 2000	Criterion A	No non-compliance noted		
IEC 61000-4-8: 1993 +A1: 2000	Criterion A	N/A		
IEC 61000-4-11: 1994 +A1: 2000	Criterion B/C/C	No non-compliance noted		
Deviation from Applicable Standard				
None				

The above equipment was tested by Compliance Certification Services Inc. for compliance with the requirements set forth in the EMC Directive 89/336/EMC and the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

David Wang Manager of Hsintien Laboratory Compliance Certification Services Inc.

**Reviewed by:** 

ANG

Vince Chiang Assistant Manager of Hsintien Laboratory Compliance Certification Services Inc.



# **2 EUT DESCRIPTION**

Product	PICMG Full-Size SBC	
Trade Name	AAEON	
Model	FSB-866G	
Housing Type	N/A	
EUT Power Rating	3.3VDC/ 5VDC/ <u>+</u> 12VDC from Host PC Power Supply	
AC Power During Test	230VAC / 50 Hz to Host PC Power Supply	
Power Supply Manufacturer	Seventeam	
Power Supply Model Number	ST-300BLV	
AC Power Cord Type	Unshielded, 1.8m (Detachable) to Host PC Power Supply	
<b>OSC/Clock Frequencies</b>	12MHz; 14.31818MHz; 25MHz; 32.768kHz	

#### **I/O PORT OF EUT**

I/O PORT TYPE	Q'TY	TESTED WITH
1). PIO Port	1	1
2). SIO Port	2	2
3). PS/2 one to two adaptor Port	1/1	1/1
4). Video out Port (VGA)	1	1
5). Audio in Port	1	1
6). Microphone Port	1	1
7). Earphone Port	1	1
8). LAN Port	4	4
9). USB 2.0 Port	7	7

Note: Client consigns only one model sample (Model Number is FSB-866G) to test.



# **3 TEST METHODOLOGY**

## 3.1 EUT SYSTEM OPERATION

- 1. Windows 2000 boots system.
- 2. Run Emctest.exe to activate all peripherals and display "H" pattern on monitor screen.
- 3. Run Emitest.exe choose "0" run all test.
- 4. Run Winemc.exe then select (C:/、E:/、F:/、G:/、H:/、I:/、J:/、K:/) to test USB 2.0 ports.
- 5. Press the start menu, select executive and type ping 192.168.0.2 -t (EUT), ping 192.168.0.1 -t (Server Notebook).
- 6. Press the start menu, select executive and type ping 192.168.1.2 –t (EUT), ping 192.168.1.1 –t (Server PC).

Note: Test program is self-repeating throughout the test.

### 3.2 DECISION OF FINAL TEST MODE

1. The following test mode(s) were scanned during the preliminary test:

Mode:

#### 1. 1600X1200, VF=60Hz

2. After the preliminary scan, the following test mode(s) was found to produce the highest emission level.

Conduction: Mode 1 Radiation: Mode 1

Then, the EUT configuration and cable configuration of the above highest emission mode was chosen for all final test items.



# 4 SETUP OF EQUIPMENT UNDER TEST

### Setup Diagram

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

#### Support Equipment

Host	Host PC Devices:							
No	Equipment	Model #	Serial #	FCC/BSMI ID	Trade Name			
1	CPU (3.2GHz)	Pentium 4	N/A	N/A	INTEL			
2	Memory (256MB)	DDR400	S32MLD64V4F3	N/A	SYNNEX			
3	Power Supply	ST-300BLV	N/A	N/A	Seventeam			
4	HDD (40GB)	D540X-4D, 5400rpm	N/A	N/A	Maxtor			

#### **Peripherals Devices:**

No	Equipment	Model	Serial No.	FCC/ BSMI ID	Trade Name	Data Cable	Power Cord
1	PS/2 Mouse	M071KC	443029438	BSMI: R41108 DoC	DELL	Shielded, 1.8m	N/A
2	PS/2 Keyboard	SK-8110	N/A	BSMI: T3A002 DoC	DELL	Shielded, 1.8m	N/A
3	Player	RQ-L317	N/A	N/A	PANASONIC	Unshielded, 1.8m	N/A
4	Ear / Mic	MSB301	N/A	N/A	e-Sense	Unshielded, 1.8m	N/A
5	DB 5Pin Keyboard	6311-TW4Cl6	N/A	BSMI ID: 4862A064	ACER	Shielded, 1.8m	N/A
6	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
7	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
8	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
9	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
10	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
11	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
12	USB 2.0 HDD	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
13	Modem	5JEG4033MKO	N/A	5RJTAI-35500-M5-E	TOP - SOLUTION	Shielded, 0.8m	Unshielded, 1.8m
14	Modem	5JEG4033MKO	N/A	5RJTAI-35500-M5-E	TOP - SOLUTION	Shielded, 0.8m	Unshielded, 1.8m
15	Monitor	213T	NB21H4JX305280H	BSMI: R33475 DoC	SAMSUNG	Shielded, 1.8m with two cores	Unshielded, 1.8m
16	Printer	C20SX	EW4E126644	BSMI ID: 3902E004	EPSON	Shielded, 1.8 m	Unshielded, 1.8m
17	Server Notebook	PP05L	2464936188	BSMI: R33002 DoC	DELL	Unshielded, 20m	Unshielded, 1.8m
18	Server PC	845G MAX	HS-03	DoC	MSI	Unshielded, 20m	Unshielded, 1.8m
19	LAN Loadx2	N/A	N/A	N/A	N/A	Unshielded, 1.0m	N/A

*Note:* All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test. Grounding: Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.



# **5** FACILITIES AND ACCREDITATIONS

# 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at CCS Taiwan Hsintien Lab at No. 165, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan.

The measurement facilities are constructed in conformance with the requirements of CISPR 16-1, ANSI C63.4 and other equivalent standards.

## 5.2 LABORATORY ACCREDITATIONS AND LISTINGS

The test facilities used to perform Electromagnetic compatibility tests are registered or accredited by the organizations listed in the following table which includes the recognized scope specifically.

Country	Agency	Scope of Accreditation	Logo
USA	USA A2LA CFR 47, FCC Part 15/18 using ANSI 63.4; AS/NZS 3548; VCCI V3; CNS 13438; CNS 13439; CNS 13783; CNS 14115 CISPR 11/EN 55011; CISPR 14-1/EN 55014-1; CISPR 15/EN 55015; CISPR 22/EN 55022; EN 50081-1/EN 61000-6-3; EN 50082-1/EN 61000-6-4; IEC/EN 61000-4-2, IEC/EN 61000-4-3, IEC/EN 61000-4-4, IEC/EN 61000-4-5, IEC/EN 61000-4-6, IEC/EN 61000-4-8, IEC/EN 61000-4-11, IEC/EN 61000-3-2, IEC/EN 61000-3-3; CISPR 24/EN 55024 CISPR 14-2/EN 55014-2; EN 50081-2/EN 61000-6-1; EN 50082-2/EN 61000-6-2.		ACCREDITED 824.01
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	<b>FC</b> 250366
Japan	Room to perform conducted/radiated measurements		<b>VCCI</b> R-1434/1630~4 C-1511/1882
Norway	Norway NEMKO EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2/3/4, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, Cispr 16-1/2/3/4		ELA 103
Taiwan	CNLA	47 CFR FCC Part 15 Subpart B, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 13438, AS/NZS 3548, VCCI, CNS 13022-1/2/3, EN 55022, EN 55013, EN 55014-1, EN 61000-4-2/3/4/5/6/8/11, ENV 50204, ENV 50141, ENV 50142	1108 ILAC MRA
Taiwan BSMI CNS 13438, CNS 13783-1, CNS 13439		SL2-IN-E-0005 SL2-A1-E-0005 SL2-R1-E-0005 SL2-R2-E-0005	
Canada	Industry Canada	RSS212, Issue 1	Canada IC 5742

*Note:* No part of this report may be used to claim or imply product endorsement by CNLA, A2LA or other government agency.



# 6 INSTRUMENT AND CALIBRATION

## 6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

## 6.2 TEST AND MEASUREMENT EQUIPMENT

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective manual.

Open Area Test Site # H					
EQUIPMENT	MFR	MODEL	SERIAL NUMBER	CAL. DUE	
SITE NSA	CCS	H Site	N/A	09/11/2005	
MEASURE RECEIVER	SCHAFFNER	SCR3501	341	09/02/2005	
SPECTRUM ANALYZER	ADVANTEST	R3132	120900002	No Calibration Required	
ANTENNA	SCHAFFNER	CBL 6112B	2801	09/24/2005	
AMPLIFIER	SCHAFFNER	CPA9231A	3613	10/08/2005	
CABLE	SUHNER	RG 214	N-TYPE#H2	12/03/2005	
THERMO- HYGRO METER	TFA	N/A	NO.1	12/22/2005	
DECOUPLING NETWORK	FCC	F-201-DCN-5-6MM	22、24	09/07/2005	

#### Equipment Used for Emission Measurement

*Note:* The measurement uncertainty is less than +/- 3.36dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Conducted Emission Test Site # A					
EQUIPMENT MFR		MODEL	SERIAL NUMBER	CAL. DUE	
TEST RECEIVER	R&S	ESHS20	840455/006	02/17/2006	
LISN (EUT)	SCHWARZBECK	NSLK 8127	8127382	01/03/2006	
LISN	SOLAR	8012-50-R-24-BNC	8305114	01/03/2006	
BNC CABLE	MIYAZAKI	5D-FB	BNC A1	01/28/2006	
THERMO- HYGRO METER	ТОР	HA-202	9303-1	03/02/2006	
ISN	FCC	FCC-TLISN-T4	20166	07/13/2006	
ISN	FCC	FCC-TLISN-T8-02	20169	07/13/2006	

*Note:* The measurement uncertainty is less than +/-2.83dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



Power Harmonic & Voltage Fluctuation/Flicker Test Site (EN 61000-3-2&-3-3)					
Manufacturer/Type	Serial No.	Cal. Due			
Schaffner / Signal Conditioning Unit	CCN 1000-1	72122	12/05/2005		
Schaffner / 5KVA AC Power Source	NSG 1007	55131	No Calibration Required		

#### **Equipment Used for Immunity Measurement**

ESD Test Site (EN 61000-4-2)					
Manufacturer/TypeModel No.Serial No.Cal. Due					
Schaffner / ESD Simulator	NSG 438	129	04/20/2006		
Sato / Aneroid Barometer	7610-20	89090	09/07/2005		
TOP / Thermo-Hygro meter	HA-202	9303-1	03/02/2006		

Radiated Electromagnetic Field Immunity Test Site (EN 61000-4-3)					
Manufacturer/Type	Model No.	Serial No.	Cal. Due		
Calibration of Field	Chamber#RS	RS3H-7 / RS3V-7	07/01/2006		
Agilent / Signal Generator	E4421B	MY43350597	05/16/2006		
AR / Electric Field Probe	FP6001	305650	02/03/2006		
Boonton / RF Voltmeter	9200B	328001AE	02/23/2006		
BNC / Function Generator	625A	25451	02/17/2006		
AR / Amplifier	100W1000M1	17564	No Calibration Required		
Werlatone Inc. / Direction Coupler	C2630	4121	No Calibration Required		
Frankonia / Broadband Antenna	BTA-M	030001M	No Calibration Required		
TOP / Thermo-Hygro meter	HA-202	9303-2	03/02/2006		

Fast Transients/Burst Test Site (EN 61000-4-4)				
Manufacturer/TypeModel No.Serial No.Cal. Due				
Schaffner / EFT Generator	BEST EMC V2.3	200031A024SC	11/09/2005	
Schaffner / Capacitive Clamp	N/A	N/A	No Calibration Required	



Surge Immunity Test Site (EN 61000-4-5)					
Manufacturer/TypeModel No.Serial No.Cal. Due					
Schaffner / Surger Generator	BEST EMC V2.3	200031A024SC	11/09/2005		
Schaffner / Signal and Data Lines Coupling Network	CDN118	19328	No Calibration Required		

CS test (EN 61000-4-6)				
Manufacturer/Type	Model No.	Serial No.	Cal. Due	
Schaffner / RF Generator	NSG 2070-1	1061	08/02/2005	
Schaffner / CDN	CDN M316	19600	08/02/2005	
Schaffner / CDN	CDN M216	19294	08/02/2005	
Schaffner / EM Clamp	KEMZ 801	19227	02/23/2006	
Schaffner / CDN	CDN A800	17885	08/02/2005	
Schaffner / CDN	CDN T002	15881	01/13/2006	
FCC / CDN	FCC-801-T8-RJ45	04025	06/23/2006	
Schaffner / Attenuator	INA2070-1	2061	No Calibration Required	
FCC / CDN	FCC-801-T4-RJ45	04031	08/19/2005	

Power Frequency Magnetic Field Immunity test (EN 61000-4-8)						
Manufacturer/TypeModel No.Serial No.Cal. Due						
Schaffner / Induction Coil Interface	INA 21141	6009	No Calibration Required			
Schaffner / 5KVA AC Power Source	NSG 1007	55131	No Calibration Required			
CHY/ TRMS Clamp Meter	932C	2K0900285	10/12/2005			
Sypris / Magnetic Field Meter	4080	0247	01/19/2006			

Voltage Dips/Short Interruption and Voltage Variation Immunity test (EN 61000-4-11)						
Manufacturer/Type	facturer/Type Model No. Serial No. Cal. Due					
Schaffner / Dips/Interruption/Variations Tester	BEST EMC V2.3	200031A024SC	11/09/2005			
Protronix / Digital Power Meter	1201	201091	08/31/2005			



# 7 LINE CONDUCTED & RADIATED EMISSION TEST

## **7.1 LIMIT**

### Maximum permissible level of Line Conducted Emission

FREQUENCY	Class A (dBuV)		Class B (dBuV)	
(MHz)	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

*Note:* The lower limit shall apply at the transition frequency.

#### Maximum permissible level of Common Mode Conducted Emission (Telecommunication Ports)

#### CLASS A

FREQUENCY	Voltage Limit (dBuV)		Current Limit (dBuA)	
(MHz)	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	97 – 87	84 - 74	53 - 43	40 - 30
0.5 - 30.0	87	74	43	30

### CLASS B

FREQUENCY	Voltage Limit (dBuV)		Current Limit (dBuA)	
(MHz)	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	84 - 74	74 - 64	40 - 30	30 - 20
0.5 - 30.0	74	64	30	20

Note: The lower limit shall apply at the transition frequency.

#### Maximum permissible level of Radiated Emission measured at 10 meter

FREQUENCY	Class A (dBuV/m)	Class B (dBuV/m)
(MHz)	Quasi-peak	Quasi-peak
30 - 230	40	30
230 - 1000	47	37

Note: The lower limit shall apply at the transition frequency.



## 7.2 TEST PROCEDURE OF LINE CONDUCTED EMISSION

### **Procedure of Preliminary Test**

- The EUT was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per EN 55022 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per EN 55022.
- All I/O cables were positioned to simulate typical actual usage as per EN 55022.
- The test system with EUT received AC power, 230V/50Hz, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane.
- All support equipment received power from a second LISN.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- During the above scans, the emissions were maximized by cable manipulation.
- The test mode(s) described in Item 3.2 were scanned during the preliminary test.
- After the preliminary scan, we found the test mode described in Item 3.2 producing the highest emission level.
- The EUT configuration and cable configuration of the above highest emission level were recorded for reference of the final test.

### Procedure of Final Test

- EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the Average limit in Q.P. mode, then the emission signal was re-checked using an Average detector.
- The test data of the worst-case condition(s) was recorded.



### **Data Sample:**

Freq. MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dB	Reading Type (P/Q/A)	Line (L1/L2)
X.XX	42.95	0.55	43.50	73	-29.50	Q	L1

Freq.	= Emission frequency in MHz
Read Level	= Uncorrected Analyzer/Receiver reading
Factor	= Insertion loss of LISN + Cable Loss
Level	= Read Level + Factor
Limit	= Limit stated in standard
Over Limit	= Reading in reference to limit
Р	= Peak Reading
Q	= Quasi-peak Reading
А	= Average Reading
L1	= Hot side
L2	= Neutral side

### **Calculation Formula**

Over Limit (dB) = Level (dBuV) - Limit (dBuV)

## 7.3 TEST PROCEDURE OF COMMON MODE CONDUCTED EMISSION FOR TELECOMMUNICATION PORT

- Selecting ISN for unscreened cable or a current probe for screened cable to take measurement.
- The port of the EUT was connected to the remote side support equipment through the ISN/Current Probe and communication in normal condition.
- Making a overall range scan by using the test receiver controlled by controller and record at least six highest emissions for showing in the test report.
- Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- In case of measuring on the screened cable, the current limit shall be applied, otherwise the voltage limit should be applied.
- The following test mode(s) were scanned during the preliminary test:

Mode(s):

- 1 10 Mbps
- 2 100Mbps
- 3 1Gbps
- After the preliminary scan, we found the following test mode(s) producing the highest emission level and test data of the worst case was recorded.

### Mode: 1



### **Data Sample:**

Freq. MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dB	Reading Type (P/Q/A)
x.xx	62.95	0.55	63.50	87	-23.50	Q

Freq.	= Emission frequency in MHz
Read Level	= Uncorrected Analyzer/Receiver reading
Factor	= Insertion loss of ISN + Cable Loss
Level	= Read Level + Factor
Limit	= Limit stated in standard
Over Limit	= Reading in reference to limit
Р	= Peak Reading
Q	= Quasi-peak Reading
А	= Average Reading

#### **Calculation Formula**

Over Limit (dB) = Level (dBuV) - Limit (dBuV)

## 7.4 TEST PROCEDURE OF RADIATED EMISSION

### **Procedure of Preliminary Test**

- The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
  - Support equipment, if needed, was placed as per EN 55022.
  - All I/O cables were positioned to simulate typical usage as per EN 55022.
  - The EUT received AC power source, 230V/50Hz, from the outlet socket under the turntable. All support equipment received power from another socket under the turntable.
  - Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No. extension cords shall be used to mains receptacle.
  - The antenna was placed at 10 meter away from the EUT as stated in EN 55022. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.
  - The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.



- The test mode(s) described in Item 3.2 were scanned during the preliminary test:
- After the preliminary scan, we found the test mode described in Item 3.2 producing the highest emission level.
- The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

### **Procedure of Final Test**

- EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.
- The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

Freq. MHz	Amptd dBuV/m	Margin dB	Limit dBuV/m	Reading dBuV	Factor dB/m	Reading Type (P/Q/A)	Pol. (H/V)
X.XX	26.2	-13.8	40	14	12.2	Q	Н

#### **Data Sample:**

Freq.	= Emission frequency in MHz
Reading	= Uncorrected Analyzer/Receiver reading
Factor	= Antenna Factor + Cable Loss + Attenuator (3/6/10dB) – Amplifier Gain
Amptd	= Uncorrected Analyzer/Receiver reading + Factor
Limit	= Limit stated in standard
Margin	= Reading in reference to limit
Р	= Peak Reading
Q	= Quasi-peak Reading
А	= Average Reading
Η	= Antenna Polarization: Horizontal
V	= Antenna Polarization: Vertical

#### **Calculation Formula**

Margin (dB) = Amptd (dBuV/m) – Limit (dBuV/m)

## 7.5 TEST RESULTS

### **Line Conducted Emission**

Model: FSB-866G

Temperature: 26 °C

Test Results: Passed

Test Mode: Mode 1 Humidity: 40% RH Tested by: WEBBER JUNG

(The chart below shows the highest readings taken from the final data, see Appendix III for details.)

Six Highest Conducted Emission Readings							
Fre	quency Ran	ge Investig	ated		150 kHz (	to 30 MHz	
Freq (MHz)	Read Level (dBuV)	Factor (dB)	Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Reading Type (P/Q/A)	Line (L1/L2)
0.158	56.41	0.14	56.55	79.00	-22.45	Р	L1
0.185	47.78	0.14	47.92	79.00	-31.08	Р	L1
0.204	52.71	0.14	52.85	79.00	-26.15	Р	L1
0.307	46.66	0.19	46.85	79.00	-32.15	Р	L1
0.160	56.83	0.13	56.96	79.00	-22.04	Р	L2
0.204	50.79	0.13	50.92	79.00	-28.08	Р	L2

NOTE: The emission level was or more than 2dB below the Average limit, so no re-check anymore.

#### Common Mode Conducted Emission

#### Test Mode: Mode 1

Six Highest Conducted Emission Readings						
Frequency Range Investigated 150 kHz to 30 MHz					Iz	
Freq (MHz)	Read Level (dBuV)	Factor (dB)	Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Reading Type (P/Q/A)
0.283	33.45	9.53	42.98	91.72	-48.74	Р
1.464	41.58	9.56	51.14	87.00	-35.86	Р
2.110	43.60	9.57	53.17	87.00	-33.83	Р
2.839	39.30	9.59	48.89	87.00	-38.11	Р
3.964	36.47	9.60	46.07	87.00	-40.93	Р
11.257	38.22	9.68	47.90	87.00	-39.10	Р

#### **Radiated Emission**

Model: FSB-866G	Test Mode: Mode 1
<b>Temperature:</b> 32°C	Humidity: 35 % RH
Test Results: Passed	Tested by: ELVIS ZENG

(The chart below shows the highest readings taken from the final data, see Appendix III for details.)

Six Highest Radiated Emission Readings							
Frequency Range Investigated30 MHz to 1000 MHz at 10m						m	
Freq (MHz)	Amptd (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Reading (dBuV)	Factor (dB/m)	Reading Type (P/Q/A)	Pol. (H/V)
39.3500	33.52	-6.48	40.00	49.29	-15.77	Р	V
199.9080	34.25	-5.75	40.00	50.66	-16.41	Р	Н
331.8500	41.10	-5.90	47.00	50.48	-9.38	Р	Н
405.6000	40.92	-6.08	47.00	47.54	-6.62	Р	Н
675.9480	42.33	-4.67	47.00	43.80	-1.47	Р	Н
725.1000	42.83	-4.17	47.00	43.59	-0.76	Р	Н

NOTE: None.




# 8 POWER HARMONICS TEST

Port	: AC Power Port
<b>Basic Standard</b>	: EN 61000-3-2 (2000)
Limits	: V CLASS A ; CLASS D
Teste d by	: SAM HU
Temperature	: 19°C
Humidity	: 56%


## Limit:

Limits for Class A equipment				
Harmonics	Max. permissible			
Order	harmonics current			
n	А			
Od	d harmonics			
3	2.30			
3 5 7	1.14			
7	0.77			
9	0.40			
11	0.33			
13	0.21			
15<=n<=39	0.15x15/n			
Eve	en harmonics			
2	1.08			
4	0.43			
6	0.30			
8<=n<=40	0.23x8/n			

	Limits for Class D equipment						
Harmonics Order n	Max. permissible harmonics current per watt mA/W	Max. permissible harmonics current A					
	Odd Harmonics only	7					
3	3.4	2.30					
5	1.9	1.14					
7	1.0	0.77					
9	0.5	0.40					
11	0.35	0.33					
13	0.30	0.21					
15<=n<=39	3.85/n	0.15x15/n					



## **Block Diagram of Test Setup:**

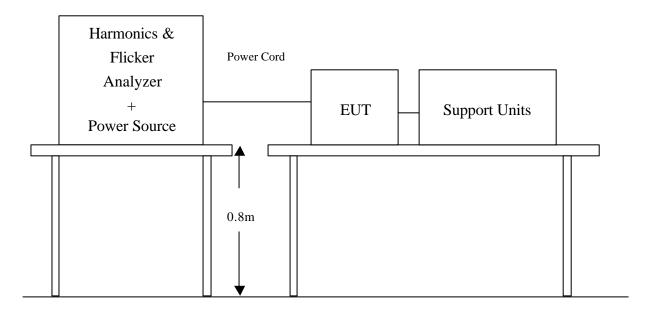

### **Test Procedure:**

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- b. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

Test Result : (See Appendix II for details)

PASS	<b>FAIL</b>	
<b>Note:</b> No function degraded during the tests.		




# 9 POWER VOLTAGE FLUCTUATION / FLICKER TEST

Port	: AC Power Port
<b>Basic Standard</b>	: EN 61000-3-3 (1995 + A1: 2001)
Limits	: § of EN 61000-3-3
Tested by	: SAM SU
Temperature	: 19°C
Humidity	: 56%

## Limit:

TEST ITEM	LIMIT	REMARK
P <sub>st</sub>	1.0	P <sub>st</sub> means short-term flicker indicator.
P <sub>lt</sub>	0.65	P <sub>lt</sub> means long-term flicker indicator.
T <sub>dt</sub> (ms)	500	$T_{dt}$ means maximum time that dt exceeds 3.3 %.
d <sub>max</sub> (%)	4%	d <sub>max</sub> means maximum relative voltage change.
dc (%)	3.3%	dc means relative steady-state voltage change

## **Block Diagram of Test Setup:**

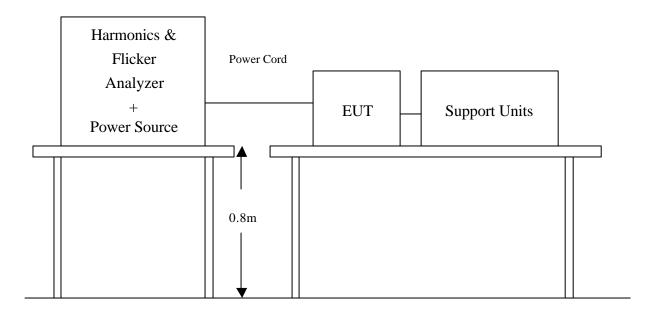



## **Test Procedure:**

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- b. During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

TEST PARAMETER	MEASUREMENT VALUE	LIMIT	RESULT
P <sub>st</sub>	0.001	1.0	Pass
P <sub>lt</sub>	0.001	0.65	Pass
T <sub>dt</sub> (ms)	0	500	Pass
d <sub>max</sub> (%)	0	4%	Pass
dc (%)	0	3.3%	Pass

### Test Result: (See Appendix II for details)

Note: None.




# 10 ELECTROSTATIC DISCHARGE (ESD) IMMUNITY TEST

Port	:	Enclosure	
<b>Basic Standard</b>	:	IEC/EN 61000-4-2	
Test Level	:	±8 kV (Air Discharge)	
		±4 kV (Contact Discharge)	
		±4 kV (Indirect Discharge)	
<b>Performance</b> Criterior	1:	B (Standard Required)	
Tested by	:	SAM HU	
Temperature	:	19°C	
Humidity	:	56%	
Pressure	:	1012mbar	

### **Block Diagram of Test Setup:**

(The 470 k ohm resistors are installed per standard requirement.)

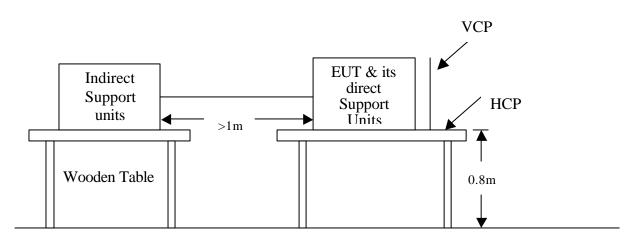

Ground Reference Plane



### **Test Procedure:**

- 1. The EUT was located 0.1 m minimum from all sides of the HCP.
- 2. The indirect support units were located 1 m minimum away from the EUT, but direct support unit was/were located at same location as EUT on the HCP and keep at a distance of 10 cm with EUT.
- 3. As per the requirement of EN 55024; applying direct contact discharge at the sides other than front of EUT at minimum 50 discharges (25 positive and 25 negative) if applicable, can't be applied direct contact discharge side of EUT then the indirect discharge shall be applied. One of the test points shall be subjected to at least 50 indirect discharge (contact) to the front edge of horizontal coupling plane.
- 4. Other parts of EUT where it is not possible to perform contact discharge then selecting appropriate points of EUT for air discharge, a minimum of 10 single air discharges shall be applied.
- 5. The application of ESD to the contact of open connectors is not required.
- 6. The EUT direct connection units also need to be applied ESD at the port of EUT cable connected.
- 7. Putting a mark on EUT to show tested points. The following test condition was followed during the tests.

*Note:* As per IEC/EN 61000-4-2, two 470k bleed resistors cable is connected between the EUT and HCP during the test applicable for power ungrounded or battery operating unit only.

Amount of discharge	Voltage	Coupling	Result (Pass/Fail)
Mini 10 /Point	$\pm 8 \ kV$	Air Discharge	Pass
Mini 25 /Point	$\pm 4 \ kV$	Contact Discharge	Pass
Mini 25 /Point	$\pm 4 \ kV$	Indirect Discharge HCP (Front)	Pass
Mini 25 /Point	$\pm 4 \ kV$	Indirect Discharge VCP (Right)	Pass
Mini 25 /Point	$\pm 4 \ kV$	Indirect Discharge VCP (Left)	Pass
Mini 25 /Point	$\pm 4 \ kV$	Indirect Discharge VCP (Back)	Pass

The electrostatic discharges were applied as follows:

\*\*For the tested points to EUT, please refer to attached page.

(Blue arrow mark for contact discharge and red arrow mark for air discharge)



### Performance & Result:

**Criterion A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.

Criterion B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.

**Criterion C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.



**Observation:** As  $\pm 4$  kV contact discharge applied to the screw beside USB port, the data transmitting was paused and could recover after 3 seconds.



# The Tested Points of EUT

Photo 1 of 5



Photo 2 of 5






















# 11 RADIATED ELECTROMAGNETIC FIELD IMMUNITY TEST

Port :	Enclosure
Basic Standard :	IEC/EN 61000-4-3
Requirements :	3 V/m / with 80% AM. 1kHz Modulation.
Performance Criterion:	A (Standard Required)
Tested by :	SAM HU
Temperature :	19°C
Humidity :	56%
Pressure :	1012mbar

### **Block Diagram of Test Setup:**

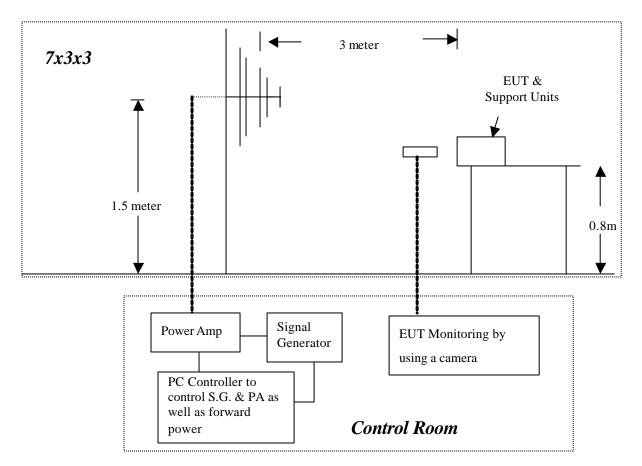



### **Test Procedure:**

- 1. The EUT and support units were located at the edge of supporting table keep 3 meter away from transmitting antenna, it just the calibrated square area of field uniformity.
- 2. Adjusting the cables to be exposed to the electromagnetic filed as possible.
- 3. Performing a Radiated Emission Scan in range of 80 to 1000 MHz prior to do RS test and records the more higher emission frequencies for the reference of RS test, due to antenna effectiveness.
- 4. Adjusting the monitoring camera to monitor the "H" message as clear as possible.
- 5. Setting the testing parameters of RS test software per IEC 61000-4-3.
- 6. Referring to the tested data of step 3 to performing the RS test from 80 to 1000 MHz.
- 7. Recording the test result in following table.
- 8. Changing the EUT to the other side and repeat step 3 to 6, until 4 sides of EUT were verified.

#### **IEC 61000-4-3 Final test conditions:**

Test level: 3V/mSteps: 1 % of fundamentalDwell Time: 3 sec

Range (MHz)	Field	Modulation	Polarity	Position (°)	Result (Pass/Fail)
80-1000	3V/m	Yes	Н	Front	Pass
80-1000	3V/m	Yes	V	Front	Pass
80-1000	3V/m	Yes	Н	Right	Pass
80-1000	3V/m	Yes	V	Right	Pass
80-1000	3V/m	Yes	Н	Back	Pass
80-1000	3V/m	Yes	V	Back	Pass
80-1000	3V/m	Yes	Н	Left	Pass
80-1000	3V/m	Yes	V	Left	Pass



### **Performance & Result:**

- Criterion A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
  - **Criterion B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.

**Criterion C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.




**Observation:** No function degraded during the tests.



# **12 FAST TRANSIENTS/BURST IMMUNITY TEST**

Port	: AC Power Port and RJ45 Port
<b>Basic Standard</b>	: IEC/EN 61000-4-4
Requirements	: $\pm 1 \text{ kV}$ for AC Power Port
	$\pm 0.5$ kV for RJ45 Port
Performance Criteria	: B (Standard Required)
Teste d by	: SAM HU
Temperature	: 19°C
Humidity	: 56%
Pressure	: 1012mbar

### **Block Diagram of Test Setup:**

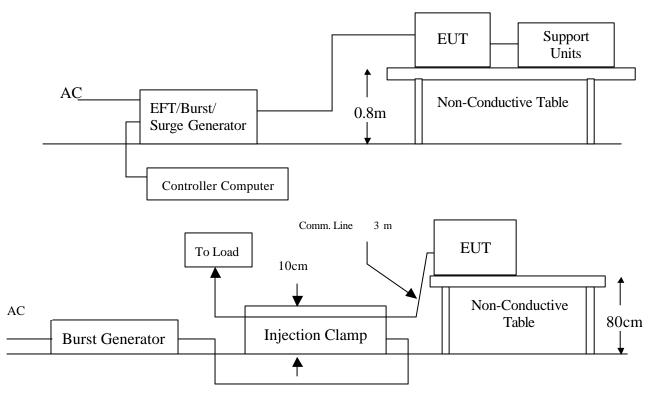

### **<u>Test Procedure</u>**:

- 1. The EUT and support units were located on a wooden table 0.8 m away from ground reference plane.
- 2. A 1.0 meter long power cord was attached to EUT during the test.
- 3. The length of communication cable between communication port and clamp was keeping within 1 meter.
- 4. Injected test voltage to the EUT ports from minimum to standard request or client request.
- 5. Recorded the test result as shown in following table.



#### **Test conditions:**


Impulse Frequency : 5kHzTr/Th: 5/50nsBurst Duration: 15msBurst Period: 300ms

Inject Line	Voltage kV	Inject Method	Result (Pass/Fail)
L	± 1	Direct	Pass
N	± 1	Direct	Pass
PE	± 1	Direct	Pass
L + N	± 1	Direct	Pass
L + PE	± 1	Direct	Pass
N + PE	± 1	Direct	Pass
L + N + PE	± 1	Direct	Pass
RJ45	±0.5	Clamp	Pass

### Performance & Result:

- Criterion A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
  - Criterion B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.

**Criterion C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.






# **13 SURGE IMMUNITY TEST**

Port	:	AC Power Port
<b>Basic Standard</b>	:	IEC/EN 61000-4-5
Requirements	:	$\pm$ 1 kV (Line to Line) for AC Power Port
		$\pm 2$ kV (Line to Ground) for AC Power Port
Performance Criteria	:	B (Standard Required)
Tested by	:	SAM HU
Temperature	:	19°C
Humidity	:	56%
Pressure	:	1012mbar

### **Block Diagram of Test Setup:**

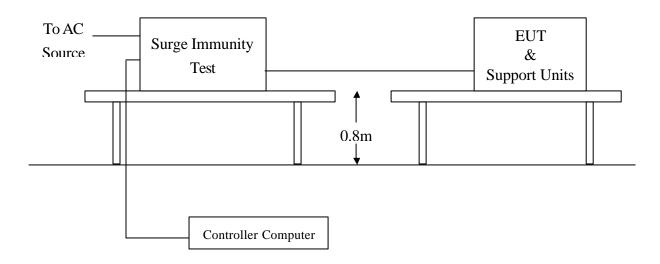

## **<u>Test Procedure</u>:**

1. The EUT and support units were located on a wooden table 0.8 m away from ground floor.

2. Injected test voltage to the EUT ports from minimum to standard request or client request.

3. Recorded the test result as shown in following table.



#### **Test conditions:**

Voltage Waveform	: 1.2/50 <i>u</i> s
Current Waveform	: 8/20 <i>u</i> s
Polarity	: Positive/Negative
Phase angle	: 0°, 90°, 270°
Number of Test	: 5

Coupling Line	Voltage (kV)	Polarity	Coupling Method	Result (Pass/Fail)
L1-L2	1	Positive	Capacitive	Pass
L1-PE	2	Positive	Capacitive	Pass
L2-PE	2	Positive	Capacitive	Pass
L1-L2	1	Negative	Capacitive	Pass
L1-PE	2	Negative	Capacitive	Pass
L2-PE	2	Negative	Capacitive	Pass

### Performance & Result:

Criterion A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.

Criterion B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.

Criterion C: Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.



FAIL


**Observation:** Where normal functioning of LAN can't be achieved because of the impact of CDN on the EUT, no test be required.



# 14 CONDUCTED DISTRBANCE/INDUCED RADIO-FREQUENCY FIELD IMMUNITY TEST

Port :	AC Power Port and RJ45 Port
Basic Standard :	IEC/EN 61000-4-6
Requirements :	3 V, with 80% AM. 1kHz Modulation.
Injection Method :	CDN-M3 for AC Power Port
	CDN-T4 for RJ45 Port
<b>Performance Criterion :</b>	A (Standard Required)
Tested by :	SAM HU
Temperature :	19°C
Humidity :	56%
Pressure :	1012mbar

### **Block Diagram of Test Setup:**

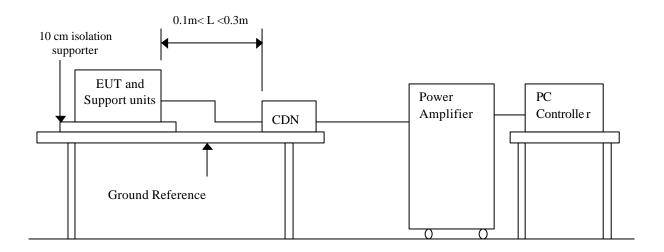

### **Test Procedure:**

- 1. The EUT and support units were located at a ground reference plane with the interposition of a 0.1 m thickness insulating support and the CDN was located on GRP directly.
- 2. Set the testing parameters of CS test software as per IEC/EN 61000-4-6.
- 3. Recorded the test result in following table.



#### **Test conditions:**

Frequency Range	: 0.15MHz-80MHz
Frequency Step	:1% of fundamental
Dwell Time	: 3 sec

Range (MHz)	Field	Modulation	Result (Pass/Fail)
0.15-80	3V	Yes	Pass

### **Performance & Result:**

Criterion A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.

Criterion B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.

**Criterion C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.


	PASS	<b>FAIL</b>		
<b>Observation:</b> No function degraded during the tests.				



## 15 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST

Port	:	Enclosure
<b>Basic Standard</b>	:	IEC/EN 61000-4-8
Requirements	:	1 A/m
<b>Performance Criterion</b>	:	A (Standard Required)
Tested by	:	N/A
Temperature	:	N/A
Humidity	:	N/A
Pressure	:	N/A

### **Block Diagram of Test Setup:**

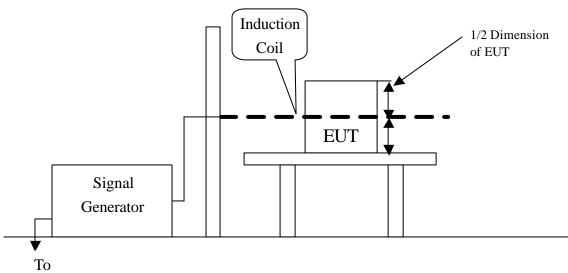

Earth Ground

### **Test Procedure:**

- 1. The EUT and support units were located on Ground Reference Plane with the interposition of a 0.1 m thickness insulation support.
- 2. Put the induction coil on horizontal direction. ( X direction )
- 3. Recorded the test result as shown in following table.
- 4. Rotated the induction coil by  $90^{\circ}$  (Y direction) then repeat step 3.
- 5. Rotated the induction coil by  $90^{\circ}$  (Z direction) then repeat step 3.



### **Test conditions:**

Field Strengt Power Freq.: Orientation:			
Orientation	Field	Result (Pass/Fail)	Remark

### Performance & Result:

- Criterion A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
  - **Criterion B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- **Criterion C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

PASS FAIL	
<b>Observation:</b> The EUT is not containing any component that is susceptible to a 50 Hz of 60 Hz magnetic failed. Therefore, this requirement is not applicable to th EUT.	




## **16 VOLTAGE DIPS / SHORT INTERRUPTIONS**

Port	:	AC Power Port
<b>Basic Standard</b>	:	IEC/EN 61000-4-11
Requirement	:	PHASE ANGLE 0, 45, 90, 135, 180, 225, 270, 315 degrees
<b>Test Interval</b>	:	Min. 10 sec.
Teste d by	:	SAM HU
Temperature	:	19°C
Humidity	:	56%
Pressure	:	1012mbar

Voltage	Test Level % U <sub>T</sub>	Reduction (%)	Duration ( periods )	Performance Criterion
Dips	<5	>95	0.5	В
	70	30	25	С

Voltage	Test Level	Reduction	Duration	Performance
Interruptions	% U <sub>T</sub>	(%)	( periods )	Criterion
Interruptions	<5	>95	250	С

### Block Diagram of Test Setup:

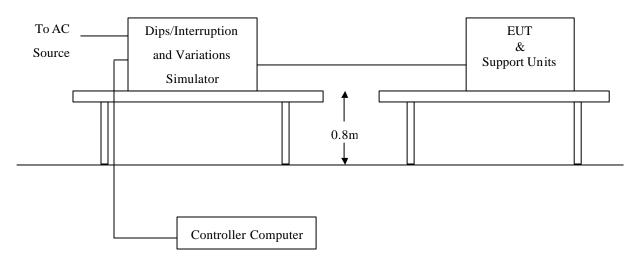

### **Test Procedure:**

- 1. The EUT and support units were located on a wooden table, 0.8 m away from ground floor.
- 2. Set the parameter of tests and then Performed the test software of test simulator.
- 3. Changed Condition to occur at 0 degree crossover point of the voltage waveform.
- 4. Recorded the test result in test record form.



### **Test conditions:**

The duration with a sequence of three dips/interruptions with interval of 10 sec. minimum (Between each test event )

### Voltage Dips:

Test Level % U <sub>T</sub>	Reduction (%)	Duration (periods)	Observation	Meet Performance Criterion
0	100	0.5	Normal	А
70	30	25	Normal	А


### **Voltage Interruptions:**

Test Level % U <sub>T</sub>	Reduction (%)	Duration (periods)	Observation	Meet Performance Criterion
0	100	250	EUT shut down, but EUT can be auto recovered after it restart.	С

Note: "Normal" means no any functions degrade during and after the test.

### **Performance & Result:**

- **Criterion A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- **Criterion B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- **Criterion C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.






# APPENDIX I - PHOTOGRAPHS OF TEST SETUP LINE CONDUCTED EMISSION TEST (EN 55022)








## COMMON MODE CONDUCTED EMISSION TEST



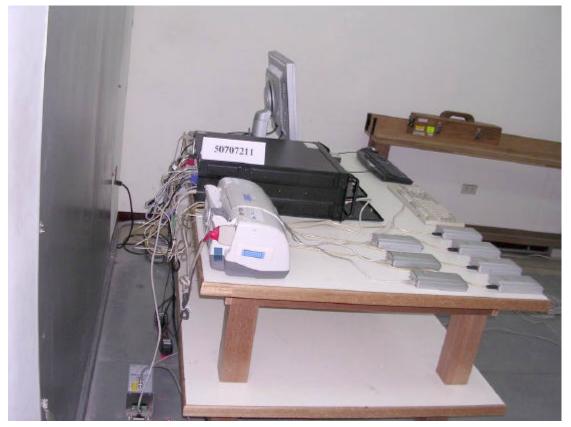



## **RADIATED EMISSION TEST**






POWER HARMONIC & VOLTAGE FLUCTUATION / FLICKER TEST







## ELECTROSTATIC DISCHARGE TEST




**RADIATED ELECTROMAGNETIC FIELD TEST** 






Compliance Certification Services Inc. Report No.: 50707211-E

### FAST TRANSIENTS/BURST TEST

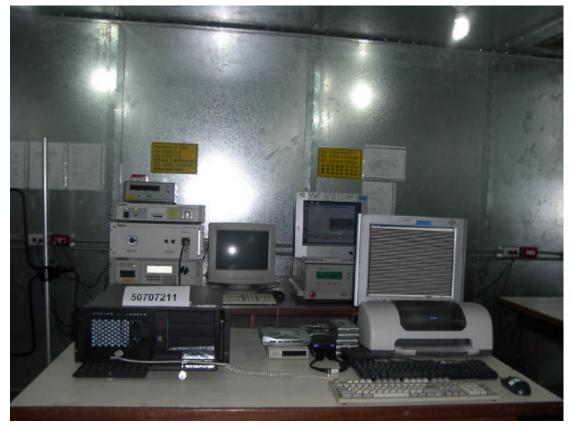

(IEC 61000-4-4 FOR I/O)





### SURGE IMMUNITY TEST



CONDUCTED DISTURBANCE, INDUCED BY RADIO-FREQUENCY FIELDS TEST





## (IEC 61000-4-6 FOR I/O)



**VOLTAGE DIPS / INTERRUPTION TEST** 






## **APPENDIX II – TEST RESULT OF EN 61000-3/2-3**

Test Result: Pass


Source qualification: Normal


Current & voltage waveforms

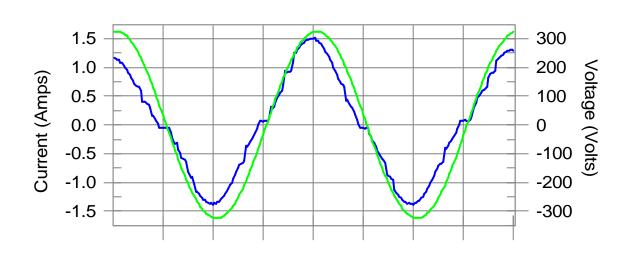

#### Harmonics and Class D limit line

European Limits

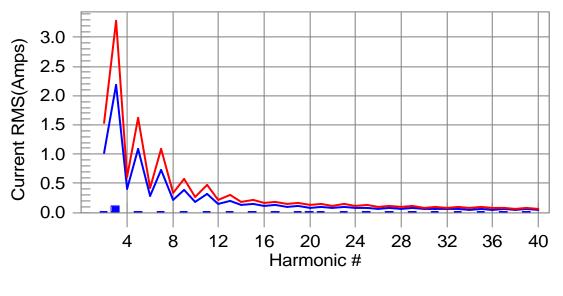





THC(A):       0.115       THD(pk%):       14.914       POHC(A):       N/A       POHC Limit(A):       N/A         Highest parameter values during test:       V_RMS (Voits):       229.97       I_Peak (Amps):       1.512       I_RMS (Amps):       0.899       I_Fund (Amps):       0.892       Crest Factor:       1.806         I_Fund (Amps):       0.892       Crest Factor:       0.983       Image: Crest Factor:       0.983         Harm#       Harms(avg)       100%Limit       %of Limit       Harms(max)       150%Limit       %of Limit       Status         2       0.002       1.026       0.2       0.005       1.539       0.32       Pass         3       0.107       2.185       4.9       0.108       3.13       Pass         4       0.001       0.409       0.2       0.002       0.613       0.30       Pass         5       0.016       1.0285       0.4       0.002       0.428       0.46       Pass         7       0.007       0.732       0.9       0.008       1.097       0.71       Pass         6       0.001       0.219       0.43       0.001       0.428       0.46       Pass         10       0.001       0.	Test Re	sult: Pass		Source	e qualification:	Normal		
Highest parameter values during test: V_RMS (Volts): 229.97 LPeak (Amps): 1.512 LRMS (Amps): 0.899 LFund (Amps): 0.892 Crest Factor: 1.806 Power (Watts): 203 Power Factor: 0.983 Harm# Harms(avg) 100%Limit %of Limit Harms(max) 150%Limit %of Limit Status 2 0.002 1.026 0.2 0.005 1.539 0.32 Pass 3 0.107 2.185 4.9 0.109 3.278 3.31 Pass 4 0.001 0.409 0.2 0.002 0.613 0.30 Pass 5 0.016 1.083 1.5 0.018 1.625 1.09 Pass 6 0.001 0.285 0.4 0.002 0.428 0.46 Pass 7 0.007 0.732 0.9 0.001 0.328 0.38 Pass 8 0.001 0.219 0.4 0.001 0.328 0.38 Pass 9 0.014 0.380 3.6 0.014 0.570 2.45 Pass 11 0.010 0.314 3.3 0.012 0.470 2.47 Pass 13 0.012 0.124 1.6 0.001 0.262 0.55 Pass 13 0.012 0.124 1.6 0.002 0.187 1.25 Pass 14 0.002 0.143 1.0.1 0.013 0.299 4.33 Pass 15 0.014 0.134 1.0.1 0.013 0.299 4.33 Pass 16 0.002 0.124 1.6 0.002 0.187 1.25 Pass 17 0.002 0.124 1.6 0.002 0.187 1.25 Pass 18 0.001 0.097 1.4 0.002 0.164 1.13 Pass 14 0.002 0.124 1.6 0.002 0.167 1.25 Pass 15 0.014 0.143 10.1 0.015 0.214 6.99 Pass 16 0.002 0.109 1.5 0.002 0.164 1.13 Pass 17 0.005 0.125 4.1 0.002 0.164 1.13 Pass 18 0.001 0.097 1.4 0.002 0.145 1.17 Pass 18 0.001 0.097 1.4 0.002 0.145 1.17 Pass 19 0.009 0.112 8.3 0.010 0.169 5.71 Pass 20 0.002 0.007 2.6 0.003 0.113 2.31 Pass 21 0.007 0.102 6.4 0.008 0.153 5.36 Pass 22 0.002 0.007 2.6 0.003 0.119 2.12 Pass 23 0.012 0.093 1.3.1 0.013 0.140 9.07 Pass 24 0.001 0.073 1.9 0.002 0.087 2.15 Pass 19 0.009 0.112 8.3 0.010 0.109 7.6 Pass 25 0.007 0.0066 8.0 0.008 0.128 6.56 Pass 26 0.001 0.067 2.2 0.002 0.087 2.15 Pass 31 0.008 0.669 11.6 0.009 0.073 2.57 Pass 33 0.007 0.065 10.9 0.008 0.097 8.74 Pass 33 0.007 0.065 10.9 0.002 0.087 2.47 Pass 33 0.007 0.066 10.9 0.002 0.087 2.47 Pass 33 0.007 0.066 10.9 0.002 0.087 2.47 Pass 34 0.001 0.068 2.0 0.002 0.087 2.47 Pass 35 0.007 0.066 10.9 0.008 0.097 8.74 Pass 36 0.001 0.068 2.0 0.002 0.087 2.47 Pass 37 0.005 0.058 8.6	THC(A)	: 0.115	ITHD(pk%):	14.914	POHC(A):	N/A	POHC Lin	nit(A): N/A
LPeak (Amps):         1.512         LRMS (Amps):         0.899           LFund (Amps):         0.892         Crest Factor:         1.806           Power (Watts):         203         Power Factor:         0.983           Harm# Harms(avg)         100%Limit         %of Limit         Harms(max)         150%Limit         %of Limit         Status           2         0.002         1.026         0.2         0.005         1.539         0.32         Pass           3         0.107         2.185         4.9         0.109         3.278         3.31         Pass           4         0.001         0.409         0.2         0.002         0.613         0.30         Pass           5         0.016         1.083         1.5         0.018         1.625         1.09         Pass           6         0.001         0.282         0.46         Pass         9         0.14         0.380         3.6         0.014         0.570         2.45         Pass           10         0.010         0.775         0.6         0.001         0.262         0.55         Pass           12         0.002         0.144         1.0         0.002         0.147         2.47         <	Highest	parameter va						
L_Fund (Amps):         0.892         Crest Factor:         1.806           Power (Watts):         203         Power Factor:         0.983           Harm# Harms(avg)         100%Limit         %of Limit         Harms(max)         150%Limit         %of Limit         Status           2         0.002         1.026         0.2         0.005         1.539         0.32         Pass           3         0.107         2.165         4.9         0.109         3.278         3.31         Pass           4         0.001         0.409         0.2         0.002         0.613         0.30         Pass           5         0.016         1.083         1.5         0.018         1.625         1.09         Pass           6         0.001         0.228         0.4         0.002         0.428         0.46         Pass           7         0.007         0.732         0.9         0.008         1.097         2.45         Pass           10         0.001         0.218         0.38         Pass         11         0.012         2.47         Pass           12         0.002         0.144         3.3         0.012         0.470         2.47         Pass     <		V_RMS (Volts	): 229.97					
Power (Watts):         203         Power Factor:         0.983           Harm# Harms(avg)         100%Limit         %of Limit         Harms(max)         150%Limit         %of Limit         Status           2         0.002         1.026         0.2         0.005         1.539         0.32         Pass           3         0.107         2.185         4.9         0.109         3.278         3.31         Pass           5         0.016         1.083         1.5         0.018         1.625         1.09         Pass           6         0.001         0.285         0.4         0.002         0.413         0.30         Pass           7         0.007         0.732         0.9         0.008         1.097         0.71         Pass           8         0.001         0.279         0.4         0.001         0.328         Pass           10         0.001         0.175         0.6         0.001         0.262         0.55         Pass           11         0.010         0.314         3.3         0.012         0.470         2.47         Pass           12         0.002         0.145         1.0         0.002         0.187         1.25		I_Peak (Amps	s): 1.512		I_RMS (Amps):	0.899		
Harm# Harms(avg)         100%Limit         %of Limit         Harms(max)         150%Limit         %of Limit         Status           2         0.002         1.026         0.2         0.005         1.539         0.32         Pass           3         0.107         2.185         4.9         0.109         3.278         3.31         Pass           5         0.016         1.083         1.5         0.018         1.625         1.09         Pass           6         0.001         0.285         0.4         0.002         0.428         0.46         Pass           7         0.001         0.732         0.9         0.008         1.097         0.71         Pass           8         0.001         0.752         0.9         0.008         1.097         0.71         Pass           10         0.001         0.175         0.6         0.001         0.262         0.55         Pass           11         0.010         0.314         3.3         0.012         0.247         Pass           12         0.002         0.145         1.0         0.002         0.187         1.25         Pass           13         0.012         0.219         0.229 <td></td> <td>I_Fund (Amps</td> <td>s): 0.892</td> <td></td> <td>Crest Factor:</td> <td>1.806</td> <td></td> <td></td>		I_Fund (Amps	s): 0.892		Crest Factor:	1.806		
2         0.002         1.026         0.2         0.005         1.539         0.32         Pass           3         0.107         2.185         4.9         0.109         3.278         3.31         Pass           4         0.001         0.409         0.2         0.002         0.613         0.30         Pass           5         0.016         1.083         1.5         0.018         1.625         1.09         Pass           6         0.001         0.285         0.4         0.002         0.428         0.46         Pass           7         0.007         0.732         0.9         0.008         1.097         0.71         Pass           8         0.001         0.219         0.4         0.001         0.328         0.38         Pass           10         0.001         0.775         0.6         0.001         0.262         0.55         Pass           11         0.010         0.314         3.3         0.012         0.470         2.47         Pass           12         0.002         0.143         1.0         0.002         0.187         1.25         Pass           13         0.014         0.143         10.1		Power (Watts)	): 203		Power Factor:	0.983		
3         0.107         2.185         4.9         0.109         3.278         3.31         Pass           4         0.001         0.409         0.2         0.002         0.613         0.30         Pass           5         0.016         1.083         1.5         0.018         1.625         1.09         Pass           6         0.001         0.285         0.4         0.002         0.428         0.46         Pass           7         0.007         0.732         0.9         0.008         1.097         0.71         Pass           9         0.014         0.380         3.6         0.014         0.570         2.45         Pass           10         0.001         0.175         0.6         0.001         0.262         0.55         Pass           11         0.010         0.314         3.3         0.012         0.470         2.47         Pass           12         0.002         0.145         1.0         0.002         0.187         1.25         Pass           14         0.002         0.187         1.26         0.003         0.187         1.25         Pass           15         0.014         0.143         10	Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
3         0.107         2.185         4.9         0.109         3.278         3.31         Pass           4         0.001         0.409         0.2         0.002         0.613         0.30         Pass           5         0.016         1.083         1.5         0.018         1.625         1.09         Pass           6         0.001         0.285         0.4         0.002         0.428         0.46         Pass           7         0.007         0.732         0.9         0.008         1.097         0.71         Pass           9         0.014         0.380         3.6         0.014         0.570         2.45         Pass           10         0.001         0.175         0.6         0.001         0.262         0.55         Pass           11         0.010         0.314         3.3         0.012         0.470         2.47         Pass           12         0.002         0.145         1.0         0.002         0.187         1.25         Pass           14         0.002         0.187         1.26         0.003         0.187         1.25         Pass           15         0.014         0.143         10								
4       0.001       0.409       0.2       0.002       0.613       0.30       Pass         5       0.016       1.083       1.5       0.018       1.625       1.09       Pass         7       0.007       0.732       0.9       0.008       1.097       0.71       Pass         8       0.001       0.219       0.4       0.001       0.328       0.38       Pass         9       0.014       0.380       3.6       0.011       0.262       0.55       Pass         10       0.001       0.175       0.6       0.001       0.262       0.55       Pass         11       0.010       0.314       3.3       0.012       0.470       2.47       Pass         12       0.002       0.145       1.0       0.002       0.187       1.25       Pass         13       0.012       0.200       6.1       0.013       0.299       4.33       Pass         14       0.002       0.199       1.5       0.002       0.187       1.25       Pass         15       0.014       0.143       10.1       0.015       0.214       6.199       Pass         17       0.005 <td< td=""><td></td><td>0.002</td><td>1.026</td><td>0.2</td><td>0.005</td><td>1.539</td><td>0.32</td><td>Pass</td></td<>		0.002	1.026	0.2	0.005	1.539	0.32	Pass
5         0.016         1.083         1.5         0.018         1.625         1.09         Pass           6         0.001         0.285         0.4         0.002         0.428         0.46         Pass           7         0.007         0.732         0.9         0.008         1.097         0.71         Pass           8         0.001         0.219         0.4         0.001         0.328         0.38         Pass           9         0.014         0.380         3.6         0.014         0.570         2.45         Pass           10         0.001         0.175         0.6         0.001         0.247         Pass           11         0.002         0.145         1.0         0.002         0.219         0.92         Pass           13         0.012         0.200         6.1         0.013         0.299         4.33         Pass           14         0.002         0.144         1.6         0.002         0.187         1.25         Pass           15         0.014         0.143         10.1         0.015         0.214         6.99         Pass           16         0.002         0.1097         1.4         0	3	0.107	2.185	4.9	0.109	3.278	3.31	Pass
6         0.001         0.285         0.4         0.002         0.428         0.46         Pass           7         0.007         0.732         0.9         0.008         1.097         0.71         Pass           9         0.014         0.380         3.6         0.014         0.570         2.45         Pass           10         0.001         0.175         0.6         0.001         0.262         0.55         Pass           11         0.010         0.314         3.3         0.012         0.470         2.47         Pass           12         0.002         0.145         1.0         0.002         0.187         1.25         Pass           13         0.012         0.124         1.6         0.002         0.187         1.25         Pass           16         0.002         0.109         1.5         0.002         0.164         1.13         Pass           17         0.005         0.125         4.1         0.006         0.189         3.37         Pass           18         0.001         0.097         1.4         0.002         0.145         1.17         Pass           20         0.002         0.079		0.001	0.409		0.002	0.613	0.30	Pass
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	5	0.016	1.083	1.5	0.018	1.625	1.09	Pass
8         0.001         0.219         0.4         0.001         0.328         0.38         Pass           9         0.014         0.380         3.6         0.014         0.570         2.45         Pass           10         0.001         0.175         0.6         0.001         0.262         0.55         Pass           11         0.010         0.314         3.3         0.012         0.470         2.47         Pass           12         0.002         0.145         1.0         0.002         0.219         0.92         Pass           13         0.012         0.200         6.1         0.013         0.299         4.33         Pass           14         0.002         0.143         10.1         0.015         0.214         6.99         Pass           15         0.014         0.143         10.1         0.016         0.189         3.37         Pass           16         0.002         0.125         4.1         0.002         0.145         1.17         Pass           19         0.009         0.112         8.3         0.010         0.169         5.71         Pass           20         0.002         0.087         <	6	0.001	0.285	0.4	0.002	0.428	0.46	Pass
9         0.014         0.380         3.6         0.014         0.570         2.45         Pass           10         0.001         0.175         0.6         0.001         0.262         0.55         Pass           11         0.010         0.314         3.3         0.012         0.470         2.47         Pass           12         0.002         0.145         1.0         0.002         0.219         0.92         Pass           13         0.012         0.200         6.1         0.013         0.299         4.33         Pass           14         0.002         0.124         1.6         0.002         0.164         1.13         Pass           15         0.014         0.143         10.1         0.015         0.214         6.99         Pass           16         0.002         0.109         1.5         0.002         0.164         1.13         Pass           17         0.005         0.125         4.1         0.002         0.145         1.17         Pass           18         0.001         0.097         1.4         0.002         0.145         1.17         Pass           21         0.002         0.087         <	7	0.007	0.732	0.9	0.008	1.097	0.71	Pass
10         0.001         0.175         0.6         0.001         0.262         0.55         Pass           11         0.010         0.314         3.3         0.012         0.470         2.47         Pass           12         0.002         0.145         1.0         0.002         0.219         0.92         Pass           13         0.012         0.200         6.1         0.013         0.299         4.33         Pass           14         0.002         0.124         1.6         0.002         0.187         1.25         Pass           15         0.014         0.143         10.1         0.015         0.214         6.99         Pass           16         0.002         0.109         1.5         0.002         0.164         1.13         Pass           17         0.005         0.125         4.1         0.002         0.145         1.17         Pass           18         0.001         0.097         1.4         0.002         0.145         1.17         Pass           20         0.002         0.087         2.6         0.003         0.119         2.12         Pass           23         0.012         0.079	8	0.001	0.219	0.4	0.001	0.328	0.38	Pass
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	9	0.014	0.380	3.6	0.014	0.570	2.45	Pass
12         0.002         0.145         1.0         0.002         0.219         0.92         Pass           13         0.012         0.200         6.1         0.013         0.299         4.33         Pass           14         0.002         0.124         1.6         0.002         0.187         1.25         Pass           15         0.014         0.143         10.1         0.015         0.214         6.99         Pass           16         0.002         0.109         1.5         0.002         0.164         1.13         Pass           17         0.005         0.125         4.1         0.006         0.189         3.37         Pass           18         0.001         0.097         1.4         0.002         0.145         1.17         Pass           20         0.002         0.087         2.6         0.003         0.131         2.31         Pass           21         0.007         0.102         6.4         0.008         0.153         5.36         Pass           22         0.002         0.079         2.6         0.003         0.119         2.12         Pass           23         0.012         0.073	10	0.001	0.175	0.6	0.001	0.262	0.55	Pass
13         0.012         0.200         6.1         0.013         0.299         4.33         Pass           14         0.002         0.124         1.6         0.002         0.187         1.25         Pass           15         0.014         0.143         10.1         0.015         0.214         6.99         Pass           16         0.002         0.109         1.5         0.002         0.164         1.13         Pass           17         0.005         0.125         4.1         0.006         0.189         3.37         Pass           18         0.001         0.097         1.4         0.002         0.145         1.17         Pass           19         0.009         0.112         8.3         0.010         0.169         5.71         Pass           20         0.002         0.087         2.6         0.003         0.131         2.31         Pass           21         0.007         0.102         6.4         0.008         0.153         5.36         Pass           22         0.002         0.079         2.6         0.003         0.119         1.12         Pass           24         0.001         0.073	11	0.010	0.314	3.3	0.012	0.470	2.47	Pass
14         0.002         0.124         1.6         0.002         0.187         1.25         Pass           15         0.014         0.143         10.1         0.015         0.214         6.99         Pass           16         0.002         0.109         1.5         0.002         0.164         1.13         Pass           17         0.005         0.125         4.1         0.006         0.189         3.37         Pass           18         0.001         0.097         1.4         0.002         0.145         1.17         Pass           19         0.009         0.112         8.3         0.010         0.169         5.71         Pass           20         0.002         0.087         2.6         0.003         0.131         2.31         Pass           21         0.007         0.102         6.4         0.008         0.153         5.36         Pass           22         0.002         0.079         2.6         0.003         0.119         2.12         Pass           23         0.012         0.093         13.1         0.013         0.140         9.07         Pass           24         0.001         0.067	12	0.002	0.145	1.0	0.002	0.219	0.92	Pass
15         0.014         0.143         10.1         0.015         0.214         6.99         Pass           16         0.002         0.109         1.5         0.002         0.164         1.13         Pass           17         0.005         0.125         4.1         0.006         0.189         3.37         Pass           18         0.001         0.097         1.4         0.002         0.145         1.17         Pass           19         0.009         0.112         8.3         0.010         0.169         5.71         Pass           20         0.002         0.087         2.6         0.003         0.131         2.31         Pass           21         0.007         0.102         6.4         0.008         0.153         5.36         Pass           23         0.012         0.093         13.1         0.013         0.140         9.07         Pass           24         0.001         0.073         1.9         0.002         0.109         1.76         Pass           25         0.007         0.086         8.0         0.008         0.128         6.56         Pass           26         0.001         0.063	13	0.012	0.200	6.1	0.013	0.299	4.33	Pass
16         0.002         0.109         1.5         0.002         0.164         1.13         Pass           17         0.005         0.125         4.1         0.006         0.189         3.37         Pass           18         0.001         0.097         1.4         0.002         0.145         1.17         Pass           19         0.009         0.112         8.3         0.010         0.169         5.71         Pass           20         0.002         0.087         2.6         0.003         0.131         2.31         Pass           21         0.007         0.102         6.4         0.008         0.153         5.36         Pass           22         0.002         0.079         2.6         0.003         0.119         2.12         Pass           23         0.012         0.093         13.1         0.013         0.140         9.07         Pass           24         0.001         0.073         1.9         0.002         0.109         1.76         Pass           25         0.007         0.866         8.0         0.008         0.128         6.56         Pass           26         0.001         0.063	14	0.002	0.124	1.6	0.002	0.187	1.25	Pass
17       0.005       0.125       4.1       0.006       0.189       3.37       Pass         18       0.001       0.097       1.4       0.002       0.145       1.17       Pass         19       0.009       0.112       8.3       0.010       0.169       5.71       Pass         20       0.002       0.087       2.6       0.003       0.131       2.31       Pass         21       0.007       0.102       6.4       0.008       0.153       5.36       Pass         22       0.002       0.079       2.6       0.003       0.119       2.12       Pass         23       0.012       0.093       13.1       0.013       0.140       9.07       Pass         24       0.001       0.073       1.9       0.002       0.109       1.76       Pass         25       0.007       0.086       8.0       0.008       0.128       6.56       Pass         26       0.001       0.067       2.2       0.002       0.094       1.90       Pass         28       0.001       0.063       1.5       0.002       0.094       1.90       Pass         30       0.001	15	0.014	0.143	10.1	0.015	0.214	6.99	Pass
18         0.001         0.097         1.4         0.002         0.145         1.17         Pass           19         0.009         0.112         8.3         0.010         0.169         5.71         Pass           20         0.002         0.087         2.6         0.003         0.131         2.31         Pass           21         0.007         0.102         6.4         0.008         0.153         5.36         Pass           22         0.002         0.079         2.6         0.003         0.119         2.12         Pass           23         0.012         0.093         13.1         0.013         0.140         9.07         Pass           24         0.001         0.073         1.9         0.002         0.109         1.76         Pass           25         0.007         0.086         8.0         0.008         0.128         6.56         Pass           26         0.001         0.067         2.2         0.002         0.094         1.90         Pass           29         0.006         0.074         7.7         0.007         0.110         5.92         Pass           31         0.008         0.069	16	0.002	0.109	1.5	0.002	0.164	1.13	Pass
190.0090.1128.30.0100.1695.71Pass200.0020.0872.60.0030.1312.31Pass210.0070.1026.40.0080.1535.36Pass220.0020.0792.60.0030.1192.12Pass230.0120.09313.10.0130.1409.07Pass240.0010.0731.90.0020.1091.76Pass250.0070.0868.00.0080.1286.56Pass260.0010.0672.20.0020.1012.14Pass270.0110.07914.30.0130.11910.68Pass280.0010.0631.50.0020.0941.90Pass290.0060.0747.70.0070.1105.92Pass300.0010.0582.00.0020.0872.15Pass310.0080.06911.60.0090.1048.24Pass320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0588.60.0060.0732.57 <td>17</td> <td>0.005</td> <td>0.125</td> <td>4.1</td> <td>0.006</td> <td>0.189</td> <td>3.37</td> <td>Pass</td>	17	0.005	0.125	4.1	0.006	0.189	3.37	Pass
200.0020.0872.60.0030.1312.31Pass210.0070.1026.40.0080.1535.36Pass220.0020.0792.60.0030.1192.12Pass230.0120.09313.10.0130.1409.07Pass240.0010.0731.90.0020.1091.76Pass250.0070.0868.00.0080.1286.56Pass260.0010.0672.20.0020.1012.14Pass270.0110.07914.30.0130.11910.68Pass280.0010.0631.50.0020.0941.90Pass290.0060.0747.70.0070.1105.92Pass310.0080.06911.60.0090.1048.24Pass320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33 <td>18</td> <td>0.001</td> <td>0.097</td> <td>1.4</td> <td>0.002</td> <td>0.145</td> <td>1.17</td> <td>Pass</td>	18	0.001	0.097	1.4	0.002	0.145	1.17	Pass
210.0070.1026.40.0080.1535.36Pass220.0020.0792.60.0030.1192.12Pass230.0120.09313.10.0130.1409.07Pass240.0010.0731.90.0020.1091.76Pass250.0070.0868.00.0080.1286.56Pass260.0010.0672.20.0020.1012.14Pass270.0110.07914.30.0130.11910.68Pass280.0010.0631.50.0020.0941.90Pass290.0060.0747.70.0070.1105.92Pass310.0080.06911.60.0090.1048.24Pass320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36 <td>19</td> <td>0.009</td> <td>0.112</td> <td>8.3</td> <td>0.010</td> <td>0.169</td> <td>5.71</td> <td>Pass</td>	19	0.009	0.112	8.3	0.010	0.169	5.71	Pass
220.0020.0792.60.0030.1192.12Pass230.0120.09313.10.0130.1409.07Pass240.0010.0731.90.0020.1091.76Pass250.0070.0868.00.0080.1286.56Pass260.0010.0672.20.0020.1012.14Pass270.0110.07914.30.0130.11910.68Pass280.0010.0631.50.0020.0941.90Pass290.0060.0747.70.0070.1105.92Pass300.0010.0582.00.0020.0872.15Pass310.0080.06911.60.0090.1048.24Pass320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36 <td>20</td> <td>0.002</td> <td>0.087</td> <td>2.6</td> <td>0.003</td> <td>0.131</td> <td>2.31</td> <td>Pass</td>	20	0.002	0.087	2.6	0.003	0.131	2.31	Pass
230.0120.09313.10.0130.1409.07Pass240.0010.0731.90.0020.1091.76Pass250.0070.0868.00.0080.1286.56Pass260.0010.0672.20.0020.1012.14Pass270.0110.07914.30.0130.11910.68Pass280.0010.0631.50.0020.0941.90Pass290.0060.0747.70.0070.1105.92Pass300.0010.0582.00.0020.0872.15Pass310.0080.06911.60.0090.1048.24Pass320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0732.57Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	21	0.007	0.102	6.4	0.008	0.153	5.36	Pass
240.0010.0731.90.0020.1091.76Pass250.0070.0868.00.0080.1286.56Pass260.0010.0672.20.0020.1012.14Pass270.0110.07914.30.0130.11910.68Pass280.0010.0631.50.0020.0941.90Pass290.0060.0747.70.0070.1105.92Pass300.0010.0582.00.0020.0872.15Pass310.0080.06911.60.0090.1048.24Pass320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	22	0.002	0.079	2.6	0.003	0.119	2.12	Pass
250.0070.0868.00.0080.1286.56Pass260.0010.0672.20.0020.1012.14Pass270.0110.07914.30.0130.11910.68Pass280.0010.0631.50.0020.0941.90Pass290.0060.0747.70.0070.1105.92Pass300.0010.0582.00.0020.0872.15Pass310.0080.06911.60.0090.1048.24Pass320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	23	0.012	0.093	13.1	0.013	0.140	9.07	Pass
260.0010.0672.20.0020.1012.14Pass270.0110.07914.30.0130.11910.68Pass280.0010.0631.50.0020.0941.90Pass290.0060.0747.70.0070.1105.92Pass300.0010.0582.00.0020.0872.15Pass310.0080.06911.60.0090.1048.24Pass320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	24	0.001	0.073	1.9	0.002	0.109	1.76	Pass
270.0110.07914.30.0130.11910.68Pass280.0010.0631.50.0020.0941.90Pass290.0060.0747.70.0070.1105.92Pass300.0010.0582.00.0020.0872.15Pass310.0080.06911.60.0090.1048.24Pass320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	25	0.007	0.086	8.0	0.008	0.128	6.56	Pass
280.0010.0631.50.0020.0941.90Pass290.0060.0747.70.0070.1105.92Pass300.0010.0582.00.0020.0872.15Pass310.0080.06911.60.0090.1048.24Pass320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	26	0.001	0.067	2.2	0.002	0.101	2.14	Pass
290.0060.0747.70.0070.1105.92Pass300.0010.0582.00.0020.0872.15Pass310.0080.06911.60.0090.1048.24Pass320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	27	0.011	0.079	14.3	0.013	0.119	10.68	Pass
300.0010.0582.00.0020.0872.15Pass310.0080.06911.60.0090.1048.24Pass320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	28	0.001	0.063	1.5	0.002	0.094	1.90	Pass
310.0080.06911.60.0090.1048.24Pass320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	29	0.006	0.074	7.7	0.007	0.110		Pass
320.0020.0552.80.0020.0822.83Pass330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	30	0.001	0.058	2.0	0.002	0.087	2.15	Pass
330.0070.06510.90.0080.0978.74Pass340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	31	0.008	0.069	11.6	0.009	0.104	8.24	Pass
340.0010.0512.80.0020.0772.64Pass350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	32	0.002	0.055	2.8	0.002	0.082	2.83	Pass
350.0070.06112.10.0080.0919.27Pass360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	33	0.007	0.065	10.9	0.008	0.097	8.74	Pass
360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	34	0.001	0.051	2.8	0.002	0.077	2.64	Pass
360.0010.0492.50.0020.0732.57Pass370.0050.0588.60.0060.0866.40Pass380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass	35	0.007	0.061	12.1	0.008	0.091	9.27	Pass
380.0010.0463.00.0020.0692.33Pass390.0040.0557.00.0040.0835.36Pass		0.001	0.049		0.002	0.073	2.57	Pass
39 0.004 0.055 7.0 0.004 0.083 5.36 Pass		0.005	0.058	8.6	0.006	0.086	6.40	Pass
39 0.004 0.055 7.0 0.004 0.083 5.36 Pass	38	0.001	0.046	3.0	0.002	0.069	2.33	Pass
40 0.001 0.044 2.4 0.001 0.066 1.84 Pass		0.004	0.055		0.004	0.083	5.36	Pass
	40	0.001	0.044	2.4	0.001	0.066	1.84	Pass




#### Test Result: Pass

Source qualification: Normal

#### Highest parameter values during test:

Voltage (Vrms):	229.97		
I_Peak (Amps):	1.512	I_RMS (Amps):	0.899
I_Fund (Amps):	0.892	Crest Factor:	1.806
Power (Watts):	203	Power Factor:	0.983

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.124	0.460	27.06	ОК
3	0.416	2.069	20.09	OK
4	0.040	0.460	8.70	OK
5	0.024	0.920	2.59	ОК
6	0.051	0.460	11.02	OK
7	0.028	0.690	4.03	OK
8	0.032	0.460	6.88	OK
9	0.041	0.460	8.87	OK
10	0.018	0.460	3.95	OK
11	0.041	0.230	17.82	OK
12	0.021	0.230	9.02	OK
13	0.023	0.230	9.97	OK
14	0.015	0.230	6.52	OK
15	0.013	0.230	5.76	OK
16	0.017	0.230	7.37	OK
17	0.016	0.230	6.77	OK
18	0.026	0.230	11.41	OK
19	0.017	0.230	7.28	OK
20	0.019	0.230	8.18	OK
21	0.017	0.230	7.29	OK
22	0.014	0.230	6.15	OK
23	0.038	0.230	16.34	OK
24	0.016	0.230	7.02	OK
25	0.065	0.230	28.08	OK
26	0.021	0.230	9.00	OK
27	0.017	0.230	7.28	OK
28	0.027	0.230	11.80	OK
29	0.019	0.230	8.45	OK
30	0.051	0.230	22.06	OK
31	0.018	0.230	8.04	OK
32	0.016	0.230	6.98	OK
33	0.014	0.230	5.88	OK
34	0.008	0.230	3.53	OK
35	0.020	0.230	8.83	OK
36	0.006	0.230	2.75	OK
37	0.016	0.230	7.07	OK
38	0.006	0.230	2.42	OK
39	0.010	0.230	4.54	OK
40	0.009	0.230	3.78	OK




#### Test Result: Pass

**Status: Test Completed** 

#### Psti and limit line

**European Limits** 

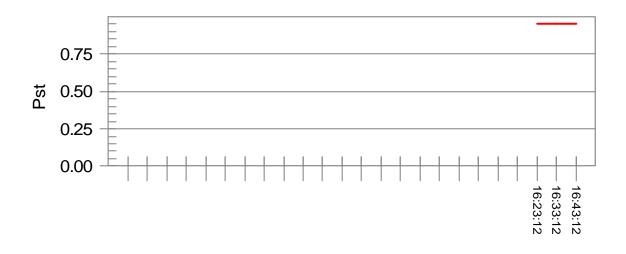

#### Time is too short for Plt plot

#### Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.93
Highest dt (%):	0.00
Time(mS) > dt:	0.0
Highest dc (%):	0.00
Highest dmax (%):	0.00
Highest Pst (10 min. period):	0.001
Highest Plt (2 hr. period):	0.001

Test limit (%):	3.14	Pass
Test limit (mS):	500.0	Pass
Test limit (%):	3.14	Pass
Test limit (%):	3.80	Pass
Test limit:	0.950	Pass
Test limit:	0.617	Pass




## **APPENDIX III - TEST RESULT OF FINAL DATAS**

**Conducted Emission Plot** 

**Radiated Emission Data** 



No. 199, Chung Sheng Road, Hsin Tien City, Taipei, Taiwan, R.O.C. Tel:02-2217-0894 Fax:02-2217-1029

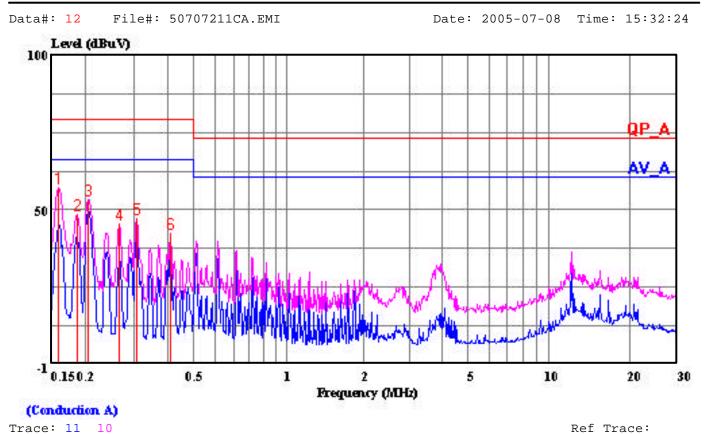

Ref Trace:


Condition: LI	NE
Report No. :	50707211
Test Engr. :	WEBBER JUNG
Company :	AAEON Technology Inc.
EUT :	FSB-866G
Test Config :	EUT / ALL PERIPHERALS
Type of Test:	EN 55022 CLASS A
Mode of Op. :	1600X1200, VF=60Hz

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.158	56.41	0.14	56.55	79.00	-22.45	Peak
2	0.185	47.78	0.14	47.92	79.00	-31.08	Peak
3	0.204	52.71	0.14	52.85	79.00	-26.15	Peak
4	0.266	44.58	0.17	44.75	79.00	-34.25	Peak
5	0.307	46.66	0.19	46.85	79.00	-32.15	Peak
б	0.408	41.53	0.20	41.73	79.00	-37.27	Peak

Page: 1



No. 199, Chung Sheng Road, Hsin Tien City, Taipei, Taiwan, R.O.C. Tel:02-2217-0894 Fax:02-2217-1029

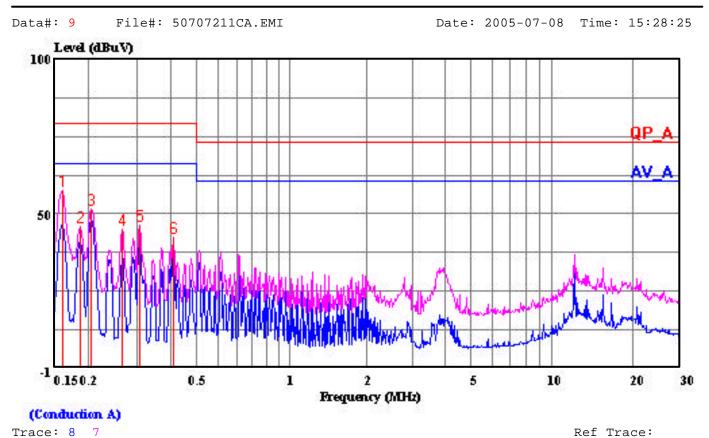

Ref Trace:


Condition: NEUTRAL
Report No. : 50707211
Test Engr. : WEBBER JUNG
Company : AAEON Technology Inc.
EUT : FSB-866G
Test Config : EUT / ALL PERIPHERALS
Type of Test: EN 55022 CLASS A
Mode of Op. : 1600X1200, VF=60Hz

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.160	56.83	0.13	56.96	79.00	-22.04	Peak
2	0.185	45.37	0.13	45.50	79.00	-33.50	Peak
3	0.204	50.79	0.13	50.92	79.00	-28.08	Peak
4	0.266	44.38	0.14	44.52	79.00	-34.48	Peak
5	0.307	45.84	0.15	45.99	79.00	-33.01	Peak
6	0.408	41.85	0.18	42.03	79.00	-36.97	Peak

Page: 1



No. 199, Chung Sheng Road, Hsin Tien City, Taipei, Taiwan, R.O.C. Tel:02-2217-0894 Fax:02-2217-1029

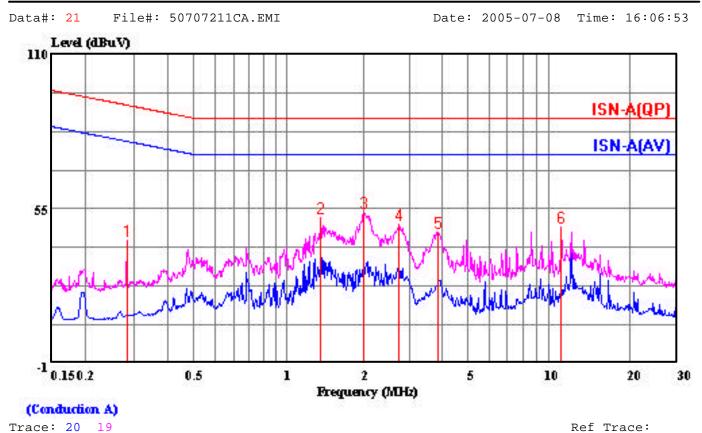

Ref Trace:

Condition: C	OMMON MODE
Report No. :	50707211
Test Engr. :	WEBBER JUNG
Company :	AAEON Technology Inc.
EUT :	FSB-866G
Test Config :	EUT / ALL PERIPHERALS
Type of Test:	EN 55022 CLASS A
Mode of Op. :	10Mbps / worst

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.283	33.45	9.53	42.98	91.72	-48.74	Peak
2	1.464	41.58	9.56	51.14	87.00	-35.86	Peak
3	2.110	43.60	9.57	53.17	87.00	-33.83	Peak
4	2.839	39.30	9.59	48.89	87.00	-38.11	Peak
5	3.964	36.47	9.60	46.07	87.00	-40.93	Peak
6	11.257	38.22	9.68	47.90	87.00	-39.10	Peak

Page: 1



Custom Name: AAEON Technology Inc. Model Name: FSB-866G Test Mode:1600X1200, VF=60Hz Project No.: 50707211 Engineer Name: ELVIS ZENG Date: 2005-07-12

Index: EN55022 Class-A 10m Vertical dBuV/m 80 Limit 70 6 dB Peak I 60 QP 50 40 4 7 5 30 20 10 MHz 0-100 300 30 EN55022 Class-A 10m Vertical dBuV/m 80 Limit -6 dB 70-Peak I 60 QP K 50 11 9 10 40 30 20 10 MHz 0-1000 300 Freq(MHz) Peak(dBuV/m) QP(dBuV/m) Margin(dB) Limit(dBuV/m) Reading(dBuV) Factor(dB) Height Degree Comment 39.3500 100 0 1 33.52 -6.48 40.00 49.29 -15.77 2 64.7000 28.57 -11.43 40.00 50.65 -22.08 100 0 3 125.0300 -13.40 40.00 41.45 -14.85 100 360 26.60 4 135.1940 31.28 -8.72 40.00 46.48 -15.20 100 310 158.9300 -7.37 40.00 48.30 -15.67 100 119 5 32.63 31.94 -8.06 40.00 48.35 -16.41 100 311 6 199.8750 7 208.9300 30.53 -9.47 40.00 46.17 -15.64 100 0 8 250.0200 34.98 -12.02 47.00 47.08 -12.10 100 232 9 -10.04 47.00 42.21 -5.25 400 340 454.7300 36.96 639.3000 36.18 -10.82 47.00 37.91 -1.73 400 141 10 -8.54 -1.27 700.5200 47.00 39.73 11 38.46 400 360

Site H



Custom Name: AAEON Technology Inc. Model Name: FSB-866G Test Mode:1600X1200, VF=60Hz Project No.: 50707211 Engineer Name: ELVIS ZENG Date: 2005-07-12

Index: EN55022 Class-A 10m Horizontal dBuV/m 80 Limit 70 6 dB Peak I 60 QP 50 40 3 4 2 30 20 10 MHz 0-100 300 30 EN55022 Class-A 10m Horizontal dBuV/m 80 Limit -6 dB 70-Peak 60 QP K 50 9 8 11 40 30 20 10 MHz 0-1000 300 Freq(MHz) Peak(dBuV/m) QP(dBuV/m) Margin(dB) Limit(dBuV/m) Reading(dBuV) Factor(dB) Height Degree Comment 67.2500 1 25.32 -14.68 40.00 47.20 -21.88 400 339 108 2 86.0200 28.74 -11.26 40.00 47.63 -18.89 400 130.7800 31.22 -8.78 40.00 46.27 -15.05 400 275 3 4 159.3200 31.33 -8.67 40.00 47.01 -15.68 400 359 199.9080 34.25 -5.75 40.00 0 5 50.66 -16.41 400 -5.90 47.00 -9.38 400 255 6 331.8500 41.10 50.48 7 405.6000 40.92 -6.08 47.00 47.54 -6.62 100 0 8 430.1450 38.08 -8.92 47.00 44.02 -5.94 100 0 -8.57 47.00 -5.25 100 77 9 454.7500 38.43 43.68 675.9480 42.33 47.00 43.80 -1.47 100 162 10 -4.67 47.00 -1.27 11 700.5010 38.38 -8.62 39.65 100 0 0 12 725.1000 42.83 -4.17 47.00 43.59 -0.76 100

Site H