

Features

- Onboard Intel® Atom™ D2550/N2600 Processor
- Intel® NM10
- SODIMM DDR3 1066 Memory, Max. 4 GB
- 10/100Base-TX Ethernet
- CRT, Up to 24-bit Dual-channel LVDS LCD
- SATA 3.0Gb/s x 3, USB2.0 x 6, PATA x 1, SATA SSD (Optional)
- PCI-Express [x1] x 4, PCI x 4



Specifications

System	
Form Factor	XTX
Processor	Intel® Atom™ D2550/N2600 processor D2550: 1.86 GHz N2600: 1.6 GHz
System Memory	204-pin DDR3 SODIMM x1, Max. 4 GB (DDR3 800/1066) D2550 800/1066MHz: Max. 4 GB N2600 800 MHz: Max. 2 GB
Chipset	Intel® NM10
I/O Chipset	Intel® NM10
Ethernet	Realtek RTL8105E, 10/100Base-TX
BIOS	AMI BIOS SPI type, 4MB ROM
Wake On LAN	Yes
Watchdog Timer	Winbond W83627DHG/PT, 255 levels
H/W status Monitoring	Supports CPU temperature monitoring
Expansion interface	PCI-Express [x1] x 4 32-bit PCI x4 LPC bus x 1 SMBus x 1
Power Requirement	Intel® Atom™ D2550 1.86 GHz, DDR3 2GB 3.94A @ +5V, 0.3A @ +12V w/ECB-910M Intel® Atom™ N2600 1.6 GHz, DDR3 2GB 2.46A @ +12V, 0.3A @ + 12V w/ECB-910M
Power Consumption	Intel® Atom™
Board Size	4.5" (L) x 3.74"(W) (114mm x 95mm)
Gross Weight	0.55 lb (0.25 kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	69,000
Display	
	Supports CRT/LVDS simultaneous/ dual view displays
Chipset	Intel® Atom™ D2550/N2600 processor integrated DirectX 9, OpenGL *3.0 Integrated hardware MPEG2 decoder
Memory	Shared system memory up to 512MB/ DVMT 5.0
Resolution	Up to 1920 x 1200 for CRT Up to 1920 x 1080@24-bit for LCD (D2550) Up to 1366 x 768@18-bit for LCD (N2600)
LCD Interface	Up to 24-bit dual-channel LVDS
I/O	
Storage	PATA x1 (One device) SATA 3.0Gb/s x 3 SATA SSD up to 16G (optional)
Serial Port	2
Parallel Port	1

USB	USB 2.0 x 6
PS/2 Port	Keyboard x 1, Mouse x 1
IrDA	One IrDa Tx/Rx Header
Audio	Mic-in, Line-in, Line-Out


Packing List

- M2.5 Screw x 4
- Product CD
- XTX-CV

XTX-CV

Dimension

Unit: mm

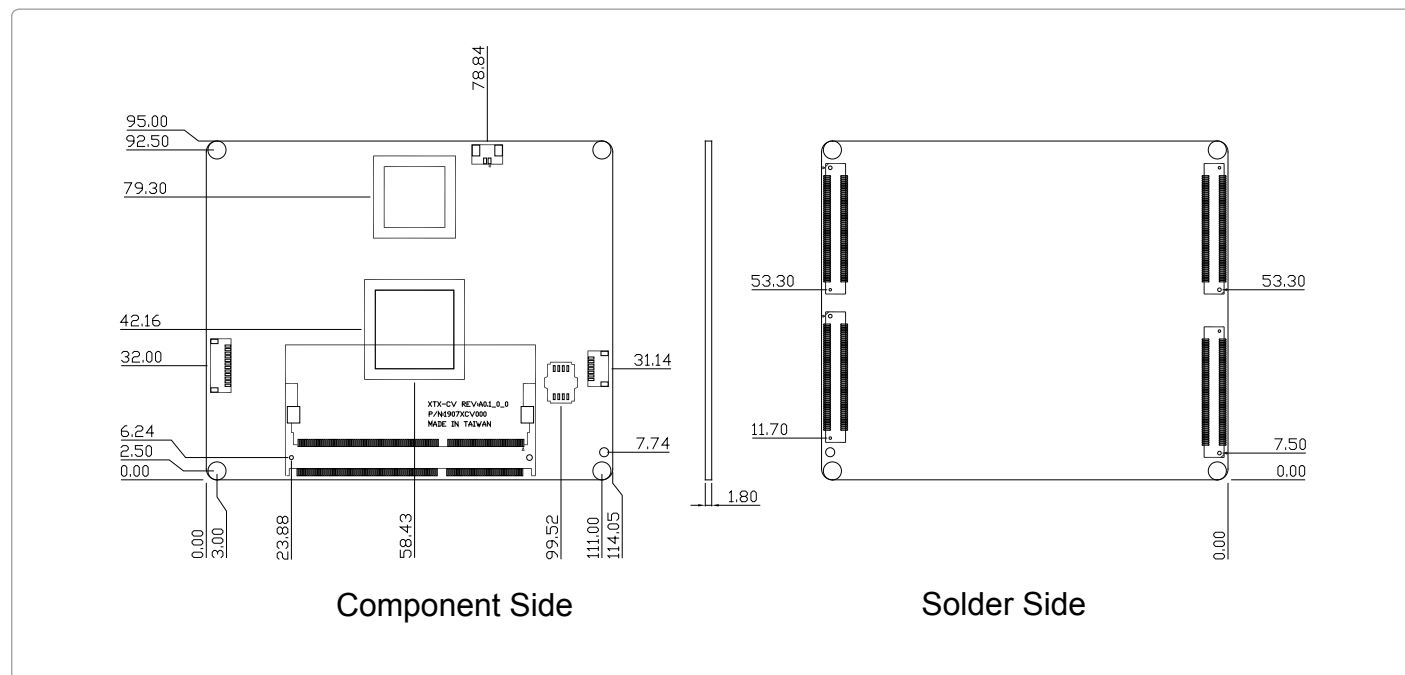

Ordering Information

Part Number	CPU	Memory	Display	LVDS	Storage	LAN	USB2.0	KB/MS	URAT	LPT	Expansion Slot	Power	Temp
TF-XTX-CV-A10	Intel® Atom™ D2550/1.86GHz	DDR3 SODIMM x 1 Max. 4GB	CRT, LVDS	24-bit dual channel	SATA2 x 3 PATA x 1	FE x 1	6	1	2	1	PCI-E[1] x 4 32-bit PCI x 4	5V	0°C~60°C
TF-XTX-CV-A10-01	Intel® Atom™ N2600/1.6GHz	DDR3 SODIMM x 1 Max. 2GB	CRT, LVDS	18-bit dual channel	SATA2 x 3 PATA x 1	FE x 1	6	1	2	1	PCI-E[1] x 4 32-bit PCI x 4	5V	0°C~60°C

Optional Accessories

- TF-ECB-910M-BA10**
 XTX Carrier Board, LAN, Audio, 4 COM, USB, PCI-E, 2 SATA, TPM, AT/ATX, Rev.A1.0
- TF-PER-A119**
 Heat Spreader, For XTX/ETX-CV
- TF-PER-A120**
 Passive Heat-sink, For XTX/ETX CPU Module
- TF-PER-A121**
 CPU Cooler, 35W, For XTX/ETX CPU Module