ARC-615F

1U 4-slot Rackmount Chassis, Full-size CPU Cards Support

HDD LED
Power LED

Features

- *1U Rackmount Chassis*
- *Supports 2 Slots PICMG_PCI Bus Passive Backplane (Support Half-size PCI Card Only)*
- *Supports Standard 1U Power Supply Up To 180W*
- *One Internal 3.5" Hard Disk Drive Bay*
- *Aluminum, Steel Front Panel Option*
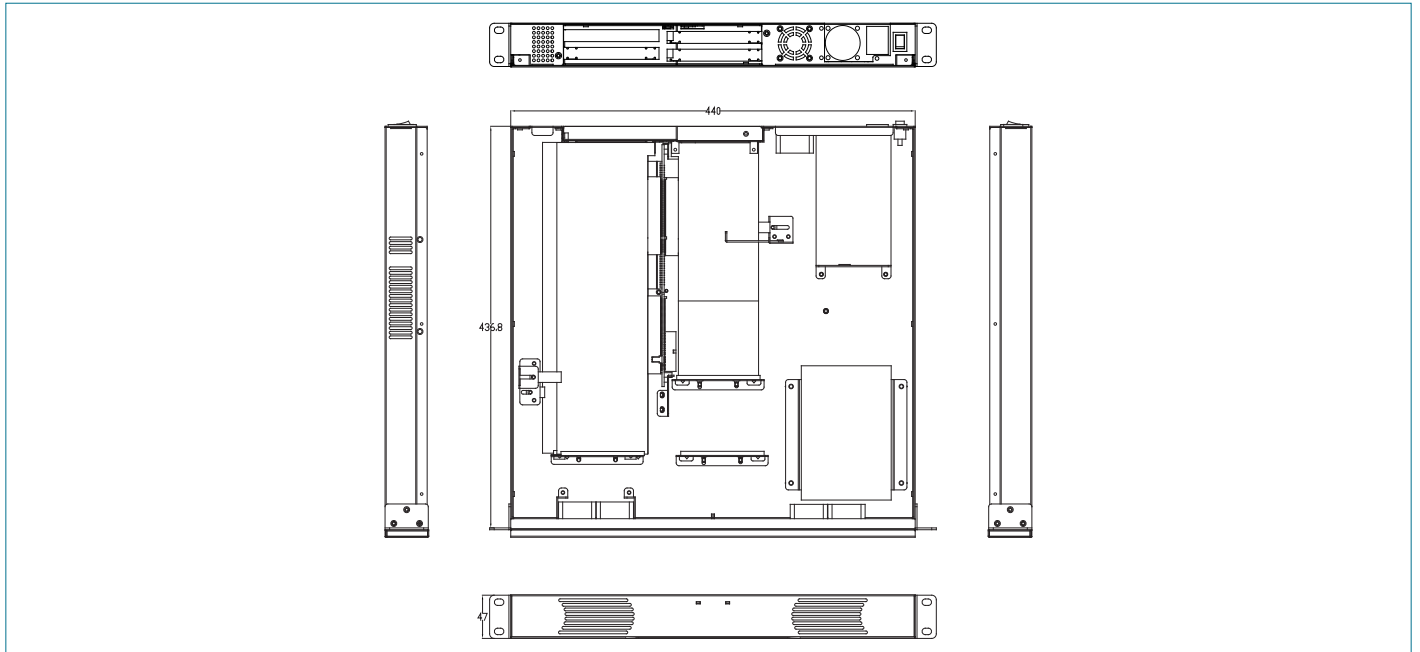- *Special Card Holders To Resist Transportation Shock*

CE FC

Specifications

1U Power Supply

Power Switch

System	
Construction	Heavy-duty steel chassis
Storage	Internal: 3.5" Hard Disk Drive x 1 (for SATA HDD)
System Fan	External : 4cm ball bearing fan x 1 Internal : 4cm ball bearing fan x 4
Front Panel	Power LED x 1 HDD Active LED x 1
Rear Panel	ATX power switch
Color	Black
Dimensions	19" (W) x 1.8" (H) x 18.4" (D) (486mm x 47mm x 450mm)
Carton Size	22.2" (W) x 6.7" (H) x 21.7" (D) (565mm x 170mm x 550mm)
Net Weight	—
Gross Weight	37.4 lb (17kg)
Environmental	
Operating Temperature	32ºF ~ 104ºF (0ºC ~ 40ºC)
Storage Temperature	-4ºF ~ 176ºF (-20ºC ~ 80ºC)
Operating Humidity	10 ~ 90%
Storage Humidity	10 ~ 90% @ 40ºC , non-condensing
Vibration	0.5G / 5 ~ 500Hz / operation (3.5" Hard Disk Drive) 1.5G / 5 ~ 500Hz / non operation
Shock	10G peak acceleration (11 m sec. Duration), operation
EMC	CE, FCC Class A

AAEON®

ARC-615F

Dimension   Unit: mm

CPU Card Options

Model/Name	CPU Level	Master Interface
TF-FSB-868G	Socket LGA 775 P4/ P-D/ Celeron® D/ Core™2 Duo (533/800/1066 MHz)	PICMG

Ordering Information

Model/Name	Description	Remark
TF-ARC-615F-B	Rackmount 1U Chassis Bare, 4-slots Backplane, Power 1U, PS_SW(ATX),Black	

Ordering Accessories

Model/Name	Description	Remark
1709070800	(TF) SATA Cable, 7P Pitch 1.27mm, 80cm, w/Lock	