
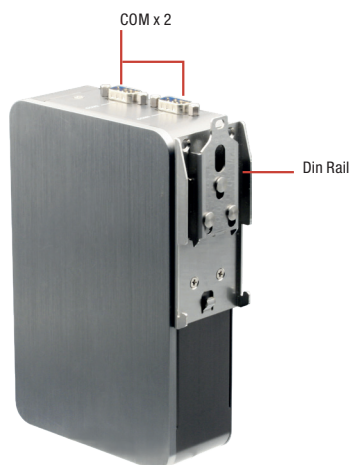


Din Rail Mount Embedded BOX PC with Intel[®] Atom[™] Processor N4200 or N3350

Features

- Slim Design: Min. width 44mm
- Designed for Embedded Automation Controller
- Gigabit Ethernet x 2, USB x 4
- Operate in -30 °C ~ 60 °C Environment
- Support Din Rail Mount

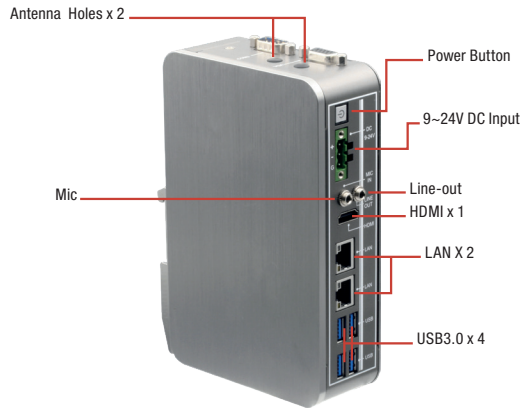


Specifications

System	
CPU	Intel [®] Pentium [®] processor N4200 Intel [®] Celeron [®] processor N3350
Chipset	Intel [®] System on Chip
System Memory	DDR3L 1866 SODIMM slot x 1, up to 8GB
Display Interface	HDMI, VGA
Storage Device	HDD/SSD, optional mSATA
Network	Intel [®] i211-AT x 1 Intel [®] i219-LM x 1
I/O	VGA x 1 HDMI x 1 RJ-45 x 2 for GbE LAN USB Type A x 4 for USB 3.0 Mic-in x 1 Line-out x 1 RS-232/422/485 x 3 with automatic flow control Power On/Off Button x 1 DC-in 3-pin terminal block (9~24V) x 1
Expansion	Full-size Minicard x 1 w/ SIM Slot Half-size Minicard x 1 (optional for mSATA)
Indicator	Power LED on power button
OS Support	Windows [®] 10 64 bit Windows [®] 10 IoT 64 bit Linux Ubuntu 16.04.4
Power Supply	
Power Requirement	9 - 24V with 3-pin terminal block
Mechanical	
Mounting	DIN Rail Mount
Dimensions (W x H x D)	44mm(W) x 166mm(H) x 106mm(D)
Gross Weight	3.08lb (1.4kg)
Net Weight	1.32lb (0.6kg)
Environmental	
Operating Temperature	-30°C ~ 60°C with W.T. SSD/HDD/mSATA (according to IEC68-2-14 with 0.5 m/s AirFlow ; with industrial devices)
Storage Temperature	-49°F ~ 176°F (-45°C ~ 80°C)
Storage Humidity	95% @ 40°C, non-condensing
Anti-Vibration	3 Grms/ 5 ~ 500Hz/ operation – mSATA/SSD 1 Grms/ 5~ 500Hz/ operation – HDD
Certification	CE/FCC class A

Dimension

Unit: mm

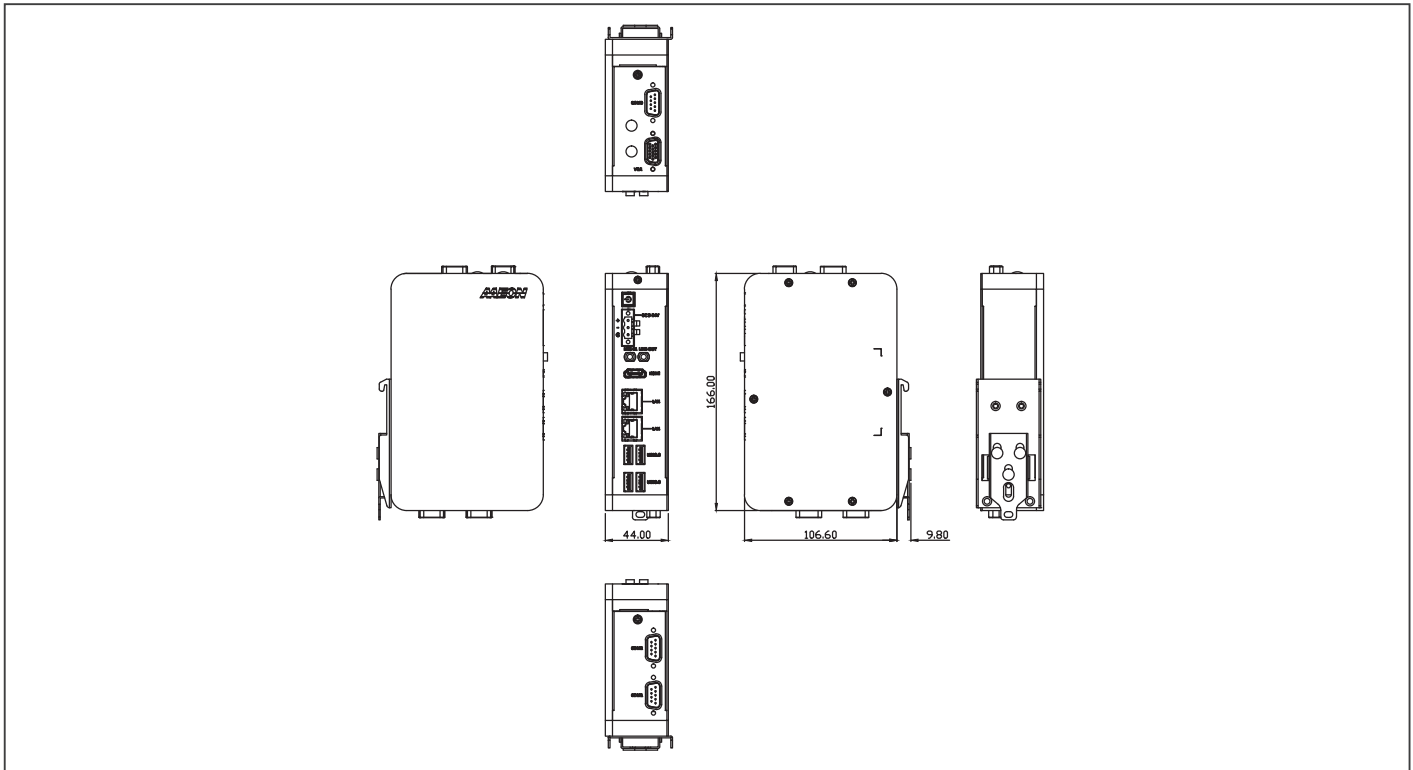

Ordering Information

Part Number	CPU	PCH	RAM	LAN	USB 3.0	USB 2.0	RS-232	RS-232/422/485	Digital I/O	Audio	Storage	Display	Expansion	Mounting	Power	Operation temp.
BOXER-6710-A1-1010	N3350	SoC	—	2	4	—	—	3	—	MIC-in, Line-out	2.5" SATA Drive bay x 1 Optional mSATA x1	VGA x 1 HDMI x 1	Full-size Minicard x 1 Half-size Minicard x1	Din Rail Mount	9~24V	-30°C ~ 60°C
BOXER-6710-A2-1010	N4200	SoC	—	2	4	—	—	3	—	MIC-in, Line-out	2.5" SATA Drive bay x 1 Optional mSATA x1	VGA x 1 HDMI x 1	Full-size Minicard x 1 Half-size Minicard x1	Din Rail Mount	9~24V	-30°C ~ 60°C

Packing List


- Din Rail Bracket x 1
- Screw Package x 1
- Product DVD x 1
- 3 Pin DC-In Power Connector x 1
- BOXER-6710

Optional Accessories

- 1255300402
Power Adapter
- 1702031802
Power Cord (US Type)
- 1702031803
Power Cord (Europe)
- 170203180E
Power Cord (Japan)
- 9741238H00
WiFi Module & Antenna
- 9741EC20E0
4G Module & Antenna(for Europe)
- 9741640404
Din Rail Mount Kit

Din Rail Mount Embedded BOX PC with Intel® Core™ i3-6100U or Celeron® 3955U Processor

Front View

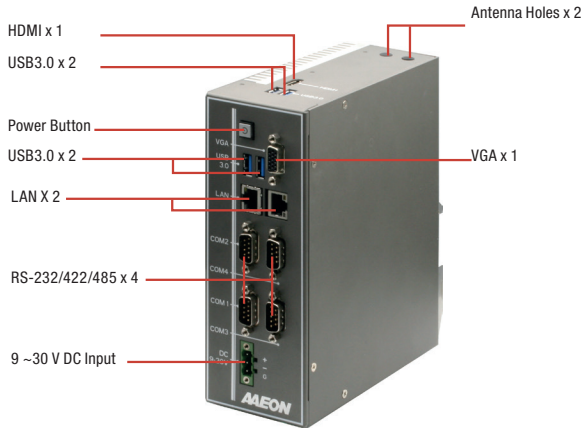

Rear View



Features

- U-Series CPU: Intel® Core™ i3-6100U/ Celeron® 3955U
- DDR4 2133 MHz SODIMM x 1, Memory Max. up to 16GB
- Supports Industrial-grade Intel® GbE LAN x 2
- Supports BIOS Selectable RS-232/422/485 x 4
- VGA + HDMI Dual Display Output
- USB3.0 x 4
- 8-bit Digital Input and Output x 1 (Optional)
- Wide Range DC 9~30V Input With Power Protection
- Wide Temperature -20 °C ~ 60 °C
- Din-Rail Mount Design




Mechanical	
Mounting	DIN Rail Mount Wallmount (Mounting kit is optional)
Dimensions (W x H x D)	69mm (W) x 183mm (H) x 155mm (D)
Gross Weight	6.1 lb (2.8kg)
Net Weight	3.9 lb (1.8kg)
Environmental	
Operating Temperature	-20°C ~ 60°C with W.T. SSD/HDD/mSATA (according to IEC68-2-14 with 0.5 m/s AirFlow ; with industrial devices)
Storage Temperature	-49°F ~ 176°F (-45°C ~ 80°C)
Storage Humidity	95% @ 40°C, non-condensing
Anti-Vibration	3 Grms/ 5 ~ 500Hz/ operation – mSATA/SSD 1 Grms/ 5~ 500Hz/ operation – HDD
Certification	CE/FCC class A

Specifications

System	
CPU	Intel® Core™ i3-6100U Intel® Celeron® 3955U
Chipset	Intel® System on Chip
System Memory	DDR4 2133MHz SODIMM slot x 1, up to 16GB
Display Interface	HDMI x 1, VGA x 1
Storage Device	mSATA, HDD/SSD
Ethernet	Intel® i210-IT x 2
I/O	RS-232/422/485 x 4 RJ-45 x 2 for GbE (i210IT x 2) USB 3.0 x 4 VGA x 1 HDMI x 1 Antenna Holes x 2 Power Switch Power Input
Expansion	Full-size minicard x 1 (PCIe+USB with SIM slot, optional for mSATA) Full-size minicard x 1 (PCIe+USB)
Indicator	Power LED on power button
OS Support	Windows® 10 (64 bit) Windows® 8.1 (64 bit) Windows® 7 (32/64 bit) Linux
Power Supply	
Power Requirement	9 - 30V with 3-pin terminal block

Dimension

Unit: mm

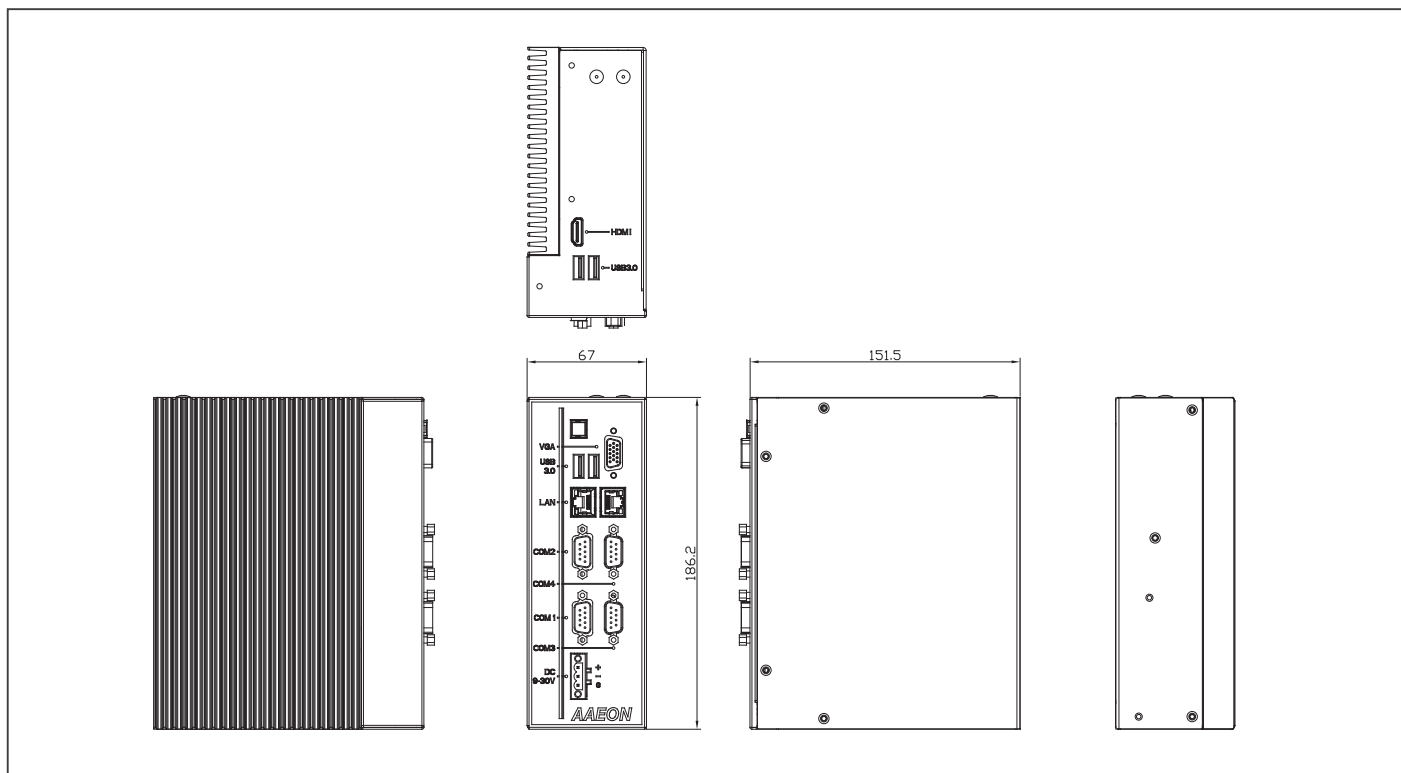

Ordering Information

Part Number	CPU	RAM	LAN	USB 3.0	USB 2.0	RS-232	RS-232/422/485	Digital I/O	Audio	Storage	Display	Expansion	Mounting	Power	Operation temp.
BOXER-6750-A1-1010	Intel® Core™ i3-6100U	—	2	4	—	—	4	—	—	2.5" SATA Drive bay x 1 Optional mSATA x 1	VGA x 1 HDMI x 1	Full-size Minicard x 2	Din Rail Optional Wallmount	9-30V	-20°C ~ 60°C
BOXER-6750-A2-1010	Intel® Celeron® 3955U	—	2	4	—	—	4	—	—	2.5" SATA Drive bay x 1 Optional mSATA x 1	VGA x 1 HDMI x 1	Full-size Minicard x 2	Din Rail Optional Wallmount	9-30V	-20°C ~ 60°C

Packing List

- Din Rail Bracket x 1
- Screw Package x 1
- Product DVD x 1
- 3 Pin DC-In Power Connector x 1
- BOXER-6750

Optional Accessories

- 1255900841
Power Adapter
- 1702031802
Power Cord (US Type)
- 1702031803
Power Cord (Europe)
- 170203180E
Power Cord (Japan)
- 9741909A00
Wifi 802.11 a/b/g/n + BT 4.0 Kit
- 9741UC20G0
3G module Kit
- 9741640404
Din Rail Mount Kit