



RT-620R-C246

2U Industrial Server Chassis with 8th/9th Generation Intel® Core™ Processor, DDR4 DRAM, Multiple Display Ports, Supports iAMT 12.0

Front View

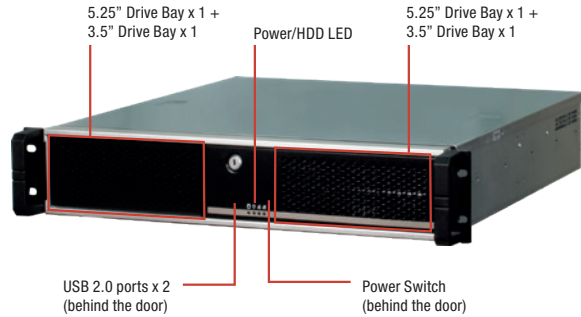

Rear View

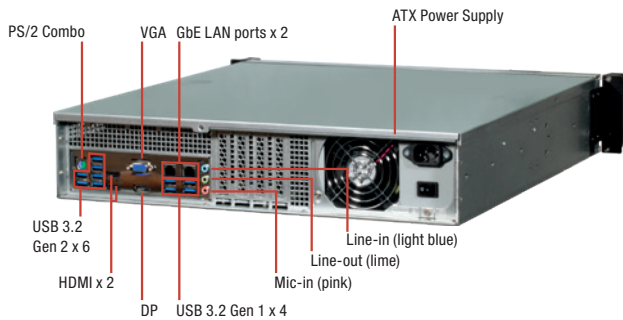

Features

- Industrial computer/workstation for automation and AI edge Computing
- 8th/9th Generation Intel® Core™, Celeron™, Xeon® E-2200/2100, LGA 1151 socket Processor
- DDR4 2666/2400/2133 MHz, max. 64GB
- Two Independent Displays: HDMI x 2, DP x 1
- Dual Intel® Gigabit Ethernet, i211AT x 1, i219LM x 1, i219LM Supports iAMT 12.0
- USB 3.2 Gen 2 ports x 6, USB 3.2 Gen 1 ports x 4
- M.2 E-key (PCIe/USB) x 1, M.2 M-key (PCIex4/SATA3) x 1
- Intel® VPU with 8x Myraid X support for AI acceleration(optional)
- Support Windows® 10 64bit, Linux Ubuntu 64bit (18.04.1/Kernal4.8.0) and later
- Support AAEON grabber card



H/W Monitor	Temperature Monitor on CPU/System, Voltage Monitor on Vcore/5V/3.3V/12V, Fan Monitor on CPU/Chassis
Watchdog Timer	1~255 steps by software program
Smart Fan control	CPU Fan connector(s) (4-pin) x 1 Chassis Fan connector(s) (4-pin) x 2
Wake On LAN/ PXE	Yes (WOL / PXE)
Power State	S3, S4, S5
System Fan	Front: 1 x 80mm (T=32mm), PWM mode. Rear: 2 x 40mm (T=28mm)(Option), PWM mode.
I/O	
Front Panel	Power On/Off, System Reset, 2 x USB 2.0
Rear Panel I/O	USB 3.2 Gen 2 ports (10 Gbps) x 6, USB 3.2 Gen 1 ports (5 Gbps) x 4 DP x 1, HDMI x 2 Audio Jack x 3: Line-in, Mic-in, Line-out PS/2 combo Port (Keyboard & Mouse) x 1 LAN (RJ45) ports x 2
Internal I/O connectors	Storage: SATA III (6.0Gb/s) ports x 4, support RAID 0/1/5/10, M.2 2280 M-key (PCIex4/SATA3) x 1 USB: USB 2.0 headers support additional 3 USB ports (2x5PIN, p=2.54mm) x 2 Audio I/O: Speaker for 2W@4Ω x 1 Serial Port: RS-232 Boxer headers x 5, RS-232/422/485 Boxer header (COM1, Pin9 supports 5V/12V/RI optional) x 1 DIO: 8-bit Digital I/O interface (In/Out programmable) x 1 FAN: CPU Fan connector(s) (4-pin) x 1, Chassis Fan connector(s) (4-pin) x 2 Others: Chassis Intrusion x 1, AT/ATX mode select jumper x 1, Front panel header x 1, Clear CMOS jumper x 1
Expansion	PCIe 3.0[x16] Slot x 1, PCIe 3.0[x4] Slot (open edge) x 2, PCIe 3.0[x1] Slot (open edge) x 1, M.2 2230 E-key (PCIe+USB) x 1, M.2 2280 M-key (PCIex4/SATA3) x 1
Power	
Battery	—
Power Requirement	ATX power supply Input: 90~264V Output: 500W.
Mechanical	
Color	Silver
Dimensions (W X H X D)	457.2 x 430 x 88 (mm) , 18" x 16.9" x 3.5"
Gross Weight	TBC
Net Weight	TBC
Environmental	
Operating Temperature	32°F ~ 113°F (0°C ~ 45°C)
Storage Temperature	-49°F ~ 176°F (-45°C ~ 80°C)
Storage Humidity	0%~90%RH, non-condensing


Specifications

System	
CPU	8th/9th Generation Intel® (Coffee Lake-S) Core™ i9/ i7/ i5/ i3, Pentium™ 14nm, Celeron™, Xeon™ E-2200/2100, LGA 1151 socket Processor, Max. 95W(E-2278GE, 8C16T)
Chipset	Intel® C246 Express Chipset
System Memory	DIMM x 4, DDR4 (2666/2400/2133 MHz, max. 64GB), ECC, un-buffered memory, Dual-channel memory architecture
I/O Chipset	NCT6793D+ F81216HD
Display Interface	HDMI x 2, DP x 1
Storage	SATA III (6.0Gb/s) ports x 4, support RAID 0/1/5/10 M.2 2280 M-key (PCIex4/SATA3) x 1
Storage Devices	Exposed: 2 x 5.25" + 2 x 3.5" Internal: 2 x 2.5"
Audio	Realtek® ALC887 6-Channel High Definition Audio CODEC
Ethernet	Intel® PHY i219LM Gb LAN (supports Intel® AMT 12.0) x 1 Intel® i211AT Gb LAN x 1 RJ45 x 2
TPM	Nuvoton NPCT750AAAYX TPM2.0

RT-620R-C246

Dimension

Unit: mm

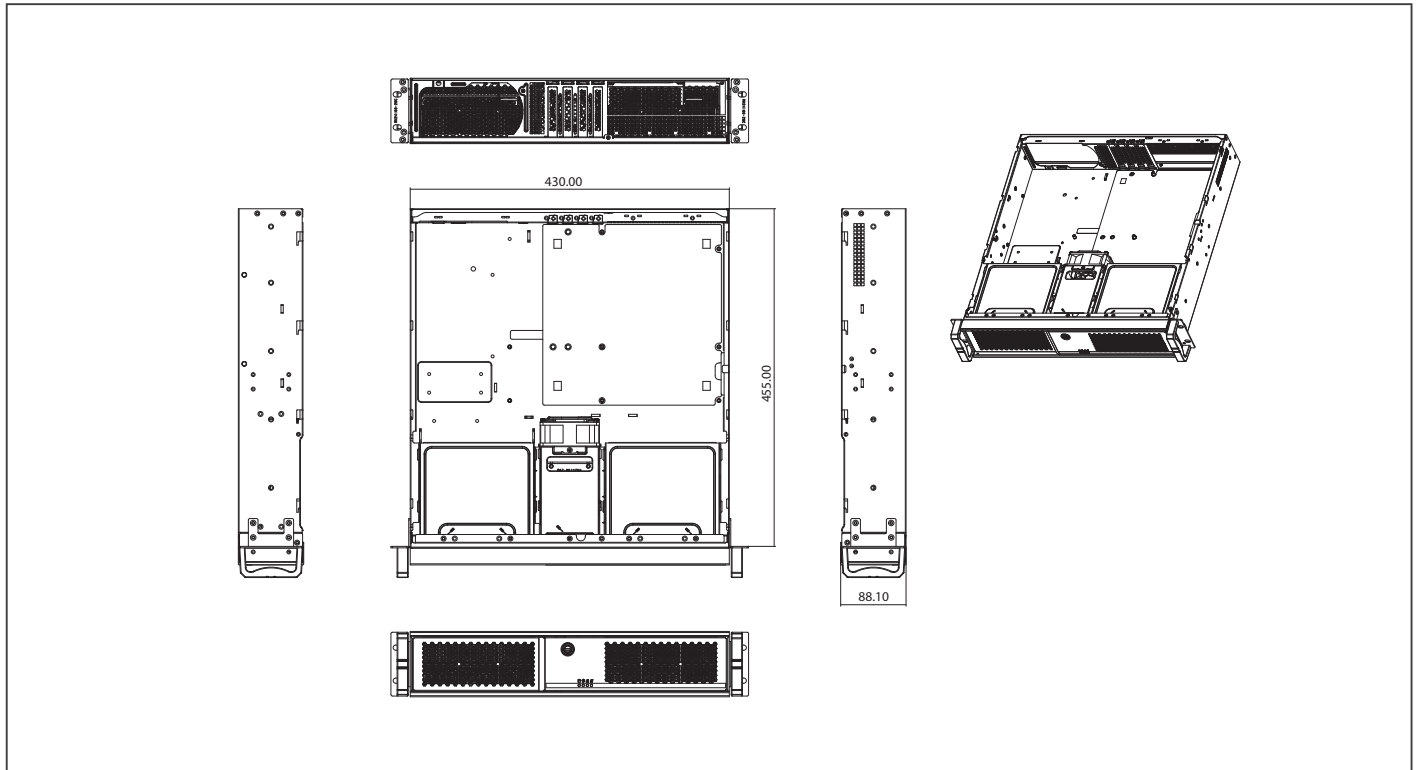

Packing List

- Product CD (Driver DVD)
- Accessory Box (Cable And Screw Bag)
- RT-620R-C246

Ordering Information

- RT-620R-C246-A10-001
2U Rackmount Chassis, MAX-C246A, ATX power supply 500W, Silver color


Optional Accessories

- COOLER-65W-01
1U CPU cooler
- AP-FNTH1Q370010
2U CPU cooler for TDP 95W
- 175921156B
2U CPU Cooler (2-Ball, Push-pin Type)
- 1759200172
2U CPU Cooler (2-Ball, Screw with Retention Plate)
- 1702031802
Power Cord (US & Taiwan Type)
- 1702031803
Power Cord (European Type)
- 170203180E
Power Cord (Japanese Type)
- AP-FW9789182100
(TF)3.5" to 2.5" HDD bracket.Tragant.DeLock 18210
- AP-OT9789343000
5.25" converter bracket, supports 1x 3.5" hard drive or 2 x 2.5" hard drive


RT-620R-Q370

2U Industrial Server Chassis with 8th/9th Generation Intel® Core™ Processor, DDR4 DRAM, Multiple Display Ports, Supports iAMT 12.0

Front View

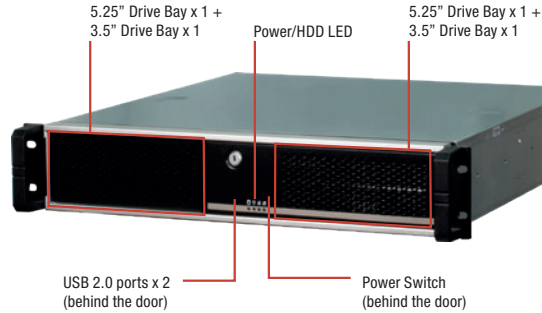

Rear View

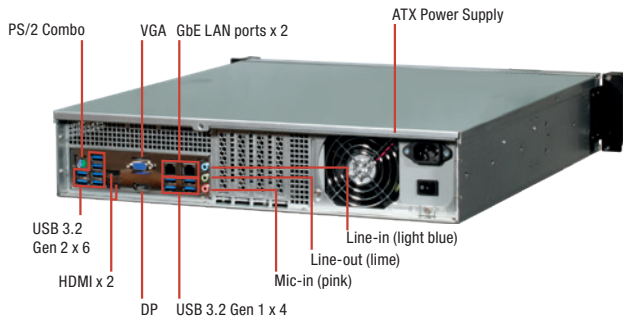

Features

- Industrial computer/workstation for automation and AI edge Computing
- 8th/9th Generation Intel® Core™, Celeron™ LGA 1151 socket Processor
- DDR4 2666/2400/2133 MHz, max. 64GB
- Two Independent Displays: HDMI x 2, DP x 1
- Dual Intel® Gigabit Ethernet, i211AT x 1, i219LM x 1, i219LM Supports iAMT 12.0
- USB 3.2 Gen 2 ports x 6, USB 3.2 Gen 1 ports x 4
- M.2 E-key (PCIe/USB) x 1, M.2 M-key (PCIex4/SATA3) x 1
- Intel® VPU with 8x Myraid X support for AI acceleration(optional)
- Support Windows® 10 64bit, Linux Ubuntu 64bit (18.04.1/Kernal4.8.0) and later
- Support AAEON grabber card



H/W Monitor	Temperature Monitor on CPU/System, Voltage Monitor on Vcore/5V/3.3V/12V, Fan Monitor on CPU/Chassis
Watchdog Timer	1~255 steps by software program
Smart Fan control	CPU Fan connector(s) (4-pin) x 1 Chassis Fan connector(s) (4-pin) x 2
Wake On LAN/ PXE	Yes (WOL / PXE)
Power State	S3, S4, S5
System Fan	Front: 1 x 80mm (T=32mm), PWM mode. Rear: 2 x 40mm (T=28mm)(Option), PWM mode.
I/O	
Front Panel	Power On/Off, System Reset, 2 x USB 2.0
Rear Panel I/O	USB 3.2 Gen 2 ports (10 Gbps) x 6, USB 3.2 Gen 1 ports (5 Gbps) x 4 DP x 1, VGA x 1, HDMI x 2 Audio Jack x 3: Line-in, Mic-in, Line-out PS/2 combo Port (Keyboard & Mouse) x 1 LAN (RJ45) ports x 2
Internal I/O connectors	Storage: SATA III (6.0Gb/s) ports x 4, support RAID 0/1/5/10, M.2 2280 M-key (PCIex4/SATA3) x 1 USB: USB 2.0 headers support additional 3 USB ports (2x5PIN, p=2.54mm) x 2 Audio I/O: Speaker for 2W@4Ω x 1 Serial Port: RS-232 Boxer headers x 5, RS-232/422/485 Boxer header (COM1, Pin9 supports 5V/12V/RI optional) x 1 DIO: 8-bit Digital I/O interface (In/Out programmable) x 1 FAN: CPU Fan connector(s) (4-pin) x 1, Chassis Fan connector(s) (4-pin) x 2 Others: Chassis Intrusion x 1, AT/ATX mode select jumper x 1, Front panel header x 1, Clear CMOS jumper x 1
Expansion	PCIe 3.0[x16] Slot x 1, PCIe 3.0[x4] Slot (open edge) x 2, PCIe 3.0[x1] Slot (open edge) x 1, M.2 2230 E-key (PCIe+USB) x 1, M.2 2280 M-key (PCIex4/SATA3) x 1
Power	
Battery	—
Power Requirement	ATX power supply Input: 90~264V Output: 500W.
Mechanical	
Color	Silver
Dimensions (W X H X D)	457.2 x 430 x 88 (mm) , 18" x 16.9" x 3.5"
Gross Weight	TBC
Net Weight	TBC
Environmental	
Operating Temperature	32°F ~ 113°F (0°C ~ 45°C)
Storage Temperature	-49°F ~ 176°F (-45°C ~ 80°C)
Storage Humidity	0%~90%RH, non-condensing


Specifications

System	
CPU	8th/9th Generation Intel® (Coffee Lake-S) Core™ i9/ i7/ i5/ i3, Pentium™ 14nm LGA 1151 socket Processor, Max. 95W
Chipset	Intel® Q370 Express Chipset
System Memory	DIMM x 4, DDR4 (2666/2400/2133 MHz, max. 64GB) non-ECC, un-buffered memory Dual-channel memory architecture
I/O Chipset	NCT6793D+ F81216HD
Display Interface	HDMI x 2, DP x 1
Storage	SATA III (6.0Gb/s) ports x 4, support RAID 0/1/5/10 M.2 2280 M-key (PCIex4/SATA3) x 1
Storage Devices	Exposed: 2 x 5.25" + 2 x 3.5" Internal: 2 x 2.5"
Audio	Realtek® ALC887 6-Channel High Definition Audio CODEC
Ethernet	Intel® PHY i219LM Gb LAN (supports Intel® AMT 12.0) x 1 Intel® i211AT Gb LAN x 1 RJ45 x 2
TPM	Nuvoton NPCT750AAAYX TPM2.0 onboard

RT-620R-Q370

Dimension

Unit: mm

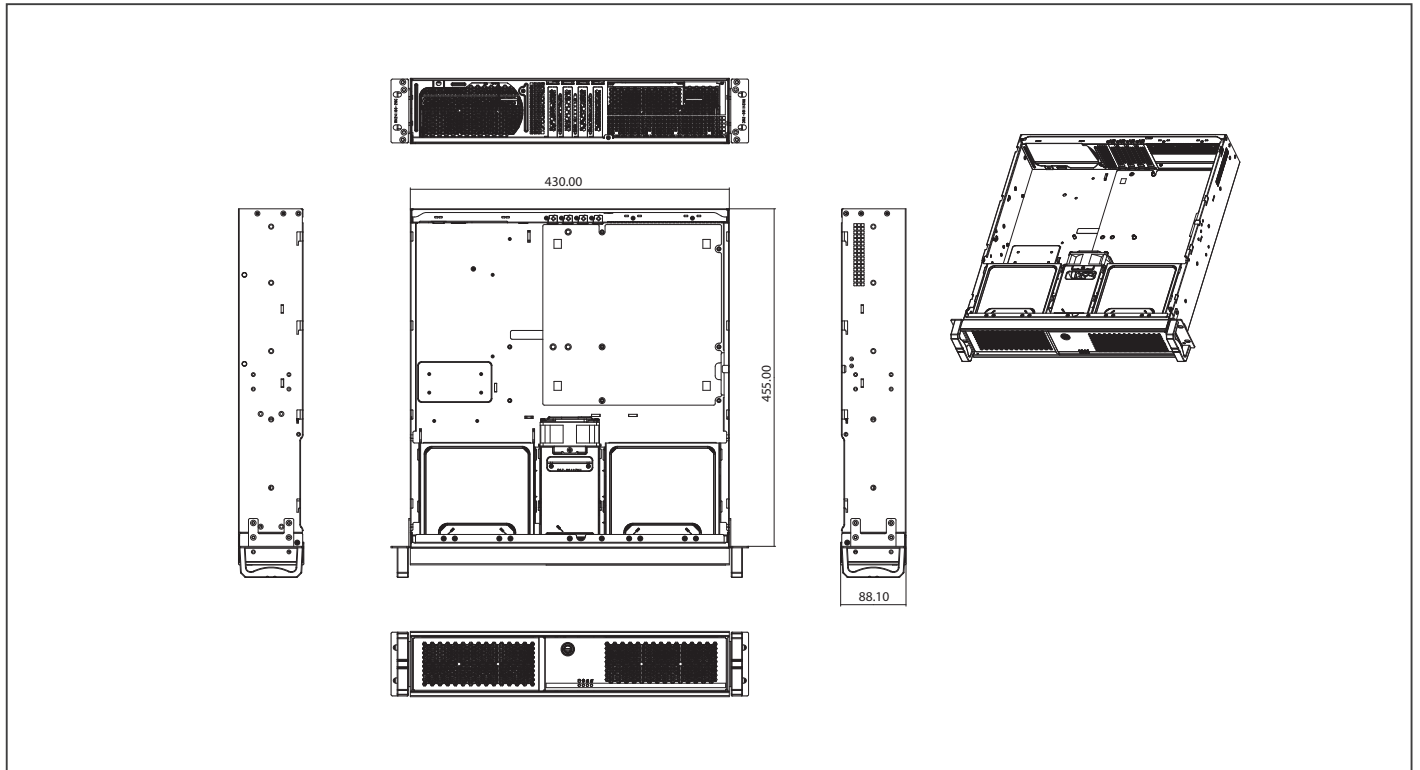

Packing List

- Product CD (Driver DVD)
- Accessory Box (Cable And Screw Bag)
- RT-620R-Q370

Ordering Information

- RT-620R-Q370-A10-001
2U Rackmount Chassis, MAX-Q370A, ATX power supply 500W, Silver color

Optional Accessories


- COOLER-65W-01
1U CPU cooler
- AP-FNTH1Q370010
2U CPU cooler for TDP 95W
- 175921156B
2U CPU Cooler (2-Ball, Push-pin Type)
- 1759200172
2U CPU Cooler (2-Ball, Screw with Retention Plate)
- 1702031802
Power Cord (US & Taiwan Type)
- 1702031803
Power Cord (European Type)
- 170203180E
Power Cord (Japanese Type)
- AP-FW9789182100
(TF)3.5" to 2.5" HDD bracket.Tragant.DeLock 18210
- AP-OT9789343000
5.25" converter bracket, supports 1x 3.5" hard drive or 2 x 2.5" hard drive

RT-660R-C246


4U 17.5" Rackmount Chassis with 8th/9th Generation Intel® Core™, Celeron™, Xeon® E-2200/2100 Processor, DDR4 DRAM, Supports iAMT 12.0, and Intel® CNVi WLAN Card

Turn-Key Chassis Solutions

Front View

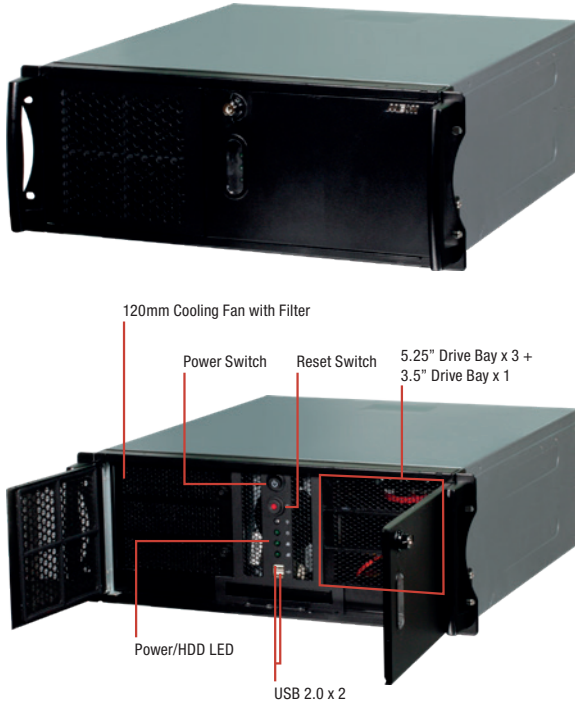

Rear View

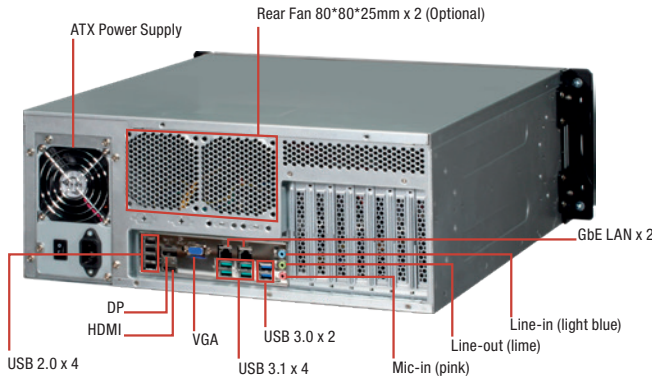

Features

- Industrial computer/workstation for automation and AI edge Computing
- 8th/9th Generation Intel® Core™, Celeron™, Xeon E-2200/2100 LGA1151 Processor
- DDR4 2666/2400/2133 MHz, max. 64GB
- Three Independent Displays: HDMI x 1, VGA x 1, DP x 1.
- Dual Intel® Gigabit Ethernet, i211AT x 1, i219LM x 1
- PCIe 3.0[x16] Slot x 1, PCIe 3.0[x4] Slot (open edge) x 2, PCIe 3.0[x1] Slot (openedge) x 2, PCI x 2,
- USB 3.1 Gen2 ports x 4, USB 3.1 Gen1 ports x 2, USB 2.0 ports x 4
- Intel® VPU with 8x Myraid X support for AI acceleration(optional)
- Support Windows® 7/8/10, Linux Ubuntu 16.04.4 and later
- Support AAEON grabber card



TPM	Nuvoton NPCT750ABBYX TPM2.0 onboard (optional)
H/W Monitor	Temperature Monitor on CPU/Chassis, Voltage Monitor on Vcore/5V/3.3V/12V, Fan Monitor on CPU/Chassis
Watchdog Timer	1~255 steps by software program
Smart Fan control	CPU Fan connector(s) (4-pin) x 1 Chassis Fan connector(s) (4-pin) x 2
Wake On LAN/ PXE	Yes (WOL / PXE)
Power State	S3, S4, S5
System Fan	Front: 1 x 120mm (T=25mm), PWM mode. Rear: 2 x 80mm (T=25mm)(Option), PWM mode.
I/O	
Front Panel	Power On/Off, System Reset, 2 x USB2.0
Rear Panel I/O	USB 3.1 Gen2 ports (10 Gbps) x 4, USB 3.1 Gen1 ports (5 Gbps) x 2, USB 2.0 ports x 4 HDMI x 1, VGA x 1, DP x 1 Audio Jack x 3: Line-in, Mic-in, Line-out LAN (RJ45) ports x 2
Internal I/O connectors	Storage: SATA III (6.0Gb/s) ports x 4, support RAID 0/1/5/10, M.2 2280 M-key (PCIex4/SATA3) x 1 USB: USB 2.0 headers x 1 support additional 2 USB ports (2x5PIN, p=2.54mm) Audio I/O: 1 x speaker header (Line-out) Serial Port: 5 x RS-232 headers, 1 x RS-232/422/485 (COM1, supports 5V/12V/RI optional) DIO: 8-bit Digital I/O interface (In/Out programmable) x 1 Others: Chassis Intrusion x 1, AT/ATX mode select jumper x 1, Front panel header x 1, Clear CMOS jumper x 1
Expansion	PCIe 3.0[x16] Slot x 1, PCIe 3.0[x4] Slot (open edge) x 2, PCIe 3.0[x1] Slot (open edge) x 2, PCI x 2, M.2 2230 E-key (PCIex1/USB2.0/CNVi) x 1, M.2 2280 M-key (PCIex4/SATA3) x 1
Power	
Battery	—
Power Requirement	ATX power supply Input:90~264V Output:500W.
Mechanical	
Color	Silver
Dimensions (W X H X D)	445 x 430 x 176 (mm), 17.5" x 16.9" x 6.9"
Gross Weight	TBC
Net Weight	TBC
Environmental	
Operating Temperature	32°F ~ 113°F (0°C ~ 45°C)
Storage Temperature	-49°F ~ 176°F (-45°C ~ 80°C)
Storage Humidity	0~90%, non-condensing


Specifications

System	
CPU	Intel® 8th/9th Generation (Coffee Lake-S/Coffee Lake-S Refresh) Core™ i9/ i7/ i5 /i3, Pentium 14nm, Celeron™, Xeon E-2200/2100, LGA 1151 socket Processor
Chipset	Intel® C246 Express Chipset
System Memory	DIMM x 4, DDR4 (2666/2400/2133 MHz, max. 64GB) ECC, un-buffered memory Dual-channel memory architecture
I/O Chipset	NCT6793D + F81216HD
Display Interface	HDMI x 1, VGA x 1, DP x 1
Storage	SATA III (6.0Gb/s) ports x 4, support RAID 0/1/5/10 M.2 2280 M-key (PCIex4/SATA3) x 1
Storage Devices	5.25" x 3 + 3.5" x 1 External Drive Cage, w/ Anti-Vibration kits 1 x 4-bay Internal 3.5" HDD Cage, w/Anti-Vibration kits
Audio	Realtek® ALC887 6-Channel High Definition Audio CODEC
Ethernet	Intel® PHY i219LM Gb LAN (supports Intel® AMT 12.0) x 1 Intel® i211AT Gb LAN x 1 RJ45 x 2

RT-660R-C246

Dimension

Unit: mm

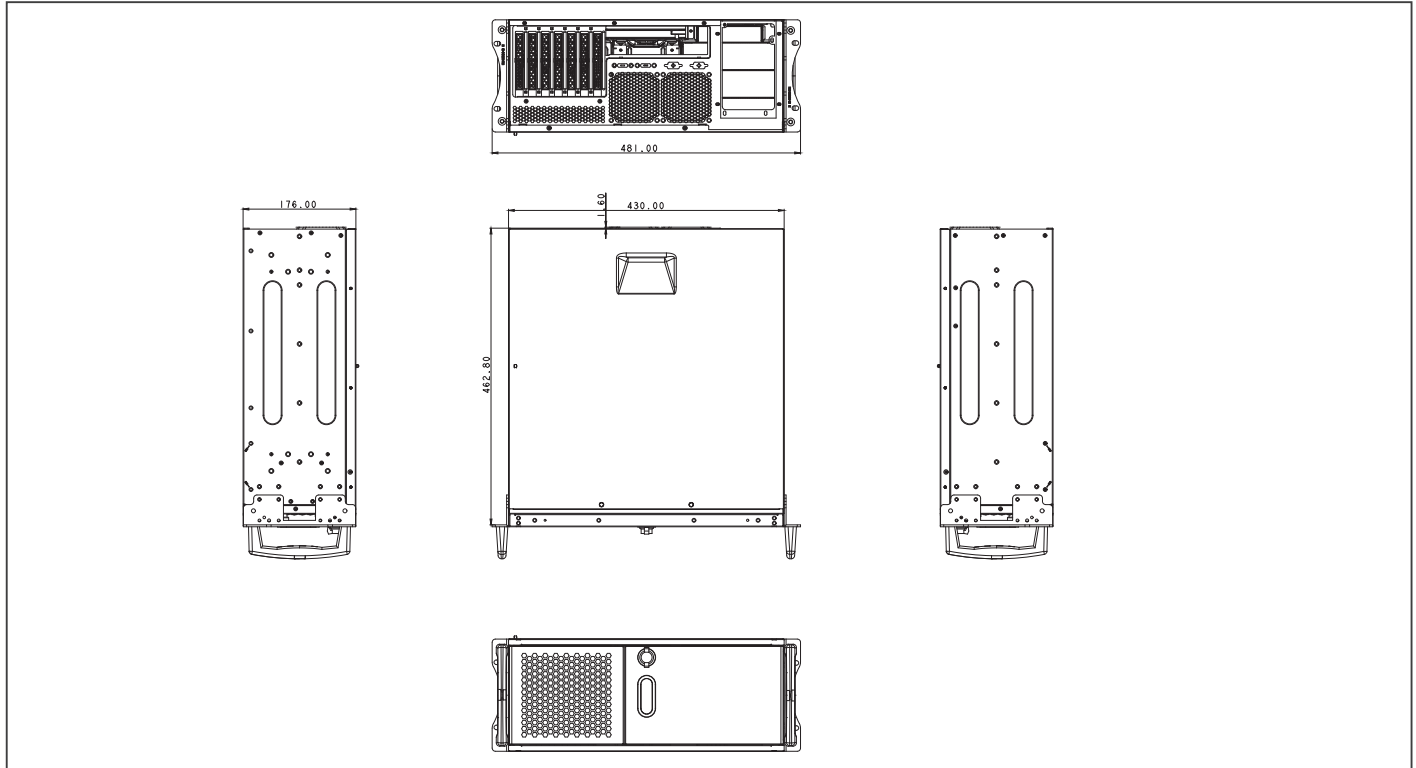

Packing List

- Product CD (Driver DVD)
- Accessory Box (Cable And Screw Bag)
- RT-660R-C246

Ordering Information

- RT-660R-C246-A10-001
4U 17.5" Rackmount Chassis, ATX-C246A, ATX power supply 500W, Silver color

Optional Accessories


- 1709100330
USB 2.0 cable (9P, 330MM, p=2.54mm, w/bracket)
- 14001-00400100
COM Port Cable (9P, 260mm, p=2.54mm w/bracket)
- 175921156B
CPU Cooler (2-Ball, Push-pin Type)
- 1759200172
CPU Cooler (2-Ball, Screw with Retention Plate)
- 1702031802
Power Cord (US & Taiwan Type)
- 1702031803
Power Cord (European Type)
- 170203180E
Power Cord (Japanese Type)
- AP-FW9789182100
(TF)3.5" to 2.5" HDD bracket.Tragant.DeLock 18210
- AP-OT9789343000
5.25" converter bracket, supports 1x 3.5" hard drive or 2 x 2.5" hard drive
- 1759232902
Rear Fan.8 0°80*25mm. 12VDC. PWM 4-pin, L=300mm. sunon. PF80251B1-Q120-S99

RT-660R-Q170


4U 17.5" Rackmount Chassis with 7th/6th Generation Intel® Core™ Processor, DDR4 DRAM, USB x 13, Supports iAMT 11.0

Turn-Key Chassis Solutions

Front View

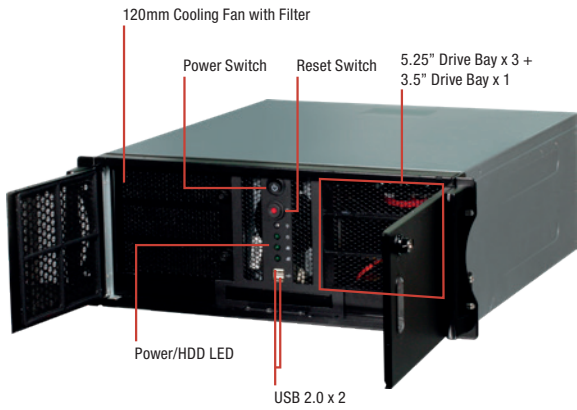

Rear View

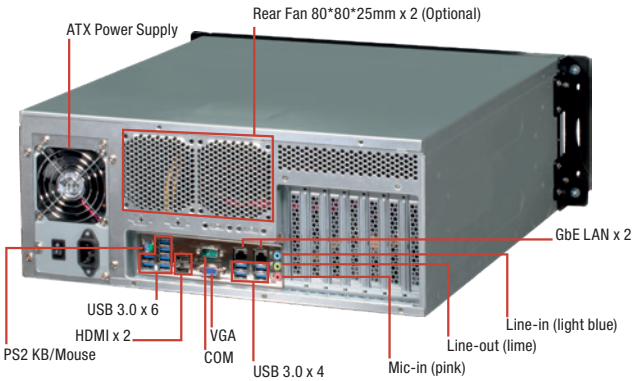

Features

- Industrial computer/workstation for automation and AI edge Computing
- 7th/6th Generation Intel® Core™ LGA1151 Processor
- DDR4 DRAM Support, 2133 MHz, Max. 64GB
- Dual Intel® Gigabit Ethernet, LAN1 Supports iAMT 11.0
- PCIe[x16] x 1, PCIe[x4] x 1 (open edge), PCIe[x1] x 1 (open edge), PCI x 1
- USB 3.0 Port x 10, USB 2.0 Port x 4
- SATA 6.0 Gb/s x 6
- Intel® VPU with 8x Myraid X support for AI acceleration(optional)
- Support Windows® 7/8/10, Linux Ubuntu 16.04.4 and later
- Support AAEON grabber card



H/W Monitor	Temperature Monitor on CPU/Chassis, Voltage Monitor on Vcore/5V/3.3V/12V, Fan Monitor on CPU/Chassis
Watchdog Timer	1~255 steps by software program
Smart Fan control	CPU Fan connector(s) (4-pin) x 1 Chassis Fan connector(s) (4-pin) x 2
Wake On LAN/ PXE	Yes (WOL / PXE)
Power State	S3, S4, S5
System Fan	Front: 1 x 120mm (T=25mm), PWM mode. Rear: 2 x 80mm (T=25mm)(Option) PWM mode.
I/O	
Front Panel	Power On/Off, System Reset, 2 x USB2.0
Rear Panel I/O	USB 3.0 x 10 HDMI x 1, VGA x 1, DP x 1 Audio Jack x 3: Line-in, Mic-in, Line-out LAN (RJ45) ports x 2 DB-9 COM x 1 (supports RS-232/422/485, 5V/12V/RI) Stack Port (Keyboard & Mouse) x 1
Internal I/O connectors	Storage: Supports RAID 0/1/5/10 SATA 6.0Gb/s x 3, M.2 M key (SATA) x 1 USB: USB 2.0 x 3 Audio I/O: 1 x speaker header (Line-out) Serial Port: 5 x RS-232 headers DIO: 8-bit Digital I/O interface (In/Out programmable) x 1 Others: Chassis Intrusion x 1, AT/ATX mode select jumper x 1, Front panel header x 1, Clear CMOS jumper x 1
Expansion	PCIe [x16] x 1, PCIe [x4] (open edge) x 2, PCI x 3, M.2 E key (22 x 30mm) x 1, M.2 M key (22 x 80mm, for SATA) x 1
Power	
Battery	—
Power Requirement	ATX power supply Input: 90~264V Output: 500W.
Mechanical	
Color	Silver
Dimensions (W X H X D)	445 x 430 x 176 (mm), 17.5" x 16.9" x 6.9"
Gross Weight	TBC
Net Weight	TBC
Environmental	
Operating Temperature	32°F ~ 113°F (0°C ~ 45°C)
Storage Temperature	-49°F ~ 176°F (-45°C ~ 80°C)
Storage Humidity	0~90%, non-condensing


Specifications

System	
CPU	Intel® 7th/ 6th Generation(Kaby Lake-S/ Skylake-S) Core™ i7/i5/i3/Pentium®/ Celeron® 14nm LGA1151 Socket Processor
Chipset	Intel® Q170
System Memory	288-pin DIMM x 4, max. 64GB, DDR4 2400/2133/1867, Dual channel
I/O Chipset	NCT6791D + F81216HD
Display Interface	HDMI x 2, VGA x 1
Storage	Supports RAID 0/1/5/10 SKU1: SATA 6.0Gb/s x 3, M.2 M key (SATA) x 1 SKU2: SATA 6.0Gb/s x 4, M.2 M key (PCIex4) x 1
Storage Devices	5.25" x 3 + 3.5" x 1 External Drive Cage, w/ Anti-Vibration kits 1 x 4-bay Internal 3.5" HDD Cage, w/Anti-Vibration kits
Audio	Realtek® ALC887 (Colay with ALC886)
Ethernet	Intel® PHY i219LM Gb LAN (supports Intel® AMT 12.0) x 1 Intel® i211AT Gb LAN x 1 RJ45 x 2
TPM	Nuvoton NPCT6xx TPM2.0 (Optional)

RT-660R-Q170

Dimension

Unit: mm

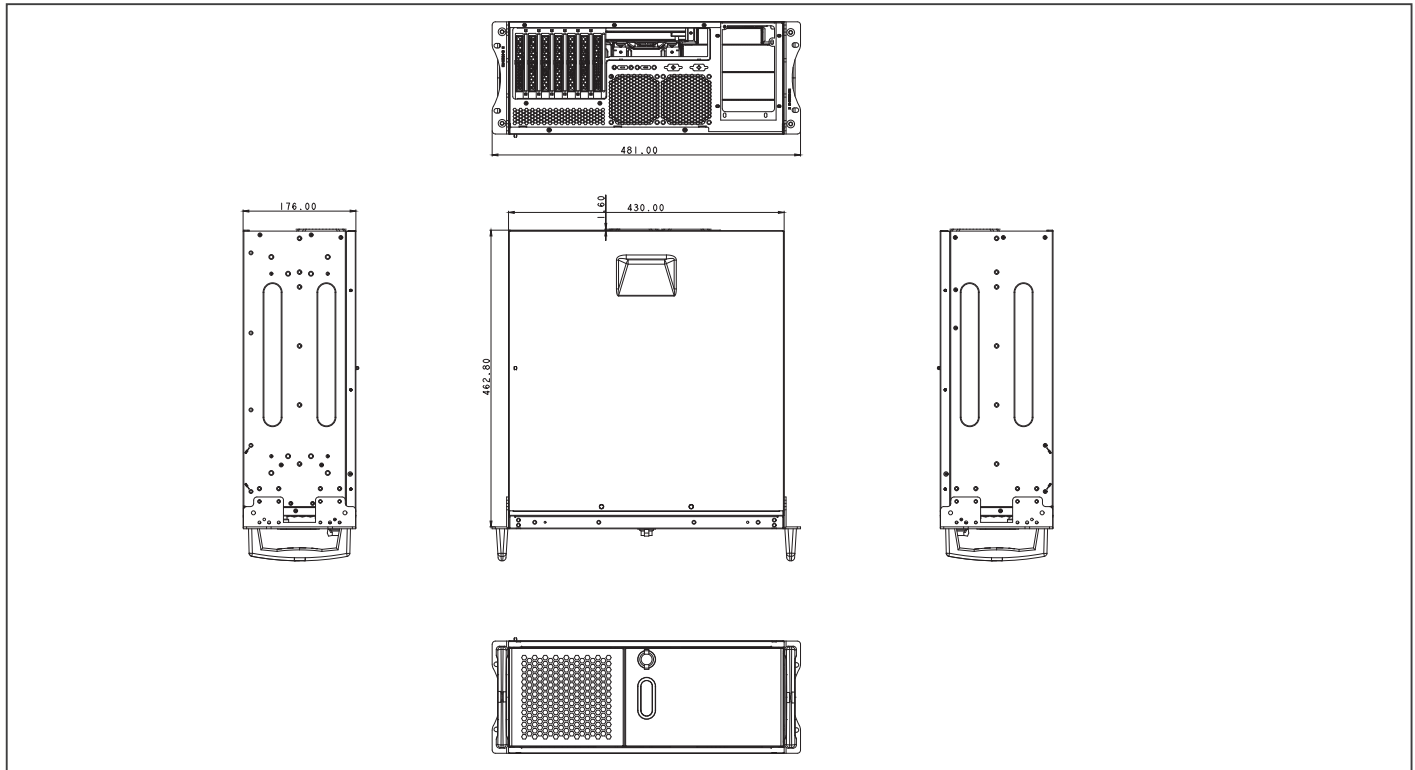

Packing List

- Product CD (Driver DVD)
- Accessory Box (Cable And Screw Bag)
- RT-660R-Q170

Ordering Information

- RT-660R-Q170-A10-001
4U 17.5" Rackmount Chassis, IMBA-Q170A, ATX power supply 500W, Silver color

Optional Accessories


- 1709100330
USB 2.0 cable (9P, 330MM, p=2.54mm, w/bracket)
- AP-CB1701100505
(TF)COM port cable.DB9M+DB9M.IDC 10P+ IDC 10P.500MM
- 175921156B
CPU Cooler (2-Ball, Push-pin Type)
- 1759200172
CPU Cooler (2-Ball, Screw with Retention Plate)
- 1702031802
Power Cord (US & Taiwan Type)
- 1702031803
Power Cord (European Type)
- 170203180E
Power Cord (Japanese Type)
- AP-FW9789182100
(TF)3.5" to 2.5" HDD bracket.Tragant.DeLock 18210
- AP-OT9789343000
5.25" converter bracket, supports 1x 3.5" hard drive or 2 x 2.5" hard drive
- 1759232902
Rear Fan.8 0*80*25mm. 12VDC. PWM 4-pin, L=300mm. sunon. PF80251B1-Q120-S99

RT-660R-Q370


4U 17.5" Rackmount Chassis with 8th/9th Generation Intel® Core™ Processor, DDR4 DRAM, Supports iAMT 12.0, and Intel® CNVi WLAN Card

Turn-Key Chassis Solutions

Front View

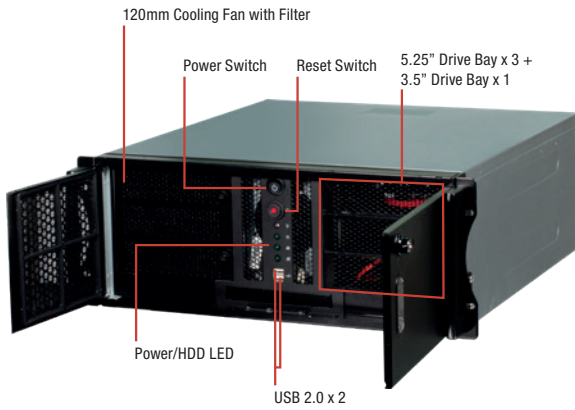

Rear View

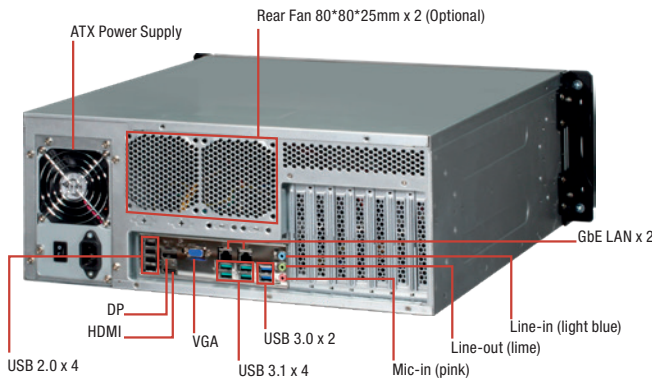

Features

- Industrial computer/workstation for automation and AI edge Computing
- 8th/9th Generation Intel® Core™ LGA1151 Processor
- DDR4 2666/2400/2133 MHz, max. 64GB
- Three Independent Displays: HDMI x 1, VGA x 1, DP x 1.
- Dual Intel® Gigabit Ethernet, i211AT x 1, i219LM x 1
- PCIe 3.0[x16] Slot x 1, PCIe 3.0[x4] Slot (open edge) x 2, PCIe 3.0[x1] Slot (openedge) x 2, PCI x 2,
- USB 3.1 Gen2 ports x 4, USB 3.1 Gen1 ports x 2, USB 2.0 ports x 4
- Intel® VPU with 8x Myraid X support for AI acceleration(optional)
- Support Windows® 7/8/10, Linux Ubuntu 16.04.4 and later
- Support AAEON grabber card



H/W Monitor	Temperature Monitor on CPU/Chassis, Voltage Monitor on Vcore/5V/3.3V/12V, Fan Monitor on CPU/Chassis
Watchdog Timer	1~255 steps by software program
Smart Fan control	CPU Fan connector(s) (4-pin) x 1 Chassis Fan connector(s) (4-pin) x 2
Wake On LAN/ PXE	Yes (WOL / PXE)
Power State	S3, S4, S5
System Fan	Front: 1 x 120mm (T=25mm), PWM mode. Rear: 2 x 80mm (T=25mm)(Option) PWM mode.
I/O	
Front Panel	Power On/Off, System Reset, 2 x USB2.0
Rear Panel I/O	USB 3.1 Gen2 ports (10 Gbps) x 4, USB 3.1 Gen1 ports (5 Gbps) x 2, USB 2.0 ports x 4 HDMI x 1, VGA x 1, DP x 1 Audio Jack x 3: Line-in, Mic-in, Line-out LAN (RJ45) ports x 2
Internal I/O connectors	Storage: SATA III (6.0Gb/s) ports x 4, support RAID 0/1/5/10, M.2 2280 M-key (PCIex4/ SATA3) x 1 USB: USB 2.0 headers x 1 support additional 2 USB ports (2x5PIN, p=2.54mm) Audio I/O: 1 x speaker header (Line-out) Serial Port: 5 x RS-232 headers, 1 x RS-232/422/485 (COM1, supports 5V/12V/RI optional) DIO: 8-bit Digital I/O interface (In/Out programmable) x 1 Others: Chassis Intrusion x 1, AT/ATX mode select jumper x 1, Front panel header x 1, Clear CMOS jumper x 1
Expansion	PCIe 3.0[x16] Slot x 1, PCIe 3.0[x4] Slot (open edge) x 2, PCIe 3.0[x1] Slot (open edge) x 2, PCI x 2, M.2 2230 E-key (PCIex1/USB2.0/CNVi) x 1, M.2 2280 M-key (PCIex4/SATA3) x 1
Power	
Battery	—
Power Requirement	ATX power supply Input: 90~264V Output: 500W.
Mechanical	
Color	Silver
Dimensions (W x H x D)	445 x 430 x 176 (mm), 17.5" x 16.9" x 6.9"
Gross Weight	TBC
Net Weight	TBC
Environmental	
Operating Temperature	32°F ~ 113°F (0°C ~ 45°C)
Storage Temperature	-49°F ~ 176°F (-45°C ~ 80°C)
Storage Humidity	0~90%, non-condensing


Specifications

System	
CPU	Intel® 8th/9th Generation (Coffee Lake-S/Coffee Lake-S Refresh) Core™ i9/ i7/ i5 /i3, Pentium 14nm LGA 1151 socket Processor
Chipset	Intel® Q370 Express Chipset
System Memory	DIMM x 4, DDR4 (2666/2400/2133 MHz, max. 64GB) Non-ECC, un-buffered memory Dual channel memory architecture
I/O Chipset	NCT6793D+ F81216HD
Display Interface	HDMI x 1, VGA x 1, DP x 1
Storage	SATA III (6.0Gb/s) ports x 4, support RAID 0/1/5/10 M.2 2280 M-key (PCIex4/SATA3) x 1
Storage Devices	5.25" x 3 + 3.5" x 1 External Drive Cage, w/ Anti-Vibration kits 1 x 4-bay Internal 3.5" HDD Cage, w/Anti-Vibration kits
Audio	Realtek® ALC887 6-Channel High Definition Audio CODEC
Ethernet	Intel® PHY i219LM Gb LAN (supports Intel® AMT 12.0) x 1 Intel® i211AT Gb LAN x 1 RJ45 x 2
TPM	Nuvoton NPCT750ABBYX TPM2.0 onboard (optional)

RT-660R-Q370

Dimension

Unit: mm

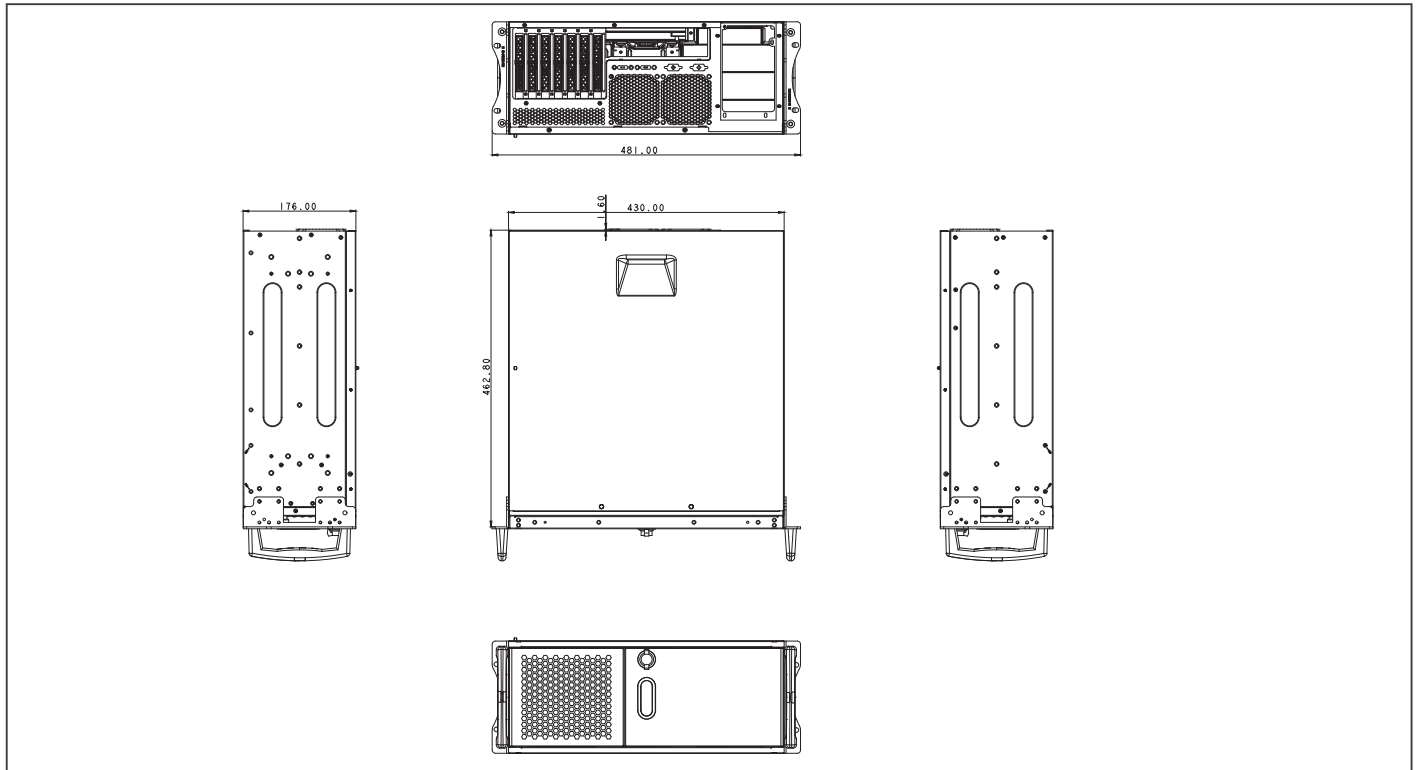

Packing List

- Product CD (Driver DVD)
- Accessory Box (Cable And Screw Bag)
- RT-660R-Q370

Ordering Information

- RT-660R-Q370-A10-001
4U 17.5" Rackmount Chassis, ATX-Q370A, ATX power supply 500W, Silver color

Optional Accessories

- 1709100330
USB 2.0 cable (9P, 330MM, p=2.54mm, w/bracket)
- 14001-00400100
COM Port Cable (9P, 260mm, p=2.54mm w/bracket)
- 175921156B
CPU Cooler (2-Ball, Push-pin Type)
- 1759200172
CPU Cooler (2-Ball, Screw with Retention Plate)
- 1702031802
Power Cord (US & Taiwan Type)
- 1702031803
Power Cord (European Type)
- 170203180E
Power Cord (Japanese Type)
- AP-FW9789182100
(TF)3.5" to 2.5" HDD bracket.Tragant.DeLock 18210
- AP-OT9789343000
5.25" converter bracket, supports 1x 3.5" hard drive or 2 x 2.5" hard drive
- 1759232902
Rear Fan.8 0*80*25mm. 12VDC. PWM 4-pin, L=300mm. sunon. PF80251B1-Q120-S99