

Test item list

1. <i>Test item list</i> -----	2
2. <i>Temp./humidity power on/off test</i> -----	3
3. <i>Temperature variation operation test</i> -----	4
4. <i>Cold start and hot start test</i> -----	5

Test Product: XTX-915 A0.3-A + ECB-910A A0.2

Sample Configuration & Quantity Under Test:

1. Chipset: Intel 915GM(E) + Intel82801FBM
2. VGA: Intel 915GM(E)
3. Test Software: Windows XP / Run PassMark Burn In Test 4.0 Pro
4. ETX Evaluation Board: ECB-901A A0.2
5. Cooler:



Sample 1: (AT Power)

1. CPU: Intel Pentium M / 1.8GHz (Bios Ver.x-915_08a)
2. Memory: Kingston 256MB / V046103MDAPC (DDRII-533)
3. DOM: PQI 32MB
4. HDD: Seagate ST340014A 40GB
5. AT Power Supply: Zippy SP2-4300F

Sample 2: (ATX Power)

1. CPU: Intel Pentium M / 1.73GHz (Bios Ver.x-915_08a)
2. Memory: Apacer 1GB / V59C1512804QBF3 (DDRII-533)
3. CFD: PQI 32MB
4. HDD: WD 800JB-00JJC0 80GB
5. ATX Power Supply: Seventeam ST-350EAG-05G

Temp./humidity power on/off test

Test Date: 11-30-2007~12-02-2007

Test Site: AAEON QA Internal Lab.

Test Standard: Reference IEC 68-2-30 Testing procedures
Test Db: Damp Heat Test


Test Equipment:
Programmable Temperature & Humidity Chamber
K.SON. INS. TECH. CORP.
Model: THS-A4C-100
Date of Calibration: 06/20/07
Serial Number: 3188

Temperature & Humidity Power On/Off Test:

Testing Specification:

Step	Temperature ()	Humidity (%RH)	Duration (HH:MM)
1	25	50	00:30
2	25	50	00:30
3	25	90	01:00
4	25	90	00:30
5	60	90	03:30
6	60	90	03:00
7	0	0	04:50
8	0	0	05:23
9	25	50	01:47
10	25	50	03:00

Test Curve:

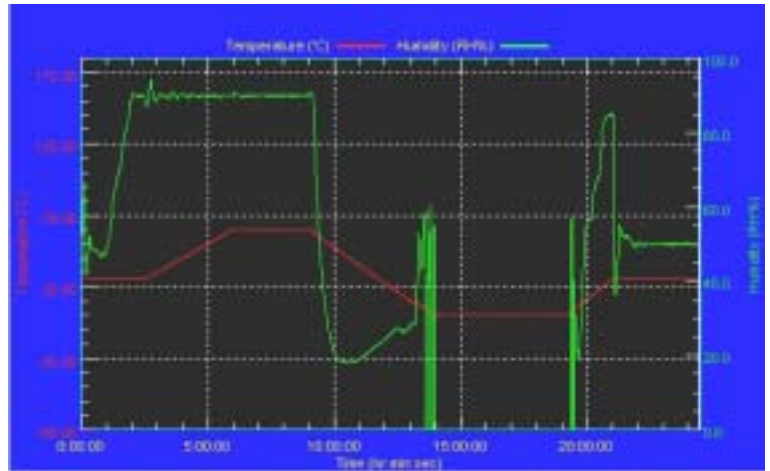

Test Result:

No problem was found during the temperature & humidity power on/off test.

Temperature variation operation test

Test Date: 11-29~30-2007


Test Site: AAEON QA Internal Lab.

Test Standard: Reference IEC 68-2-14 Testing procedures
Test N: Change of temperature Test

Test Equipment:
Programmable Temperature & Humidity Chamber
K.SON. INS. TECH. CORP.
Model: THS-D4L+-100
Date of Calibration: 11/06/07
Serial Number: 2582

Temperature & Humidity Cycle Test:

1. Test Low Temperature: 0 (1~2 cycles)
-5 (3rd cycle)
2. Test High Temperature: 60 (1~3 cycles)
65 (3rd cycle)
3. Test dwell time: 4Hrs (1~2 cycles)
2Hrs (3rd cycle)
4. Temperature slope: 2 /min
5. Test cycle: 3 cycles
6. Test Environment Curve:

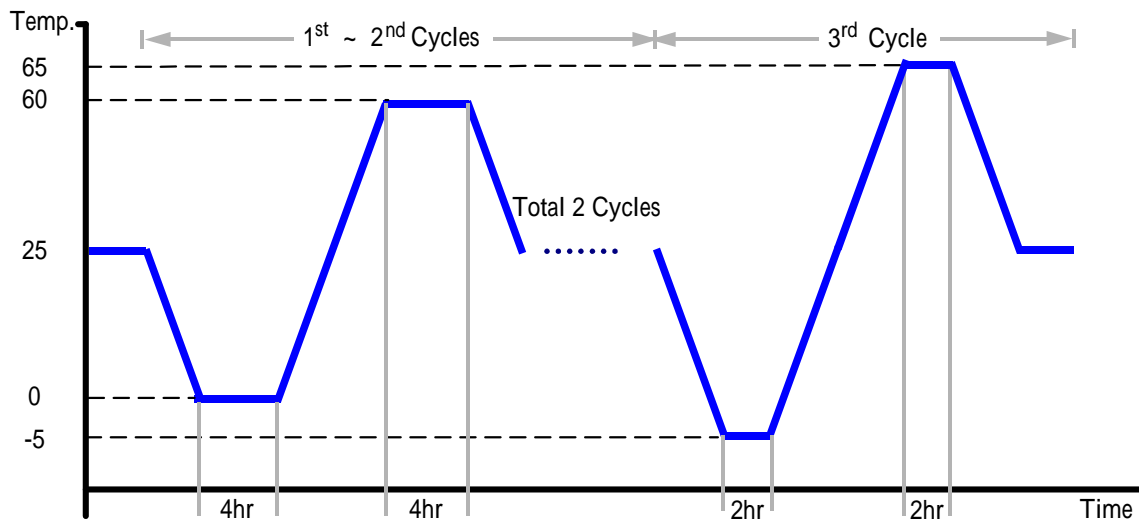

Test Result:

No problem was found during the temperature variation operation test.

Cold start and hot start test


Test Date: 11-29-2007

Test Site: AAEON QA Internal Lab.

Test Standard: Reference IEC 68-2-14 Testing procedures
Test N: Change of temperature Test

Test Equipment:
Programmable Temperature & Humidity Chamber
K.SON. INS. TECH. CORP.
Model: THS-D4L+-100
Date of Calibration: 11/06/07
Serial Number: 2582

Test Condition:

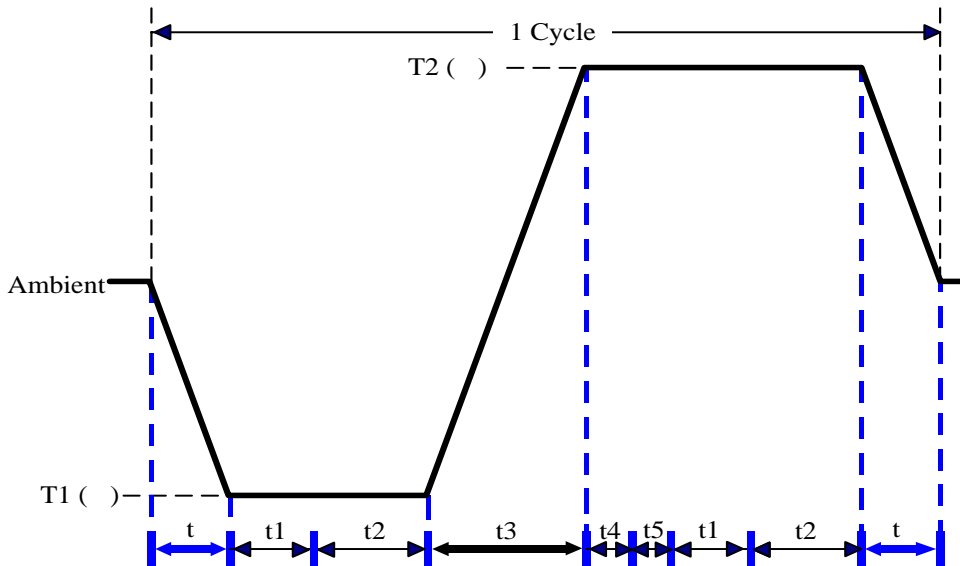

Parameters	Description
T1	-5
T2	65
t1	1 hrs
t2	2 hrs
t4, t5	30 min
t, t3	2 /min
n (Cycle)	1

t,t3 = temprature slope
t, t1: Power Off
t2: Power on/off test 10 times (on 2 min / off 5min)
t3,t4: Run PassMark Burn In Test
t5: Win XP Software restart test 2 times
Test Software: Windows XP

Test Result:

- a. No problem was found during the cold start test.
- b. No problem was found during the hot start test.