

ACP-1073

(With mSATA)

Vibration Test Report

Report NO: 13P030037

Issued by:	<u>Rex Chang</u>	/	<u>2013/10/09</u>
	Engineer		Date
Reviewed by:	<u>Tom Lin</u>	/	<u>2013/10/09</u>
	Sr. Manager		Date

Test item list

- | | |
|---|---|
| <i>1. Test item list</i> | 3 |
| <i>2. Random Vibration Operation Test</i> | 4 |

Testing Result

Num	Test item list	Result	Remark
1	Random vibration operation test	Pass	

Configuration of EUT

Num	Item	Spec
1.	Fanless Touch Panel :	ACP-1073
	1. 7" LCD	Suniverse.V070WHU100
	2. Main board	PBA-CV02 A1.0
	3. BIOS	ACP-1073 R0.5 (1073AT05) (07/29/2013)
	4. CPU Type	Intel Atom N2600 / 1.6GHz
	5. Wide Temp. Memory	Transcend 2GB / DDR3-1333 / Hynix H5TQ2G83CFR
	6. Wide Temp. mSATA	MEMORIGHT 29F64G08AFAAA / 16GB
	7. WiFi Module	VNT9271b6050
	8. Test Software	Windows 7 / Run BurnIn test 7.0 Pro
2.	Adapter	FSP FSP060-DBAE1

Heat Sink



Random Vibration Operation Test

Test Date: 10-09-2013

Test Product: ACP-1073


Test Site: AAEON QE Dept.

Test Standard: Reference IEC68-2-64 Testing procedures
Test Fh: Vibration; broad-band random test

Test Equipment:
Vibration Simulator System
KING DESIGN Co. LTD.
Model: KD 9363-EM-600F2K-40N20
Serial Number: UU110099090
Date of Calibration: 10/21/2012

Test Condition:

1. Operation
2. Test Acceleration: 1.0Grms Random
3. Test Frequency: 5-500Hz
4. Test Axis: X, Y, Z axes
5. Test Time: 60min each axis
6. Test Software: Windows 7 / Run one Microsoft media player simultaneously.
7. Test Vibration Curve:

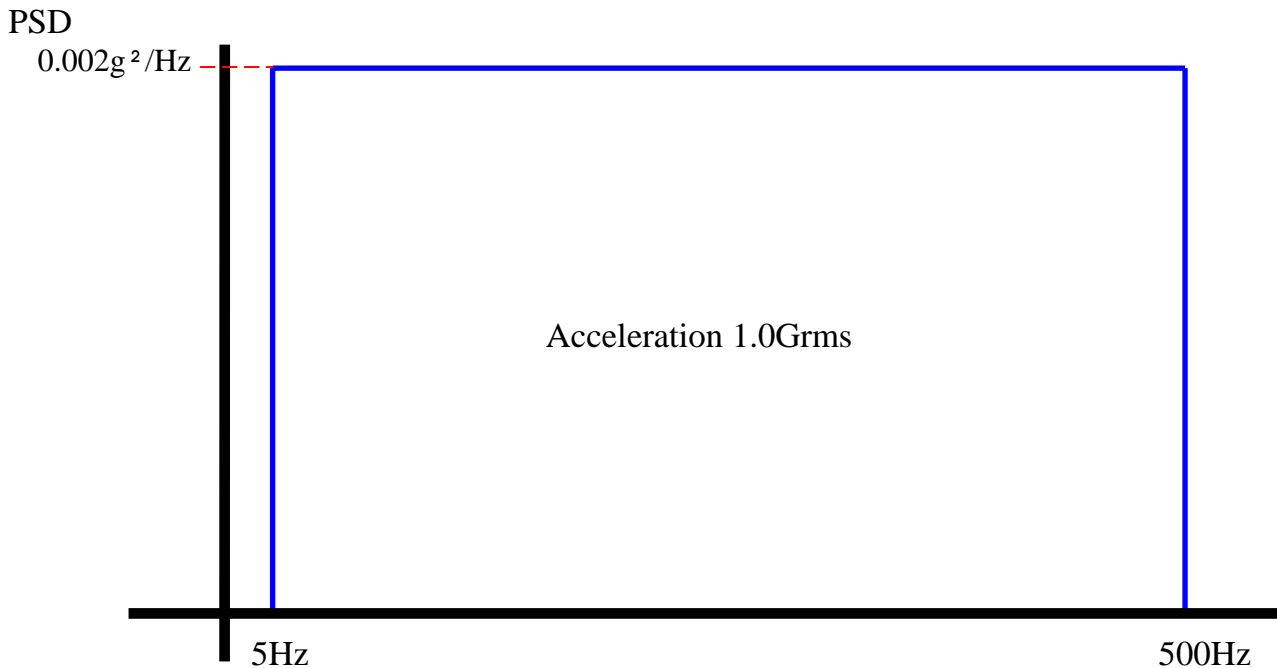

Test Result:
The structure of the system did not deform after testing, and all functions still work will.